

# POPULAR **Computing** WEEKLY



3 June 1982 Vol 1 No 7

**30p**

**The Black Hole**

**Reviewed inside:  
Jungle Maths**

**Party Tricks**

**40 column board  
for Vic-20**

**ZX81 character  
codes**

**Spectrum colour**



# ANGLO AMERICAN SOFTWARE CO.

## SOFTWARE SPECIALISTS

Starfleet Orion	PET 8K TRS-80 Level II 16K TRS-80 32K w/disk	£19.50
Invasion Orion	APPLE Integer BASIC 16K APPLE Integer BASIC w/disk 48K TRS-80 Level II 16K — ATARI 32K TRS-80 32K — APPLE 48K w/disk ATARI 32K w/disk	£19.50
Temple of Apshai	TRS-80 Level II 16K TRS-80 32K — APPLE 48K w/disk ATARI 32K ATARI 32K w/disk IBM 64K w/disk	£23.50
Hellfire Warrior	TRS-80 Level II 16K TRS-80 32K — APPLE 48K w/disk	£23.50
Upper Reaches of Apshai	TRS-80 Level II 16K TRS-80 32K — APPLE 48K w/disk	£15.50
The Keys of Acheron	TRS-80 Level II 16K TRS-80 32K — APPLE 48K w/disk	£15.50
Curse of Ra	TRS-80 32K — APPLE 48K w/disk TRS-80 Level II 16K 24K PET w/disk TRS-80 32K APPLE 48K w/disk	£15.50 £32.00
Introductory 3-Pack 3-Pack: Morloc's Tower, Rescue at Rigel and Datesones of Ryn	TRS-80 Level II 16K — ATARI 32K TRS-80 32K — APPLE 48K w/disk ATARI 32K 2/disk	£15.50
Datestones of Ryn	PET 24K TRS-80 Level II 16K TRS-80 32K — APPLE 48K w/disk APPLE 32K	£15.50
Morloc's Tower	32K PET APPLE 48K w/disk	£19.50
Dragon's Eye	TRS-80 Level II 16K TRS-80 32K — APPLE 48K w/disk	£21.50
Sorcerer of Siva	TRS-80 Level II 16K — ATARI 32K TRS-80 32K — APPLE 48K w/disk	£21.50
Rescue at Rigel	ATARI 32K w/disk TRS-80 Level II 16K — ATARI 32K TRS-80 32K — APPLE 48K w/disk ATARI 32K w/disk	£21.50
Star Warrior	TRS-80 Level II 16K — ATARI 32K TRS-80 32K — APPLE 48K w/disk ATARI 32K w/disk	£23.50
Crush, Crumble and Chomp!	TRS-80 Level II 16K — ATARI 32K TRS-80 32K — APPLE 48K w/disk ATARI 32K w/disk	£21.50
Tuesday Morning Quarterback	TRS-80 48K — APPLE 48K w/disk ATARI 16K — TRS-80 Level II 16K	£21.50
Richochet	TRS-80 32K — APPLE 48K w/disk ATARI 32K w/disk	£19.95
Jabbertalky	TRS-80 32K — APPLE 48K w/disk IBM 64K w/disk	£21.50

SEND 75p FOR FULL CATALOGUE  
(Refundable against purchase)  
DEALER ENQUIRIES WELCOME

**ANGLO AMERICAN SOFTWARE**

138a Stratford Road, Sparkhill  
Birmingham B11 1AG 021-771 2996/2736

ALL PRICES INCLUDE VAT & POSTAGE  
24 Hour answering service  
on 021-771 2995 for Access orders.



PLEASE SUPPLY .....

I enclose a cheque/PO for £..... made payable to  
ANGLO AMERICAN or debit my

Access and number .....

Signature .....

NAME .....

ADDRESS .....



# POPULAR Computing WEEKLY

## The Team

### Editor

Duncan Scot

### Reporter

David Kelly [01-930 3271]

### Sub-editor

Peter Harvey

### Designer

Eric Robbie

### Editorial Secretary

Fiona McCormick

### Advertisement Manager

David Lake [01-839 2846]

### Advertisement Executive

Alastair Macintosh [01-930 3840]

### Publishing Director

Nick Hampshire

*Popular Computing Weekly*,  
Hobhouse Court, 19 Whitcomb Street,  
London WC2  
Telephone: 01-839 6835

Published by Sunshine Publications Ltd.

Typesetting, origination and printing by  
Chesham Press, Chesham, Bucks

Distributed by S M Distribution  
London SW9. 01-274 8611. Telex: 261643

© Sunshine Publications Ltd 1982

### Subscriptions

You can have *Popular Computing Weekly* sent  
to your home: the subscription rate is £19.95 per  
year, for addresses in the UK.

### How to submit articles

Articles which are submitted for publication  
should not be more than 1000 words long.

All submissions should be typed and a double  
space should be left between each line.

Programs should, whenever possible, be  
computer printed.

At present we cannot guarantee to return  
every submitted article, so please keep a copy.

### Accuracy

*Popular Computing Weekly* cannot accept any  
responsibility for any errors in programs we  
publish, although we will always try our best to  
make sure programs work.

## This Week



Cover illustration by Ian Craig

### News 5

Clash on Spectrum name, EEC backs  
tele-text.

### Club Reports 7

David Kelly reports on the Sunbury-  
on-Thames computer club.

### Black Hole 8

Dave Middleton presents a space game  
for the ZX81.

### Reviews 10

Missile Command, ZX81 EPROM.

### Open Forum 13

Seven pages of programs.

### Programming 20

ZX81 character codes.

### Spectrum 22

Nick Hampshire looks at Spectrum  
colour.

### Sound & Vision 23

About computer art and music.

### Peek & Poke 25

Your questions answered.

### Competitions 26

Puzzle, crossword.

## Editorial

Most schools in the country must  
know by now about the various Gov-  
ernment microcomputer support  
schemes.

The most ambitious of the Govern-  
ment's aims is to see a microcomputer  
installed in every secondary school by  
the end of this year.

To this end it has been offering to  
pay half the cost of each computer  
bought. But most of the computers  
approved under the scheme are ex-  
pensive and, by now, largely obsolete.

The other half of the Government's  
campaign is Information Technology  
Year '82, a project supposed to stimu-  
late public awareness. But ITY seems  
to have died of inertia less than  
half-way through.

Many teachers must have realised  
by now that if they want to equip their  
pupils for a computing future they will  
have to do it on their own initiative.

The only way to keep up is to go out  
and buy a computer now. Schools  
cannot afford to wait for the Govern-  
ment and local education authorities  
to catch up.

## Next Week



It's a drab,  
drab world till you  
add a little colour with your  
BBC Micro. Paint the town red,  
blue, yellow... the choice is yours!



# Classified

## 20 SIMPLE ELECTRONIC PROJECTS FOR THE ZX81 and other computers

Make the most of your Micro-computer with this great book of construction projects. £6.45.

Available from:  
National ZX Users' Club  
44-46 Earls Court Road  
London W8 6EJ

Please make your cheque payable to  
Interface.

**ZX81 WITH 16K RAM** for sale. All original packing. £75. Tel: 01-642 9190 days, 01-771 6814 evenings (Croydon).

**ZX81 WITH 16K** plus two tapes, only £79. Tel: Burgh Heath 57658.

**VIC-20**, cassette deck, super expander, super larder ROM software worth £16, only £235 unboxed. Tel: 993 2778, 6-8 pm.

**CBM 32K 4008** and cassette sound-box, books, much software, £499 ono (neg). Tel: 051-428 1500 (Liverpool).

**VIC-20** and VIC cassette plus £16 books, cost £270. Best offer secures. Tel: Bill 01-794 4436.

**SHARP PC1211 POCKET COMPUTER** plus printer and cassette interface with manuals, £80. Tel: 041-884 3404.

**ZX81 EDUCATIONAL SOFTWARE.** Brush up on your "O" level maths and French. Three (16K) programs of generated maths questions plus answers plus help. Three (16K) programs of French grammar (plus tests) plus three (16K) programs of vocabulary. Both cassettes £4.50 each or send s&e for catalogue to: Rose Cassettes, 148 Widney Lane, Solihull, West Midlands B91 3LH.

**ZX81 PLUS 64K MEMOTECH RAM** plus tapes. Guarantee, £95. Tel: 01-455 6296.

**VIC-20 COMPUTER**, cassette deck, programmers guide, Introduction Basic (1), joystick, software, £200. Tel: 01-969 6374.

**ZX81**, vgc, 16K, user port, tapes, Chess Defender etc. Only £100. Tel: 0630 85565.

**ATOM USERS** interesting new range of hardware for the Acorn Atom, please send s&e for full details. Poundgate E.D.S., Beguilly, Knighton, Powys. Tel: 05477 273.

**ZX81 16K**, excellent condition, 5 months old, leads, tapes, manual and books £100. tel: Carlisle 60842 after 5 pm.

**ZX81 16K VGC** 3 months old and 2 tapes £100. Phone Worthing 46344.

**BBC MICRO.** M/C Invaders + Break-out and Dodgems. All new on model A or B using sound and colour. Three programs on one cassette £4 inclusive. From B. Cridland, 8 Bowness Avenue, Fleetwood, Lancs FY7 8PA.

**ZX81 WITH 16K RAM**, as new, plus four Sinclair tapes. Phone Davies 0403 60304 daytime.

**FOR SALE.** 4K ROM ZX80. First offer over £30 secures, including leads. P. Gower, 4 Clifford Crescent, Newport Gwent.

**ZX81 16K RAM** with all leads etc, cost £120 will accept £85. Phone 061-431 3800 evenings.

**ZX81 16K PROGRAMS**, 2 tapes, 4 games + 1, £3.75 each. SAE details, M. Fox, 6 Lawson Close, Aldridge, Walsall WS9 0RX.

**ZX81 16K. PAYE TAX PROGRAM** based on "Which" Tax Guide. Check last years tax; estimate this years tax and code; check salary tax, N.I., and superannuation deductions. Updatable at next budget. Extensive notes. Dr Wilkinson, 57 Osbalwick Village, York YO1 3NP. £5.95.

**ZX81 BLEEP.** Provides audible feedback. Improves your keyboard cheaply, fits inside. Simple plug-in, no soldering connections. Aids faster more accurate programming. £8.95 includes instructions, P&P+VAT. Fulcrum Products, Dept. W, Hillside, Steep Lane, Findon, W. Sussex.

**ZX81 16K COMPUTER**, five months old, large collection of books and cassettes, £90. Tel: 024-369 4207 evenings.

**VIC-20** for £150 including presentation cassette and booklet and lots more. 67 Worcester Street, Oldham, Lancs OL9 7SE.

**MZ80K 48K**, extended Basic, £335. Some software available. Tel: 01-505 4470 evenings.

**ZX81 16K** plus many program cassettes, chess, finance, adventures, console, £130. Tel: 021-533 6734.

**ACORN ATOM, 12K+12K.** Colour monitor, cassette, £350 ono. Tel: 0203-465311 ask for H217 (evenings only).

**SINCLAIR ZX81** plus 16K RAM, vgc, five months old, £80 ono. Tel: Hastings 753873 after 5 pm.

**ACORN ATOM, 8K ROM** plus 12K RAM. Hardly used, superb condition. PSU, leads, etc, £190 ono. Tel: Wrington (STD 0934) 862231.

**VIC-20.** Six months guarantee left, £140 ono. White, Hillside, Totterdown Lane, Weston-super-Mare.

**ZX81 16K.** Complete, six months old. Tel: Kingston St Mary 449.

**ZX81 16K** plus seven software cassettes including chess, £75. Tel: 01-524 4368.

**BBC COMPATIBLE COMPUTER** to cassette leads. Type (1) two 3.5mm plugs and one 2.5mm plug. Type (2) 5-pin DIN, £4.50 each. — Electronics Applied, 4 Dromore Road, Carrickfergus, Co Antrim, BT38 7PJ.

**ZX80, 16K RAM, 8 K ROM**, constant display, proper keyboard, cased, books, tapes including defender and ZXAS assembler, £100. Luton 411340.

**VIDEO GENIE COMPUTER**, 3 months old, and programs, £190. 0272-653300 (Bristol).

**ZX81!** Two 16K games (cassette), excellent value, guaranteed. Includes "Destroyer", great displays! £5.00 (including p&p). P. Carr, "S-S-S", Tunbeck Road, Wortwell, Norfolk.

**ZX81.** 1K factory built, two months old, for sale. £50. Gebaard, East Grange, Morpeth, Northumberland. 0670 513337.

**ATARI 400**, cassette, joysticks, manuals, complete, as new, £280, Star Raiders £20.00. Phone 461 1604.

**16K ZX 81** with keyboard, 2 software cassettes and 2 books, £100 ono. Ring 0895 31361.

**ZX81 16K** plus push button keyboard, learning lab, Startrek, loading and saving tip, £110.00. Tel: 0933 676495.

**FREE CATALOGUE** of quality ZX81 programs, many available as inexpensive listings. Send large SAE to Aquarius Software, 53 Towncourt Crescent, Petts Wood, Kent BR5 1PH.

**SINCLAIR ZX81, 16K RAM**, Abacus controller, 2 books, works perfectly, very good condition, £80 ono. Ipswich 713305.

**ZX81 16K** plus d'Kronic Graphic Rom, 4 tapes £100. Tel: 021-745 8471

## CLASSIFIED ADVERTISING RATES:

**Line by line:** For private individuals, 20p per word, minimum 10 words.

For companies, traders, and all commercial bodies, 40p per word, minimum 20 words.

**Semi-display:** £10 per single column centimetre, minimum length 3 cm. (Please supply A/W as PMT. Or supply rough setting instructions.)

**Conditions:** All copy for Classified section must be pre-paid. Cheques and postal orders should arrive at least two weeks before the publication date.

If you wish to discuss your ad, please ring Alastair Macintosh 01-930 3840.

## Here's my classified ad.

(Please write your copy in capital letters on the lines below.)


Please continue on a separate sheet of paper

I make this ..... words, at ..... per word so I owe you £.....

Name .....

Address .....

.....

.....

Telephone .....

Please cut out and send this form to: Classified Department, *Popular Computing Weekly*, Hobhouse Court, 19 Whitcomb Street, London WC2



## Other end of the Spectrum?

Micro APL, which launched its Spectrum microcomputer last September, is concerned about possible confusion between its product and the new Sinclair ZX Spectrum.

Micro APL did not register the name because it was advised that the name was too common to be accepted as a registered trade mark.

Now the company is getting enquiries from customers who are confusing the two machines.

The two Spectrums appear to have little in common. Sinclair's ZX Spectrum is, at £125, the lowest priced colour and sound machine. Micro APL's Spectrum is a 16-bit multi-user multi-task APL machine aimed mainly at the business market, with a basic price of around £10,000.

However, Micro APL is considering ways of clarifying the differences between the two micros. One solution would be to publish advertisements highlighting the facilities of the different Spectrums.

Micro APL emphasises that there are no hard feelings, and is in friendly communication with Sinclair Research.

## EEC looks for new teletext

Interactive full-channel teletext is now a real possibility following EEC funding for a research study group.

Logica Ltd, of London, together with Italian General Systems, has been given £50,000 to look at the possibilities of an interactive teletext system using cable tv. The group will also investigate the problems involved in the development of a full-channel system.

The advent of satellite and cable tv makes possible the use of complete tv channels for teletext, instead of the eight spare lines of tv signal that are currently used.

In this way a much greater volume of information could be transmitted and, with cable tv, a return signal would be possible, enabling interactive teletext.



Visitors check out the prize-winning ZX81 at the Design Council.

## Design Council picks the ZX81 for award

Sinclair's ZX81 is the first micro computer to win a Design Council Award.

Judges for the 1982 awards praised Sinclair for bringing computers within reach of the general public. The panel concluded: "The price and easy-to-follow instructions mean that every member of the family can have the opportunity to learn about computers and how they are programmed."

The award comes as Sinclair Research reports sales of over 20,000 units per week to America.

At the same time an exhibi-

tion of micros and their uses — called 'Inside Information' has been mounted jointly by the Design Council and Information Technology '82. At the Design Centre in London's Haymarket, it features many micros, including the ZX81, BBC Model B and the new Osborne 1. The display concentrates, not only on the hardware, but also on the wide-ranging applications of micros — in the home and at work — and their use in, for example, medicine and telecommunications.

The exhibition runs until June 26 and entry is free.

## Now: the fully equipped remote control household

Stripeland Electronic Control Systems have introduced a range of control units enabling micros to program the operation of domestic appliances by remote control.

The system comprises the user's own host-micro, one TX008 interface and up to 32 remote receiver units.

Instead of direct wiring from the TX008 unit to the appliance, which could be a tv, radio, lighting or even motorised curtains, the Stripeland

system uses the existing mains lines.

Richard Last, of Stripeland, told *Popular Computing Weekly* that he will shortly be selling a two-way version of the system with built-in memory at the remote point. The remote device would then be able to store information and send it back to the micro.

Further details from Stripeland, 111 Liverpool Road, Formby, Merseyside L37 6BR.

## Scotland gets first micro show

Edinburgh ZX Computer Club is to hold a one-day show on July 24. More than 30 stands are planned for this, the first micro show of its kind in Scotland.

Organiser Gordon Hewit told *Popular Computing*

*Weekly* that the time was right for such a show.

The ZX fair will be at Meadowbank Stadium, open from 10am to 6pm.

Further details from Gordon Hewit, 3 Baberton Mains View, Edinburgh EH14 3BR.

## Commodore show is on

Britain's only consumer weekly for micro owners, *Popular Computing Weekly* will be at the Cunard Hotel from June 3 to 5 for the 3rd International Commodore Computer Show. With twice the space of last year's show — over 30,000 sq ft on both exhibition levels of the hotel — there will be 154 stands on display.

Displays will feature all the new Commodore products, including the Vic-10, Vic-30 and Commodore 64, plus the Vic networking system from Datalect and IT '82.

The show is to be opened by Commodore International's Chief Executive, Jack Tramiel.

The venue is the Cunard International Hotel, Hammersmith, London. Entry is £1 and the opening times are: June 3, 12am to 6pm; June 4, 10am to 6pm; and June 5, 10am to 5 pm.

You can find *Popular Computing Weekly* on Stand 140, on the lower floor.

## IBM can't be too Personal

IBM still has no plans to introduce its Personal Computer to the UK.

The company now has an estimated backlog of 40,000 orders in the US and consequently no spare production to contemplate a UK launch.

Meanwhile, Mick Punter, managing director of Microcomputerland, has been importing the IBM micro.

Microcomputerland gets round IBM's export restrictions through its purchasing links with Computerland, an IBM US distributor.

However, Microcomputerland has reportedly been the subject of Fraud Squad enquiries and apparently a number of salesmen have been fired by Punter.

The IBM Personal Computer System is also being imported by KGB micros.

Contact Microcomputerland, 1 Prince's Street, Richmond, Surrey, or KGB Micros, 14 Windsor Road, Slough SL1 2EJ.



## The ultimate in Useful Sharp MZ80A / Sharp MZ80K Software by Dale Hubbard

Fed up with boring games? Make your SHARP work for you!  
All program cassettes based and written cleverly in Sharp standard Basic.  
All programs are "menu" operated and complete with demonstration files where appropriate. 48K memory required.  
All prices include VAT and post and packing. Despatch by return.

### DATABASE

The program that everyone needs. Facilities include sort, search, list, delete, change, totals, save file, line print if required, etc. etc. Can be used in place of any card index application. £19.95

### RUBIK SOLVER

It's not our policy to offer games but we make an exception here for a program to solve the cube from ANY position. Shorthand notation makes learning the solution by heart possible for most active brains. £12.95

### DECISION MAKER

A serious program that enables the computer to make a sound decision for you based on various criteria.  
If you want to buy a car, hi-fi, house, etc., or you don't know which woman to marry then you need this one. £5.95

### STOCK CONTROL

All the necessary for keeping a small retail inventory. Routines include stock set-up, value totals, locations, minimum stock levels and many more including financial summary and line printer routines. please state machine type. £19.95

### ACCOUNTS

A gem of a program, all for cassette, with the following features:

Daily Journal  
Credit Sales  
Cash Sales  
Credit Purchases  
Purchases — other  
Sales Ledger  
Purchase Ledger  
Bank Account  
Year to Date Summary

A fully interactive program suitable for all businesses. Files can be saved and loaded and totals from one file carried forward to another on cassette. Particularly useful from a cash flow point of view, with an immediate accessibility to totals for debtors and creditors. Bank totally supported with entries for cheque numbers, credits and, of course, running balance. £19.95

Access cards accepted. Send cheque or PO or credit card number to:

**GEMINI MARKETING LTD**

Quay House, Quay Road, Newton Abbot, Devon TQ12 2BU.

OR telephone us with your credit card order on Newton Abbot (0626) 62869

Despatch by return

VIC 20 • VIC 20 • VIC 20 • VIC 20 • VIC 20 • VIC 20

## LLAMASOFT SOFTWARE!!

ARCADE QUALITY GAMES FOR THE VIC 20 . . .

### DEFENDER (M/C)

FULL FEATURE VERSION OF THE POPULAR ARCADE GAME, INCLUDING: SWARMERS, BAITERS, PODS, LANDERS AND HUMANOID. CONTROLS: UP, DOWN, THRUST, REVERSE, FIRE AND SMART BOMB. (8K) HIGH RESOLUTION COLOUR GRAPHICS, JOYSTICK CONTROLS.

**ONLY £10.00**

### BOMB BUENOS AIRES

FLATTEN THE ARGENTINE CAPITAL WITH YOUR VULCAN BOMBER, AND THEN LAND IT IN SAFETY. LEVELS OF PLAY, HIGH RESOLUTION COLOUR GRAPHICS. WILL RUN ON THE UNEXPANDED VIC 20.

**ONLY £4.95**

OR BOTH PROGRAMS ON ONE CASSETTE

**FOR ONLY £12.95**

AVAILABLE FROM: LLAMASOFT SOFTWARE  
LINDON HOUSE, THE GREEN, TADLEY  
BASINGSTOKE, HANTS  
TEL: (07356) 5038

## From Dreams to Reality.....

It's here at last!

## B.B.C Microcomputer Games Pack 1

GAMES PACK INCLUDES:  
STAR WARS — BLACKJACK — SIMON —  
FORTUNE — ALIEN INVASION

R.G.B COLOUR MONITORS

£317.50 inc. Lead, V.A.T. and P. & P.

recommended for use with B.B.C Microcomputer

**Now Available B.B.C Microcomputer  
Pack 2 3 Great Games**

Star Trek - Puck Chase - Mastermind  
Both Packs for B.B.C models A and B

**for further information send large S.A.E.**

## Computers for All

72 NORTH STREET, ROMFORD, ESSEX. TEL 0708 752862





# Club Reports

Is your club involved in any special projects? Use this page to tell the world about it.

## Three years on and it's still fun in Sunbury

*David Kelly visits Sunbury-on-Thames Computer Club and talks to its founder*

They're such a casual lot in Sunbury. Not for them the establishment rigours of membership fees, newsletters, and tutorial meetings. Though founder Simon Taylor originally planned that the club should take that sort of direction, the members unanimously decided against such formalities and instead created a regular weekly meet in the pub to offset the 'formality' of their monthly meeting in St Benedict's Church Hall in Ashford.

A lot has happened in the three years since the club was formed and Simon readily points out that it's been a long time in the world of micros.

Nowadays he's making a name for himself as creator of the game *Blitz*, which Commodore have contracted to market, and as a software programmer for Microgen and also writing programs for the new Sharp PC-1500. At 18 he's a budding expert quite naturally at home in one of the oldest computer clubs in Britain.

It all started just after he left school.

First he saved for a Mark 14, Sinclair's first micro, and began learning machine code. Then when a friend bought a Nascom I kit he decided to try to get in touch with other micro enthusiasts in and around Sunbury.

As so often happens, it was a letter in a magazine which really set the ball rolling. Simon got 10 letters and promptly organised meetings. He kept a list of names and addresses and every month someone



*Simon Taylor ... a budding expert*

would volunteer their house for the meeting. Everyone brought along their machine and exchanged ideas and programs.

They would meet on the first Friday of the month, bringing quite a variety of micros — Mark 14s, Nascoms, a Triton, Psycomp '80s, an Elector Junior and an Aim 65. Most of the machines operated only in machine code and if your micro understood a high-level language then that was really something!

Over the next eight months the club grew rapidly, with new members joining every month.

This arrangement ran into difficulties when more than 50 people, each with their machines turned up to the December 1980 meeting. The problem was no longer how to plug in all the micros but how to get all the members in through the front door! This was to be the last meeting of that type — just meeting in each other's homes was no longer practical.

The three people most involved in the running of the club at this time, Simon Taylor, Andy Lawrie and Stephen Battle, felt the club needed a formal set up — with membership fees, a newsletter and possibly lectures and tutorials.

They set out their ideas in a letter but the response from members suggested the most important feature of the club was its informality. To have a rigidly constituted group would be to destroy what the club stood for — a friendly meeting of people

with a common interest. So it was decided to carry on, but to let the club, as far as possible, govern itself.

Over the next four months they held no meetings at all while Simon searched for a suitable monthly venue. At last he found St Benedict's Church Hall in Ashford and in April 1981 they met again for the first time in the hall.

Since then Sunbury Computer Club has met on the last Tuesday of every month and the air of informality is maintained. Simon keeps no list of names and addresses of those who attend and can only estimate that the membership is stable at somewhere around 60. In his own words "it is just a place where interested individuals can go and talk and exchange ideas."

He reckons that within the membership they now have at least two of every popular computer (except, strangely, the PET), and can provide help and advice on just about any machine.

The club also meets every week in the pub 50 yards from Simon's home — The Grey Horse.

As the club has developed, so has Simon's involvement in micro-computing. Together with Microgen he plans to produce a monthly cassette-based user club magazine, which should appear before the end of the summer.

All this, together with his full-time apprenticeship and his work for Sunbury Computer Club keeps Simon very busy — he admits he doesn't know where he finds the time. Simon's advice is never to forget the Sunbury Club's motto — *Per ardua ad error!*

Sunbury Computer Club meets at 8 pm in St Benedict's Church Hall, Napier Road, Ashford, on the last Tuesday of each month. The next hall meeting will be at 8 pm on June 29. On the other Tuesdays of each month the club meets for a drink and a chat at 8 pm in the Grey Horse, Staines Road East, Sunbury-on-Thames.

Further details from Simon Taylor, 8 Priory Close, Sunbury-on-Thames.

## For your diary

Norwich and District BBC Micro-Computer User Group meets twice-monthly, with workshops and talks, in Norwich City College. Contact Paul Beverley, Room B12a, Norwich City College. (Tel: 0603 60011 ext 233).

Mid-Cheshire Computer Club meets on the second Friday of each month in the main Winsford Library (in the Town Centre Precinct) at 7.30 pm. Contact Dave Clare, Providence House, 222 Townsfields Road, Winsford, Cheshire, CW7 4AX. (Tel: Winsford 51374.)

## We want to hear from you!

Whether you are starting a new club, holding a special meeting, or just changing the venue, we want to hear from you.

Write to David Kelly, Club News, *Popular Computing Weekly*, Hobhouse Court, 19 Whitcomb Street, London WC2 7HF or call him on 01-930 3271.



# Black

Learn to combat the greatest peril of space. By Dave Middleton

You are captain of a small spaceship carrying damaged androids to a repair ship and the quicker you get to the ship the larger your bonus. Your ship is fitted with only crude instruments which give your velocity components in the x and y directions of motion.

Long range scanning has already shown that there is a black hole in the area but because black holes do not emit light you obviously cannot see it. You will have to rely on gravitational effects on your velocity to fix its position on the screen.

Like any true space ship once you have accelerated to a velocity by giving thrust in one direction you have to thrust in the opposite direction to reduce velocity again.

If you move your ship out of the quadrant you are in, your on-board

computer will advise you to use your warp drive and give you your current x,y position relative to the repair ship which is at co-ordinates 1,1; you still have control of your ship however and can manoeuvre using the normal controls. If you use the warp drive you will usually end up in the vicinity of the black hole but at least your ship will be back under control again.

## How to get to the repair ship


The easiest way is to move outside quadrant, out of the gravitational effects of the black hole and fly by watching the x,y co-ordinates change. The average time I achieved for this was between 45 and 55 hours.

The more skillful way is to move diagonally across the screen and make use of the whiplash effect. The velocity component added by the black hole is inversely proportional to your distance from it, so if you go too

close you will end up with a velocity which will either destroy your ship or fling you out at an uncontrollable speed. However if you get your approach correct your ship will be accelerated around the black hole into the vicinity of your repair ship. It is than a simple matter of decelerating and docking. The best time I achieved using this method was 20 hours. (You still have to spend some time outside the quadrant).

The game is in real time so you have to make your decisions quickly or another 'hour' will be added to your travel time.

To control your ship use the unshifted cursor keys. Pressing a key adds one velocity component in the direction the arrow is pointing, the key only works while information is being displayed. Positive x-velocity moves the ship to the right and positive y-velocity moves the ship down. Press 'w' if you are either too close to the black hole or you have lost control of your ship.

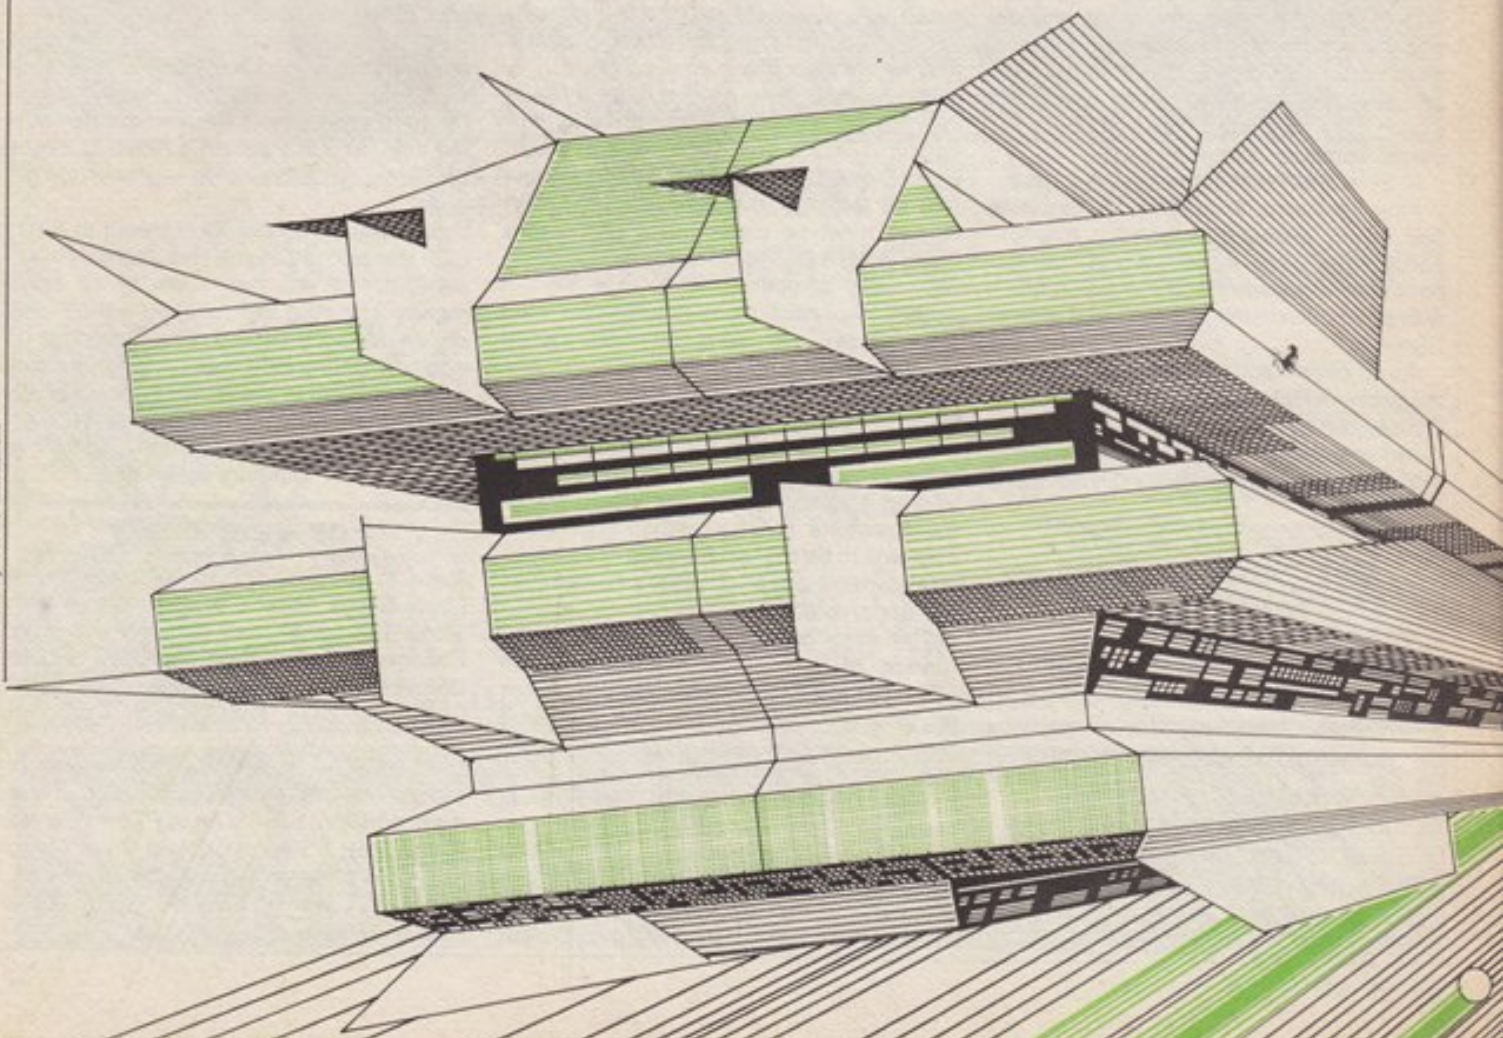



```


000000 BLACK HOLE
000000
000000 BY DAVID MIDDLETON
000000
000000 PRINT AT 10,11,"BLACK HOLE"
000000 PRINT AT 11,10,"-----"
000000
000000 LET X=50
000000 Y=50
000000 X0=1
000000 Y0=1
000000 X5=1
000000 Y5=1
000000 X1=0
000000 Y1=0
000000 T=0
000000 PAUSE 100
000000 REM MOVE SHIP
000000 T=T+1
000000 IF INKEY$="U" THEN GOSUB 30
000000
000000 IF INKEY$="S" THEN LET X1=X
000000
000000 IF INKEY$="D" THEN LET X1=X
000000
000000 IF INKEY$="6" THEN LET Y1=Y
000000
000000 IF INKEY$="7" THEN LET Y1=Y
000000
000000 GOSUB 2000
000000 LET V=50R (X1+X1+Y1+Y1)
000000 IF V>20 THEN GOTO 1500
000000 LET X=X-X1
000000 LET Y=Y-Y1
000000 IF X<0 OR Y<0 OR X>31 OR Y>31 THEN GOTO 1000
000000 IF X=X5 AND Y=Y5 THEN GOTO
000000 IF X=X5 AND Y=Y5 THEN GOTO
000000
000000 CLS
000000 PRINT AT Y,X,"O"
000000 REM PRINT AT Y5,X5,"B"
000000 PRINT AT Y5,X5,"S"
000000 PRINT AT 21,0,"X",X1," Y",Y1
000000 PAUSE 100
000000 GOTO 1000
000000 PRINT "SHIP EXPLODED DUE TO
000000 VELOCITY"
000000 GOTO 9999
000000 CLS
000000 PRINT "USE WARP DRIVE TO GE
000000 T BACK TO"
000000 PRINT "KNOWN SPACE"
000000 PRINT "CO-ORDINATES NOW"
000000 PRINT "X",X," Y",Y
000000 PAUSE 100
000000 GOTO 1000
000000 PRINT "YOU JUST FELL INTO T
000000 HE BLACK"
000000 PRINT "HOLE...."
000000 GOTO 9999
000000 IF V>3 THEN GOTO 1550
000000 CLS
000000 PRINT "WELL DONE YOU MANAGE
000000 O TO DOCK"
000000 PRINT "WITH THE REPAIR SHIP"
000000 PRINT "IN ",T," HOURS"
000000 IF T<35 AND T>25 THEN PRIN
000000 T "YOU WILL GET A BONUS"

```

```

1034 IF T<=25 THEN PRINT "YOU WILL GET A HUGE BONUS"
1036 IF T>50 THEN PRINT "TOO LATE...NO BONUS"
1038 IF T<50 AND T>35 THEN PRINT "YOU GET A SMALL BONUS"
1040 GOTO 9990
1050 PRINT "YOU JUST CRASHED INTO THE"
1060 PRINT "REPAIR SHIP, KILLING A LOT"
1070 PRINT "OF PEOPLE"
1080 GOTO 9990
2000 REM GRAVITY EFFECT OF BLACK HOLE
3010 LET X3=X
3020 LET Y3=Y
3030 GOSUB 2500
3040 LET X1=X1+X4
3050 LET Y1=Y1+Y4
3060 LET X3=X3
3070 LET Y3=Y3
3080 GOSUB 2500
3090 LET SX=SX+X4
3100 LET SY=SY+Y4
3110 RETURN
3120 LET X4=ABS (X3-XB)
3130 LET Y4=ABS (Y3-YB)
3140 LET D=INT (20/YOR (X4**2+Y4**2))
3150 IF X4>0 THEN GOTO 2530
3160 LET AN=PI/2
3170 GOTO 2540
3180 LET AN=PI/N (Y4/X4)
3190 LET X4=INT ((.1+D)*COS AN)
3200 LET Y4=INT ((.1+D)*SIN AN)
3210 IF X3>XB THEN LET X4=-X4
3220 IF Y3>YB THEN LET Y4=-Y4
3230 RETURN
3240 REM UARP DRIVE
3250 LET X=INT (5+RND*20)
3260 LET Y=INT (5+RND*15)
3270 LET X1=INT (X1/2)
3280 LET Y1=INT (Y1/2)
3290 RETURN


```

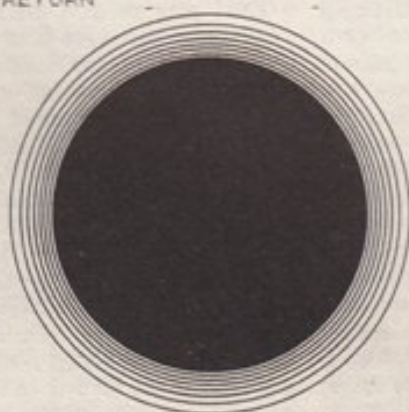



# Reviews

## software

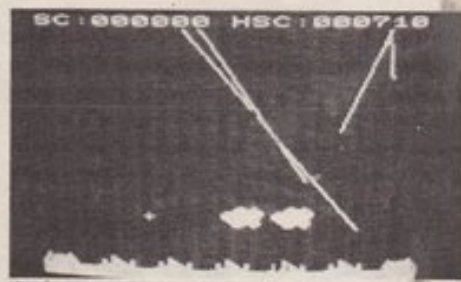

### Missile Command

Available from Hi-Tech, or any Commodore Vic Dealer. Price £8.75.

All right, I admit it, I'm hooked! Another reproduction of a popular arcade game, this requires an additional 3K of RAM before the action can commence. It can be played using either the keyboard or a joystick, and a joystick is certainly to be preferred. Using the keyboard tends to get your fingers tied up in knots as you desperately try to press nineteen keys at the same time.

The same takes a while to load, as there is one setting up program before the main one comes in. Having selected keyboard or joystick control, sit back and wait for a few minutes while the second program is loaded. Once you've got there, you're in for a frantic time! You are defending five cities, which are under siege by missiles raining down from above. The method of defence is quite ingenious: you control a set of sights, which race about the screen at breakneck speed (they need to). When the sight is in an appropriate position, usually just in front of one of the missiles coming down, pressing the fire button launches a counter missile of your own, aimed at your sights. When it gets there, explosions occur, and the ensuing debris wipes out any enemy missiles which blunder into it.

However, any of the missiles which get through your defences are more than capable of wiping out a city if they score a direct hit, and when all your cities go . . .!

To score, you must demolish the enemy missiles, and use as few of your own missiles as possible, since you get points for any that remain after a particular attack wave is completed. The missiles come down in droves, and every wave gets successively more frantic, with seemingly hundreds pouring down at a time. There is a way of surviving this, which entails setting up a 'line' of your own missiles across the bottom of the screen, and hoping that the enemy missiles run out before your own do.

#### Summary

An extremely addictive game, and a fairly good reproduction of the existing arcade

game. This is a difficult one for manufacturers to tackle, as the original game had a very novel way of moving your sights across the screen, and one which is not reproducible on any microcomputer. The efforts that Hi-Tech have put into being as faithful to the original as they could, considering the limitations imposed upon them, are commendable. A very good game.

PG

### Party Tricks

Video Software, Stone Lane, Kinver, West Midlands. ZX81 1K cassette, Price: £4.95.

So Video Software, long a supplier of sophisticated up-market 16K software for small businesses and training, is lowering its sights! They have just launched this cassette, containing ten BASIC 1K routines and promise more.

The kind of party they're aiming at is for children, I think. Introducing something different for children's parties is a major cause of ulcers in certain circles — to have a ZX81 play session can't be bad.

However, there are doubtless plenty of adults who will enjoy much of the material here, even if the overall novelty is not in the same league as that of, say, the Orwin packages or the "adult" games from Automata.

Video Software shows rather poor marketing in putting the least exciting programs first. We have *Shoot* — where you are taking a penalty which the goalie has to try to save; *Sketch* — differing from the million other etch-a-sketches only by having a SAVE facility; *Name The Day* — giving weekday for any date; and *Train* — you drive a train, in forward or reverse, along a track.

These are all fairly good, even if hardly world-shattering. Later programs are better. They include *Onger-Wonger* (a picture-drawing routine); *Weather* (a variant on the random poetry genre); *UFO* (shoot down the single space invader); *Who Shot JR?* (ZX81 Cluedo); *Field-Gun* (a nice target practise game); and *Follow* (you must copy the micro's wiggly path across the screen).

Video Software's well-known high-quality of presentation is used with this 1K package.

For your money you get a good cassette, with a set of saves on each side, and an impressive 26-page booklet.

#### Summary

Near top marks for this collection of 1K ZX81 programs — fun for all, and useful for those struggling to get into Sinclair BASIC.

KJL

### Jungle Maths

Scisoft, 5 Minster Gardens, Newthorpe, Eastwood, Notts.

ZX81 16K cassette.

Price £4.50.

It was with a great thrill of anticipation that I prepared to look at this package. There is not much material yet for ZX81 teaching, and a huge need. Scisoft's material is nicely packaged, not too costly and comes with a separate four-page leaflet.

But the thrill soon died down. The leaflet has been hastily and poorly written — there are ten grammatical errors in the eleven-sentence description of the material, for instance. And the recording quality on the cassette is very reminiscent of what we had to put up with nine months ago — the signal on one side was so weak that loading was impossible; that on the other was not quite as bad, but still bad.

Such lack of attention to detail is bad practice in any kind of software. It is not at all excusable where children's learning is concerned.

The ha'p'orths of tar are missing throughout the program that I loaded as well — slow reaction to key presses, punctuation marks missing, poor screen layout generally, inappropriate language, inadequate mugtrapping.

There are matters too that any competent maths teacher would frown on severely: inadequate restrictions on the questions posed, use of the "less than" symbol, incorrect use of the word "decimal".

All this is a great pity. Scisoft had a lovely idea — why, oh why, didn't they carry it right to the end before rushing to the market place?

The lovely idea is of course to link the educationist's need for drill programs to the child's need for games.

In *Jungle Maths* you must move across the screen avoiding a (rather strange) collection of hazards by answering the posed questions correctly.

Type of question (from the four rules), range and type of numbers involved, and time limit may all be selected during the initial stages.

The hazards involve rather laborious moving graphics, but the children enjoyed them (despite their horrific nature) — they probably can't readily be improved without machine code. All the same, tar needs application to the BASIC coding generally.

#### Summary

An excellent idea — parents and teachers need this kind of program. It is a great pity that the authors haven't worked a bit longer on the coding: it is to be hoped that a polished version will soon appear.

KJ



# Reviews

## hardware

### Beebox

Available from Beelines Limited.  
Price £220 plus VAT.

This neat, compact unit, which sits underneath your Vic, is designed to give you a 40 column by 25 line display, and increase the amount of available memory from 3K to 32K. It connects up to the expansion socket on the Vic, but has a further socket of its own, so nothing is lost and quite a bit gained.

All this sounds very impressive, but is it as good as it's cracked up to be? The company's description creates the impression that a true 40 x 25 screen area is available on which you could merrily program impressive graphics for anything from arcade games to word processing packages. Not so.

On connecting up the unit and powering it all up, you have lost the traditional 'window' screen display of the Vic, and the whole screen is there for you to marvel at. This is somewhat reminiscent of the old Commodore Pet 4032 display. The old Vic appearance is not all you've lost however. Also gone are the Vic graphics, and indeed just about everything you've become familiar with. In their place is the Prestel character set, which in its defence is quite impressive, and a variety of other control characters. For some reason best known to Beelines, actioning these involves positioning them on the screen, thus losing some of the much valued 40 x 25 area.

These control characters include a facility to produce double height characters, flashing characters, and so on. What you can't do is alter the background colouring: you start off with white on a black background, and black it will remain, whatever you try and do about it.

One further unfortunate feature is that you cannot revert to the ordinary Vic screen, once that board is wired up. To get back into Vic mode you have to disconnect everything and start again. It would have been nice to be able to swap from one to the other at will.

On the plus side, the colour quality looks distinctly better than on a normal Vic, although there is a slight shimmer when scrolling through a listing.

#### Summary

It does give you an extra amount of memory, and all told is probably fairly cheap for an additional 29K of RAM and a 40 x 25 display area, even if it is only a display area. At £220 it will probably be of most use to the businessman who wants to use a larger area (for say stock control, or whatever), but for the average hobbyist I would say that it's a waste of time. **PG**



### 20 Simple Projects

By Stephen Adams, published by Interface, 44-46 Earls Court Road, London W8  
Price £6.45.

This is the latest offering from the Interface publishing house that specialises in books for home computer users, in particular Sinclair users.

Author Stephen Adams is well-known in the microcomputer world as the man who knows his way around Sinclair hardware, and who has had much of his work published in the microcomputer press. The idea of this book is a good one, microcomputer hardware projects being a subject not often covered in magazines.

Adams makes no claims about the quality of his projects, each being the cheapest and simplest way of performing a task, not necessarily the best. For this reason the book deserves praise as a source of ideas or questions, rather than answers. Adams has provided you with the route, it's up to you to explore it.

Some of the projects are specific to the ZX81, but not so many that other computer users will feel left out. The circuit diagrams use a non-standard series of symbols, but are clear enough. As in other Interface books, there are a lot of pictures that have no relationship with the text — an interesting quirk. One other point I find most annoying is the liberal use of upper case letters throughout the book.

It should be remembered that books of this nature are not judged by the quality of their production, but by the information they contain, and this book contains a fair amount of that. The construction projects contain a minimum of software, concentrating on the electronics.

Among them are a tape recorder control, which every computer user will find handy, a light pen, which is the ultimate in low-technology, and an analogue to digital converter. **SB**

### ZX81 EPROM board

EPROM Services, 3 Wedgewood Drive, Leeds LS8 1EF. Tel: 0532 667183.  
Prices: board, £17.50 including p&p; EPROM, £3 each and programming them £2/K.

This printed circuit board comes ready made to connect up to your ZX81 and provide it with your own 'commands' stored as subroutines in a ROM.

The type of ROM used is called an EPROM which means it can be erased by ultra violet light and reprogrammed.

The board can take four 2716 (+5 volt type) EPROMs and connect up to the 16K pack as well.

The EPROM can be programmed by you or the company which supplies the board. EPROM Services supply the complete service, erasing the EPROM and reprogramming it from your machine code listing. The advantage of using this method of program storage is that no RAM is used up and the program is still safe in the ROM when the power is switched off.

The space allocated to the EPROMs on the board is 8K to 16K in the memory map, but due to the fact that only one IC is used to decode the address, it also appears in the 40K to 48K section as well. This means that you are limited to 16K of RAM as the Sinclair ROM takes up the space from 32K to 40K.

The instructions for inserting the EPROMs are easy to understand and include instructions on how to alter the board so that it can take 6116 RAMs instead.

The board arrived with an EPROM containing seven machine code routines, in the first 2K socket. They were RENUMBER (in steps of 10, starting from 10, but with no GOSUBs or GOTOs altered.), FREE MEMORY, PROGRAM LENGTH, MEMORY LENGTH, FILL (fills the screen with the character selected).

The last two convert decimal numbers POKed into the system variables to hexadecimal numbers printed on the screen. There were a couple of errors in the last two, due to address changes being made but not clearly explained. The address changes were 16514/16515 to 16507/16508.

This EPROM board could be very useful on saving RAM, if you can write your own routines in machine code (EPROM services intend to make more programs available soon).

It does however restrict the amount of RAM you can use and as a number of boards that plug into the same address space, you will be limited as to what sockets you can use. **SA**



**C.C.S.**  
14 Langton Way  
London SE3  
Tel: 01-858 0763

**PLEASE NOTE** Payment may be made in Sterling (Money Order available at your bank) or U.S. to U.S.A. customers only. Prices quoted above are also prices and include AIRMAIL.



# Open Forum

Open Forum is for you to publish your programs and ideas.

It is important that your programs are bug free before you send them in. We cannot test all of them.

Contributions should be sent to: Popular Computing Weekly, Hobhouse Court,  
19 Whitcomb Street, London WC2H 7HF.

## Flashing pound

on Vic-20

This program places the Vic pound sign as a defined character randomly on the screen and then scrolls it in pixel format vertically in its cell space.

Lines 150 to 190 copy the character down, redefine the space character and switch the character sets. Lines 200 to 240 move the bytes through the character cell to perform the scroll.

If the same routine was applied to more characters in machine code it should be possible to move displays on the screen in fine scroll, thus opening up interesting areas in the games and visual presentation fields.

### Flashing pound by Chris Palmer

```
10 REM FLOATING POUND
20 REM
30 REM CHRIS PALMER
40 :
50 :
60 SC=7680:CL=38400
70 CH=26#8:CB=7168
80 PRINT"J"
90 POKE 36879,8
100 FORI=1TO10
110 PS=INT(RND(1)*506+1)
120 POKE SC+PS,20
130 POKE CL+PS,7
140 NEXT
150 FORI=0TO7
160 POKECB+I+CH,PEEK(32768+I+CH)
170 POKE CB+32#8+I,0
180 NEXT
190 POKE36869,255
200 TV=PEEK(CB+CH)
210 FORI=0TO6
220 POKECB+CH+I,PEEK(CB+CH+I+1)
230 NEXT
240 POKE CB+7+CH,TV
250 GOTO 200
```

## YOUR PROGRAM COULD WIN A PRIZE!

Each week the editor goes through all the programs that you send to Open Forum in order to find the Program of the Week.

The author of that program will qualify for DOUBLE the usual fee we pay for published programs (the usual fee is £10).

Programs which are most likely to be considered for the Star Prize will be computer printed and accompanied by a cassette.

The programs will be well documented, the documentation being typed with a double spacing between each line.

The documentation should start with a general description of the program and then give some detail of how the program has been constructed and of its special features.

Listings taken from a ZX Printer should be cut into convenient lengths and stuck down on to white paper.

Please enclose a self-addressed envelope.

## Cone

by Jeremy Rowntree

```
10 REM 3-D CONES
20 REM BY J.ROWNTREE
30 REM AND S.LINDSAY
40 REM FOR BBC MICRO
50 REM
60 MODE 4
70 REM DEFINE COLOURS
80 VDU 19,1,2,0,0,0,19,0,7,0,0,0
90 A=640:B=130
100 MOVE A,B:PLOT 22,A,1024
110 J=RND(180)+220:K=RND(100)+20
120 I=K/J:V=RND(30)+25:S=50+RND(50)-V
130 MOVE A,B+K
140 FOR X=0 TO 2*PI STEP PI/180
150 DRAW A+J*SIN(X),B+K*COS(X)
160 NEXT X
170 FOR Q=0 TO 2*PI STEP PI/9
180 MOVE A+J*SIN(Q),B+K*COS(Q):DRAW A*(J-S)*SIN(Q),B+V+I*(J-S)*COS(Q)
190 NEXT Q
200 B=B+V:J=J-S
210 REM TRY 'V+B' AT LINE 220
220 V=V-B/100
230 K=I*J
240 GOTO 130
```

## Cone

on BBC Micro

This program will run on a BBC Micro Model A or B in any available graphics mode. When RUN it will draw a random cone in 3D in the form of a moulded grid.

The screen colours are defined at Line 80; the '2' sets the foreground, ie plotting, colour to green while the '7' sets the background, ie screen, colour to white.

These numbers can be altered to give different colours: 1 — red; 2 — green; 3 — yellow; 4 — blue; etc.

### Program notes

Lines 90-120 define a random ellipse, centre A, B; major axis J; minor axis K. This ellipse is then plotted by Lines 130-160.

V and S define how the next ellipse relates to this one — V = vertical distance between them, S = amount by which ellipse shrinks — while I keep the ratio of the axes constant. Lines 170-190 draw lines connecting the ellipses.

Line 220 adjusts the vertical step as the cone is plotted causing the shape to curve — with a '-' sign it curves inwards while with a '+' sign it curves outwards.

The STEP in Line 140 can be altered to give a more rapid plot (try PI/90) at the expense of resolution while altering the STEP in Line 170 will vary the spacing of the vertical lines.

## Depth charge

on ZX81

In this program you command a frigate with a substantial supply of depth-charges. You must destroy the submarines, which travel at various depths, before five parts of the dam-wall are destroyed. The deeper the

to next page



# Open Forum

from previous page

submarines are the more you score for hitting them.

You can move your frigate with the "5" and "8" arrow keys. To drop a depth-charge you have to press "6". The submarines will continue to move even after you have dropped a depth-charge but with a more inconsistent movement.

To start the game from the instructions you have to press NEW-LINE.

## Program notes

Lines 1 to 10 set up the main variables, 15 and 16 set up the screen by calling a sub-routine at 1000.

Lines 20 to 250 make up the main body of the program.

Lines 270 to 295 make an explosion when the depth-charge reaches the lowest point it can move to and has not hit anything.

Lines 300 to 395 generate and move the submarine.

Lines 400 to 470 create an explosion and increment the score when a submarine is hit.

Lines 600 and 610 finish the program when five parts of the dam-wall have been destroyed.

Lines 1000 to 1110 generate the screen display.

Lines 2000 to 2110 print out the instructions.

## Depth charge by Clive Carter

```

1000  RAND
1010  LET CC=0
1020  GOSUB 2000
1030  LET SC=0
1040  LET Y=3
1050  LET X=0
1060  LET X2=0
1070  LET Y2=0
1080  LET CC=PEEK 16396:PEEK 16397
1090  LET AS="  "
1100  GOSUB 1070
1110  PRINT AT 0,0;"SCORE=0"
1120  IF X=0 THEN LET X=X+(X>0)
1130  IF X=0 THEN LET X=X+(X<0)
1140  PRINT AT 3,X;AS
1150  IF X=0 AND Y=3 THEN LET
1160  Y=X+5
1170  IF X=0 AND Y=3 THEN GOTO
1180  200
1190  IF RAND>.9 THEN GOTO 300
1200  IF X2=0 THEN GOTO 300
1210  IF Y2=0 THEN GOTO 300
1220  IF PEEK 100+(X1+1)+(Y+33)=
1230  0 THEN GOTO 400
1240  PRINT AT Y,X1;" "
1250  PRINT AT Y,X1;" "
1260  LET Y=Y+1
1270  IF Y=10 THEN GOTO 270
1280  GOTO 50
1290  FOR K=1 TO 5
1300  PRINT AT Y,X1-1;" "
1310  PRINT AT Y,X1-1;" "
1320  NEXT K
1330  LET Y=3
1340  GOTO 20
1350  IF X=0 THEN GOTO 140
1360  LET Y1=INT (RND*10)+7
1370  PRINT AT Y1,X2;" "
1380  LET X2=X2+1
1390  IF X2=27 THEN GOTO 360
1400  GOTO 140
1410  IF PEEK 100+(X2+1)+(Y1+33)=1
1420  THEN LET CC=CC+1
1430  FOR K=1 TO 5
1440  PRINT AT Y1,X2+1;" "
1450  PRINT AT Y1,X2+1;" "
1460  NEXT K

```

```

370 IF CC=5 THEN GOTO 600
380 LET X2=0
390 GOTO 140
400 FOR K=1 TO 5
410 PRINT AT Y1,X2;" "
420 PRINT AT Y1,X2;" "
430 NEXT K
440 LET SC=SC+Y1
450 PRINT AT 0,5,SC
460 LET Y=3
470 LET X2=0
480 GOTO 20
490 PRINT AT 10,10;"GAME OVER"
510 STOP
1000 PRINT
1010 PRINT
1020 PRINT
1030 FOR K=1 TO 10
1040 PRINT " "
1050 NEXT K
1060 PRINT AT 21,0;" "
1070 PRINT AT 20,0;" "
1080 FOR K=1 TO 21
1090 PRINT AT K,51;" "
1100 NEXT K
1110 RETURN
2000 PRINT TAB 10;"DEPTH-CHARGE"
2010 PRINT TAB 10;"-----"
2020 PRINT
2030 PRINT " YOU HAVE AN UNLIMITED"
2040 PRINT " NUMBER OF DEPTH-CHARGES TO"
2050 PRINT " DESTROY THE SUBMARINES WITH. YOU"
2060 PRINT " MUST BLOW UP THE SUBMARINES BE"
2070 PRINT " FORE THEY DESTROY 5 PARTS OF T"
2080 PRINT " HE DAM-WALL."
2090 PRINT
2100 PRINT " USE ""5"" TO MOVE L"
2110 PRINT " USE ""8"" TO MOVE R"
2120 PRINT " USE ""6"" TO DROP A"
2130 PRINT " DEPTH-CHARGE."
2140 PAUSE 10000
2150 CLS
2160 RETURN

```

## 3D noughts and crosses

on Vic-20

The following program is not only for the Pet/Vic, it can be for anybody who owns a computer that can handle data statements — if not then the array will have to be put in as LET A(1) = 2 etc.

After every move, the program first identifies all cells in a particular direction; it then determines the situation in that line by multiplying the cell values M(P1,R1,C1) together; finally, it adds a value S to the priority values N(P1,R1,C1) for the cells in line. S depends upon the line situation determined previously, as you will see.

## Figure 1 Illustrative game

For convenience, plays are only considered on the top plane. The player moves first with O's inputting Plane, Row, Column. The program replies on all even numbered moves with X's. Note that on all its moves the program has a choice of several moves, as cells N(P1,R1,C1) of the same value. After every move N(P1,R1,C1) is updated but only for cells in line with the move cell. Examination of each move in conjunction with figure 3 will make the process clear.

Note that N(P1,R1, C1) is updated even for already-occupied cells: checks could be introduced to avoid that, but the saving in time would probably not be very great.

Figure 1

MOVE	NEW Position	N(P1,R1,C1)			
start	* * * *	10	0	0	10
of	* * * *	0	0	0	0
game	* * * *	10	0	0	10
(1)					
1,1,1	0 * * *	20	10	10	20
	* * * *	10	10	0	0
	* * * *	10	0	10	0
	* * * *	20	0	0	20
(2)					
1,1,4	0 * * X	10	0	0	38
	* * * *	10	10	14	14
	* * * *	10	14	10	14
	* * * *	34	0	0	34
(3)					
1,2,1	0 * * X	108	0	0	38
	0 * * *	118	20	24	24
	* * * *	108	14	10	14
	* * * *	132	0	0	34
(4)					
1,4,1	0 * * X	10	0	0	138
	0 * * *	20	20	124	24
	* * * *	10	114	10	14
	X * * *	148	14	14	48
(5)					
1,2,2	0 * * X	108	10	0	138
	0 0 * *	118	226	222	122
	* * * *	10	124	108	14
	X * * *	148	24	14	146
(6)					
1,2,3	0 * * X	108	10	14	1138
	0 0 X *	20	128	1138	24
	* * * *	10	1124	122	14
	X * * *	1148	24	28	146

Figure 2 Top plane of cube

```

0,0,0 0,0,1 0,0,2 0,0,3
0,1,0 0,1,1 0,1,2 0,1,3
0,2,0 0,2,1 0,2,2 0,2,3
0,3,0 0,3,1 0,3,2 0,3,3

```

Figure 3 Priority values for line situations

Line situation	Line value A(N)	Priority value B(N)
0 * * *	3	10
X * * *	2	14
0 0 * *	9	98
X X * *	4	100
0 0 0 *	27	900
X X X *	8	1000
0 X * *	6	-14
0 0 X *	18	-98
X X 0 *	12	-100

Note that the last three values of b(n) are used only at certain times. If a line was already blocked, neither B(7) or B(8) is used — line 5040. If 0X\*\* is preceded by 0\*\*\*, S is set to -10 line 5030.

Figure 4 Computation of - D -

```

SITUATION IN LINE: 0 * 0 *
VAL OF M(P1,R1,C1): 3 1 3 1
Value of D: 3x1x3x1=9

```

## Program notes

The program has been written deliberately to be machine-independent, and offers several opportunities for changes. Subroutine 2000, which draws the board after every move,



# Open Forum

could be revised using PEEK and POKE to give a static display.

If line 3050 is deleted, the program will now play the same replies in a new game if the player repeats moves from a previous game. Various strategies can be examined to determine the program's weaknesses.

For an alternative game, reverse the inequality signs in lines 3030 and 3040. The program will now play anti-noughts and crosses, trying to avoid creating lines of four. Remember also to change lines 5000 and 5020. If lines 140-170 are deleted, and this line is substituted:

```
140 GOSUB 3000: PRINT:PRINT"YOUR MOVE IS";PRINT P+1;R+1;C+1
```

The computer will take both sides and play itself. Experimentation is possible with the program playing both parts with different versions of B(n). If the losing values of B(N) are modified while the winning values are retained, the program becomes self-teaching and will eventually improve.

The values of B(0)-B(8) are not optimal and can be varied to change the program's play — the only changes required are in line 20.

With a few extra lines the value can be altered according to who is playing eg low values for XXX\* and 0000\* when you play and very high when your friends play.

Please remember you input plane, row and column (P,R,C) as 1,1,1 not 111. Good luck!

## Message scroller

on ZX81

The program asks you to type in a message. It then scrolls your message four letters at a time up the screen, enlarging each character 64 times; forming an 8 x 8 matrix. A machine code routine is used to help speed the printing up.

### Program notes

The program is divided into two sections; the first to enter the machine code (Lines 1-30), when this section of the program has been entered (take care to get line 2 exact) apparent rubbish will appear in line 1 — this is the machine code, lines

## 3D noughts and crosses by Martin Burke

```
1 OPEN1,4 : CMD 1
5 POKE537,PEEK(537)+3:REM RUN /STOP OFF.
10 REM-SET UP BOARD & INITIALISE VARIABLES.-
20 DATA3,10,2,14,9,98,4,100,27,900,8,1000,6,-14,18,-98,12,-100
30 DIM M(3,3,3),N(3,3,3),A(8),B(8)
40 D=1:A$="ROWS"
50 FOR P=0 TO 3:FOR R=0 TO 3:FOR C=0 TO 3
60 IF P=R AND P=C THEN 110
70 IF P=C AND P=3-R THEN 110
80 IF P=3-C AND R=C THEN 110
90 IF P=R AND P=3-C THEN 110
100 GOTO 120
110 N(P,R,C)=10
120 M(P,R,C)=1:NEXT C:NEXT R:NEXT P
130 FOR N=1 TO 8:READ A(N),B(N):NEXT N:GOSUB 2000
140 PRINT"INPUT YOUR MOVE":
150 INPUT P,R,C:P=P-1:R=R-1:C=C-1
160 IF P<0 OR R<0 OR C<0 OR P<0 OR R<0 OR C<0 THEN 140
170 IF M(P,R,C)>1 THEN PRINT"CELL OCCUPIED":PRINT GOTO 140
180 M(P,R,C)=3:GOSUB 1000:GOSUB 2000:GOSUB 3000
190 PRINT"MY MOVE IS ":P+1;R+1;C+1:MC=MC+2
200 PRINT:M(P,R,C)=2:GOSUB1000:GOSUB2000
210 IF MC=64 THEN PRINT" GAME DRAWN " :END
220 GOTO 140
990 REM** FIND ON WHICH LINES THE MOVE CELL LIES.**
1000 FOR Q=1 TO 3:GOSUB 4000:NEXT Q
1020 IF P<R AND P<C AND R<C THEN 1060
1030 IF P=R THEN Q=4:GOSUB 4000
1040 IF P=C THEN Q=5:GOSUB 4000
1050 IF R=C THEN Q=6:GOSUB 4000
1060 IF P<3-R AND P<3-C AND R<3-C THEN 1130
1070 IF P=3-R THEN Q=7:GOSUB 4000
1080 IF P=3-C THEN Q=8:GOSUB 4000
1090 IF R=3-C THEN Q=9:GOSUB 4000
1100 IF P=R AND P=3-C THEN Q=10:GOSUB 4000
1110 IF P=C AND P=3-R THEN Q=11:GOSUB 4000
1120 IF P=3-C AND R=C THEN Q=12:GOSUB 4000
1130 IF P=R AND R=C THEN Q=13:GOSUB 4000
1140 RETURN
1190 REM####DRAW BOARD####
2000 PRINTTAB(10);"COLOURS":PRINT
2020 PRINTTAB(4);"1234 1234 1234 1234"
2030 FOR R=0 TO 3:PRINTMID$(A$,R+1,1);R+1;
2040 FOR P=0 TO 3:FOR C=0 TO 3
2050 ON M(P,R,C) GOTO 2070,2080
2060 PRINT"0":GOTO2090
2070 PRINT"X":GOTO2090
2080 PRINT"X":
2090 NEXT C:PRINT " ":NEXT P:PRINT:NEXT R:PRINT:PRINT:RETURN
2990 REM####FIND CELL WITH HIGHEST PRIORITY VALUE####
3000 HV=0:FOR P=0 TO 3:FOR R=0 TO 3:FOR C=0 TO 3
3020 IF M(P,R,C)>1 THEN 3060
3030 IF N(P,R,C)>HV THEN HV=N(P,R,C):P1=P:R1=R:C1=C:GOTO 3060
3040 IF N(P,R,C)>HV THEN HV=N(P,R,C):P1=P:R1=R:C1=C:GOTO 3060
3050 IF RND(8)>0.5 THEN HV=N(P,R,C):P1=P:R1=R:C1=C
3060 NEXT C:NEXT R:NEXT P:P=P1:R=R1:C=C1:RETURN
3990 REM##### ADD PRIORITY VALUES TO TOTAL#####
3995 REM#####FOR CELLS IN LINE WITH MOVE CELL.#####
4000 FOR T=0 TO 3:P1=P:R1=R:C1=C
4020 ON Q GOTO 4050,4060,4070
4030 P1=T
4040 ON Q-3GOTO4060,4070,4100,4110,4120,4130,4140,4150,4160,4170
4050 P1=T:GOTO 4180
4060 R1=T:GOTO 4180
4070 C1=T:GOTO 4180
4100 P1=P:R1=T:C1=C:GOTO 4180
4110 R1=3-T:GOTO 4180
4120 C1=3-T:GOTO 4180
4130 P1=P:R1=T:C1=3-T:GOTO 4180
4140 R1=T:C1=3-T:GOTO 4180
4150 R1=3-T:C1=3-T:GOTO 4180
4160 R1=3-T:C1=3-T:GOTO4180
4170 R1=T:C1=T
4180 IF F=1 THENN(P1,R1,C1)=N(P1,R1,C1)+S:GOTO 4200
4190 D=D+N(P1,R1,C1)
4200 NEXT T:IF F=0 THEN F=1:GOSUB 5000:GOTO 4000
4210 F=0:RETURN
4900 REM####FIND NEW PRIORITY VALUE TO BE STORED AND ADDED.###
5000 IF D=16 THEN GOSUB 2000:PRINT" I WIN !!!":END
5020 IF D=81 THEN PRINT:PRINT" YOU WIN " :PRINT:END
5030 IF D=6 AND M(P,R,C)=2 THEN S=-10:GOTO 5070
5040 IF D/M(P,R,C)=6 THEN S=0:GOTO 5070
5050 FOR N=0 TO 8:IF D=A(N) THEN S=B(N):GOTO 5070
5060 NEXT N
5070 D=1:RETURN
```

to next page



# Open Forum

from previous page

2,5,10,20,25,30 can then be deleted. Lines 40-195 can then be entered — this is the main program. In the program, the two characters used for printing are a space and inverse space. You can change the characters by 'POKE'ing 16529 and 16536 with two new characters.

For example:

```
POKE 16529,128
POKE 16536,0
```

will give inverse video character.

You can use the program to give a continuously repeating message by adding

```
200 GOTO 110
```

## Message scroller by Philip Haywood

```
1 REM 12345678901234567890123
2 LET B$="210240DE040606E3E0
3 LET B$=B$+03E00D710F4230DC26040C
4 LET N=16520
5 FOR R=1 TO LEN B$ STEP 2
6   POKE N,(B$(R+1)-20)
7   LET N=N+1
8   NEXT R
9   PRINT "TYPE IN YOUR MESSAGE"
10  INPUT AS
11  IF LEN AS/4=INT (LEN AS/4)
12  THEN GOTO 130
13  LET X=ABS (LEN AS-(4*INT (L
14  EN AS)/4))
15  FOR U=1 TO X
16    LET AS=AS+" "
17    NEXT U
18  FOR G=1 TO LEN AS STEP 4
19    LET N=1
20    FOR R=0 TO G/3
21      POKE N+16513,PEEK (7680+R+C
22      ODE AS(R)+E)
23      LET N=N+1
24      NEXT R
25      RAND USR 16520
26      SCROLL
27      NEXT G
28  NEXT AS
```

## Graph by Stephen Read

```
10 DEF "GRAPH"
11 PRINT AT 1,10:"GRAPH"
12 PRINT AT 2,5:"X AXIS = 0 TO
13 30"
14 PRINT AT 5,10:"Y AXIS = 0 TO
15 50"
16 PRINT AT 8,5:"1 STATE AXES"
17 PRINT AT 9,8:"(12 CHARACTER
18 S)"
19 PRINT AT 12,8:"2 PLOT FUNC
20 TION"
21 PRINT AT 13,8:"(G=1=PLOT,G=
22 2=UNPLOT)"
23 PRINT AT 14,8:"(R=X TO FINI
24 SH PLOT)"
25 PRINT AT 17,8:"3 LABEL FUNC
26 TION"
27 PRINT AT 18,8:"(G=1=PRINT,G
28 2=RUBOUT)"
29 PRINT AT 19,8:"(R=X TO FINI
30 SH)"
31 PRINT AT 21,10:"PRESS RETURN"
32
33 INPUT HS
34 CLS
35 FOR X=3 TO 53
36   PLOT X,0
37   NEXT X
38   FOR Y=5 TO 41
39     PLOT 0,Y
40     NEXT Y
41   PRINT AT 1,20:"X=?"
42   LET AS=""
43   INPUT AS
44   PRINT AT 21,7:"X="+AS
45   PRINT AT 1,22:""
46
47   PRINT AT 2,20:"Y=?"
48   LET BS=""
49   INPUT BS
50   PRINT AT 3,8:"Y="+BS
51   PRINT AT 0,20:""
52
53 REM SUBROUTINE STARTS HERE
54 GOSUB 300
55 PRINT AT 0,23:"FROM (R,B)"
56 INPUT R
57 IF R=X THEN GOTO 1270
58
59 CLS
60 FOR X=3 TO 53
61   FOR Y=5 TO 41
62     IF X=X AND Y=Y THEN GOTO 1100
63     LET D=0
64     LET D=SGN U
65     LET D=SGN V
66     LET D=SGN W
67     LET D=SGN X
68     LET D=SGN Y
69     LET D=SGN Z
70     LET D=SGN A
71     LET D=SGN B
72     LET D=SGN C
73     LET D=SGN D
74     LET D=SGN E
75     LET D=SGN F
76     LET D=SGN G
77     LET D=SGN H
78     LET D=SGN I
79     LET D=SGN J
80     LET D=SGN K
81     LET D=SGN L
82     LET D=SGN M
83     LET D=SGN N
84     LET D=SGN O
85     LET D=SGN P
86     LET D=SGN Q
87     LET D=SGN R
88     LET D=SGN S
89     LET D=SGN T
90     LET D=SGN U
91     LET D=SGN V
92     LET D=SGN W
93     LET D=SGN X
94     LET D=SGN Y
95     LET D=SGN Z
96     LET D=SGN A
97     LET D=SGN B
98     LET D=SGN C
99     LET D=SGN D
100    LET D=SGN E
101    LET D=SGN F
102    LET D=SGN G
103    LET D=SGN H
104    LET D=SGN I
105    LET D=SGN J
106    LET D=SGN K
107    LET D=SGN L
108    LET D=SGN M
109    LET D=SGN N
110    LET D=SGN O
111    LET D=SGN P
112    LET D=SGN Q
113    LET D=SGN R
114    LET D=SGN S
115    LET D=SGN T
116    LET D=SGN U
117    LET D=SGN V
118    LET D=SGN W
119    LET D=SGN X
120    LET D=SGN Y
121    LET D=SGN Z
122    LET D=SGN A
123    LET D=SGN B
124    LET D=SGN C
125    LET D=SGN D
126    LET D=SGN E
127    LET D=SGN F
128    LET D=SGN G
129    LET D=SGN H
130    LET D=SGN I
131    LET D=SGN J
132    LET D=SGN K
133    LET D=SGN L
134    LET D=SGN M
135    LET D=SGN N
136    LET D=SGN O
137    LET D=SGN P
138    LET D=SGN Q
139    LET D=SGN R
140    LET D=SGN S
141    LET D=SGN T
142    LET D=SGN U
143    LET D=SGN V
144    LET D=SGN W
145    LET D=SGN X
146    LET D=SGN Y
147    LET D=SGN Z
148    LET D=SGN A
149    LET D=SGN B
150    LET D=SGN C
151    LET D=SGN D
152    LET D=SGN E
153    LET D=SGN F
154    LET D=SGN G
155    LET D=SGN H
156    LET D=SGN I
157    LET D=SGN J
158    LET D=SGN K
159    LET D=SGN L
160    LET D=SGN M
161    LET D=SGN N
162    LET D=SGN O
163    LET D=SGN P
164    LET D=SGN Q
165    LET D=SGN R
166    LET D=SGN S
167    LET D=SGN T
168    LET D=SGN U
169    LET D=SGN V
170    LET D=SGN W
171    LET D=SGN X
172    LET D=SGN Y
173    LET D=SGN Z
174    LET D=SGN A
175    LET D=SGN B
176    LET D=SGN C
177    LET D=SGN D
178    LET D=SGN E
179    LET D=SGN F
180    LET D=SGN G
181    LET D=SGN H
182    LET D=SGN I
183    LET D=SGN J
184    LET D=SGN K
185    LET D=SGN L
186    LET D=SGN M
187    LET D=SGN N
188    LET D=SGN O
189    LET D=SGN P
190    LET D=SGN Q
191    LET D=SGN R
192    LET D=SGN S
193    LET D=SGN T
194    LET D=SGN U
195    LET D=SGN V
196    LET D=SGN W
197    LET D=SGN X
198    LET D=SGN Y
199    LET D=SGN Z
200    LET D=SGN A
201    LET D=SGN B
202    LET D=SGN C
203    LET D=SGN D
204    LET D=SGN E
205    LET D=SGN F
206    LET D=SGN G
207    LET D=SGN H
208    LET D=SGN I
209    LET D=SGN J
210    LET D=SGN K
211    LET D=SGN L
212    LET D=SGN M
213    LET D=SGN N
214    LET D=SGN O
215    LET D=SGN P
216    LET D=SGN Q
217    LET D=SGN R
218    LET D=SGN S
219    LET D=SGN T
220    LET D=SGN U
221    LET D=SGN V
222    LET D=SGN W
223    LET D=SGN X
224    LET D=SGN Y
225    LET D=SGN Z
226    LET D=SGN A
227    LET D=SGN B
228    LET D=SGN C
229    LET D=SGN D
230    LET D=SGN E
231    LET D=SGN F
232    LET D=SGN G
233    LET D=SGN H
234    LET D=SGN I
235    LET D=SGN J
236    LET D=SGN K
237    LET D=SGN L
238    LET D=SGN M
239    LET D=SGN N
240    LET D=SGN O
241    LET D=SGN P
242    LET D=SGN Q
243    LET D=SGN R
244    LET D=SGN S
245    LET D=SGN T
246    LET D=SGN U
247    LET D=SGN V
248    LET D=SGN W
249    LET D=SGN X
250    LET D=SGN Y
251    LET D=SGN Z
252    LET D=SGN A
253    LET D=SGN B
254    LET D=SGN C
255    LET D=SGN D
256    LET D=SGN E
257    LET D=SGN F
258    LET D=SGN G
259    LET D=SGN H
260    LET D=SGN I
261    LET D=SGN J
262    LET D=SGN K
263    LET D=SGN L
264    LET D=SGN M
265    LET D=SGN N
266    LET D=SGN O
267    LET D=SGN P
268    LET D=SGN Q
269    LET D=SGN R
270    LET D=SGN S
271    LET D=SGN T
272    LET D=SGN U
273    LET D=SGN V
274    LET D=SGN W
275    LET D=SGN X
276    LET D=SGN Y
277    LET D=SGN Z
278    LET D=SGN A
279    LET D=SGN B
280    LET D=SGN C
281    LET D=SGN D
282    LET D=SGN E
283    LET D=SGN F
284    LET D=SGN G
285    LET D=SGN H
286    LET D=SGN I
287    LET D=SGN J
288    LET D=SGN K
289    LET D=SGN L
290    LET D=SGN M
291    LET D=SGN N
292    LET D=SGN O
293    LET D=SGN P
294    LET D=SGN Q
295    LET D=SGN R
296    LET D=SGN S
297    LET D=SGN T
298    LET D=SGN U
299    LET D=SGN V
300    LET D=SGN W
301    LET D=SGN X
302    LET D=SGN Y
303    LET D=SGN Z
304    LET D=SGN A
305    LET D=SGN B
306    LET D=SGN C
307    LET D=SGN D
308    LET D=SGN E
309    LET D=SGN F
310    LET D=SGN G
311    LET D=SGN H
312    LET D=SGN I
313    LET D=SGN J
314    LET D=SGN K
315    LET D=SGN L
316    LET D=SGN M
317    LET D=SGN N
318    LET D=SGN O
319    LET D=SGN P
320    LET D=SGN Q
321    LET D=SGN R
322    LET D=SGN S
323    LET D=SGN T
324    LET D=SGN U
325    LET D=SGN V
326    LET D=SGN W
327    LET D=SGN X
328    LET D=SGN Y
329    LET D=SGN Z
330    LET D=SGN A
331    LET D=SGN B
332    LET D=SGN C
333    LET D=SGN D
334    LET D=SGN E
335    LET D=SGN F
336    LET D=SGN G
337    LET D=SGN H
338    LET D=SGN I
339    LET D=SGN J
340    LET D=SGN K
341    LET D=SGN L
342    LET D=SGN M
343    LET D=SGN N
344    LET D=SGN O
345    LET D=SGN P
346    LET D=SGN Q
347    LET D=SGN R
348    LET D=SGN S
349    LET D=SGN T
350    LET D=SGN U
351    LET D=SGN V
352    LET D=SGN W
353    LET D=SGN X
354    LET D=SGN Y
355    LET D=SGN Z
356    LET D=SGN A
357    LET D=SGN B
358    LET D=SGN C
359    LET D=SGN D
360    LET D=SGN E
361    LET D=SGN F
362    LET D=SGN G
363    LET D=SGN H
364    LET D=SGN I
365    LET D=SGN J
366    LET D=SGN K
367    LET D=SGN L
368    LET D=SGN M
369    LET D=SGN N
370    LET D=SGN O
371    LET D=SGN P
372    LET D=SGN Q
373    LET D=SGN R
374    LET D=SGN S
375    LET D=SGN T
376    LET D=SGN U
377    LET D=SGN V
378    LET D=SGN W
379    LET D=SGN X
380    LET D=SGN Y
381    LET D=SGN Z
382    LET D=SGN A
383    LET D=SGN B
384    LET D=SGN C
385    LET D=SGN D
386    LET D=SGN E
387    LET D=SGN F
388    LET D=SGN G
389    LET D=SGN H
390    LET D=SGN I
391    LET D=SGN J
392    LET D=SGN K
393    LET D=SGN L
394    LET D=SGN M
395    LET D=SGN N
396    LET D=SGN O
397    LET D=SGN P
398    LET D=SGN Q
399    LET D=SGN R
400    LET D=SGN S
401    LET D=SGN T
402    LET D=SGN U
403    LET D=SGN V
404    LET D=SGN W
405    LET D=SGN X
406    LET D=SGN Y
407    LET D=SGN Z
408    LET D=SGN A
409    LET D=SGN B
410    LET D=SGN C
411    LET D=SGN D
412    LET D=SGN E
413    LET D=SGN F
414    LET D=SGN G
415    LET D=SGN H
416    LET D=SGN I
417    LET D=SGN J
418    LET D=SGN K
419    LET D=SGN L
420    LET D=SGN M
421    LET D=SGN N
422    LET D=SGN O
423    LET D=SGN P
424    LET D=SGN Q
425    LET D=SGN R
426    LET D=SGN S
427    LET D=SGN T
428    LET D=SGN U
429    LET D=SGN V
430    LET D=SGN W
431    LET D=SGN X
432    LET D=SGN Y
433    LET D=SGN Z
434    LET D=SGN A
435    LET D=SGN B
436    LET D=SGN C
437    LET D=SGN D
438    LET D=SGN E
439    LET D=SGN F
440    LET D=SGN G
441    LET D=SGN H
442    LET D=SGN I
443    LET D=SGN J
444    LET D=SGN K
445    LET D=SGN L
446    LET D=SGN M
447    LET D=SGN N
448    LET D=SGN O
449    LET D=SGN P
450    LET D=SGN Q
451    LET D=SGN R
452    LET D=SGN S
453    LET D=SGN T
454    LET D=SGN U
455    LET D=SGN V
456    LET D=SGN W
457    LET D=SGN X
458    LET D=SGN Y
459    LET D=SGN Z
460    LET D=SGN A
461    LET D=SGN B
462    LET D=SGN C
463    LET D=SGN D
464    LET D=SGN E
465    LET D=SGN F
466    LET D=SGN G
467    LET D=SGN H
468    LET D=SGN I
469    LET D=SGN J
470    LET D=SGN K
471    LET D=SGN L
472    LET D=SGN M
473    LET D=SGN N
474    LET D=SGN O
475    LET D=SGN P
476    LET D=SGN Q
477    LET D=SGN R
478    LET D=SGN S
479    LET D=SGN T
480    LET D=SGN U
481    LET D=SGN V
482    LET D=SGN W
483    LET D=SGN X
484    LET D=SGN Y
485    LET D=SGN Z
486    LET D=SGN A
487    LET D=SGN B
488    LET D=SGN C
489    LET D=SGN D
490    LET D=SGN E
491    LET D=SGN F
492    LET D=SGN G
493    LET D=SGN H
494    LET D=SGN I
495    LET D=SGN J
496    LET D=SGN K
497    LET D=SGN L
498    LET D=SGN M
499    LET D=SGN N
500    LET D=SGN O
501    LET D=SGN P
502    LET D=SGN Q
503    LET D=SGN R
504    LET D=SGN S
505    LET D=SGN T
506    LET D=SGN U
507    LET D=SGN V
508    LET D=SGN W
509    LET D=SGN X
510    LET D=SGN Y
511    LET D=SGN Z
512    LET D=SGN A
513    LET D=SGN B
514    LET D=SGN C
515    LET D=SGN D
516    LET D=SGN E
517    LET D=SGN F
518    LET D=SGN G
519    LET D=SGN H
520    LET D=SGN I
521    LET D=SGN J
522    LET D=SGN K
523    LET D=SGN L
524    LET D=SGN M
525    LET D=SGN N
526    LET D=SGN O
527    LET D=SGN P
528    LET D=SGN Q
529    LET D=SGN R
530    LET D=SGN S
531    LET D=SGN T
532    LET D=SGN U
533    LET D=SGN V
534    LET D=SGN W
535    LET D=SGN X
536    LET D=SGN Y
537    LET D=SGN Z
538    LET D=SGN A
539    LET D=SGN B
540    LET D=SGN C
541    LET D=SGN D
542    LET D=SGN E
543    LET D=SGN F
544    LET D=SGN G
545    LET D=SGN H
546    LET D=SGN I
547    LET D=SGN J
548    LET D=SGN K
549    LET D=SGN L
550    LET D=SGN M
551    LET D=SGN N
552    LET D=SGN O
553    LET D=SGN P
554    LET D=SGN Q
555    LET D=SGN R
556    LET D=SGN S
557    LET D=SGN T
558    LET D=SGN U
559    LET D=SGN V
560    LET D=SGN W
561    LET D=SGN X
562    LET D=SGN Y
563    LET D=SGN Z
564    LET D=SGN A
565    LET D=SGN B
566    LET D=SGN C
567    LET D=SGN D
568    LET D=SGN E
569    LET D=SGN F
570    LET D=SGN G
571    LET D=SGN H
572    LET D=SGN I
573    LET D=SGN J
574    LET D=SGN K
575    LET D=SGN L
576    LET D=SGN M
577    LET D=SGN N
578    LET D=SGN O
579    LET D=SGN P
580    LET D=SGN Q
581    LET D=SGN R
582    LET D=SGN S
583    LET D=SGN T
584    LET D=SGN U
585    LET D=SGN V
586    LET D=SGN W
587    LET D=SGN X
588    LET D=SGN Y
589    LET D=SGN Z
590    LET D=SGN A
591    LET D=SGN B
592    LET D=SGN C
593    LET D=SGN D
594    LET D=SGN E
595    LET D=SGN F
596    LET D=SGN G
597    LET D=SGN H
598    LET D=SGN I
599    LET D=SGN J
600    LET D=SGN K
601    LET D=SGN L
602    LET D=SGN M
603    LET D=SGN N
604    LET D=SGN O
605    LET D=SGN P
606    LET D=SGN Q
607    LET D=SGN R
608    LET D=SGN S
609    LET D=SGN T
610    LET D=SGN U
611    LET D=SGN V
612    LET D=SGN W
613    LET D=SGN X
614    LET D=SGN Y
615    LET D=SGN Z
616    LET D=SGN A
617    LET D=SGN B
618    LET D=SGN C
619    LET D=SGN D
620    LET D=SGN E
621    LET D=SGN F
622    LET D=SGN G
623    LET D=SGN H
624    LET D=SGN I
625    LET D=SGN J
626    LET D=SGN K
627    LET D=SGN L
628    LET D=SGN M
629    LET D=SGN N
630    LET D=SGN O
631    LET D=SGN P
632    LET D=SGN Q
633    LET D=SGN R
634    LET D=SGN S
635    LET D=SGN T
636    LET D=SGN U
637    LET D=SGN V
638    LET D=SGN W
639    LET D=SGN X
640    LET D=SGN Y
641    LET D=SGN Z
642    LET D=SGN A
643    LET D=SGN B
644    LET D=SGN C
645    LET D=SGN D
646    LET D=SGN E
647    LET D=SGN F
648    LET D=SGN G
649    LET D=SGN H
650    LET D=SGN I
651    LET D=SGN J
652    LET D=SGN K
653    LET D=SGN L
654    LET D=SGN M
655    LET D=SGN N
656    LET D=SGN O
657    LET D=SGN P
658    LET D=SGN Q
659    LET D=SGN R
660    LET D=SGN S
661    LET D=SGN T
662    LET D=SGN U
663    LET D=SGN V
664    LET D=SGN W
665    LET D=SGN X
666    LET D=SGN Y
667    LET D=SGN Z
668    LET D=SGN A
669    LET D=SGN B
670    LET D=SGN C
671    LET D=SGN D
672    LET D=SGN E
673    LET D=SGN F
674    LET D=SGN G
675    LET D=SGN H
676    LET D=SGN I
677    LET D=SGN J
678    LET D=SGN K
679    LET D=SGN L
680    LET D=SGN M
681    LET D=SGN N
682    LET D=SGN O
683    LET D=SGN P
684    LET D=SGN Q
685    LET D=SGN R
686    LET D=SGN S
687    LET D=SGN T
688    LET D=SGN U
689    LET D=SGN V
690    LET D=SGN W
691    LET D=SGN X
692    LET D=SGN Y
693    LET D=SGN Z
694    LET D=SGN A
695    LET D=SGN B
696    LET D=SGN C
697    LET D=SGN D
698    LET D=SGN E
699    LET D=SGN F
700    LET D=SGN G
701    LET D=SGN H
702    LET D=SGN I
703    LET D=SGN J
704    LET D=SGN K
705    LET D=SGN L
706    LET D=SGN M
707    LET D=SGN N
708    LET D=SGN O
709    LET D=SGN P
710    LET D=SGN Q
711    LET D=SGN R
712    LET D=SGN S
713    LET D=SGN T
714    LET D=SGN U
715    LET D=SGN V
716    LET D=SGN W
717    LET D=SGN X
718    LET D=SGN Y
719    LET D=SGN Z
720    LET D=SGN A
721    LET D=SGN B
722    LET D=SGN C
723    LET D=SGN D
724    LET D=SGN E
725    LET D=SGN F
726    LET D=SGN G
727    LET D=SGN H
728    LET D=SGN I
729    LET D=SGN J
730    LET D=SGN K
731    LET D=SGN L
732    LET D=SGN M
733    LET D=SGN N
734    LET D=SGN O
735    LET D=SGN P
736    LET D=SGN Q
737    LET D=SGN R
738    LET D=SGN S
739    LET D=SGN T
740    LET D=SGN U
741    LET D=SGN V
742    LET D=SGN W
743    LET D=SGN X
744    LET D=SGN Y
745    LET D=SGN Z
746    LET D=SGN A
747    LET D=SGN B
748    LET D=SGN C
749    LET D=SGN D
750    LET D=SGN E
751    LET D=SGN F
752    LET D=SGN G
753    LET D=SGN H
754    LET D=SGN I
755    LET D=SGN J
756    LET D=SGN K
757    LET D=SGN L
758    LET D=SGN M
759    LET D=SGN N
760    LET D=SGN O
761    LET D=SGN P
762    LET D=SGN Q
763    LET D=SGN R
764    LET D=SGN S
765    LET D=SGN T
766    LET D=SGN U
767    LET D=SGN V
768    LET D=SGN W
769    LET D=SGN X
770    LET D=SGN Y
771    LET D=SGN Z
772    LET D=SGN A
773    LET D=SGN B
774    LET D=SGN C
775    LET D=SGN D
776    LET D=SGN E
777    LET D=SGN F
778    LET D=SGN G
779    LET D=SGN H
780    LET D=SGN I
781    LET D=SGN J
782    LET D=SGN K
783    LET D=SGN L
784    LET D=SGN M
785    LET D=SGN N
786    LET D=SGN O
787    LET D=SGN P
788    LET D=SGN Q
789    LET D=SGN R
790    LET D=SGN S
791    LET D=SGN T
792    LET D=SGN U
793    LET D=SGN V
794    LET D=SGN W
795    LET D=SGN X
796    LET D=SGN Y
797    LET D=SGN Z
798    LET D=SGN A
799    LET D=SGN B
800    LET D=SGN C
801    LET D=SGN D
802    LET D=SGN E
803    LET D=SGN F
804    LET D=SGN G
805    LET D=SGN H
806    LET D=SGN I
807    LET D=SGN J
808    LET D=SGN K
809    LET D=SGN L
810    LET D=SGN M
811    LET D=SGN N
812    LET D=SGN O
813    LET D=SGN P
814    LET D=SGN Q
815    LET D=SGN R
816    LET D=SGN S
817    LET D=SGN T
818    LET D=SGN U
819    LET D=SGN V
820    LET D=SGN W
821    LET D=SGN X
822    LET D=SGN Y
823    LET D=SGN Z
824    LET D=SGN A
825    LET D=SGN B
826    LET D=SGN C
827    LET D=SGN D
828    LET D=SGN E
829    LET D=SGN F
830    LET D=SGN G
831    LET D=SGN H
832    LET D=SGN I
833    LET D=SGN J
834    LET D=SGN K
835    LET D=SGN L
836    LET D=SGN M
837    LET D=SGN N
838    LET D=SGN O
839    LET D=SGN P
840    LET D=SGN Q
841    LET D=SGN R
842    LET D=SGN S
843    LET D=SGN T
844    LET D=SGN U
845    LET D=SGN V
846    LET D=SGN W
847    LET D=SGN X
848    LET D=SGN Y
849    LET D=SGN Z
850    LET D=SGN A
851    LET D=SGN B
852    LET D=SGN C
853    LET D=SGN D
854    LET D=SGN E
855    LET D=SGN F
856    LET D=SGN G
857    LET D=SGN H
858    LET D=SGN I
859    LET D=SGN J
860    LET D=SGN K
861    LET D=SGN L
862    LET D=SGN M
863    LET D=SGN N
864    LET D=SGN O
865    LET D=SGN P
866    LET D=SGN Q
867    LET D=SGN R
868    LET D=SGN S
869    LET D=SGN T
870    LET D=SGN U
871    LET D=SGN V
872    LET D=SGN W
873    LET D=SGN X
874    LET D=SGN Y
875    LET D=SGN Z
876    LET D=SGN A
877    LET D=SGN B
878    LET D=SGN C
879    LET D=SGN D
880    LET D=SGN E
881    LET D=SGN F
882    LET D=SGN G
883    LET D=SGN H
884    LET D=SGN I
885    LET D=SGN J
886    LET D=SGN K
887    LET D=SGN L
888    LET D=SGN M
889    LET D=SGN N
890    LET D=SGN O
891    LET D=SGN P
892    LET D=SGN Q
893    LET D=SGN R
894    LET D=SGN S
895    LET D=SGN T
896    LET D=SGN U
897    LET D=SGN V
898    LET D=SGN W
899    LET D=SGN X
900    LET D=SGN Y
901    LET D=SGN Z
902    LET D=SGN A
903    LET D=SGN B
904    LET D=SGN C
905    LET D=SGN D
906    LET D=SGN E
907    LET D=SGN F
908    LET D=SGN G
909    LET D=SGN H
910    LET D=SGN I
911    LET D=SGN J
912    LET D=SGN K
913    LET D=SGN L
914    LET D=SGN M
915    LET D=SGN N
916    LET D=SGN O
917    LET D=SGN P
918    LET D=SGN Q
919    LET D=SGN R
920    LET D=SGN S
921    LET D=SGN T
922    LET D=SGN U
923    LET D=SGN V
924    LET D=SGN W
925    LET D=SGN X
926    LET D=SGN Y
927    LET D=SGN Z
928    LET D=SGN A
929    LET D=SGN B
930    LET D=SGN C
931    LET D=SGN D
932    LET D=SGN E
933    LET D=SGN F
934    LET D=SGN G
935    LET D=SGN H
936    LET D=SGN I
937    LET D=SGN J
938    LET D=SGN K
939    LET D=SGN L
940    LET D=SGN M
941    LET D=SGN N
942    LET D=SGN O
943    LET D=SGN P
944    LET D=SGN Q
945    LET D=SGN R
946    LET D=SGN S
947    LET D=SGN T
948    LET D=SGN U
949    LET D=SGN V
950    LET D=SGN W
951    LET D=SGN X
952    LET D=SGN Y
953    LET D=SGN Z
954    LET D=SGN A
955    LET D=SGN B
956    LET D=SGN C
957    LET D=SGN D
958    LET D=SGN E
959    LET D=SGN F
960    LET D=SGN G
961    LET D=SGN H
962    LET D=SGN I
963    LET D=SGN J
964    LET D=SGN K
965    LET D=SGN L
966    LET D=SGN M
967    LET D=SGN N
968    LET D=SGN O
969    LET D=SGN P
970    LET D=SGN Q
971    LET D=SGN R
972    LET D=SGN S
973    LET D=SGN T
974    LET D=SGN U
975    LET D=SGN V
976    LET D=SGN W
977    LET D=SGN X
978    LET D=SGN Y
979    LET D=SGN Z
980    LET D=SGN A
981    LET D=SGN B
982    LET D=SGN C
983    LET D=SGN D
984    LET D=SGN E
985    LET D=SGN F
986    LET D=SGN G
987    LET D=SGN H
988    LET D=SGN I
989    LET D=SGN J
990    LET D=SGN K
991    LET D=SGN L
992    LET D=SGN M
993    LET D=SGN N
994    LET D=SGN O
995    LET D=SGN P
996    LET D=SGN Q
997    LET D=SGN R
998    LET D=SGN S
999    LET D=SGN T
1000   LET D=SGN U
1001   LET D=SGN V
1002   LET D=SGN W
1003   LET D=SGN X
1004   LET D=SGN Y
1005   LET D=SGN Z
1006   LET D=SGN A
1007   LET D=SGN B
1008   LET D=SGN C
1009   LET D=SGN D
1010   LET D=SGN E
1011   LET D=SGN F
1012   LET D=SGN G
1013   LET D=SGN H
1014   LET D=SGN I
1015   LET D=SGN J
1016   LET D=SGN K
1017   LET D=SGN L
1018   LET D=SGN M
1019   LET D=SGN N
1020   LET D=SGN O
1021   LET D=SGN P
1022   LET D=SGN Q
1023   LET D=SGN R
1024   LET D=SGN S
1025   LET D=SGN T
1026   LET D=SGN U
1027   LET D=SGN V
1028   LET D=SGN W
1029   LET D=SGN X
1030   LET D=SGN Y
1031   LET D=SGN Z
1032   LET D=SGN A
1033   LET D=SGN B
1034   LET D=SGN C
1035   LET D=SGN D
1036   LET D=SGN E
1037   LET D=SGN F
1038   LET D=SGN G
1039   LET D=SGN H
1040   LET D=SGN I
1041   LET D=SGN J
1042   LET D=SGN K
1043   LET D=SGN L
1044   LET D=SGN M
1045   LET D=SGN N
1046   LET D=SGN O
1047   LET D=SGN P
1048   LET D=SGN Q
1049   LET D=SGN R
1050   LET D=SGN S
1051   LET D=SGN T
1052   LET D=SGN U
```



# Open Forum

## Space warrior

on Vic-20

The idea is simple but requires some skill to manoeuvre the cross until it is over the centre of an 'alien', when the player must fire and destroy it. The cross can be manoeuvred in both vertical and horizontal directions with a 'repeat' action so to avoid having to keep on pressing the same key to move it a few spaces. The keys I have chosen are:

Z — left  
C — right  
V — down  
G — up  
M — fire

They may seem a little 'clustered up' but I assure you after only a few games they become no problem.

There are ten aliens which must be destroyed within the time limit. The player enters his time at the beginning of the program (4-10 min; this can be shortened or lengthened by changing one or two of the lines from 66-72).

The aliens are randomly positioned at the top of the screen and then come down the screen at totally random movements. The reaction from pressing a key to the movement of the cross is very good.

When, or if, the alien reaches a red border line then it disappears and another is generated. Also if the cross touches the border then it marks the end of the game.

The sound generators have been put to good use especially when an explosion occurs.

## Car race

on ZX81

The object of this game is to manoeuvre your racing car (shown as a multiplication sign) round the racing circuit in a clockwise direction without crashing into the barriers.

Every time a lap is completed the computer adds to your score and randomly places a number of obstacles on the circuit which you have to avoid.

As well as keeping your score the computer also keeps the highest score.

to next page

Space warrior  
by Gerhard Nath

```

10 PRINT "J"
20 PRINT "  SPACE  WARRIOR!!"
30 PRINT " "
40 PRINT "X000"
50 PRINT "Z-LEFT C-RIGHT V-DOWN"
60 PRINT "G-UP & M-FIRE."
65 PRINT "ENTER YOUR TIME(4-10)" INPUT F
66 IFF=4 THEN S$="000400"
67 IFF=5 THEN S$="000500"
68 IFF=6 THEN S$="000600"
69 IFF=7 THEN S$="000700"
70 IFF=8 THEN S$="000800"
71 IFF=9 THEN S$="000900"
72 IFF=10 THEN S$="001000"
75 PRINT "PRESS A KEY TO START"
80 GET A$: IFA$="" THEN 80
90 TI$="000000"
100 POKE 36879, 14: PRINT "J"
101 L=0
110 FOR I=1 TO 30
120 Q=INT(470*RND(1))+7680
130 POKE Q, 46: NEXT I
140 FOR I=0 TO 20: POKE 7680+I, 160: POKE 38400+I, 2: NEXT I
150 FOR I=0 TO 463 STEP 22
160 POKE 7702+I, 160: POKE 38422+I, 2: NEXT I
170 FOR I=0 TO 20: POKE 8154+I, 160: POKE 38884+I, 2: NEXT I
180 FOR I=0 TO 485 STEP 22
190 POKE 8163+I, 160: POKE 38883+I, 2: NEXT I
300 REM ALIENS
305 GOSUB 2000
410 J=0: Q=INT(18*RND(1))+7703
411 POKE 36876, 0: FORT=1 TO 1000: NEXT T
420 POKE Q, J, 60: POKE Q+J+1, 216: POKE Q+J+2, 62
430 POKE 36878, 3: POKE 36876, 220: GOSUB 2000
435 FORT=1 TO 50: NEXT T: GOSUB 2000
440 POKE Q, J, 32: POKE Q+J+1, 32: POKE Q+J+2, 32
450 V=INT(3*RND(1))+1
452 IF V=1 THEN J=J+21
454 IF V=2 THEN J=J+22
456 IF V=3 THEN J=J+23
460 IF PEEK(Q+J+1)=160 THEN 410
462 IF PEEK(Q+J)=160 THEN 410
464 IF PEEK(Q+J+2)=160 THEN 410
467 IFTI$=S$ THEN 9000
468 POKE 36876, 0
470 GOTO 420
1000 IF PEEK(Q+J+1)=91 THEN 1150
1020 POKE 36878, 13: POKE 36874, 220
1030 FORT=1 TO 50: NEXT T
1040 POKE 36874, 0
1060 RETURN
1150 REM HIT ALIEN
1151 POKE 36876, 0: FORT=1 TO 60: NEXT T
1160 POKE 36878, 15: FORM=135 TO 239 STEP 2
1170 POKE 36876, M: NEXT M
1175 FORT=1 TO 700: NEXT T
1180 POKE 36876, 0: POKE 36877, 220
1181 FORM=15 TO 0 STEP -1

```



## Open Forum

```

1182 POKE36878,M
1183 FORT=1T0300:NEXTT
1184 NEXTM
1185 POKE36877,0:L=L+1:IFL=10THEN8000
1190 GOT0300
2000 REM YOUR SHIP
2020 POKE7910+D,91
2040 S=PEEK(197)
2050 IFS=33THEND=D-1:POKE7911+D,32
2060 IFS=34THEND=D+1:POKE7909+D,32
2065 IFS=36THENGOSUB1000
2070 IFS=19THEND=D-22:POKE7932+D,32
2080 IFS=27THEND=D+22:POKE7888+D,32
2085 IFPEEK(7910+D)=160THEN9000
2090 RETURN
8000 PRINT"J":POKE36879,93
8010 PRINT"XXXXXXXXXX":PRINT" WELL DONE YOU'VE"
8020 PRINT"DESTROYED THE ENEMY!!"
8030 END
9000 REM YOUR DEAD
9005 POKE36876,0
9010 POKE36877,220
9020 POKE36879,42
9030 FORI=15T00STEP-1
9040 POKE36878,I
9045 FORT=1T0300:NEXTT
9046 NEXTI
9050 POKE36877,0
9060 PRINT"J"
9070 PRINT"XXXXXXXXXX"
9080 PRINT"X YOU'VE BEEN "
9090 PRINT"X ATOMISED!! "
9100 FORT=1T03000:NEXTT
9200 END

```

[illegible]

## Vic-Orator

on Vic-20

This program which will run on an unexpanded Vic will utilise the facility of a user-defined character set to display double height characters on the screen, the visual equivalent of a shout, ideal for group or display activities.

To write this program to fit into the limited space I have had to cheat a little and only produce 128 characters in the set so the user must be careful to not print any reverse characters (128 onwards) otherwise strange things may happen!

Vic owners with additional memory can get round this by setting-up a 4K character generator and they will also need to change the top of memory locations that are poke-ed in lines 3, 4, 33, 34.

The character set used in the program is the upper case letters and graphics set. If you require upper and lower case letters the peek address in lines 10 and 11 needs to be changed to peek(34816+c).

The REMs are reasonably self-explanatory.

from previous page

### Program notes

The variables are as follows:

S — Your score

HS — High Score

Y — Y co-ordinate of car

X — X co-ordinate of car

L — Number or points to be added to score

**D\$** — String which determines direction of car

Lines 1000 — 1100 randomly place obstacles

Array D contains the set-up of the circuit.

When the program is run the screen will go blank for approximately five seconds while the circuit is being printed.

Listings taken from a ZX printer should be cut into convenient lengths and stuck down on to white paper. Please enclose a self-addressed envelope.

### Car race

by Alasdair Sanderson

```

1 LET H$=0
2 LET L=0
3 LET Y=3
4 LET X=0
5 PRINT AT 4,3
6 FOR F=1 TO 30
7   PRINT AT 1,F
8   LET D(F,1)=1
9   NEXT F
10 FOR F=1 TO 30
11   PRINT AT 20,F
12   LET D(F,20)=1
13   NEXT F
14 FOR F=1 TO 20
15   PRINT AT F,1
16   LET C(1,F)=1
17   NEXT F
18 FOR F=1 TO 30
19   PRINT AT 30,F
20   LET D(30,F)=1
21   NEXT F
22 FOR F=5 TO 25
23   PRINT AT 5,F
24   LET D(F,5)=1
25   NEXT F
26 FOR F=5 TO 30
27   PRINT AT 9,F
28   LET C(F,9)=1
29   NEXT F
30 FOR F=5 TO 25
31   PRINT AT 13,F
32   LET C(F,13)=1
33   NEXT F
34 FOR F=5 TO 16
35   PRINT AT F,5
36   LET C(5,F)=1
37   NEXT F
38 FOR F=14 TO 16
39   PRINT AT F,17
40   LET C(17,F)=1
41   NEXT F
42 FOR F=18 TO 19
43   PRINT AT F,9
44   LET C(9,F)=1
45   NEXT F
46 FOR F=19 TO 25
47   PRINT AT F,25
48   LET D(25,F)=1
49   NEXT F

```



# Open Forum

## Corrections

A number of mistakes have crept into the programs published in the first issues of *Popular Computing Weekly*. We will print corrections as quickly as possible.

Here is a list of the corrections we have to date:

### Vol 1 No 1 page 9 Space Amaze

Line 25 should be renumbered line 15:  
Line 560 should read IF DS="<" AND X>1 THEN  
LET X=X+1  
Line 2000 should read LET Q(X,Y)=0

### Vol 1 No 2 Page 17 Squash

```
80 PROCset-up
130 PRINT CHR$(RND(5)+128);"for";(TIME DIV
10)/10;"seconds"
170 IF AS="Z" OR AS="M" THEN PROCmove-bat
180 PROCmove-ball
260 SOUND T+16,-15,RND(100)+100,255
340 DEF PROCset-up
380 PRINT TAB(10,T+10);STRINGS(20), CHR$(
255); TAB(30,T+10);CHR$(255)
460 TIME=0
```

### Vol 1 No 2 Page 18 Subchase

```
5 LET TH=5
100 LET BS="TAN (Y/TX)"
355 GOSUB 1000
400 UNPLOT INT (H(P/64)),30
```

```
1 REM VIC-ORATOR (C)1982 KEN CLARK RUNS ON 3.5K VIC-20
2 REM***LOWER MEMORY TO PROTECT MEMORY @ 5120 ONWARDS***
3 POKE51,255:POKE52,19
4 POKE55,255:POKE56,19
5 CLR
6 REM***BLANK SCREEN WHILE SETTING UP REGISTERS ETC.***
7 POKE36867,128
8 REM***SET UP CHARACTER GENERATOR @ 5120 ONWARDS***
9 I=0:C=0
10 POKE5120+I,PEEK(32768+C)
11 POKE5120+I+1,PEEK(32768+C)
12 C=C+1:I=I+2
13 IF C<1024 THEN10
14 REM***SET REGISTERS FOR USER DEFINED CHAR GENERATOR***
15 POKE36869,253
16 POKE36866,PEEK(36866)OR128
17 REM***ADJUST SCREEN SIZE AND SELECT 16 X 8 CHARACTERS***
18 POKE36867,149
19 REM***PUT YOUR MESSAGE/TEXT FROM HERE....***
20 PRINT"16 LARGE CHARACTERS ARE"
21 PRINT
22 PRINT"POSSIBLE ON THE VIC-20"
23 PRINT
24 PRINT"WITH A USER DEFINABLE"
25 PRINT
26 PRINT"CHARACTER SET."
27 PRINT:PRINT:PRINT"PRESS ANY KEY"
28 REM***.....TO HERE - THEN RESET VIC WHEN FINISHED***
29 GETAF:IFAF=" "THEN29
30 POKE36869,240
31 POKE36866,150
32 POKE36867,174
33 POKE51,255:POKE52,29
34 POKE55,255:POKE56,29
```

### Vol 1 No 3 Page 9 Hell Driver

```
10 GOSUB 1000
80 DIM A(14), B(14), C(14), GS(5), BS(10),
MS(14)
```

```
930 ML=0: PRINT "36 spaces"
```

### Vol 1 No 3 Page 15 Scrabble Scorer

```
1110 PRINT AT 6, J, 10; Q$(4,J)
1225 REM C=COUNT OF PLAYERS
1430 LET Z=SUM*(X-28)
1500 LET S(R,N)=Z
1510 LET T(N)=T(N)+Z
1520 IF N<>2 OR P>2 THEN PRINT AT
X(N,1),X(N,2);T(N);" "
1530 IF N=2 AND P=2 THEN PRINT AT
X(3,1),X(3,2);T(N);" "
1540 NEXT N
1550 LET R=R+1
1560 GOTO 1210
4000 CLS
4010 PRINT Q$(1); Q$(2);
4020 IF P>2 THEN PRINT Q$(3);
4030 IF P>3 THEN PRINT Q$(4)
4040 PRINT AT 1,0;"-----"
4050 FOR J=1 TO R
4060 PRINT TAB 1;S(J,1); TAB(10); S(J,2);
4070 IF P>2 THEN PRINT TAB 19;S(J,3);
4080 IF P>3 THEN PRINT TAB 28;S(J,4)
4090 PRINT
4100 NEXT J
4110 STOP
8000 CLEAR
8010 SAVE "SCRABBLE"
8020 RUN
```

### Vol 1 No 3 Page 21 Programming

```
50 FOR I=CODE"(Graphic 1)" TO CODE "(Graphic
A)"
60 IF BS(F,I)="" THEN GOTO CODE "(Graphic W)"
```

Vic-Orator  
by Ken Clarke

PROGRAM OF THE WEEK

### Vol 1 No 4 Page 17 Space Pilot

```
370 LET P1=INT((S3/1000)/2)
730 LET X=10-(INKEYS="3") (the rest of the line
remains the same)
```

### Vol 1 No 4 P 23 Programming

Some of you noticed that the programs were missing from Barry Cornhill's article on chaining ZX81 programs in the 13 May 1982 issue. To put matters right, here they are:

```
5 REM P1 CRE (T) DATA
10 DIM B(10)
20 FOR I=1 TO 10
30 LET B(I)=I
40 NEXT I
50 LET J=PEEK 16400+256*PEEK 1
6401 LET K=PEEK 16386+256*PEEK 1
6389
70 FOR I=0 TO 55
80 POKE K+I,PEEK (J+I)
90 NEXT I
```

```
5 REM P2
10 DIM B(10)
20 LET J=PEEK 16400+256*PEEK 1
6401 LET K=PEEK 16386+256*PEEK 1
6389
40 FOR I=0 TO 55
50 POKE J+I,PEEK (K+I)
60 NEXT I
70 FOR I=1 TO 10
80 LET B(I)=10*B(I)
90 PRINT B(I)
100 NEXT I
```

```
5 REM P3
10 DIM B(10)
20 LET J=PEEK 16400+256*PEEK 1
6401 LET K=PEEK 16386+256*PEEK 1
6389
40 FOR I=0 TO 55
50 POKE J+I,PEEK (K+I)
60 NEXT I
70 FOR I=1 TO 10
80 LET B(I)=10*B(I)
90 PRINT B(I)
100 NEXT I
```

```
5 REM P5
10 DIM B(10)
20 LET J=PEEK 16400+256*PEEK 1
6401 LET K=PEEK 16386+256*PEEK 1
6389
40 FOR I=0 TO 55
50 POKE J+I,PEEK (K+I)
60 NEXT I
70 FOR I=1 TO 10
80 LET B(I)=10*B(I)
90 PRINT B(I)
100 NEXT I
110 FOR I=0 TO 55
120 POKE K+I,PEEK (J+I)
130 NEXT I
```

```
5 REM P6
10 DIM B(10)
20 LET J=PEEK 16400+256*PEEK 1
6401 LET K=PEEK 16386+256*PEEK 1
6389
40 FOR I=0 TO 55
50 POKE J+I,PEEK (K+I)
60 NEXT I
70 FOR I=1 TO 10
80 LET B(I)=10*B(I)
90 PRINT B(I)
100 NEXT I
110 FOR I=0 TO 55
120 POKE K+I,PEEK (J+I)
130 NEXT I
```

```
5 REM DP
10 DIM B(10)
20 LET J=PEEK 16400+256*PEEK 1
6401 LET K=PEEK 16386+256*PEEK 1
6389
40 FOR I=0 TO 55
50 POKE J+I,PEEK (K+I)
60 NEXT I
70 FOR I=1 TO 10
80 PRINT B(I)
90 NEXT I
100 PRINT "TO SAVE ENTER N/L"
110 INPUT Z$
120 GO SUB 100
125 STOP
130 SAVE "DATAFILE"
140 LET J=PEEK 16400+256*PEEK 1
6401 LET K=PEEK 16386+256*PEEK 1
6389
40 FOR I=0 TO 55
50 POKE K+I,PEEK (J+I)
60 NEXT I
100 RETURN
```



## How long is a piece of string?

*David Lawrence explains the use of character codes on the ZX81*

Lest ZX-81 owners should ever be tempted to forget the importance of the humble byte, here are three practical and elegant ways of handling strings which depend entirely upon the fact that a single string character can take any one of 256 forms.

First, the formatting of strings which have been stored in dimensioned arrays:

If you were to enter lines 20 to 50 of the demonstration program you would quickly discover that though you had intended to store 'FOX' in line 1 of the array A\$, what is actually stored there is 'FOX' followed by 17 spaces. This is because the ZX-81 fills a dimensioned string array with spaces until the positions are used for something else. This could be overcome by changing A\$(1) in line 50 to A\$(1,1 TO 3) but the array may be intended to hold a large number of strings of different lengths to be fitted into a text at various points. What is needed is a simple method enabling the program to know how much of a dimensioned string is useful information and how much is padding.

An effective answer is illustrated by lines 60-80. Line 60, which could be used with any string up to 254 characters, simply tags a single character on to the front of the string — the CODE value of that character being equal to the length of the string plus the extra character. Line 80 now shows how the useful section of the string can be unerringly identified. A\$(2,2 TO CODE A\$(2,1)) is the original B\$ without its padding — in the case of 'FOX' the character with a CODE value of 4 is tagged on to the front and the complex term boils down to no more than A\$(2,2 to 4).

This technique of adding 'string length indicators' can considerably add to speed and flexibility compared to commonly used methods such as



ZX81... something to byte on

examining the string, character by character, to assess its length.

Our second usage for single character codes is in relation to the storage of data in long strings rather than in multi-dimensioned arrays. Suppose, for instance, that we have a large number of names to store and later access. This can be done by setting up an array with sufficient lines to take all the names. The problem is that if the longest name is likely to be 20 characters long then every line will have to be 20 spaces long, even though most of the other names will only need around 10 characters, a massive waste of memory space.

### Using indicators

Alternatively, the names can be stored in one long string, for instance 'Smith, John, Adams, Bill, Brown, Alison. Hence, no space is wasted but there is, equally, no way for the program to know where one name ends and the next begins. We could put a special marker, such as an asterisk, in between the names, but this would entail examining every character in the string whenever individual names had to be identified.

The section of the demonstration program starting at line 100 illustrates how a long string can be made up of individual entries, each with an SLI tacked on to the front. Lines 200 onwards then show how much indicators can be used to retrieve items from

the string. The loop at line 240 simply uses the SLIs to jump from the beginning of one item to the next until the correct item is reached. Line 280 is not more than a slightly more complicated version of line 80, except that instead of starting to print at position 2, we start at C+1, where C is the position of the SLI of the desired entry.

This section can be used with a little adaptation to produce an effective filing system, nor is it limited to single items of information such as names, since within each entry further SLIs can identify sub-divisions such as: name, address, telephone.

Finally, we shall examine how single character codes can aid in the production of well formatted interactive programs. The program section titled 'Typical Input Routine' illustrates some of the functions that have to be performed when requesting information from the program user.

If the program contains many different requests for information, many of these functions can valuably be transferred to a single subroutine such as that from line 400 to line 560. Before this subroutine can be called, however, the string output requesting information will have to be specified (even if the same request has been made elsewhere), together with the position it is to be printed on the screen which, together with the line calling the subroutine, makes four lines for each call.

The effective use of single character codes is illustrated by the section from lines 570 to 780, which works on the assumption that A\$ is a two dimensional array containing the questions to be printed. Each question has an SLI attached, followed by two bytes which indicate the screen position at which the string is to be printed. Further single characters could be included which would allow all the printing, whether or not an input is required, to be performed by the subroutine.

The codes themselves are simply attached by the use of a subroutine such as that found at line 790 (which would only be required during program development) and every code character replaces a line defining a variable in the program.

Perhaps the humble byte is not so humble after all.



## Demonstration program by David Lawrence

```

10 REM *****
11 REMOVE PADDING
12 *****
20 DIM A$(5,20)
30 LET B$="FOXY"
40 LET A$(1,1)=B$
50 PRINT "THE QUICK BROWN ";A$
(1); " JUMPS OVER THE LAZY DOG."
60 LET B$=CHR$(LEN B$+1)+B$
70 LET A$(2)=B$
80 PRINT "THE QUICK BROWN ";A$
(2); " TO CODE A$(2,1); " JUMPS OV
90 THE LAZY DOG."
99 STOP
100 REM *****
110 DATA IN STRINGS
120 *****
130 LET C$=""
140 PRINT "ENTRY:";
150 INPUT O$
160 IF O$="STOP" THEN GOTO 200
170 LET C$=CHR$(LEN C$+1)+O$
180 CLS
190 GOTO 120
200 PRINT "NUMBER OF ENTRY? (0
TO STOP)"
210 INPUT N
220 IF N=0 THEN STOP
230 LET C=1
240 FOR I=1 TO N-1
250 IF C>LEN C$ THEN STOP
260 LET C=C+CODE C$(C)
270 NEXT I
280 PRINT N;";";C$(C+1 TO C+CO
DE C$(C)-1)
290 GOTO 200
300 REM *****
310 TYPICAL INPUT ROUTINE
320 *****
330 PRINT AT 17,0;"INPUT NUMBER
REQUIRED:";
340 INPUT O$
350 PRINT O$
360 PRINT AT 19,0;"IS THAT CORR
ECT? (Y/N)"
370 INPUT P$
380 PRINT AT 17,0;"
390 PRINT AT 19,0;"
400 IF P$(1)<>"Y" THEN GOTO 310
410 LET N=VAL O$
420 REM *****
430 SUBROUTINE FOR PRINTING
440 *****
450 LET P1=17
460 LET P2=0
470 LET P$="NAME OF FUNCTION RE
QUIRED:"
480 LET O$=""
490 REM *****
500 THIS SUBROUTINE
510 REQUIRES THE FOLLOWING
520 TO BE DECLARED BEFORE
530 IT IS CALLED:
540 1)STRING TO BE PRINTED=
P$.
550 2)PRINT POSITIONS (P1,
P2).
560 3)A COMPLETE LINE OF
SPACES=O$
570 *****
580 PRINT AT P1,P2;P$;
590 INPUT O$
600 PRINT O$
610 PRINT AT 19,0;">>";O$;"<<"
620 PRINT AT 21,0;"IS THAT CORR
ECT? (Y/N)"
630 INPUT R$
640 PRINT AT P1,P2;O$
650 PRINT AT 19,0;O$;O$;O$
660 IF R$(1)<>"Y" THEN GOTO 470
670 STOP
680 REM *****
690 PRINTING WITH CODES
700 *****
710 LET O$=""
720 PRINT AT 0,0;"NUMBER OF STR
ING TO BE PRINTED? (0 TO STOP)"
730 INPUT P
740 IF P=0 THEN STOP
750 CLS
760 GOSUB 660
770 GOTO 590
780 REM *****
790 THIS SUBROUTINE
800 NEEDS ONLY THE NUMBER
810 OF THE DESIRED STRING
820 TO BE DECLARED.
830 *****
840 LET P1=CODE A$(P,2)
850 LET P2=CODE A$(P,3)
860 PRINT AT P1,P2;O$
870 PRINT AT P1,P2;A$(P,4 TO CO
DE A$(P,1));";";
880 INPUT O$
890 PRINT O$
900 PRINT AT 19,0;">>";O$;"<<"
910 PRINT AT 21,0;"IS THAT CORR
ECT? (Y/N)"
920 INPUT R$
930 PRINT AT 19,0;O$;O$;O$
940 IF R$(1)<>"Y" THEN GOTO 660
950 PRINT AT P1,P2;O$
960 RETURN
970 REM *****
980 INPUT OF STRINGS
990 *****
1000 PRINT "HOW MANY STRINGS"
1010 INPUT S
1020 DIM A$(S,20)
1030 FOR I=1 TO S
1040 PRINT "STRING NO.";I;";";
1050 INPUT O$
1060 PRINT O$
1070 PRINT "LINE FOR PRINTING:";
1080 INPUT P1
1090 PRINT P1
1100 PRINT "COLUMN FOR PRINTING:
";
1110 INPUT P2
1120 PRINT P2
1130 LET O$=CHR$(LEN O$+3)+CHR$
P1+CHR$ P2+O$
1140 CLS
1150 LET A$(I)=O$
1160 NEXT I
1170 STOP
1180 REM *****

```



# Spectrum

In this new slot various contributors explore different aspects of the ZX Spectrum.

## This is why they called it Spectrum

*Nick Hampshire discusses the colour commands on the ZX Spectrum*

The Spectrum screen is organised as 24 lines of 32 characters, and the character and background colour of each one of these 768 character spaces can be individually programmed to one of the eight possible colours which can be displayed by the Spectrum.

The two colours associated with each character space are the foreground or character colour, this is referred to as the ink colour, and the background colour or paper. In the normal power up mode the INK colour is black and the PAPER colour white.

There are eight different colours, including black and white, which can be displayed, they are as follows:


- 0 — black
- 1 — blue
- 2 — red
- 3 — purple or magenta
- 4 — green
- 5 — pale blue or cyan
- 6 — yellow
- 7 — white

These colours are produced on a colour tv by mixing just three primary colours — blue, red and green. Thus magenta, which is colour 3, is produced by mixing colours 1 and 2 — blue and red. Likewise colour 5, cyan, is a mix of colours 1 and 4, and colour 6, yellow is a mix of colours 4 and 2.

From this you can see that the colour number is in fact the sum of the primary colours required to produce that colour. Thus white, which is produced by having all three primary colours mixed, has colour number 7 or colours 1 + 2 + 4.

The number associated with each colour on the above list is important since it is used in the colour commands to designate that colour.

The INK command is used to set the character or foreground colour of characters subsequently displayed

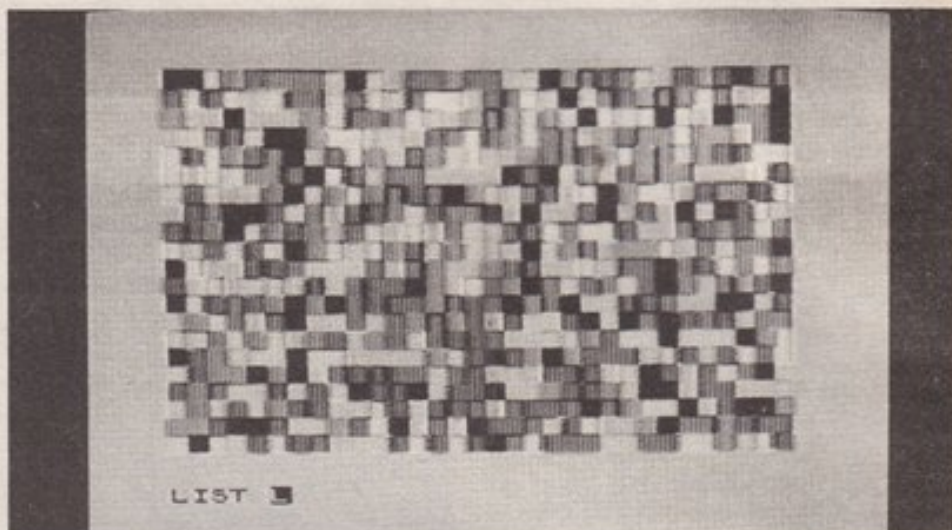

All the fantastic colours: (due to technical reasons, here only in black and white).

using PRINT commands starting at the current cursor position. The command:

```
INK 4 : PRINT "ink colour green"
will print the statement "ink colour green" on the screen starting at the current cursor position in green characters on the existing background colour (normally white) of the screen. To show the range of colours try the following program:
```

```
10 FOR Q = 0 TO 7
20 INK Q
30 PRINT "ink colour number"; Q
40 NEXT Q
```

The PAPER command is identical to the INK command except that it sets the background colour for the printed characters. Thus the command:

```
PAPER 4 : PRINT "paper colour is green"
will display the statement "paper colour is green" starting at the current cursor position and using the existing ink colour (normally black). The following short program shows the 64 different combinations of INK and PAPER colours which can be obtained.
```

```
10 PRINT "01234567 ink colours"
20 FOR Q = 0 TO 7
30 FOR Z = 0 TO 7
40 INK Z: PAPER Q
50 PRINT "•";
60 NEXT Z
70 PRINT "paper colour"; Q
80 NEXT Q
```

Besides the foreground and background colours there is also the colour of the border around the screen display area. This border can have its colour set by use of the BORDER command followed by one of the eight colour code numbers. Thus:

```
BORDER 5
```

will set the border to a cyan colour.

The original INK or PAPER colours

can be retained for a character by setting the colour value to 8. This means that the characters printed following the command are "transparent", with the previously defined colours on the screen being used to display the new characters. Thus if the command

```
PAPER 8
```

is executed then the PAPER colour will be left as currently displayed on the text following the cursor. However, the INK colour will be that defined in the previous statement. Similarly the command:

```
INK 8
```

will leave the INK colour unchanged but the PAPER colour changed to that defined in the previous colour definition statement. Both INK 8 and PAPER 8 can be used together to leave all colours unchanged.

There is a very poor contrast between some of the colours. For example it is virtually impossible to read a character which has an INK colour of cyan and a PAPER colour of green.

To overcome this and ensure enhanced character contrast there is an extra character code value. To do this you have to use the colour code number 9 after either the INK or PAPER commands.

These set the colour used with either the defined INK or PAPER colour to a colour with the maximum contrast. Thus if the colour is dark (eg. black, blue, red or magenta), then the complimentary colour will be made white. If light, then the complimentary colour will be black.



# Sound & vision



## Beep-Beep, Beep Beep, yeah!

Now that the initial excitement of the ZX Spectrum launch is out of the way, and the computers are starting to be used, its functions are beginning to be explored. My first impression was quite good, even though the machines I saw were pre-production models. There are a number of weaknesses but the machine is a vast improvement on its older brother, especially to readers of this column who will be interested to hear that the Spectrum has sound.

Spectrum sound is governed by the BEEP command, which sounds silly but then so do PEEK and POKE. BEEP is used with two parameters, that is the word Beep is followed by two variables, which may be numbers or variable names, separated by a comma. The first one of these parameters governs the duration of the

sound, the second its pitch. Duration is specified in seconds. I didn't have the opportunity to test the duration for accuracy, but at a guess it should be OK for most music. After all, notes don't usually extend beyond a couple of seconds.

The pitch variable is interesting. If it is given the value 0 then the pitch is that of middle C. Add one to get the next semitone, ie C sharp or D flat. Adding one always gives the next semitone up, subtracting gives the one lower.

The pitches are so organised to make an octave rise equal an extra twelve added to the pitch value. This continues to rise all the way up to a pitch value of around 73, way beyond my hearing, where an illegal parameter error message is given. I'm sure people can think up some good uses for the very high frequencies, such as

disturbing bats and opera singers.

Another nice touch is that these pitches don't have to be integers — in other words quarter tones — and smaller pitch variations can be programmed. This gives rise to two more possibilities.

The first is the playing of Arabic, or Chinese music where the scales are organised differently.

The second is tuning of the Spectrum to other musical instruments. This can be done by ear, adding tiny fractions as an increment until two pitches coincide.

It also raises the possibility of portamento between two notes.

It is quite likely that BEEP is not accurate over more than a couple of octaves, so this limitation should be kept in mind. Also I expect BEEP will be affected greatly by dirty power supplies.

Sam Blythe



The BEEP key on the Spectrum is next to CAPS SHIFT.



## The colourful plot thickens

The graphical complexity of the BBC Micro is such as to make it one of the most useful machines around, yet the very wide range of options, permutations and cunning tricks can get rather confusing.

This week, we'll look at one of the most important graphics capabilities and how it can be used.

The feature is called XOR plotting — XOR standing for 'exclusive or'. You probably recognise this as a term from logic, to be grouped with others like AND, OR and NOT. Whilst the latter are fairly easily understood, XOR is more difficult to grasp.

What is easy to appreciate, however, is the fact that it applies to plotting a colour on the screen, and means that the colour you draw with is *modified* by the colour already there, 'underneath it'.

XOR plotting, simply, means that the computer does a quick check on the information already present in the bit of memory looking after each pixel — individual dot — on the screen.

Normal plotting would just replace whatever information was there with new stuff — hence replacing the old colour with the new. Red might be changed to black, or white made yellow, for example.

But XOR plotting implies that if, say, red

is laid over yellow, the result is a new colour altogether. Or — what is even more useful — if a colour is plotted on the screen in XOR mode, then plotted *again*, it disappears. What is more, it vanishes leaving whatever was underneath still intact!

Only a few other machines, such as the RML 38Z, can do this. They let you move shapes (or text) around over an already existing coloured background, leaving the original image just as it was before.

Here's how to use it. Having set up a graphics mode (try MODE 5), you can determine the colour of any plotting commands by the use of GCOL. GCOL needs two numbers following it, separated from each other by a comma. In normal use, the first digit is 0, and the second is 0 to 3, which gives colours black, red, yellow and white (or their monochrome equivalents on a black-and-white tv).

So GCOL 0,3 means 'use colour 3, normally'. But change the 0 to a 3, and you're in XOR mode. GCOL3,3 means 'use colour 3, in XOR mode'.

Next week, I'll be presenting two programs — rather brain-damaging ones — using this and other graphics effects. This week, try the program on the left.

Brian Reffin Smith

```
10 MODE 5
20 CLG : clear graphics area
30 FOR I=1 TO 1000
40 GCOL 3,1 : REM plot in XOR red
50 GOSUB 100
60 GCOL 3,2 : REM XOR yellow
70 GOSUB 100
80 NEXT I
90 END
100 REM plot twice
110 X1=(1239) : Y1=RND(1023)
120 X2=RND(1239) : Y2=RND(1023)
130 FOR J=1 TO 2
140 MOVE X1,Y1 : DRAW X2,Y2
150 NEXT J
160 RETURN
```



# Our classifieds are faster.

Do you want to sell your computer and buy a bigger and better one?

Have you ever thought of trying to make some money out of selling tapes of your own programs?

Whatever it is you want to buy or sell why not use our classified pages?

It has to be better than waiting for up to nine weeks to get into one of the old monthly magazines.

Not only that, but our rates are very reasonable.

For private individuals it only costs 20p per word, with a minimum of 10 words.

We can make it so cheap because we charge companies using the classified columns 40p per word.

The classified pages can be used for semi-display advertising.

The cost for this is £10 per single column centimetre, with a minimum charge of £30.

All copy for the classified pages must be pre-paid. (You'll find a handy form on page 22).

Cheques and postal orders should be made out to *Popular Computing Weekly*. Your advertisement should arrive at least two weeks before the publication date.

If you have any queries regarding Classified or semi-display advertising please call Alastair Macintosh on 01-930 3840

**Popular Computing Weekly.**  
The fast one.



# Peek & poke

Peek your problems to our address. Ian Beardsmore will poke back an answer.

## A QUESTION OF INTERPRETATION

David Geach of Graeme Road, Ross-on-Wye writes:

**Q** I am fairly new to computing, using a second-hand Atom at the moment. Slowly I am learning the jargon but two things are still confusing me. These are Compiler and Interpreter. I do not seem to understand several descriptions that I have read. If anything it makes things seem more complex. Could you please explain them?

**A** A compiler de-codes a program in a high level language, such as Basic or Cobol, into machine code or an assembly language. Initially this is comparatively slow, nevertheless once it has been done the program will RUN faster than an interpreter program. This is because the de-coded program will be stored in the memory.

An Interpreter does essentially the same, except that each statement is done individually and not stored. So each statement has to be re-read and re-coded each time it is used. The advantage of the Interpreter is that it uses less memory, as no interim program has to be stored. The disadvantage is that it takes more time. Obviously the continual re-reading needed for the Interpreter, takes more time to RUN, than the stored de-coded program of the compiler.

## IT'S ALL PART OF THE EDUCATION

K. Daniels of Poole, Dorset writes:

**Q** At the recent computer fair in Earls Court, I heard the name MUSE on two different occasions. No one I have asked seems to have heard of them beyond someone who said that they had heard of them and EZUG but did not know what they were. I haven't a clue. Have you?

**A** Yes. MUSE stands for Micro Users in Secondary Education while EZUG

stands for Educational ZX Users' Group. As you can guess they are both concerned with computers in the school. EZUG was formed out of MUSE, and I gather that both groups are quite active within education, having their own news letters and software libraries.

## THIS SHOULD RAM IT ALL HOME

Nick Starking of Caister-on-Sea, Norfolk writes:

**Q** I am writing to you in the hope that you can answer a question (well two really) for me. I am interested in the Commodore Vic-20, but I feel that the 3.5K RAM is too small. I hear that extra RAM is available, but my query is this: Do the 3K, 8K, and 16K RAM cartridges for the Vic-20 fit inside the computer, or is an expansion unit (like the Afron Expansion Unit) necessary?

Also, I have read about the introduction either later this year, or early next year of the Vic-20/16, a 40-column 16K RAM computer which is a big brother to the Vic-20, and the Commodore 64/40, a 40-column, 64K RAM computer which will sell for about £395. Is there an approximate price available for the Vic-20/16?

**A** The extra RAM cartridges for the Vic-20 are external, however, a memory expansion port is already supplied, so an expansion unit is not needed unless you want to add other peripherals as well. As for the new Vics, if you look at your third issue of *Popular Computing Weekly* you will find your question answered on page 5. The Vic-20/16, is in fact the Vic-30. Cost will be about £250, and it is due to be launched in January next year.

## PUT MORE POKE IN YOUR RACER

J. R. Johnson of Tottenham, London writes:

**Q** I have had a BBC model B micro since early this month and now I'm writing a

*Grand Prix* game. I have tried tabbing the cars on to the screen, but this slows the game down. I would prefer to PEEK and POKE to and from a screen location. Could you tell me and many other BBC owners how to use PEEK and POKE to and from a screen location?

**A** The first thing that has to be done is that the SCROLL function has to be stopped, or at least controlled by setting up a text window. This still scrolls the screen, but the VDU RAM locations do not change. Enter this:

VDU 28,0,24,0,39,0

This sets up a screen window for the entire screen. To POKE use the following:

?(HIMAN x+y\*40) ASC" character you want"

Here x and y are the co-ordinates that you want. To PEEK use the following:

CH=(HIMAN+x+y\*40)

This makes CH equal to whatever is at x,y. When you want to bring the character on to the screen just enter the line:

CH\$=CHR\$ "CH"

## STRICTLY FOR THE KNOB TWIDDLER

B. W. Bailey of Hampstead, London NW3 writes:

**Q** As a display for my ZX81 I am using a Toshiba model 10TB battery/mains portable with a 9in screen. It has an integral loop antenna marked, and a coaxial socket marked, into which I plug my ZX81. My problem is that no amount of tuning or setting of the contrast or brilliance controls gives me a clear background but a pattern of alternating light and dark lines persists over the usable area. Can you help me?

**A** Several things could be the cause of the trouble but no one factor presents itself as the most likely cause of the problem. There are two important things that you do not say in your letter. Have you tried your ZX81 with

another television, or another ZX81 on your portable? Also I would guess that when you say background that you are at least getting a cursor. If the tuning is all right, then two possible causes are the power lead, and the coax aerial lead.

The power supply jack can be very fickle on both the ZX80 and 81, try twiddling this in and out. The smallest increment in the right direction can make a vast difference. In the same way check your video lead. When I first got mine the two wires inside one of the plugs were so badly wired that the slightest pressure would cause them to touch, with all the attendant screen decay.

I would have thought that the internal antenna would be cut out as soon as an external lead was connected, but my hardware knowledge, particularly of televisions, is not all it might be. Try using another television, or computer, this will help reduce the number of possible causes of your troubles. Then try checking all the leads, making sure the power lead does not cross the signal lead, if you are using a RAM Pack, try it without the Pack as they usually add to problems like this.

If you still do not get any luck, then all I can suggest is that you go to your local electrical shop and ask their advice, and possibly if you might try out your computer on one or two other models.

If you still get the same sort of problem, then it would seem that the frequency modulator in the ZX81 is at fault, which will mean a return to Sinclair Research. If it works with other televisions then your Toshiba is the cause, and I could not tell you how to rectify that.

● Stop agonising over that problem. Write to Ian Beardsmore, Peek & Poke, Popular Computing Weekly, Hobhouse Court, 19 Whitcomb Street, London WC2 7HF.



# Competitions

## Puzzle No 7

One of the side-stalls at our summer fete was attracting some attention. Called *Lucky Seven*, it was the simplest of games, requiring only nine wooden discs — plain on one side, numbered on the other from 1 to 9.

The nine discs were placed face down on a table and were mixed up. For the payment of a 10p stake you could pick up four of the discs at random, which were then turned over to reveal the digits painted on the reverse. The person in charge would then arrange these four digits to form one four-digit number. If this number was divisible by seven then you lost 10p. If, however, it was impossible for a multiple of seven to be formed then you would win £1.

How would you assess the odds against winning this game? (Of course, such 'tricks' as inverting the six and nine are not allowed.)

### Solution for June 4

In order for a man to divide the pile of coconuts into equal fifths and have one left over for the monkey the formula is:

$$A = 4/5 (B - 1)$$

where B equals the number the pile originally contained and A those remaining after the division. A and B, of course, must be integers. By rearranging this equation we get:

$$B = (5A/4) + 1$$

In order for the second man to be able to divide these remaining nuts equally (and have one left over for the monkey), B - 1 must also be exactly divisible by five. If it is, we can repeat the procedure, and so on.

As the final number of nuts must be a multiple of five we start with this number and increase by

five each time. (To find the answer to part (b) of the question then we must start with a minimum of six to have one left over.)

```
10 LET N = 5
20 LET M = 0
30 LET A = N
40 LET B = 5*A/4 + 1
50 IF (B - 1)/5 = INT ((B - 1)/5) THEN GOTO 100
60 LET N = N + 5
70 GOTO 20
100 LET M = M + 1
110 IF M = 5 THEN PRINT B
120 IF M = 5 THEN STOP
130 LET A = B
140 GOTO 40
```

Run this and you get (a) 3121 coconuts, (b) 15,621 coconuts.

### Winner of Puzzle No 3

The winner is: David Robinson, Montgomery Hill, Frankby, Wirral, who receives £10.

### Solution to Crossword No 3

**Across:** 3 CPU, 8 Adder, 9 Shampoo, 10 Chop, 11 Gridiron, 13 Lie low, 14 Duplex, 17 Tropical, 19 Anal, 21 Real Ale, 22 Metro, 23 Lip.  
**Down:** 1 Calculators, 2 Odd ode, 3 Cry, 4 Users, 5 Eardrum, 6 Spar, 7 For next loop, 12 Nominal, 15 Length, 16 Panel, 18 Opal, 20 Amp.

### Winner of Crossword No 3


The winner is: D D R Sibbald, St. George's Road, Ilford, Essex, who receives £10.

### Rules

The winner for the crossword and the winner of the puzzle will be the first name out of the hat (in each case).

Closing date for both the crossword and the puzzle is the Monday, three weeks after the cover date.

## Crossword No 7

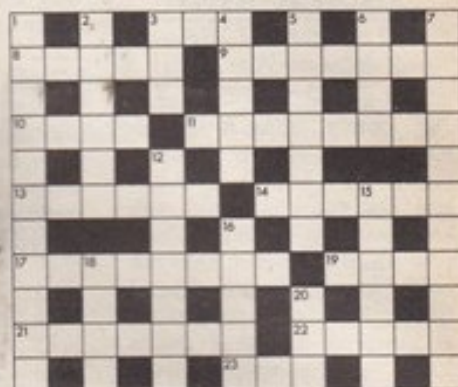

### ACROSS


- Program modules that agree with directions (5).
- Program the company to come back and press around (7).
- Program to change source of specified item (4).
- Program to translate ROM chip, with some help (8).
- Program bit swapping and calling (6).
- Three, to start with, in endlessly nice acid (6).
- Replace a switching centre (8).
- Program switch may go through 17A (4).
- Program running order — put to death! (7).
- Disable short record in a week (5).
- Slippery when caught on the lee shore (3).

### DOWN


- Program to translate, table and reprint (11).
- Computing sum of a penny ring (6).
- A quiet tree (3).
- Program storage raises more page inserts (1,1,1,1,1).
- Food container, shaken, inputs nothing (4,3).
- Storage unit for church students (4).
- Head underground to avoid the facts (7,4).
- Nu-speak versions get closer without being observed (5,2).
- Student of an input device (6).
- Say yes to nuclear reactor, electrical engineer (5).
- Credit opposite points of the workers (4).
- Tool amends law (3).

## CITIZEN PAIN

BY DAVID IRELAND and JAMES MACDONALD

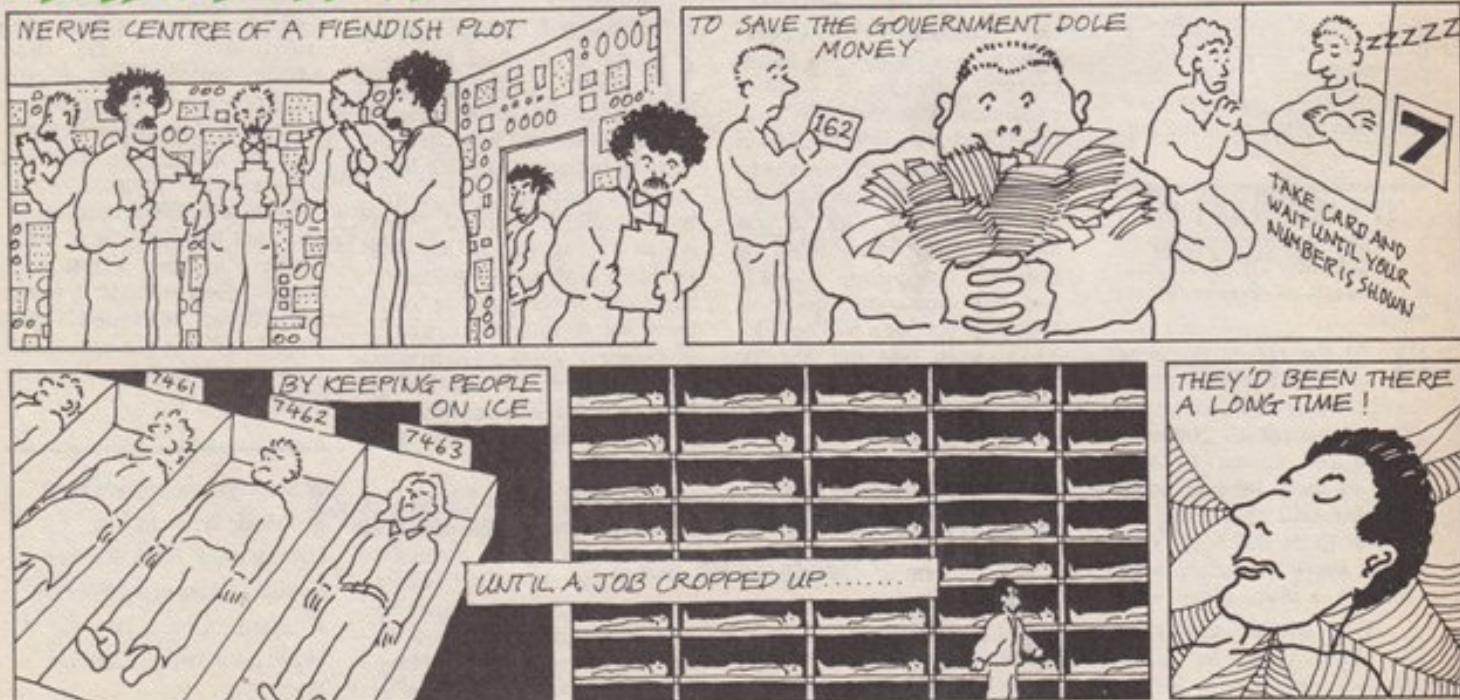



 **commodore**

# COMPUTING

Own or use a Pet or a Vic? Fed up with being ignored by all the traditional monthly magazines? Fed up with listings which are too simple or simply do not work?

You need Commodore computing, the new monthly magazine. It is published by Nick Hampshire, author of *The Pet Revealed*, *Pet Graphics*, *A Library Subroutines* and *the Vic Revealed*. Each issue is packed with advanced advice on how to make the most of your computer, whether you use a Pet or a Vic, and whatever your application. Software, hardware, machine code, games, business use — it is all covered in every issue.

If you want to learn more about your computer, take out a subscription to *Commodore Computing*. It is the only way to get it, and get it straight.

**Send £12.50 for a subscription  
for 1 year (10 issues) to:**

**COMMODORE COMPUTING, MAGSUB,  
OAKFIELD HOUSE, PERRYMOUNT ROAD,  
HAYWARDS HEATH, SUSSEX RH16 3DH**



# MORE FUN WITH YOUR ZX81!



## 16K RAM PACK

PUSH-ON PLUG-COMPATIBLE MEMORY

The addition of our fully-compatible, assembled, tested and guaranteed 16K Ram Pack means more memory for better games and programs

**ORDER YOURS TODAY FROM:**

**CAPS LTD.** Dept. E, 28 The Spain, Petersfield, Hants GU32 3LA

Please send me my Byg Byte 16K Ram Pack. I enclose cheque/postal order for £34.95 (includes VAT, Postage & Packing)

Name .....

Address .....

Dept. E

Allow 28 days for delivery

Fully **£34.95** inclusive

## WE CHALLENGE YOU, EARTHLING.

Load this COSMOS program in your ZX81 16K and see if you can defend your despicable Earth convoys against our supreme attack ships and warp mines.

A totally new space game concept written in machine code to produce fiendishly clever effects and deadly results.

You poor Earthlings have no chance.

**£5.99 ON CASSETTE.**

**PLUS OTHER 16K PROGRAMS ALSO ON CASSETTE**

**TRIAD** Three new puzzles to perplex and frustrate even the Rubik Cube expert. All with SAVE facility. **£3.99**

**QUARTET** An exciting compendium of crosswords, puzzles and memory tests with up to 10 grades of difficulty. **£3.99**

**TABLE TUTOR** Using concepts within a schoolchild's experience, this menu-driven tutor includes instruction, table lists, speed tests, homework and answer service. **£3.99**

### PET LISTINGS

Black Box; Mastermind; Pontoon.  
**£1.60 each or 3 for £4.00**

Only high quality cassettes used  
Send cheque or p.o. to:

**VORTEX SOFTWARE (DEPT POP)**  
26 CRAWFORD ROAD,  
HATFIELD, HERTFORDSHIRE, AL10 0PG.



MAIL ORDER ONLY PLEASE. SEND SAE FOR CATALOGUE.

## NEW ZX 81 16K SOFTWARE DIGGLES KITCHEN



### SIMPLE SUPPERS TO CELEBRATION DINNERS VOLUME 1

50 PAGES OF WORLDWIDE RECIPES  
£4.99 (inc. P&P and VAT)

### VOLUME 2

50 PAGES EUROPEAN RECIPES  
£4.99 (inc. P&P and VAT)

**Special price for two volumes**  
**£9 (inc. P&P and VAT)**

More volumes to follow

Please specify  
which volume(s) -  
Mail order only  
Send remittance  
to:-

**MICRO COMPUTER SOFTWARE**  
Unit D6, Pear Industrial Estate, Stockport Road, Lower Bredbury,  
Stockport SK6 2BP. Tel: 061-494 2441