

POPULAR **Computing** WEEKLY

12 August 1982 Vol 1 No 17

35_p

Street Alley on Vic 20

Psion tapes

ZXucation

**Programmable
character
generator**

**Swamp
for BBC**

**Spectrum
moving patterns**



4th. ZX MICROFAIR

**Buying your first computer?
Looking for SPECTRUM software?
Want to expand your ZX81?
Need technical advice?**

Whatever the problem you'll find the answer at the ZX Microfair — the user friendly show exclusively for ZX Computers. You can see demonstrations, displays and many new products. You can even sell your micro or pick up a bargain at the bring-and-buy sale. Whatever your interest — hobby/home, business or educational, there's lots to see at the Microfair. So come along and make the most of your Sinclair Computer!

REMEMBER — PRICES ARE DOWN!

One day: 10am to 6pm.

**August 21st. Westminster Exhibition Centre
(Royal Horticultural Society New Hall)
Greycoat Street, London SW1.**

Adult 60p
Child 40p
Advance tickets from
Mike Johnston,
71 Park Lane,
London N17 0HG
(Enclose S.A.T.)

Chrisalid -

**BERKHAMSTED'S
COMPUTER
STORE**

Watch this space for the real
computer BARGAINS every week:

EPSON MX80f/t **£355+VAT** — EPSON



MX80 tractor only

£315+VAT

VIC20 at

£173+VAT

VIC cass

unit **£39+VAT** — range
of VIC software.

11 x 9½ fanfold paper

at **£16.50** per 2000 sheets



GENIE 1 & 2 @ **£289+**

VAT — All GENIE mods
expansion/disks/mem.

CUMANA disk drives at **£199** single

and **£369** double —

9" 12MHz monitors for
only **£99+VAT** (metal).

OFFICIAL DEALERS FOR:

Nascom, Genie, Cumana, Vic,

and lots more — RING US NOW on
BERKHAMSTED (04427) 74569 or 5704

**13 HIGH STREET
BERKHAMSTED HP4 2HY
HERTFORDSHIRE**



MORE FUN WITH YOUR ZX81!



16K RAM PACK

PUSH-ON PLUG-COMPATIBLE MEMORY

The addition of our fully-compatible,
assembled, tested and guaranteed 16K
Ram Pack means more memory for better
games and programs

ORDER YOURS TODAY FROM:

**Phoenix Marketing Services
Dept. POCW, Oaklands House
Solartron Road, Farnborough
Hants GU14 9QL**

Please send me my Byg Byte 16K Ram Pack. I enclose cheque
postal order for £25.00 (includes VAT, Postage & Packing)

Name

Address

Dept POCW

Allow 28 days for delivery

Fully

£25.00

inclusive

POPULAR Computing WEEKLY

The Team

Editor

Brendon Gore

Reporter

David Kelly [01-930 3271]

Sub-editor

Peter Harvey

Editorial Secretary

Fiona McCormick

Advertisement Manager

David Lake [01-839 2846]

Advertisement Executive

Alastair Macintosh [01-930 3840]

Managing Editor

Duncan Scot

Publishing Directors

Jenny Ireland

Nick Hampshire

Popular Computing Weekly,
Hobhouse Court, 19 Whitcomb Street,
London WC2
Telephone: 01-839 6835

Published by Sunshine Publications Ltd.

Typesetting, origination and printing by
Chesham Press, Chesham, Bucks

Distributed by S M Distribution,
London SW9. 01-274 8611. Telex: 261643

© Sunshine Publications Ltd 1982

Subscriptions

You can have *Popular Computing Weekly* sent
to your home: the subscription rate is £19.95 per
year, for addresses in the UK, £37.40 overseas.

How to submit articles

Articles which are submitted for publication
should not be more than 1000 words long.

All submissions should be typed and a double
space should be left between each line.

Programs should, whenever possible, be
computer printed.

At present we cannot guarantee to return
every submitted article, so please keep a copy.

Accuracy

Popular Computing Weekly cannot accept any
responsibility for any errors in programs we
publish, although we will always try our best to
make sure programs work.

This Week



Cover illustration by Stuart Hughes

News	5
Colour Genie from Hong Kong.	
Letters	7
Missing Ram mystery.	
Street Alley	8
A new game for the Vic20.	
Street Life	11
Manchester and Edinburgh fairs.	
Reviews	12
Pision tapes, Spectrum 32K Ram.	
Open Forum	15
Six pages of your programs.	
Programming	22
ZXucation by David Nowotnik.	
Spectrum	23
Moving patterns by Malcolm Davison.	
Sound & vision	24
Swamp for BBC micro.	
Peek & poke	25
Your questions answered.	
Competition	26
Puzzle.	

Editorial

The government's scheme to put a micro in every primary school in the UK is a laudable idea (*PCW* August 5) though a scheme to put five or 10 micros in every primary school would have been better.

But, there is one part of the scheme that strikes a discordant note. For a school to qualify under the scheme, it must choose from one of three different micros — Sinclair's 48K ZX Spectrum, Acorn's BBC micro model B and Research Machines' 480Z.

Microcomputer manufacturers were not invited to tender for the scheme. The government also failed to produce a list of specifications that manufacturers had to meet in order to be placed on the approved list.

Instead, three micros were selected: "using the experience of the education departments' microelectronics programmes and with advice from educational advisers".

The scheme has undoubted benefits for the chosen manufacturers. Apart from a potential market of 27,000, there are incalculable advantages in familiarising future generations with a particular manufacturer's machine.

Micro manufacturers not on the approved list have reason to feel dissatisfied with the government.

Next Week



Repel waves of fighters in *Alien Attack*, a 1K machine code game for ZX81.

Classified

BBC MICRO

Make the most of your BBC Microcomputer with two books written by the experts. **LET YOUR BBC MICRO TEACH YOU TO PROGRAM**, by Tim Hartnell, £6.45, with over 40 complete programs. **THE BBC MICRO REVEALED**, by Jeremy Ruston. If you've mastered your computer, and want to progress, this is the book for you. £9.95. Interface Publications, Dept. PC, 44-46 Earls Court Road, London W8 6EJ.

A NEW RETAILER for Sinclair accessories in the North of England. We are situated near the M1 and M62 motorways. As well as a complete range of hard and software, our service department can repair, modify or fit a wide range of accessories. Hours of business 10am - 8pm, Monday to Saturday inclusive. **TELEPHONE PHILIP COPLEY ON 0924 272545 FOR FURTHER DETAILS.**

VIC20 with 3K Hi-res, plus cassette unit, two months old, £230 ono. Winch, 42 Cherwell Close, Tonbridge, Kent.

TRANSTEC 1200 VIDEO MONITOR, nearly new, cost £115, will accept £60. Phone Biggin Hill 75047.

ZX PRINTER, under guarantee, £50 ono. Telephone Williton 32355, evenings.

VIC20 and cassette unit, manual and Vic revealed, £165. Under guarantee. Tel: Wotton-under-Edge 2381.

ZX81 Memopak 64K, ZX81 learning lab and gametapes, 6 months old, £125 ono. 10 Addy House, Rotherhithe New Road, London SE16 2PB.

ZX81 16K, plus 16K programs, magazines, cassettes, £75. Tel: Southend 203376.

VIC20 plus cassette, tapes and books, 2 months old, bargain £160. Tel: Holbeach (0406) 362900.

ZX81 KEYBOARD BLEEPER IMPROVES KEYBOARD CHEAPLY FITS INSIDE

Simple plug-in, no soldering connections. All normal and shifted keys now beep £8.95 includes instructions. T-Shirts black with Red "Sinclair ZX81. Also available "ZX Spectrum".

Sizes 24 to 44 in £3.25. Sweat shirts as above £6.99. Load Programs from cassette first time, every time, using ZX81 (ZX80) loading aid. £9.95 (incl. instructions, p&p and VAT). Send SAE for details.

DON'T FORGET LONDON ZX MICROFAIR, AUGUST 21. FULCRUM PRODUCTS, DEPT W, HILLSIDE, STEEP LANE, FINDON W. SUSSEX BN14 0UF

MZ80 A, B AND K DATABASE

The program that everyone needs. Facilities include sort, search, list, delete, change, totals, save file, line print if required, etc. Can be used in place of any card index application. £19.95

Access cards accepted. Send cheque or PO or credit card number to:

GEMINI MARKETING LTD
Quay House, Quay Road, Newton Abbot, Devon TQ12 2BU. OR telephone us with your credit card order on Newton Abbot (0626) 62869 Despatch by return.

VIC20, cassette deck, eight games, listings and information. Value £250. Best offer secures. Chris 0793 770927 evenings.

SPECTRUM GOLF. Different course every game, colour plan of each hole shows fairway and all obstacles. scoring routines indicate birdies and eagles and a dramatic display for a hole in one. Uses the colour and sound facilities of the Spectrum to full advantage. One cassette with full instructions included in program for only £3.95 from B. S. McAlley, 78 Hedgerley, Chinnor, Oxon.

PRACTICAL PROGRAMS FOR ZX81. Library index — 600 entries; Address and phone list — 200 entries; Bank account. Fast, sophisticated multicode sorting, entries, print-outs. 16K Ram. Cassette, £5 each. SAE details. Durst, Coltscombe, Swerford, Oxon.

POW! SPECTRUM ZAP! BEEP BOOSTER

TELESOUND 82 puts the Spectrum BEEP direct through an unmodified TV set so that the full range of sound effects including the keyboard click can be heard and controlled from a whisper to a roar. The unit comes complete ready to fit between the TV and EAR sockets so that no case cutting is necessary. Fitting is made easy with no soldering as the leads have clips fitted. With a Telesound 82 you can even play your favourite music cassette through the TV! Put bounce in your BEEP. Get a Telesound 82 for only £9.95 inclusive with free sound effects program. Send cheque/PO or SAE for further details to:

COMPUSOUND

32 Langley Close, Redditch
Worcs. B98 0ET. Tel: 0527 21439 (evenings)

Hear Telesound 82 at the ZX Microfair, August 21, London and Microscene, September 11, Birmingham

ZX82 SPECTACULAR

Instant user defined graphics
The programme that designs, monitors, corrects, and saves YOUR graphics with X8 magnification and actual size display of all characters.

PLUS

hundreds of instant graphic symbols for your own programmes, including: Pakman, invaders, music, maths, gambling, 7 foreign alphabets, all on one cassette for 16K or 48K Spectrums.

ONLY £4.00 incl. UK p&p
AUTOMATA LTD
65 OSBORNE ROAD
PORTSMOUTH PO5 3LR

PECMAN & SKYSCRAPER CAPER, tape 4, high resolution graphics for standard Vic20, £3 or sae for games available. M. Gardiner, 103 Holmes Chapel Road, Congelton, Cheshire.

BBC MICRO GAMES: Invaders (full speed machine code version), Break-out and Dodgems. All run on model A or B using sound and colour. Three programs on one cassette, £5 inc. From B. Cridland, 8 Bowness Ave, Fleetwood, Lancs. FY7 8PA.

P-E-P, the Program Enhancement Package for the ZX81 (16K). Seven fantastic new features for your basic programs. Only £5.95 from R & R Software, 34 Bourton Road, Gloucester.

ZX81 FORTH

FULL FIG STANDARD

(Except for disc linkage)

Tape and documentation..... £10
GAMES PACK 1 & 2..... £6 each
UTILITIES PACK..... £5
ZX PILOT..... T.B.A.

(prices all inclusive)

QUASAR COMPUTATIONAL PARAPHERNALIA

11c Mercies Road, Uxbridge
Middlesex UB10 9LS
(Send S.A.E. for full list)

16K ZX SPECTRUM 48K SPEC-MAN

Puckman, Pacman, Gobbler, Snapper and NOW FOR THE SPECTACULAR ZX SPECTRUM

True arcade display. Fast delivery. Mail order only, £5.50 payable to:
JEGA SOFTWARE, 27 HALLCROFT AVE., COUNTESTHORPE, LEICESTERSHIRE LE8 3SL
(SAE for ZX catalogue)

TRS-80, Video Genie Software, Arcade/strategy games etc. First class stamp for lists. T. Smith, 26 Wesley Grove, Portsmouth, Hants PO3 5ER.

SINCLAIR SPECTRUM 48K, PRINTER, £240, beat the queue. Buckingham 3615.

ZX81, 16K, printer, extra paper, software (£30), excellent condition, value £220 only £150. 2 Ambleside, Epping, Essex.

UK101 24K CASED, Cegmon, New Basic 1, 3 & 4 chips, 32 lines, 1/2 meg., 300/600 baud, Eproms — (toolkit, word processor and Exmon), sound board, programmable graphics, external 10 amp PSU, large quantity of software (games and utilities), manual and documentation, complete with printer and stand, £275. Telephone: (021) 421 3732.

ZX81 CONSOLE, (£17.50), case (£27.50), securely mount computer, RAM, printer, recorder. No disconnections. sae ZXBS, 14 Brookfield Gardens, Ryde. Telephone: 0983 65897.

CLASSIFIED ADVERTISING RATES:

Line by line: For private individuals, 20p per word, minimum 10 words.

For companies, traders, and all commercial bodies, 40p per word, minimum 20 words.

Semi-display: £10 per single column centimetre, minimum length 3 cm. (Please supply A/W as PMT. Or supply rough setting instructions.)

Conditions: All copy for Classified section must be pre-paid. Cheques and postal orders should arrive at least two weeks before the publication date.

If you wish to discuss your ad, please ring Alastair Macintosh 01-930 3840.

Here's my classified ad.

(Please write your copy in capital letters on the lines below.)

Please continue on a separate sheet of paper

I make this words, at per word so I owe you £

Name

Address

.....

.....

Telephone

Please cut out and send this form to: Classified Department, Popular Computing Weekly, Hobhouse Court, 19 Whitcomb Street, London WC2

Adams is first with Spectrum Ram converter ...

HARDWARE specialist Stephen Adams has designed a Spectrum/81 converter that enables a 16K Ram pack to be added to a 16K ZX Spectrum, giving 32K of memory.

The converter will also allow the Spectrum to use most of the ZX81 peripherals which operate in the top 32K of memory.

The converter costs £7 and will be on display at the ZX Microfair in London on August 21.

Enquiries to Stephen Adams, 1 Leswin Road, London N16.

... plus add-on Ram from DK 'Tronics

DK 'Tronics has produced the first add-on Ram board for the ZX Spectrum.

The unit converts a 16K Spectrum into a 48K model in the same way as the official Sinclair Ram board.

The 32K board costs nearly £20 less than the Sinclair equivalent and, unlike the official board, it can be fitted by the purchaser.

David Helas of DK 'Tronics said: "There is no need to send your Spectrum anywhere. Fitting the board is ridiculously simple."


The company has no plans to produce boards with more than 32K. Says David Helas: "48K is a good size. With the micro floppies on the way there will be no market for larger boards."

The 32K add-on costs £39.95 (plus £1 p & p) and is available either at the 4th ZX Fair or from DK 'Tronics, 23 Sussex Road, Gorleston, Norfolk.

4th ZX Fair due in two weeks

FINAL preparations are under way for the 4th ZX Fair at the New Horticultural Hall, Greycoat Street, London SW1, on Saturday, August 21 (10 am-6 pm).

Over 120 exhibitors will be there and organiser Mike Johnston is confident that it will be a success.

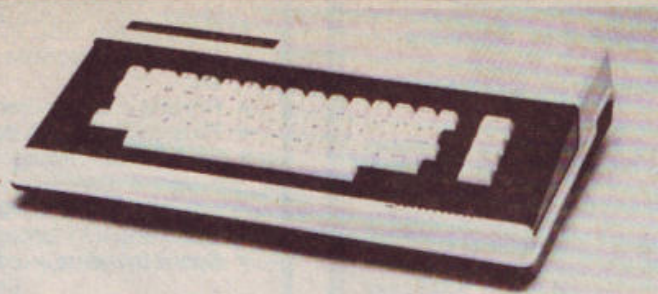

The Colour Genie ... 16K Ram, 16K Rom for £199.

Colour Genie for mid-September

THE successor to the Genie will arrive in the UK next month.

Costing £199, the new Colour Genie features 16K Ram, 16K Rom, eight colours and three sound channels.

The machine, manufactured by Eaca International in Hong Kong, will use a Basic version similar to that on the current Genie and software will be compatible.

The 40 x 24 character display can be programmed to produce 160 x 80 hi-resolution graphics.

Up to 16 colours can be generated by programming and, in addition to the 128 alpha-numeric characters, there are 64 pre-programmed and 128 programmable graphics characters.

The Colour Genie has twin parallel ports, programmable

serial port and provision for a plug-in games cartridge. Bug-Byte have been commissioned to write software for the new micro.

The machine is expandable with a plug-in 16K Ram cartridge. Discs will follow — hopefully to be demonstrated at the *Personal Computer World Show* in September.

Lowe Electronics are the sole importers of the Colour Genie. Robert Stead, head of their Computer Division, said: "We already have several thousand orders and we are hoping for great things from the product."

Initially the machine will be sold by mail-order and through existing Genie retailers.

Contact Lowe Electronics, Chesterfield Road, Matlock, Derbyshire.

Tangerine have a Tigress in their tank

TANGERINE has announced that its new Tigress TD-3000 microcomputer will be launched in mid-October.

The triple-processor machine will sell in two forms.

The basic Tigress, with 64K of program Ram and 96K of dedicated graphics memory, will cost £395.

A more advanced machine incorporating a hi-resolution colour monitor and twin double-sided, double-density disc drives will probably cost a further £2000.

It will be possible to upgrade the basic Tigress.

Both machines are based around the Z80A processor, and use a 6809 chip to handle the input/output routines and



Artist's impression of the Tigress.

a third processor to run the screen graphics.

The two versions run a modified version of Microsoft 2.2 Basic.

The Tigress TD-3000 is supplied with a full-size keyboard, Centronics and RS232 interfaces, Prestel Modem (with built-in auto-dialer), cassette interface, partial Ram battery back-up and light-pen and networking ports.

Apple acts to halt sales of illegal micros

APPLE has acted to stop the illegal manufacture of look-alike Apple micros by two Hong Kong companies.

In law suits brought against the two companies Apple Computers allege infringement of its trade marks, patents and copyright.

The counterfeit micros, almost indistinguishable from real Apple II machines, are apparently being sold in Hong Kong for as little as £300. This compares favourably with the price of the official Apple II of about £840.

For every genuine micro sold, about ten copies are bought. It has been estimated that the output of these clandestine back-street businesses could be as high as 5000 per month.

The patents claimed to be infringed relate to the colour video unit. Apple also claim that copyright of its logo and instruction manual have been infringed.

This initial action is seen as the first of a series of moves to halt the flood of copied micros from over 50 illegal assembly companies.

Although Apple is seeking damages related to lost revenue and seizure of the offending machines, the main purpose of the court action is to prohibit the copying.

These moves come as Apple — facing stiffer competition — announced encouraging third-quarter financial results.

Commodore joins classroom battle

COMMODORE are to set up their own Educational Unit to encourage the use of Pets and Vics in schools.

This move comes as a reaction to their exclusion from the government's "Micros in Schools" grants scheme.

Graham Sullivan will leave his appointment as headmaster of Lowbrook Primary School to head the unit in September.

A spokesman for the American company said: "The unit will further our educational interests. Already there are more Commodore machines in schools than any other micro."

HAVEN HARDWARE

**ZX80, ZX81, ZX Spectrum, UK101
and Superboard Hardware and Software**

ZX PROGRAMMABLE CHARACTER GENERATOR KIT £16.95 BUILT £22.95

REVIEWED IN THIS ISSUE

ZX REPEATING KEY MODULE** KIT £3.50 BUILT £4.95

The Most Popular ZX Product. Tens of thousands of Sinclair Computers already have this facility.

REVIEWED BY SINCLAIR USER, POPULAR COMPUTING WEEKLY etc. ZX81 INVERSE VIDEO** KIT £3.50 BUILT £4.95

Improve your ZX81's display by changing to WHITE on BLACK.

See Review in Popular Computing Weekly 29th July.

ZX Keyboard Entry Module KIT £3.50 BUILT £4.95

Add Single key Rubout and Cursor Controls to your Keyboard.

(Requires 3 keys)

A review will be printed in a future issue of Popular Computing Weekly.

ZX Keyboard KIT £17.95 BUILT £21.95

The first of its kind for ZX computers (as were the above 4 products).

Has provision for REPEAT KEY and SINGLE KEY RUBOUT etc (£1.50 extra).

ZX INPUT/OUTPUT PORT KIT £9.95 BUILT £12.95

ZX 3K Memory KIT £9.95 BUILT £12.95

ZX EDGE CONNECTOR Gold Plated Wire-wrap Pins £2.29

ZX Spectrum Version £3.50

UK101/Superboard/Challenger Programmable Character Generator.

The First Product which we produced. Provides 128 prog. Chars. at the

same time as the standard ASCII. Plugs into J1 and the Char. Gen Socket.

SPECIAL OFFER KIT £25.00 BUILT £35.00

PRODUCTS MARKED ** ARE AVAILABLE FROM THE BUFFER
SHOP, 374A Streatham High Road, London SW16. (Built Versions
Only).

We will be at the 4th ZX Microfair on August 21st, and the
addresses of some of our agents are printed in the Show-Guide.

'42' SOFTWARE for top professional programs

BBC WORD PROCESSOR

AVAILABLE NOW ON CASSETTE!

- ★ Runs on any BBC machine.
- ★ Full editing facilities eg copy, delete, insert, replace etc.
- ★ Printing and on-screen justification.
- ★ Files and retrieves documents on tape.
- ★ Many other features. Price inc. manual **£19.95**

ADDITIONAL BBC PROGRAMS

- ★ Sales and VAT Ledger (model B) **£11.50**
 - ★ Space Invaders A or B (6 skill levels + colour options) **£7.95**
 - ★ Curse of the Middle Kingdom (graphics adventure) **£7.95**
 - ★ Gomoku ★ Othello **£7.95**
- Please add 20p P&P on the above items.

COMING SOON

- ★ Integrated Accounts on disk — Purchase, Nominal, Sales, Invoicing, Stock.

IMMEDIATE DELIVERY AVAILABLE ON BBC MODEL B
£399.00 + £2.95 P&P.

Please send items ticked above. I enclose £.....

Name

Address

Please cut out and send with your remittance to:

BUCON LTD., '42' SOFTWARE

18 MANSEL STREET, SWANSEA SA18 5SG

Also available from Pro Soft

POPULAR Computing WEEKLY

HOBHOUSE COURT, 19 WHITCOMB STREET WC2

WHY NOT TAKE OUT A SUBSCRIPTION?

You can have *Popular Computing Weekly* sent to your home for £19.95 a year. This will cover the cost of the magazine, postage and packing.

Fill in the coupon below and keep yourself up to date week by week.

I would like to take out subscription(s) to *Popular Computing Weekly*.

Name

Address

Tel No.

I enclose £..... for subscription(s).

Please make cheques payable to Sunshine Publications Ltd.

Letters

write to Letters, Popular Computing Weekly, Hobhouse Court, 19 Whitcomb Street, London WC2

When 16K is not OK, OK?

I would like to draw your attention to what may be quite a frequent occurrence.

I recently received the ZX Spectrum I ordered, but whereas I had paid for a 48K machine, I found out, quite by accident, that 32K of it was missing.

I had attempted to enter:

`DIM AS (10000)`

This gave an out-of-memory error. When I rang Sinclair they told me to enter the following command. It may be worthwhile trying this just to make sure you've got a 48K machine.

`PRINT PEEK 23733/4—15.75;"K"`

If you have paid for a 48K Spectrum and you get the answer '16K' (or as I got, 16.25K) then you either have a faulty machine or you have been sent a Spectrum with only 16K.

David Powell
129 Chestnut Grove
Balham
London SW12

And three hours use is not OK

I ordered my Spectrum on May 8 and it arrived on July 7.

I used it for three hours that evening and, the following morning, after two minutes use, the screen went blank and smoke appeared from the rear. It is now on its way back to Sinclair.

Is this a record?

Malcolm Mitchell
Flat 3
122 Queens Road
Bury St Edmunds
Suffolk

And a Rom bug is not OK!

Prepare yourself for a shock. Sit down and have somebody nearby ready to telephone for an ambulance! There is a *BUG* in the ZX Spectrum Rom!

You don't believe me? OK, this will prove it. Type a short

program. Type in a line number one bigger than the last line of the program (for example, if the program ends at line 100, type in 101). Now press Edit.

Yes, the last line comes down, but so does the program cursor. Well, that just about wraps it up doesn't it? Sinclair Research in liquidation? Clive driving a mini? No — it is still a great computer.

Paul Harrison
77 Burnt Oak Lane
Sidcup
Kent

Just keep soldering on

Like Noorel Harque (Peek Land Poke, PCW July 15) I also had the problem of a loose power jack plug on my ZX81. The solution I found is very effective and simple if you have a soldering iron.

Remove the upper half of the case to expose the printed-circuit board. Cut or de-solder the jack-plug from the power lead and thread the lead through the socket. Gently pull the two socket clips upwards and pull the leads past them.

The leads can be stripped of insulation at the ends and soldered onto the clips. Make very sure that the positive lead (striped black and red, or in some cases black and white) is connected to the right-hand clip (which would normally contact the jack-plug tip) and that the plain lead is connected to the left-hand clip.

Note, however, that this procedure will render your guarantee void, but it solves the problem and is much more secure than using anything else, such as crocodile clips.

When the jack plug has been removed, and before the leads are soldered to the ZX81, is a good time to fit an on/off switch into the power lead. This should be fitted between the power pack and the ZX81 and *not* between the power pack and the mains.

I also wedged a small piece of rubber into the socket, alongside the power lead so that if the wires were accidentally pulled this would

take the strain rather than the solder joints.

Jason Lowe
26 Spring Street
Rishton
Hyndburn
Lancashire

Yes . . . we all have our faults

I have just received my BBC Micro Model B and wonder if anyone else has the following novel fault.

The screen is occupied by one dot per character, ie a matrix of 40 x 25 dots, whenever Mode 7 (the teletext-compatible one) is called. This matrix can however be overwritten in Mode 7 (a bit confusing) and disappears in all other Modes.

I tried your Open Forum Ski-Run (June 24, page 12) program and wonder when you are going to publish the rest of the program, since line 610 is clearly not the last line needed. Are these the missing lines?

```
620 IF INKEY$="" THEN GOTO 620
630 ENDPROC
```

I would like to congratulate you on the Saturn program in the most recent issue; it well deserved the Best Program!

Dr David Taylor
1 Elmsway
Bramhall
Stockport

These lines for Ski-Run will work. Our apologies for the omission.

Some have many faults

As a dissatisfied Sinclair user AI was interested in the letter from Sinclair Research (PCW July 8) which stated that "no ZX81s with faulty Roms were shipped to customers after July 1981". I received a ZX81 that thought SQR 0.25 was about 1.3 in June 1982. The machine and 16K Rom pack were ordered at Christmas 1981 and the micro arrived in January 1982. Attempts to use FOR/NEXT loops caused a crash. The ZX81 was returned to Sinclair.

I received a Ram pack. When the ZX81 came back I

could never enter more than 25 lines of a program with the Ram in without crashing. The Ram pack was returned to Sinclair.

I discovered SQR 0.25 was not 0.5 in June 1982. The ZX81 was returned to Sinclair.

Third ZX81 and second Ram pack received. The system crashed repeatedly as before. The Ram pack was returned to Sinclair accompanied by a request for my money back.

Presto! Sinclair have not been able to trace my orders or any record of my returns!

At no time have I received any technical advice or help from Sinclair Research, despite writing to describe the faults on each of the five returns I have made.

Sinclair has had my money since Christmas and at no time since have I had a working combination of ZX81 and 16K Ram pack.

You won't find me buying a Spectrum!

G D Pearce
5 Orchard Lea
Coxley Wick
Wells
Somerset

But finally someone's happy

Please continue your slot devoted to the ZX Spectrum as I use all the programs for my Vic20 with a Super Expander Cartridge. The programs are easily converted and work well.

But, please could you have a corner devoted to the Vic20 for people with this cartridge as I think that the manual supplied by Commodore for it does not explain fully the art of programming hi-resolution graphics.

Giles Archer
'Fernside'
Maesmaur Road
Nr Westerhorn
Kent

We shall continue to publish the Spectrum page. There are no plans at present to have a Vic20 page but we shall of course continue to print articles and programs for the Vic20 as at present.

Street Alley

A new game for Vic20
by Robert Maydew

London has been devastated by a nuclear war. Most of the population died in the blast, or from the radiation poisoning that followed.

The survivors have formed themselves into a number of small, close-knit, gangs that compete with each other for what little food remains. The rule of law has broken down. Only the gangs remain.

Each gang controls a well defined area of territory. Outsiders who trespass on a gang's "patch" are killed without compunction. It is a dog eat dog world.

But, in a bid to stop the endless feuding, the gang leaders agreed to hold a meeting amid the ruins of Wembley. All the gangs attended, unarmed and under a flag of truce.

However, just when it seemed that a peace treaty would be signed, Chris Tanner, leader of the Wembley Warriors, was assassinated. Suspicion immediately fell

on you and your gang, the Snow Hawks, because a Snow Hawk knife was found in the body.

In fact, it was a set up. Tanner was killed by his number two, Duncan Kelly, who wanted supreme power over all the London gangs.


With the other gangs united against you under the nefarious Duncan Kelly, you must fight your way back across London.

But, there are a number of hazards to be overcome. Armoured cars, driven by crazed gang warriors, will mow you down unless you can dodge them. There is a

polluted river that can only be crossed by jumping from one log to another. Falling off a log, or crashing into the river bank, will prove fatal.

The object of the game is to get five of your men into the man holes at the top of the screen.

The Snow Hawks will follow you unquestioningly, but you will have to exercise all your skill to return home safely. Press any key to start.

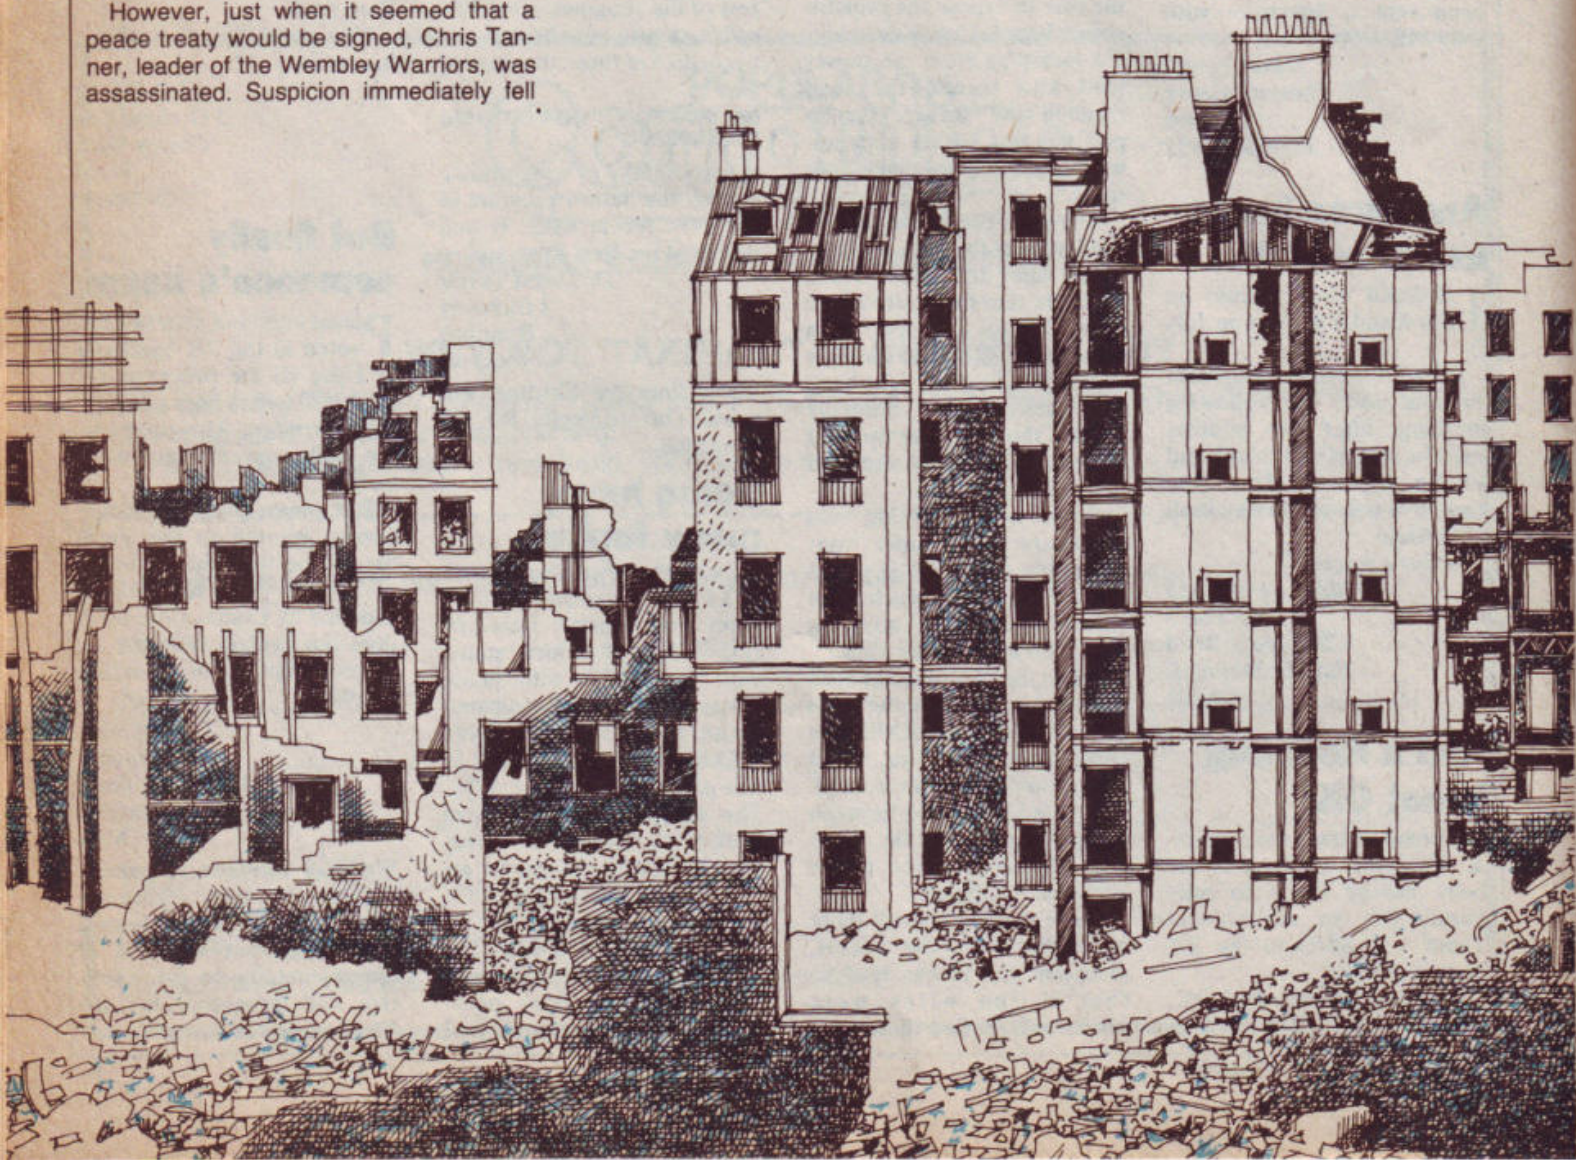


```

10 GOTO 700
15 POKE36869,255
20 C=0:D=100:SC=0:F=8152:A=0:OF=30720+F
25 B=3:N=10:TI$="000000"
30 Z$="XXXXXXXXXXXXXXXXXXXXXXXXXXXX"
35 PRINT"Z":POKEA+F,0
40 A$="DDDDDDDDDDDD"
41 B$="DDDD DDDD DDDD"
42 C$="DDDDDD DDDDD"
43 D$="DDD DDD"
44 E$="ABC ABC ABC ABC"
45 F$="ABC ABC ABC"
46 G$="ABC ABC ABC ABC"
50 FORI=0TO21
55 PRINT"XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX"
60 PRINT"XXXXXXXXXXXXXXXXXXXXXXXXXXXX"
65 PRINT"X":LEFT$(Z$,4)RIGHT$(A$,1)LEFT$(A$,22-I)
70 PRINT"X":LEFT$(Z$,6)RIGHT$(B$,1)LEFT$(B$,22-I)
75 PRINT"X":LEFT$(Z$,8)RIGHT$(C$,1)LEFT$(C$,22-I)
80 PRINT"X":LEFT$(Z$,10)RIGHT$(D$,1)LEFT$(D$,22-I)
81 PRINT"X":LEFT$(Z$,14)RIGHT$(E$,1)LEFT$(E$,22-I)
82 PRINT"X":LEFT$(Z$,16)RIGHT$(F$,1)LEFT$(F$,22-I)
85 PRINT"X":LEFT$(Z$,18)RIGHT$(G$,1)LEFT$(G$,22-I)
90 PRINT"X":SC, TI$
91 IFPEEK(A+F)=4ANDC>5THENGOSUB200
95 IFPEEK(A+F)=32ANDC>5THENGOSUB350
100 IFTI$=>"000030"THENGOSUB300
110 IFC<5THENGOSUB400
115 POKEA+F,32
120 IFC=10THENGOSUB500
125 GETL$:IFL$="@"THENA=A-44:C=C+1:SC=SC+10
130 IFL$="/"THENA=A+44:C=C-1:SC=SC-10
135 IFL$=":"THENA=A-1:N=N-1:IFN=0THENGOSUB300
140 IFL$=";"THENA=A+1:N=N+1:IFN=21THENGOSUB300
145 POKEA+F,0:POKEOF+A,5
150 FORU=1TO100:NEXT
155 NEXT
160 GOTO50


```

```

200 IFTI$=>"000030"THENGOSUB300
205 IFC=6THENA=A-1:N=N-1:RETURN
210 IFC=7THENA=A+1:N=N+1:RETURN
215 IFC=8THENA=A-1:N=N-1:RETURN

```

to next page

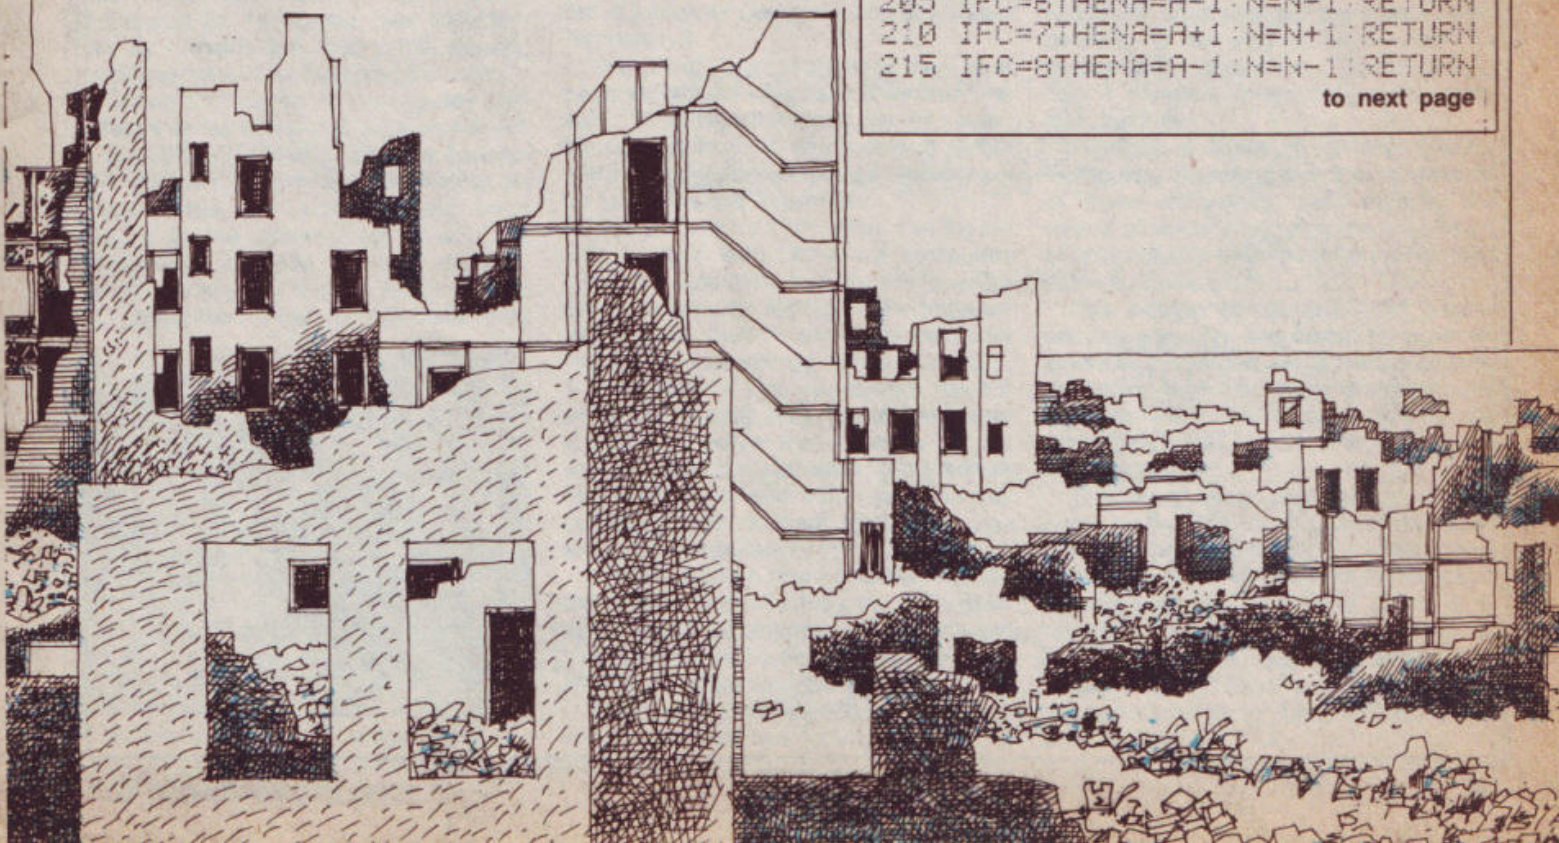

Street Alley

```

220 IF C=9 THEN A=A+1 : N=N+1 : RETURN
300 REM
305 POKE36877,220 : FOR L=15 TO 0 STEP -1 : POKE36878,L : FOR U=1 TO 100 : NEXT U, L
310 POKE36878,0 : POKE36877,0 : B=B-1 : POKE A+F,32
315 IF B=0 THEN GOTO 600
320 A=0 : C=0 : N=10 : TI$="000000" : RETURN
350 POKE36877,252 : FOR L=15 TO 0 STEP -1
355 POKE36878,L : FOR U=1 TO 90 : NEXT U, L
360 POKE36878,0 : POKE36877,0
365 A=0 : C=0 : N=10 : TI$="000000" : B=B-1 : IF B=0 THEN GOTO 600
370 RETURN
400 IF PEEK(A+F)<>32 THEN 415
410 RETURN
415 IF PEEK(A+F)=32 THEN RETURN
420 IF PEEK(A+F)=0 THEN RETURN
425 GOSUB 300
430 RETURN
500 IF A+F=77030 OR A+F=77090 OR A+F=77120 OR A+F=77150 OR A+F=7722 THEN 510
505 GOTO 593
510 X=X+1 : IF X=5 THEN D=D-20 : IF D=0 THEN D$=" " : DDD
515 IF D=60 THEN B$=" " : DD : DD : DD : "
520 IF D=40 THEN C$=" " : DDD : DDD : "
525 IF D=20 THEN A$=" " : DDD : DD : DDD : "
530 IF D=0 THEN D$=" " : DD : DD : DD : DD : "
535 IF D<0 THEN D=0
540 POKE A+F,0
545 SC=SC+20
550 POKE36878,15 : FOR L=1 TO 15
555 FORM=200 TO 220+L*2 : POKE36876,M
560 NEXT M, L : POKE36878,0 : POKE36876,0
565 IF X=5 THEN GOSUB 580
570 A=0 : C=0 : N=10 : TI$="000000"
575 RETURN
580 SC=SC+50 : X=0
585 POKE36878,15 : FOR L=130 TO 254 : POKE36876,L
590 FORM=1 TO 40 : NEXT M, L
591 POKE36878,0 : POKE36876,0
592 FOR Y=0 TO 21 : POKE7702+Y,32 : NEXT Y : RETURN
593 GOSUB 300
595 GOTO 50
600 POKE36869,240 : POKE198,0
610 PRINT "I"; SC
615 PRINT "XXXXXXXXXX"
620 INPUT "ANOTHER GO?"; V$
625 IF V$="Y" THEN RUN 15
630 PRINT "END" : END
700 POKE52,28 : POKE56,28 : POKE51,0 : CLR
710 FOR I=0 TO 511
720 POKE7168+I,PEEK(32768+I) : NEXT I
730 FOR I=0 TO 38
740 READ J : POKE7168+I,J : NEXT J
750 DATA 153,153,126,24,219,189,153,129,7,63,127,127,127,127,63,7
760 DATA 0,255,255,255,255,255,255,0,112,254,241,241,241,241,254,112
770 DATA 255,255,255,255,255,255,255,255
780 GOTO 15

```


Street Life

All's fair in Manchester and Edinburgh

PCW staff report on the Manchester and Edinburgh micro fairs.

Over 4000 visitors found their way through Manchester's decaying warehouse wastelands to the city's Microfest '82.

Held at UMIST on July 24 and 25, there were more than 70 exhibitors and continuous lecture and film programmes.

Interest for the home micro owner centred on equipment for the Sinclair ZX Spectrum. Both Fuller Micro Systems and Kempston (Micro) Electronics displayed add-ons for the Spectrum — a sound box and a mother-board plus I/O port, respectively. Spectrum software was also on display at the Richard Altwasser stand.

Microfest organisers, David and Mike Hewitt, were more than pleased with the show. Said Mike: "The whole event has been a tremendous success."

David was surprised at the differences in the audiences for the two days. The Sunday crowd was more business oriented, while the home micro enthusiasts tended to come on Saturday.

It is unfortunate that micro events seem to come in pairs. Those who attended the Manchester Microfest in preference to the Edinburgh ZX Fair salved their consciences by crossing the road to the nearest public house — The Swinging Sporrán.

During the course of the two-day Microfest a series of lectures were presented.

Alan Shaw (St Martin's College, Lancaster) spoke on *Computer Interfacing for Experiments*. He explained the basic stages in the construction of a ZX81 input/output interface. He also demonstrated how to select the pins for the parallel I/O organiser, how to calculate their



Paul Kriwaczek: "Will the alienation of ourselves from each other and from nature be solved by computers?"

addresses and how to set up a simple control device. The device enabled him to use a ZX81 to start and stop a model electric car.

Boris Allan (Senior Lecturer in Sociology, Manchester Polytechnic) tackled *The BBC Computer in Education*. He put forward his philosophy: "Ignorance of computers is not a crime; to be ignorant of computers can be a disadvantage; understanding computers requires no special type of ability; and everybody has to start somewhere."

Boris felt that the emphasis of computer education should be placed on computer awareness for everyone rather than computer studies for the few.

Paul Kriwaczek (producer of the BBC tv series 'The Computer Programme') posed the question *Is Computer Literacy Really Necessary?*

"No other new technology has ever been introduced with such a fanfare," he said. "In its time the motor car was every bit as significant a development — but there was no government department set up to give us 'car awareness'."

"People saw for themselves that the car was a good idea. Why are computers different? And why invoke this emotive phrase 'computer literacy'? The impression is given that — come the computer revolution — everything will be all right."

"Like other faiths you do not ask for evidence. Nobody asks how the computer is going to solve the problems in our society. Will the alienation of ourselves from each other and from nature, to say nothing of our rampant materialism, be solved by computers?"

"People believe that computers will be the answer because they do not understand them. Computer literacy should give us this appreciation and therefore allow us to make the most of micros."

Stephen Adams (specialist hardware writer) delivered two lectures. *Inside the*

Spectrum toured the printed-circuit board of the Sinclair micro. *Keep It Simple* explained how to begin programming and how to make your programs easily understood by others.

Eric Deeson (Educational ZX User Group) looked into *The Future of Micros in Schools*.

"To get one computer in a school is not the end of educational computing — it is the beginning," he emphasised. The trend towards cheap powerful micros will enable schools to take a more liberal approach to micro education.

"What is needed," he said, "is computer-aided freedom, rather than the 'battery farm scenario' with children in computer learning cubicles. The micro must open our educational horizons rather than restrict them."

Edinburgh ZX Computer Fair

The first true home computer exhibition in Edinburgh was an undoubted success. Nearly 1200 visitors attended the show, which was organised by Gordon Hewitt and the Edinburgh ZX Computer Club.

The exhibition was set in the long concrete reception hall of Edinburgh's Meadowbank stadium. The local club took a large stand at one end of the hall. The rest of the exhibitors were arranged in a neat line of tables extending about 60 yards down one side of the hall, leaving plenty of space for the visitors to mill around.

The main interest seemed to focus, understandably, on the ZX Spectrum. Those companies displaying the first Spectrum programs did particularly well, certainly in drawing a large crowd of permanent hangers-on. The Bug-Byte Space Invaders program was the most popular draw.

We had a Spectrum on the *Popular Computing Weekly* stand. It drew a crowd of young enthusiasts, each berating the others' ability to program it properly. Many people actually tried to buy our only copy of the manual.

One woman complained: "But I need another copy. My dog buried mine somewhere in the garden. He is always burying my books. Normally I know where he's put it but this time I have had to give up. It's probably too late now. Next time I'll wrap it in polythene."


The imaginative organisation of the show by the Edinburgh Club — competitions ran the full length of the exhibition — kept many of the visitors right to the end. It proved quite forcefully that there is a stronger home computing following in Scotland than is often assumed. The organisers hope more software and hardware companies in this business show their support.




A study in concentration . . . at Manchester

Reviews

software

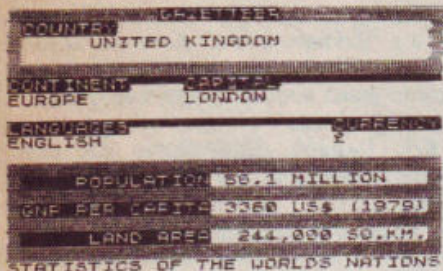

Detail from the Vu-File program.

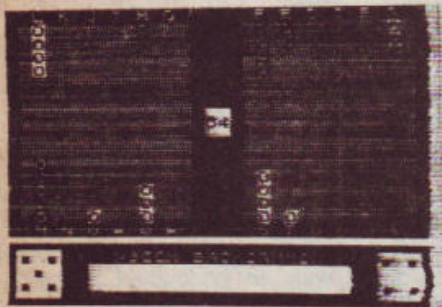

Detail from the Backgammon program.

Sinclair/Psion Tapes

Sinclair Research, Camberley, Surrey, and branches of W H Smith. ZX81, 16K cassettes.

Psion are the second software house to sign an exclusive deal with Sinclair.

Five of the tapes are games, two of these produced by Microgen under the Psion banner, and the packaging is eye-catching.

Chess (£6.95), one of the Microgen tapes, has had £3 clipped from its previous price. There are six levels of play in the program, and these may be changed in mid-play. The board may also be set up for problem solving. All legal moves are recognised. A good, solid program. The tape includes a chess clock on Side 2.

Space Raiders/Bomber (£3.95) is the other Microgen tape. *Space Raiders* is... you guessed it! Yawn. Not even a mother ship to relieve the boredom. *Bomber* (or *New York*, as Microgen call it when they sell it direct), is the well-known sky-scraper demolition program. This is a very addictive game. Please let me know if you succeed in landing your plane — I've not seen it done yet, even though upwards of 300 kids tried it at the local school fete!

The rest of the programs are Psion's own products, a couple of which were available before the Sinclair connection. *Backgammon* (£5.95) is the only program I know of which plays my favourite board-game, and so was a must when I saw it advertised some months ago. It has since

undergone a tidying-up operation, with response times being made faster. Like all Psion programs it has great visual appeal. Below the board in the accompanying illustration are the dice and between them, a box which shows the moves made by computer and human opponent. On the bar you can see the doubling cube, which the program is intelligent enough to offer at the right moment.

While the program will execute all the recognised openings, I am a little worried at its tendency to blot with its back men after only two or three throws, which leads to a game of boring attrition. This happens, in my experience, once every four or five games, but it is easy to break the game, and start again. All in all, however, a very good program, and a very rewarding one. *Sorcerer's Island/Perilous Swamp* (£4.75) are the games on the other previously available tape, and are very good value. *Perilous Swamp* contains a Princess which the player has to rescue and escort to safety. It's really more of a board game than an adventure, but along the way you will meet various monsters and pick up bits of treasure or weaponry with which to bribe or fight them.

Sorcerer's Island is a graphic adventure, in which you take a Sunday morning stroll around a paradise island. Uneventful, of course, apart from the giant, rats, minotaurs, and so on! Again, you can bribe or fight, or run away. Reaction times are a little slow, but a nice scrolling technique helps relieve any boredom. I've played the game for a year, and still not succeeded in finishing it.

Flight Simulation (£5.95) is the final games tape in this package from Psion. No words can do justice to this most elegant of programs — in my opinion the best use of machine-code yet available for the ZX81!

You are placed in the pilot's seat of a twin-engined prop plane, somewhere near a landing strip, and your job is to land safely. There are several modes, but they all feature the same cockpit display of altimeter, rev counter and so on, together with a view from the cockpit window. This shows the horizon, which will show the degree of bank and rate of climb or descent. This is all depicted in a most realistic way.

To help you find the runway, you may call up a map, and this, together with several beacons, will guide you to the final approach. At this point, you may ask for a visual approach, and this will consist of a 3D representation of the runway and approach lights. As in real life, an eye must be kept on wind-speed, and the plane kept from stalling.

Vu-File and *Vu-Calc* (£7.95 each) are

the two remaining Sinclair/Psion programs.

As its name suggests, *Vu-File* is a data filing and retrieval system. The difference between this and the multitude of others available is that Psion has examined systems run on the larger micros and compacted the design to fit into the ZX81, at the same time continuing their policy of elegant and attractive graphics.

One is able to format the file to any degree, with graphic borders and so on. Forward planning is required in this formatting — it cannot be altered during data input. Once data is input, there are a number of powerful commands to use in processing the information. For example, the user can initiate a search, which will print out a specified field in alphabetical or rank order. In the demonstration file containing information of the world's countries, for instance, all the records may be listed in, say, population order, or to show every occurrence of a particular language. Thus one can quickly find which countries speak Bantu, and which ones use Pound Sterling and so on. Using the system at home, one could find and print out every record, say, with a particular bass-player, or every stamp with a blue flower in the design.

Commands include an analysis of memory remaining while inputting data, and a copy-to-printer routine.

The companion tape to *Vu-File* is *Vu-Calc*. As its name suggests it is a ZX81 version of Visicalc. Necessarily limited by the 16K Ram, it is nevertheless a very useful cash-forecast system for the home user or the one-man-businessman who has not yet Applied.

The program acts as a window on to 936 boxes which can be filled with numerical or alphabetical data. Formulae can then be applied to these data, in many different ways. The user can define the horizontal rows as, for instance, mortgage, rates, gas, electricity etc., and the vertical rows, as January, February and so on. Data for the various months may then be input, and the formulae set. The totals will be displayed in the boxes chosen. Any data may then be changed, and the effect on the whole noted.


Summary

The Psion tapes are a welcome change from the usual run of Sinclair Software (from any source). All are good value, but I would single out *Flight Simulation* for special mention — you will not see a better games program, until Psion create one for the Spectrum. *Vu-File* and *Vu-Calc* are a brave attempt to emulate much more expensive packages and certainly succeed as far as is possible on the Sinclair.

TB

Reviews

hardware

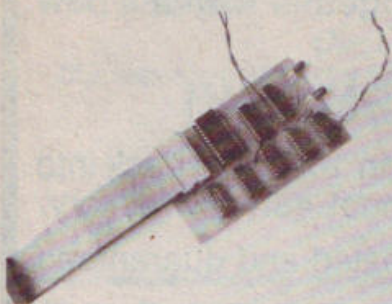

Character Generator

Haven Hardware, 4 Asby Road, Asby, Workington, Cumbria.
Price: £19.95.

This board allows you to use the inverse character (usually white on black) of your ZX80 or ZX81 to program your own character set.

The ZX character set is made up of characters each with one byte (memory location) width and eight bytes length. Each byte contains eight dots which can be ones or zeros giving either black or white dots.

With this board, any of the 64 characters can be changed by Poking the appropriate dot pattern into the various bytes that make up that character. On this board there are two inverse character sets and, using Poke commands, you can alternate between them. Unfortunately, there is no way to restore the original Rom-based inverse character set when using this board.

The board can be connected quite easily to the ZX80 by plugging in a ribbon strip and plug into the Rom socket and transferring the Rom to a similar socket on the characters board. There are five other wires to solder on to the printed-circuit board and this can be quite difficult as the connections have to be made to both sides of the printed-circuit board.

On the ZX81 the fit is very tight because it was not possible to connect the board as suggested since that would have involved obstruction of the tape sockets. An attempt was made to take it out the other side of the ZX81, but then the case would not fit on. In the end, since the board is too big to fit under the ZX81 keyboard, the case had to be left off in order to use it. The wires for the rest of the connections had to be traced out on the printed-circuit board as the diagram was rather imprecise.

On switching on you are presented with a random pattern of dots instead of the cursor. The normal characters come out the same, but as the inverse character set has been replaced with Ram all the mode characters are lost (inverse L.K.G.).

A program is provided to revert to the normal character set by reprogramming

the inverse character set — called Inverse into Programs, but the instructions fail to mention it. Two other programs are included. A graph plotter which fails if trying to plot at zero or below and a double-sized character generator which I could not get to work. A chart is also provided to help you design your own characters and is about the most useful thing in the instructions.

Summary

This board is cheaper than other character sets, but I would much rather spend the extra money and have fewer problems.

SA

Spectrum 32K RAM

Sinclair Research, Freepost, Camberley, Surrey.

Price: £60.

The Sinclair add-on 32K Ram board for the ZX Spectrum must be fitted by their factory in Scotland so, if you wish to purchase this board after buying a 16K Spectrum, you must send the Spectrum back with the order.

This seems a pity because it is so easy to fit the 6½ by 1½ inch board into the sockets provided on the back part of the printed-circuit board. The sockets for the add-on board are provided on every Spectrum and it can only be fitted into them one way round. The pins on each end of the board are stout and there is little chance of bending them.

The board contains eight Ram chips (32K x 1 bit) made by Texas, two decoding chips, two change-over chips which operate when the dynamic Ram needs to be refreshed and eight small ceramic capacitors to smooth the power supply to the Rams.

The decoding is simplified by the fact that only one address line is needed to address all the chips (A15). When this line is Binary 1 then the Ram is turned on. There is no need to tell the computer how much memory is available (as on the ZX81) since it is automatically counted from 64K downwards. Also, all the Ram can be used for machine code or Basic programs. This means that there is no space left for Eproms, ports etc in memory. The Rams used on the board are not standard Texas components. They appear to be similar to 4164 (64K x 1 bit) chips but only contain 32K. Could they have been Texas rejects? Only Sinclair seems to be able to get hold of any.

The board works very well and no noticeable increase in heat from the voltage regulator or other signs of overheating have been noticed with it in use. The Ram-pack wobble is no longer present as

all other equipment is connected to the edge connector and the Ram pack has its own connection sockets and is firmly held.

It is not possible to turn off sections of the Ram for more memory or other devices from the edge connector as Ram CS (chip select) is not provided. This is a great pity as not everyone wants to be restricted to what the manufacturer wants to provide.

Summary

The Ram board is well made and should cause no problems in use. However, to fix the units the ZX Spectrum must be sent back to the factory. This is a great disadvantage, as is the price of £60. Other Ram boards are certain to be available soon with at least the same amount of Ram which may provide a Ram CS so that other devices can be used with the Ram pack.

SA

Programming ZX81

by M James and S M Gee.

Bernard Babani Ltd, The Gramplans, Shepherds Bush Road, London W6 7NF (Tel: 01-603 2581).

Available from larger branches of W H Smith.

Price: £1.95.

The Art of Programming the 1K ZX81 is a simple yet professionally produced book of 86 pages. At £1.95 its price bears a closer resemblance to normal books than computing books, which for some reason are still grossly over-priced.

It is a well written and carefully thought out book which does far more than present a series of 1K games. Each chapter introduces and explains a different topic, explores a few ways of using the techniques discussed in simple programs and then helps you build up those programs. In this way you usually end up with a couple of games out of each chapter.

These include card games in the chapter on random numbers, arrows, lunar lander and cannon-ball in the chapters on moving graphics, clocks and reaction time testers in the chapter of the use of Fast, Slow and Pause, and codes and cyphers in the chapter on string-handling.

There is also an excellent short chapter introducing the Peek and Poke functions. This should do much to dispel the mystery for some reason still surrounding these two commands. There is also a useful big letters program.

Summary

A very useful and well written book which we strongly recommend for new users of the ZX81. It is a pity that the book has arrived on the market so late in the day for the ZX81.

DS

NEW!
FOR ZX81 USERS

BYGER BYTE 32K+ RAM PACK

Why put aside your 16K Ram pack when you can use it together with the new Byger Byte 32K+ Ram pack?

THE RESULT BEING 48K OF MEMORY!

No trailing leads or wires — all you need do is plug the existing 16K Ram pack into the back of the new Byger Byte 32K+ Ram pack and bingo! 48K of memory.

Uses existing power supply. The new 32K+ Ram pack is tested and guaranteed with the following 16K Ram packs:

Byg Byte, Sinclair, Downsway.

For further information please ring us on 0252 514990

Phoenix
Marketing
Services, Dept
PW15, Oaklands
House, Solartron
Road,
Farnborough,
Hants GU14 9QL.

£39.50
INCLUSIVE



Please send me my Byger Byte 32K+ Ram Pack. I enclose cheque/postal order for £39.50 (includes VAT, Postage & Packing).

Name

Address

Allow 28 days for delivery

Dept Poc W

POPULAR Computing WEEKLY BACK NUMBERS

MAKE SURE OF A
REAL COLLECTORS' ITEM —
THE FULL SET OF PCW

We will mail any of the numbers you're missing from Issue 1 to the latest — for just 50p an issue, including p & p.

(We have no more copies of Issue 2)

Send cheques/Postal Orders to:

Back Numbers
Popular Computing Weekly
Hobhouse Court
19 Whitcomb Street
London
WC2 7HF

**KEMPSTON
(MICRO)
ELECTRONICS**



NEW ZX SPECTRUM HARDWARE

AVAILABLE NOW — A 24 LINE
INPUT/OUTPUT PORT, WHICH MAKES
USE OF THE BASIC COMMANDS
IN AND OUT ON THE SPECTRUM

The Port is built around a M.O.S. chip which imposes virtually no D.C. load on the datalines. The device is Port Mapped and can be configured in a variety of modes dependent on the particular application. We must stress that this is not a modified ZX81 Port, but a purpose built unit designed exclusively for the Spectrum (16 line I/O port is also available for the ZX81)

The prices for the above items are as follows:

ZX SPECTRUM USER I/O PORT £16.50
ZX 2 SLOT MOTHERBOARD £16.95
STACKABLE CONNECTOR £5.50

The prices are inclusive of VAT, but postage must be added at 70p for a single item, £1.00 for two or more items.

Cheques/Postal orders made payable to:
KEMPSTON ELECTRONICS, 60 ADAMSON COURT,
HILLGROUNDS ROAD, KEMPSTON,
BEDFORD MK42 8QZ.

SAE FOR FURTHER DETAILS.
Delivery 14 days from receipt of order. A. Pandaal, B.Sc P.G.C.E.

Open Forum

Open Forum is for you to publish your programs and ideas.

It is important that your programs are bug free before you send them in. We cannot test all of them.

*Contributions should be sent to: Popular Computing Weekly, Hobhouse Court,
19 Whitcomb Street, London WC2H 7HF.*

How to contribute

Each week the editor goes through all the programs that you send to Open Forum in order to find the Program of the Week.

The author of that program will qualify for DOUBLE the usual fee we pay for published programs.
(The usual fee is £10.)

Presentation hints

Programs which are most likely to be considered for the Program of the Week will be computer printed and accompanied by a cassette.

The program will be well documented, the documentation being typed with a double spacing between each line.

The documentation should start with a general description of the program and then give some detail of how the program has been constructed and of its special features.

Listings taken from a ZX Printer should be cut into convenient lengths and carefully stuck down on to white paper, avoiding any creasing.

Please enclose a stamped, self-addressed envelope.

Simon

on BBC Micro

Simon is a program to simulate the electronic game of the same name. It runs on the BBC Model B and demonstrates some of the interesting colour graphics and sound facilities of the BBC.

The program starts by switching off the colours RED, GREEN, YELLOW and BLUE. A circle is then plotted with each quadrant assigned one of the four colours. The screen remains blank as all these colours have been turned to black. On the issue of a VDU19 command the colours can be turned on and off at will.

The computer flashes up a segment of colour accompanied by a sound (each colour has its own sound). You then have to repeat the colour by entering R, G, Y or B. The computer increases its sequence of colours and sounds by 1 until either it

to next page

Simon

by D M Dodsworth

```
1 CLS
2 FOR I=1 TO 5:PRINT:NEXT I
3 PRINT CHR$ 141 "          SIMON" ' CHR$ 141 "
4 PRINT CHR$ 141 "          =====" ' CHR$ 141 "
5 PRINT:PRINT " PRODUCED BY: A.K. and D.M.Dodsworth"
6 PRINT "          59 Balmoral Drive"
7 PRINT "          Bramcote Hills"
8 PRINT "          Beeston"
9 PRINT "          Nottingham NG9 3FT."
10 TIME=0:REPEAT UNTIL TIME=200
11 CLS
12 PRINT:INPUT "Do you need instructions (YES/NO)",A$
13 IF A$="NO" THEN 100
14 CLS
15 PRINT:PRINT
16 PRINT "          INSTRUCTIONS"
17 PRINT "          ====="
18 PRINT
19 PRINT " This is a computer version of the"
20 PRINT "popular electronic game 'SIMON'.The"
21 PRINT "computer flashes a segment of a circle"
22 PRINT "and plays a note.You must follow it."
23 PRINT "If a blue segment was shown,type 'B',"
24 PRINT "for red type 'R',green 'G',and yellow"
25 PRINT "'Y'.If blue then red were flashed then"
26 PRINT "type 'BR',and so on.The screen will be"
27 PRINT "blank for a few seconds at the start"
28 PRINT "of the game,don't worry.Good luck!!"
29 FOR Z=1 TO 7:PRINT:NEXT Z
30 INPUT "          press RETURN to commence"D$
100 DIM STORE(10)
110 MODE 2
120 PROCCIRCLE
130 FOR A=1 TO 10
140 STORE(A)=RND(4)
150 NEXT A
160 FOR A=1 TO 10
170 PRINT TAB(1,29)SPC(20);
180 FOR B=1 TO A
190 TIME=0:REPEAT UNTIL TIME=20
200 VDU19,STORE(B),STORE(B),0,0,0
210 ON STORE(B) GOSUB 380,420,460,500
220 T1=TIME
230 REPEAT UNTIL TIME=T1+50
240 VDU19,STORE(B),0,0,0,0
250 NEXT B
260 INPUT TAB(1,29)"NOW REPEAT ?"X$:
270 L=LEN(X$)
280 IF L=A THEN GOTO 310
285 PRINT TAB(1,30)SPC(20);
290 PRINTTAB(1,30)"WRONG NUMBER OF ENTRIES";
295 TIME=0:REPEAT UNTIL TIME=200
```


Open Forum

from previous page

reaches 10 or you fail to respond correctly.

The program is written in a structured manner using procedures and sub-routines. The maximum number in the sequence can be increased easily by changing line 160.

O and X Maths

on ZX81

This program is intended to be an exciting game and challenge the mathematical skills of the players. Intended for average primary age children, it is based upon the popular noughts and crosses game. I have tried to make it as simple to operate as possible.

On loading, the program will automatically run, if SAVED by GOTO 2000. The two players are asked to type in their names. The screen then goes blank for ten seconds whilst the computer prints the screen and checks the questions it sets at random.

Variables used:

Arrays: N\$: Players' names — up to 12 letters are accepted and the name is positioned within the middle of the string — by lines 50 and 75 — to produce neater printing.

Q\$: Stores the questions. The element is changed to the appropriate symbol for the check routine if the question is correctly answered. If larger questions are set by altering lines 230 and 240 it may be desirable to set Q\$ (9,6).

Strings: M\$: Players' names are input before storing in middle of element of N\$ array.

A\$: Question numbers are called by touching the keyboard. Only unanswered questions may be called due to the check in line 455.

E\$: 6 spaces are used to erase print.

R\$: Question answer is entered by player.

Loops: F: Time loops. It produced a more stable display than PAUSE.

A: Provides PRINT AT points for board in lines 110 to 180.

: Used to count element of Q\$ array in lines 220 to 250.

A & B: Provides relevant letter to print in each box in lines 150-170.

to next page

```

296 PRINT TAB(1,29)SPC(20);
297 PRINT TAB(1,30)SPC(20);
298 PRINT TAB(1,31)SPC(20);
300 GOTO 260
310 S=0
320 FOR C=1 TO A
330 GOSUB 540
340 NEXT C
350 IF S=1 THEN PROCERRR
360 NEXT A
370 PROCWON
380 SOUND1,-15,0,5
390 SOUND2,-15,12,5
400 SOUND3,-15,28,5
410 RETURN
420 SOUND1,-12,20,5
430 SOUND2,-12,50,5
440 SOUND3,-12,100,5
450 RETURN
460 SOUND1,-10,50,5
470 SOUND2,-10,100,5
480 SOUND3,-10,150,5
490 RETURN
500 SOUND1,-8,100,5
510 SOUND2,-8,150,5
520 SOUND3,-8,200,5
530 RETURN
540 REM*****
550 REM*SUBROUTINE TO CHECK FOR CORRECT SEQUENCE
560 P$=MID$(X$,C,1)
570 IF P$="R" THEN P=1
580 IF P$="G" THEN P=2
590 IF P$="Y" THEN P=3
600 IF P$="B" THEN P=4
610 IF P<> STORE(C) THEN S=1
620 RETURN
630 DEF PROCCIRCLE
640 REM*****
650 REM*PROCEDURE TO PLOT CIRCLE WITH FOUR COLOURED
660 REM*SEGMENTS - THE COLOUR IS SWITCHED OFF
670 REM*****
680 ANGLE=0
690 MOVE 640,512+400
700 FOR X=1 TO 4
710 GCOL 0,X:VDU19,X,0,0,0,0
720 FOR Y=1 TO 9
730 ANGLE=ANGLE+10
740 MOVE 640,512
750 PLOT 85,SIN(RAD(ANGLE))*400+640,COS
(RAD(ANGLE))*400+512
760 NEXT Y
770 NEXT X
780 ENDPROC
790 DEF PROCERRR
800 REM*****
810 REM*ERROR SEQUENCE PROCEDURE
820 REM*****
830 CLS

```


Open Forum

from previous page

: Provides print co-ordinates for questions in lines 320-380.

C: Checks through question to provide better print spacing when question is called in lines 470-520). It actually only needs to be FOR C = TO 3. If lines 230 and 240 are amended this may also require alteration.

C: Checks for winner by comparing the relevant elements of Q\$ array for Os and Xs in lines 710 to 790.

E: Erasure loop using E\$ in lines 560-580, 1210-1250.

T: Indicates player's turn by calling relevant element from N\$ array and also decides which symbol to print in lines 410 to 590.

Numeric: C: Question counter in print routine lines 310 to 340.

F: Flag set in print loop lines 415 to 515. Because it is possible to jump out of a loop in ZX Basic, lines 415, 475, 477 and 515 may be safely omitted.

X & Y: PRINT co-ordinates for O and X symbols in lines 620-670.

Z: Counts number of squares filled to check for stalemate in lines 705 to 800.

The memory required is about 4K and the loading time from tape is 2 minutes.

Grand Prix

on Vic-20

In this game you have to bet on a racing car and then watch the race to see if you win or not. The odds for each car change for every race and depending if you have chosen the easy or the hard game you are either told the odds before the race or not.

To select a car just enter the first letter — ie P for purple — and state your bet. The program is fool-proof so you can't bet more than you got!

The listing is in lower case letters as this is the mode in which the program runs, so capital letters are easier to see for programming.

Program notes:

Line 110-120 Sets the odds for each race
Line 130 The second print symbol is for cyan (in lower case)

Line 140 The second print symbol is for yellow (in lower case)

Line 211-216 Decyphers which car is to next page

```
840 PRINTTAB(1,10)"YOU FAILED ON SEQUENCE ";A
850 END
860 ENDPROC
870 DEF PROCWON
880 CLS
890 PRINTTAB(5,10)"WELL DONE - YOU
    SUCCEEDED TO FOLLOW THE SEQUENCE"
900 END
910 ENDPROC
```

```

  66+85   73-5   48-18   YOUR TURN,
    = ?    = ?    = ?    CHRIS
  -----
  94+52   11+18   2+81   WHICH
    = ?    = ?    = ?    QUESTION
  -----
  90/10   77-42   69-2   DO YOU WANT?
    = ?    = ?    = ?

```

```

  16+20   69-39   13+45   YOUR TURN,
    = ?    = ?    = ?    CHRIS
  -----
  59+14   20+31   17+74   WHICH
    = ?    = ?    = ?    QUESTION
  -----
  97-24   19+37   92-27   DO YOU WANT?
    = ?    = ?    = ?    YES X 14
  -----
  TYPE ANSWER
  AND PRESS
  NEW LINE

```

```

  75-2   75-2   75-2   YOUR TURN,
    = ?    = ?    = ?    CHRIS
  -----
  61+10   61+10   61+10   WHICH
    = ?    = ?    = ?    QUESTION
  -----
  49-35   33+49   49-35   DO YOU WANT?
    = ?    = ?    = ?    YES X 14
  -----
  WELL DONE

```

```

1 REM O AND X MATHS GAME
2 REM BY C.ROBINSON
3 CLS
4 DIM N$(2,12)
5 LET E$=""
6 REM *** INSTRUCTIONS ***
7 PRINT TAB 1,"NUGHTS AND CR
8 O355 MATHS GAME"
9 PRINT "FOR TWO PLAYERS
10 (OR TERMS)."
11 PRINT AT 4,6,"(X) WILL C
12 O FIRST."
13 FOR F=1 TO 100
14 NEXT F
15 PRINT AT 7,1,"PLEASE GIVE N
16 AME OF PLAYER X"
17 PRINT AT 9,1,"AND PRESS N
18 EWS"
19 INPUT M$
20 LET N$(1)=M$
21 IF LEN M$(12) THEN LET N$(1)
22 =(E$ TO (12-LEN M$(12))+M$
23 PRINT AT 7,1,E$,E$,E$,
24 PRINT AT 9,1,E$,E$,E$,
25 PRINT AT 10,20,M$(1)
26 PRINT AT 13,1,"PLEASE GIVE
27 NAME OF PLAYER O"
28 PRINT AT 15,1,"AND PRESS N
29 EWS"
30 INPUT M$
31 LET N$(2)=M$
32 IF LEN M$(12) THEN LET N$(2)
33 =(E$ TO (12-LEN M$(12))+M$
34 PRINT AT 7,1,E$,E$,E$,
35 PRINT AT 9,1,E$,E$,E$,
36 PRINT AT 10,20,M$(2)
37 PRINT AT 13,1,"PLEASE GIVE
38 NAME OF PLAYER X"
39 PRINT AT 15,1,"AND PRESS N
40 EWS"
41 INPUT M$
42 LET N$(1)=M$
43 IF LEN M$(12) THEN LET N$(1)
44 =(E$ TO (12-LEN M$(12))+M$
45 PRINT AT 7,1,E$,E$,E$,
46 PRINT AT 9,1,E$,E$,E$,
47 PRINT AT 10,20,M$(1)
48 PRINT AT 13,1,"PLEASE GIVE
49 NAME OF PLAYER O"
50 PRINT AT 15,1,"AND PRESS N
51 EWS"
52 INPUT M$
53 LET N$(2)=M$
54 IF LEN M$(12) THEN LET N$(2)
55 =(E$ TO (12-LEN M$(12))+M$
56 PRINT AT 7,1,E$,E$,E$,
57 PRINT AT 9,1,E$,E$,E$,
58 PRINT AT 10,20,M$(2)
59 PRINT AT 13,1,"PLEASE GIVE
60 NAME OF PLAYER X"
61 PRINT AT 15,1,"AND PRESS N
62 EWS"
63 INPUT M$
64 LET N$(1)=M$
65 IF LEN M$(12) THEN LET N$(1)
66 =(E$ TO (12-LEN M$(12))+M$
67 PRINT AT 7,1,E$,E$,E$,
68 PRINT AT 9,1,E$,E$,E$,
69 PRINT AT 10,20,M$(1)
70 PRINT AT 13,1,"PLEASE GIVE
71 NAME OF PLAYER O"
72 PRINT AT 15,1,"AND PRESS N
73 EWS"
74 INPUT M$
75 LET N$(2)=M$
76 IF LEN M$(12) THEN LET N$(2)
77 =(E$ TO (12-LEN M$(12))+M$
78 PRINT AT 7,1,E$,E$,E$,
79 PRINT AT 9,1,E$,E$,E$,
80 PRINT AT 10,20,M$(2)
81 PRINT AT 13,1,"PLEASE GIVE
82 NAME OF PLAYER X"
83 PRINT AT 15,1,"AND PRESS N
84 EWS"
85 INPUT M$
86 LET N$(1)=M$
87 IF LEN M$(12) THEN LET N$(1)
88 =(E$ TO (12-LEN M$(12))+M$
89 PRINT AT 7,1,E$,E$,E$,
90 PRINT AT 9,1,E$,E$,E$,
91 PRINT AT 10,20,M$(1)
92 PRINT AT 13,1,"PLEASE GIVE
93 NAME OF PLAYER O"
94 PRINT AT 15,1,"AND PRESS N
95 EWS"
96 INPUT M$
97 LET N$(2)=M$
98 IF LEN M$(12) THEN LET N$(2)
99 =(E$ TO (12-LEN M$(12))+M$
100 PRINT AT 7,1,E$,E$,E$,
101 PRINT AT 9,1,E$,E$,E$,
102 PRINT AT 10,20,M$(2)
103 PRINT AT 13,1,"PLEASE GIVE
104 NAME OF PLAYER X"
105 PRINT AT 15,1,"AND PRESS N
106 EWS"
107 INPUT M$
108 LET N$(1)=M$
109 IF LEN M$(12) THEN LET N$(1)
110 =(E$ TO (12-LEN M$(12))+M$
111 PRINT AT 7,1,E$,E$,E$,
112 PRINT AT 9,1,E$,E$,E$,
113 PRINT AT 10,20,M$(1)
114 PRINT AT 13,1,"PLEASE GIVE
115 NAME OF PLAYER O"
116 PRINT AT 15,1,"AND PRESS N
117 EWS"
118 INPUT M$
119 LET N$(2)=M$
120 IF LEN M$(12) THEN LET N$(2)
121 =(E$ TO (12-LEN M$(12))+M$
122 PRINT AT 7,1,E$,E$,E$,
123 PRINT AT 9,1,E$,E$,E$,
124 PRINT AT 10,20,M$(2)
125 PRINT AT 13,1,"PLEASE GIVE
126 NAME OF PLAYER X"
127 PRINT AT 15,1,"AND PRESS N
128 EWS"
129 INPUT M$
130 LET N$(1)=M$
131 IF LEN M$(12) THEN LET N$(1)
132 =(E$ TO (12-LEN M$(12))+M$
133 PRINT AT 7,1,E$,E$,E$,
134 PRINT AT 9,1,E$,E$,E$,
135 PRINT AT 10,20,M$(1)
136 PRINT AT 13,1,"PLEASE GIVE
137 NAME OF PLAYER O"
138 PRINT AT 15,1,"AND PRESS N
139 EWS"
140 INPUT M$
141 LET N$(2)=M$
142 IF LEN M$(12) THEN LET N$(2)
143 =(E$ TO (12-LEN M$(12))+M$
144 PRINT AT 7,1,E$,E$,E$,
145 PRINT AT 9,1,E$,E$,E$,
146 PRINT AT 10,20,M$(2)
147 PRINT AT 13,1,"PLEASE GIVE
148 NAME OF PLAYER X"
149 PRINT AT 15,1,"AND PRESS N
150 EWS"
151 INPUT M$
152 LET N$(1)=M$
153 IF LEN M$(12) THEN LET N$(1)
154 =(E$ TO (12-LEN M$(12))+M$
155 PRINT AT 7,1,E$,E$,E$,
156 PRINT AT 9,1,E$,E$,E$,
157 PRINT AT 10,20,M$(1)
158 PRINT AT 13,1,"PLEASE GIVE
159 NAME OF PLAYER O"
160 PRINT AT 15,1,"AND PRESS N
161 EWS"
162 INPUT M$
163 LET N$(2)=M$
164 IF LEN M$(12) THEN LET N$(2)
165 =(E$ TO (12-LEN M$(12))+M$
166 PRINT AT 7,1,E$,E$,E$,
167 PRINT AT 9,1,E$,E$,E$,
168 PRINT AT 10,20,M$(2)
169 PRINT AT 13,1,"PLEASE GIVE
170 NAME OF PLAYER X"
171 PRINT AT 15,1,"AND PRESS N
172 EWS"
173 INPUT M$
174 LET N$(1)=M$
175 IF LEN M$(12) THEN LET N$(1)
176 =(E$ TO (12-LEN M$(12))+M$
177 PRINT AT 7,1,E$,E$,E$,
178 PRINT AT 9,1,E$,E$,E$,
179 PRINT AT 10,20,M$(1)
180 PRINT AT 13,1,"PLEASE GIVE
181 NAME OF PLAYER O"
182 PRINT AT 15,1,"AND PRESS N
183 EWS"
184 INPUT M$
185 LET N$(2)=M$
186 IF LEN M$(12) THEN LET N$(2)
187 =(E$ TO (12-LEN M$(12))+M$
188 PRINT AT 7,1,E$,E$,E$,
189 PRINT AT 9,1,E$,E$,E$,
190 PRINT AT 10,20,M$(2)
191 PRINT AT 13,1,"PLEASE GIVE
192 NAME OF PLAYER X"
193 PRINT AT 15,1,"AND PRESS N
194 EWS"
195 INPUT M$
196 LET N$(1)=M$
197 IF LEN M$(12) THEN LET N$(1)
198 =(E$ TO (12-LEN M$(12))+M$
199 PRINT AT 7,1,E$,E$,E$,
200 PRINT AT 9,1,E$,E$,E$,
201 PRINT AT 10,20,M$(1)
202 PRINT AT 13,1,"PLEASE GIVE
203 NAME OF PLAYER O"
204 PRINT AT 15,1,"AND PRESS N
205 EWS"
206 INPUT M$
207 LET N$(2)=M$
208 IF LEN M$(12) THEN LET N$(2)
209 =(E$ TO (12-LEN M$(12))+M$
210 PRINT AT 7,1,E$,E$,E$,
211 PRINT AT 9,1,E$,E$,E$,
212 PRINT AT 10,20,M$(2)
213 PRINT AT 13,1,"PLEASE GIVE
214 NAME OF PLAYER X"
215 PRINT AT 15,1,"AND PRESS N
216 EWS"
217 INPUT M$
218 LET N$(1)=M$
219 IF LEN M$(12) THEN LET N$(1)
220 =(E$ TO (12-LEN M$(12))+M$
221 PRINT AT 7,1,E$,E$,E$,
222 PRINT AT 9,1,E$,E$,E$,
223 PRINT AT 10,20,M$(1)
224 PRINT AT 13,1,"PLEASE GIVE
225 NAME OF PLAYER O"
226 PRINT AT 15,1,"AND PRESS N
227 EWS"
228 INPUT M$
229 LET N$(2)=M$
230 IF LEN M$(12) THEN LET N$(2)
231 =(E$ TO (12-LEN M$(12))+M$
232 PRINT AT 7,1,E$,E$,E$,
233 PRINT AT 9,1,E$,E$,E$,
234 PRINT AT 10,20,M$(2)
235 PRINT AT 13,1,"PLEASE GIVE
236 NAME OF PLAYER X"
237 PRINT AT 15,1,"AND PRESS N
238 EWS"
239 INPUT M$
240 LET N$(1)=M$
241 IF LEN M$(12) THEN LET N$(1)
242 =(E$ TO (12-LEN M$(12))+M$
243 PRINT AT 7,1,E$,E$,E$,
244 PRINT AT 9,1,E$,E$,E$,
245 PRINT AT 10,20,M$(1)
246 PRINT AT 13,1,"PLEASE GIVE
247 NAME OF PLAYER O"
248 PRINT AT 15,1,"AND PRESS N
249 EWS"
250 INPUT M$
251 LET N$(2)=M$
252 IF LEN M$(12) THEN LET N$(2)
253 =(E$ TO (12-LEN M$(12))+M$
254 PRINT AT 7,1,E$,E$,E$,
255 PRINT AT 9,1,E$,E$,E$,
256 PRINT AT 10,20,M$(2)
257 PRINT AT 13,1,"PLEASE GIVE
258 NAME OF PLAYER X"
259 PRINT AT 15,1,"AND PRESS N
260 EWS"
261 INPUT M$
262 LET N$(1)=M$
263 IF LEN M$(12) THEN LET N$(1)
264 =(E$ TO (12-LEN M$(12))+M$
265 PRINT AT 7,1,E$,E$,E$,
266 PRINT AT 9,1,E$,E$,E$,
267 PRINT AT 10,20,M$(1)
268 PRINT AT 13,1,"PLEASE GIVE
269 NAME OF PLAYER O"
270 PRINT AT 15,1,"AND PRESS N
271 EWS"
272 INPUT M$
273 LET N$(2)=M$
274 IF LEN M$(12) THEN LET N$(2)
275 =(E$ TO (12-LEN M$(12))+M$
276 PRINT AT 7,1,E$,E$,E$,
277 PRINT AT 9,1,E$,E$,E$,
278 PRINT AT 10,20,M$(2)
279 PRINT AT 13,1,"PLEASE GIVE
280 NAME OF PLAYER X"
281 PRINT AT 15,1,"AND PRESS N
282 EWS"
283 INPUT M$
284 LET N$(1)=M$
285 IF LEN M$(12) THEN LET N$(1)
286 =(E$ TO (12-LEN M$(12))+M$
287 PRINT AT 7,1,E$,E$,E$,
288 PRINT AT 9,1,E$,E$,E$,
289 PRINT AT 10,20,M$(1)
290 PRINT AT 13,1,"PLEASE GIVE
291 NAME OF PLAYER O"
292 PRINT AT 15,1,"AND PRESS N
293 EWS"
294 INPUT M$
295 LET N$(2)=M$
296 IF LEN M$(12) THEN LET N$(2)
297 =(E$ TO (12-LEN M$(12))+M$
298 PRINT AT 7,1,E$,E$,E$,
299 PRINT AT 9,1,E$,E$,E$,
300 PRINT AT 10,20,M$(2)
301 PRINT AT 13,1,"PLEASE GIVE
302 NAME OF PLAYER X"
303 PRINT AT 15,1,"AND PRESS N
304 EWS"
305 INPUT M$
306 LET N$(1)=M$
307 IF LEN M$(12) THEN LET N$(1)
308 =(E$ TO (12-LEN M$(12))+M$
309 PRINT AT 7,1,E$,E$,E$,
310 PRINT AT 9,1,E$,E$,E$,
311 PRINT AT 10,20,M$(1)
312 PRINT AT 13,1,"PLEASE GIVE
313 NAME OF PLAYER O"
314 PRINT AT 15,1,"AND PRESS N
315 EWS"
316 INPUT M$
317 LET N$(2)=M$
318 IF LEN M$(12) THEN LET N$(2)
319 =(E$ TO (12-LEN M$(12))+M$
320 PRINT AT 7,1,E$,E$,E$,
321 PRINT AT 9,1,E$,E$,E$,
322 PRINT AT 10,20,M$(2)
323 PRINT AT 13,1,"PLEASE GIVE
324 NAME OF PLAYER X"
325 PRINT AT 15,1,"AND PRESS N
326 EWS"
327 INPUT M$
328 LET N$(1)=M$
329 IF LEN M$(12) THEN LET N$(1)
330 =(E$ TO (12-LEN M$(12))+M$
331 PRINT AT 7,1,E$,E$,E$,
332 PRINT AT 9,1,E$,E$,E$,
333 PRINT AT 10,20,M$(1)
334 PRINT AT 13,1,"PLEASE GIVE
335 NAME OF PLAYER O"
336 PRINT AT 15,1,"AND PRESS N
337 EWS"
338 INPUT M$
339 LET N$(2)=M$
340 IF LEN M$(12) THEN LET N$(2)
341 =(E$ TO (12-LEN M$(12))+M$
342 PRINT AT 7,1,E$,E$,E$,
343 PRINT AT 9,1,E$,E$,E$,
344 PRINT AT 10,20,M$(2)
345 PRINT AT 13,1,"PLEASE GIVE
346 NAME OF PLAYER X"
347 PRINT AT 15,1,"AND PRESS N
348 EWS"
349 INPUT M$
350 LET N$(1)=M$
351 IF LEN M$(12) THEN LET N$(1)
352 =(E$ TO (12-LEN M$(12))+M$
353 PRINT AT 7,1,E$,E$,E$,
354 PRINT AT 9,1,E$,E$,E$,
355 PRINT AT 10,20,M$(1)
356 PRINT AT 13,1,"PLEASE GIVE
357 NAME OF PLAYER O"
358 PRINT AT 15,1,"AND PRESS N
359 EWS"
360 INPUT M$
361 LET N$(2)=M$
362 IF LEN M$(12) THEN LET N$(2)
363 =(E$ TO (12-LEN M$(12))+M$
364 PRINT AT 7,1,E$,E$,E$,
365 PRINT AT 9,1,E$,E$,E$,
366 PRINT AT 10,20,M$(2)
367 PRINT AT 13,1,"PLEASE GIVE
368 NAME OF PLAYER X"
369 PRINT AT 15,1,"AND PRESS N
370 EWS"
371 INPUT M$
372 LET N$(1)=M$
373 IF LEN M$(12) THEN LET N$(1)
374 =(E$ TO (12-LEN M$(12))+M$
375 PRINT AT 7,1,E$,E$,E$,
376 PRINT AT 9,1,E$,E$,E$,
377 PRINT AT 10,20,M$(1)
378 PRINT AT 13,1,"PLEASE GIVE
379 NAME OF PLAYER O"
380 PRINT AT 15,1,"AND PRESS N
381 EWS"
382 INPUT M$
383 LET N$(2)=M$
384 IF LEN M$(12) THEN LET N$(2)
385 =(E$ TO (12-LEN M$(12))+M$
386 PRINT AT 7,1,E$,E$,E$,
387 PRINT AT 9,1,E$,E$,E$,
388 PRINT AT 10,20,M$(2)
389 PRINT AT 13,1,"PLEASE GIVE
390 NAME OF PLAYER X"
391 PRINT AT 15,1,"AND PRESS N
392 EWS"
393 INPUT M$
394 LET N$(1)=M$
395 IF LEN M$(12) THEN LET N$(1)
396 =(E$ TO (12-LEN M$(12))+M$
397 PRINT AT 7,1,E$,E$,E$,
398 PRINT AT 9,1,E$,E$,E$,
399 PRINT AT 10,20,M$(1)
400 PRINT AT 13,1,"PLEASE GIVE
401 NAME OF PLAYER O"
402 PRINT AT 15,1,"AND PRESS N
403 EWS"
404 INPUT M$
405 LET N$(2)=M$
406 IF LEN M$(12) THEN LET N$(2)
407 =(E$ TO (12-LEN M$(12))+M$
408 PRINT AT 7,1,E$,E$,E$,
409 PRINT AT 9,1,E$,E$,E$,
410 PRINT AT 10,20,M$(2)
411 PRINT AT 13,1,"PLEASE GIVE
412 NAME OF PLAYER X"
413 PRINT AT 15,1,"AND PRESS N
414 EWS"
415 INPUT M$
416 LET N$(1)=M$
417 IF LEN M$(12) THEN LET N$(1)
418 =(E$ TO (12-LEN M$(12))+M$
419 PRINT AT 7,1,E$,E$,E$,
420 PRINT AT 9,1,E$,E$,E$,
421 PRINT AT 10,20,M$(1)
422 PRINT AT 13,1,"PLEASE GIVE
423 NAME OF PLAYER O"
424 PRINT AT 15,1,"AND PRESS N
425 EWS"
426 INPUT M$
427 LET N$(2)=M$
428 IF LEN M$(12) THEN LET N$(2)
429 =(E$ TO (12-LEN M$(12))+M$
430 PRINT AT 7,1,E$,E$,E$,
431 PRINT AT 9,1,E$,E$,E$,
432 PRINT AT 10,20,M$(2)
433 PRINT AT 13,1,"PLEASE GIVE
434 NAME OF PLAYER X"
435 PRINT AT 15,1,"AND PRESS N
436 EWS"
437 INPUT M$
438 LET N$(1)=M$
439 IF LEN M$(12) THEN LET N$(1)
440 =(E$ TO (12-LEN M$(12))+M$
441 PRINT AT 7,1,E$,E$,E$,
442 PRINT AT 9,1,E$,E$,E$,
443 PRINT AT 10,20,M$(1)
444 PRINT AT 13,1,"PLEASE GIVE
445 NAME OF PLAYER O"
446 PRINT AT 15,1,"AND PRESS N
447 EWS"
448 INPUT M$
449 LET N$(2)=M$
450 IF LEN M$(12) THEN LET N$(2)
451 =(E$ TO (12-LEN M$(12))+M$
452 PRINT AT 7,1,E$,E$,E$,
453 PRINT AT 9,1,E$,E$,E$,
454 PRINT AT 10,20,M$(2)
455 PRINT AT 13,1,"PLEASE GIVE
456 NAME OF PLAYER X"
457 PRINT AT 15,1,"AND PRESS N
458 EWS"
459 INPUT M$
460 LET N$(1)=M$
461 IF LEN M$(12) THEN LET N$(1)
462 =(E$ TO (12-LEN M$(12))+M$
463 PRINT AT 7,1,E$,E$,E$,
464 PRINT AT 9,1,E$,E$,E$,
465 PRINT AT 10,20,M$(1)
466 PRINT AT 13,1,"PLEASE GIVE
467 NAME OF PLAYER O"
468 PRINT AT 15,1,"AND PRESS N
469 EWS"
470 INPUT M$
471 LET N$(2)=M$
472 IF LEN M$(12) THEN LET N$(2)
473 =(E$ TO (12-LEN M$(12))+M$
474 PRINT AT 7,1,E$,E$,E$,
475 PRINT AT 9,1,E$,E$,E$,
476 PRINT AT 10,20,M$(2)
477 PRINT AT 13,1,"PLEASE GIVE
478 NAME OF PLAYER X"
479 PRINT AT 15,1,"AND PRESS N
480 EWS"
481 INPUT M$
482 LET N$(1)=M$
483 IF LEN M$(12) THEN LET N$(1)
484 =(E$ TO (12-LEN M$(12))+M$
485 PRINT AT 7,1,E$,E$,E$,
486 PRINT AT 9,1,E$,E$,E$,
487 PRINT AT 10,20,M$(1)
488 PRINT AT 13,1,"PLEASE GIVE
489 NAME OF PLAYER O"
490 PRINT AT 15,1,"AND PRESS N
491 EWS"
492 INPUT M$
493 LET N$(2)=M$
494 IF LEN M$(12) THEN LET N$(2)
495 =(E$ TO (12-LEN M$(12))+M$
496 PRINT AT 7,1,E$,E$,E$,
497 PRINT AT 9,1,E$,E$,E$,
498 PRINT AT 10,20,M$(2)
499 PRINT AT 13,1,"PLEASE GIVE
500 NAME OF PLAYER X"
501 PRINT AT 15,1,"AND PRESS N
502 EWS"
503 INPUT M$
504 LET N$(1)=M$
505 IF LEN M$(12) THEN LET N$(1)
506 =(E$ TO (12-LEN M$(12))+M$
507 PRINT AT 7,1,E$,E$,E$,
508 PRINT AT 9,1,E$,E$,E$,
509 PRINT AT 10,20,M$(1)
510 PRINT AT 13,1,"PLEASE GIVE
511 NAME OF PLAYER O"
512 PRINT AT 15,1,"AND PRESS N
513 EWS"
514 INPUT M$
515 LET N$(2)=M$
516 IF LEN M$(12) THEN LET N$(2)
517 =(E$ TO (12-LEN M$(12))+M$
518 PRINT AT 7,1,E$,E$,E$,
519 PRINT AT 9,1,E$,E$,E$,
520 PRINT AT 10,20,M$(2)
521 PRINT AT 13,1,"PLEASE GIVE
522 NAME OF PLAYER X"
523 PRINT AT 15,1,"AND PRESS N
524 EWS"
525 INPUT M$
526 LET N$(1)=M$
527 IF LEN M$(12) THEN LET N$(1)
528 =(E$ TO (12-LEN M$(12))+M$
529 PRINT AT 7,1,E$,E$,E$,
530 PRINT AT 9,1,E$,E$,E$,
531 PRINT AT 10,20,M$(1)
532 PRINT AT 13,1,"PLEASE GIVE
533 NAME OF PLAYER O"
534 PRINT AT 15,1,"AND PRESS N
535 EWS"
536 INPUT M$
537 LET N$(2)=M$
538 IF LEN M$(12) THEN LET N$(2)
539 =(E$ TO (12-LEN M$(12))+M$
540 PRINT AT 7,1,E$,E$,E$,
541 PRINT AT 9,1,E$,E$,E$,
542 PRINT AT 10,20,M$(2)
543 PRINT AT 13,1,"PLEASE GIVE
544 NAME OF PLAYER X"
545 PRINT AT 15,1,"AND PRESS N
546 EWS"
547 INPUT M$
548 LET N$(1)=M$
549 IF LEN M$(12) THEN LET N$(1)
550 =(E$ TO (12-LEN M$(12))+M$
551 PRINT AT 7,1,E$,E$,E$,
552 PRINT AT 9,1,E$,E$,E$,
553 PRINT AT 10,20,M$(1)
554 PRINT AT 13,1,"PLEASE GIVE
555 NAME OF PLAYER O"
556 PRINT AT 15,1,"AND PRESS N
557 EWS"
558 INPUT M$
559 LET N$(2)=M$
560 IF LEN M$(12) THEN LET N$(2)
561 =(E$ TO (12-LEN M$(12))+M$
562 PRINT AT 7,1,E$,E$,E$,
563 PRINT AT 9,1,E$,E$,E$,
564 PRINT AT 10,20,M$(2)
565 PRINT AT 13,1,"PLEASE GIVE
566 NAME OF PLAYER X"
567 PRINT AT 15,1,"AND PRESS N
568 EWS"
569 INPUT M$
570 LET N$(1)=M$
571 IF LEN M$(12) THEN LET N$(1)
572 =(E$ TO (12-LEN M$(12))+M$
573 PRINT AT 7,1,E$,E$,E$,
574 PRINT AT 9,1,E$,E$,E$,
575 PRINT AT 10,20,M$(1)
576 PRINT AT 13,1,"PLEASE GIVE
577 NAME OF PLAYER O"
578 PRINT AT 15,1,"AND PRESS N
579 EWS"
580 INPUT M$
581 LET N$(2)=M$
582 IF LEN M$(12) THEN LET N$(2)
583 =(E$ TO (12-LEN M$(12))+M$
584 PRINT AT 7,1,E$,E$,E$,
585 PRINT AT 9,1,E$,E$,E$,
586 PRINT AT 10,20,M$(2)
587 PRINT AT 13,1,"PLEASE GIVE
588 NAME OF PLAYER X"
589 PRINT AT 15,1,"AND PRESS N
590 EWS"
591 INPUT M$
592 LET N$(1)=M$
593 IF LEN M$(12) THEN LET N$(1)
594 =(E$ TO (12-LEN M$(12))+M$
595 PRINT AT 7,1,E$,E$,E$,
596 PRINT AT 9,1,E$,E$,E$,
597 PRINT AT 10,20,M$(1)
598 PRINT AT 13,1,"PLEASE GIVE
599 NAME OF PLAYER O"
600 PRINT AT 15,1,"AND PRESS N
601 EWS"
602 INPUT M$
603 LET N$(2)=M$
604 IF LEN M$(12) THEN LET N$(2)
605 =(E$ TO (12-LEN M$(12))+M$
606 PRINT AT 7,1,E$,E$,E$,
607 PRINT AT 9,1,E$,E$,E$,
608 PRINT AT 10,20,M$(2)
609 PRINT AT 13,1,"PLEASE GIVE
610 NAME OF PLAYER X"
611 PRINT AT 15,1,"AND PRESS N
612 EWS"
613 INPUT M$
614 LET N$(1)=M$
615 IF LEN M$(12) THEN LET N$(1)
616 =(E$ TO (12-LEN M$(12))+M$
617 PRINT AT 7,1,E$,E$,E$,
618 PRINT AT 9,1,E$,E$,E$,
619 PRINT AT 10,20,M$(1)
620 PRINT AT 13,1,"PLEASE GIVE
621 NAME OF PLAYER O"
622 PRINT AT 15,1,"AND PRESS N
623 EWS"
624 INPUT M$
625 LET N$(2)=M$
626 IF LEN M$(12) THEN LET N$(2)
627 =(E$ TO (12-LEN M$(12))+M$
628 PRINT AT 7,1,E$,E$,E$,
629 PRINT AT 9,1,E$,E$,E$,
630 PRINT AT 10,20,M$(2)
631 PRINT AT 13,1,"PLEASE GIVE
632 NAME OF PLAYER X"
633 PRINT AT 15,1,"AND PRESS N
634 EWS"
635 INPUT M$
636 LET N$(1)=M$
637 IF LEN M$(12) THEN LET N$(1)
638 =(E$ TO (12-LEN M$(12))+M$
639 PRINT AT 7,1,E$,E$,E$,
640 PRINT AT 9,1,E$,E$,E$,
641 PRINT AT 10,20,M$(1)
642 PRINT AT 13,1,"PLEASE GIVE
643 NAME OF PLAYER O"
644 PRINT AT 15,1,"AND PRESS N
645 EWS"
646 INPUT M$
647 LET N$(2)=M$
648 IF LEN M$(12) THEN LET N$(2)
649 =(E$ TO (12-LEN M$(12))+M$
650 PRINT AT 7,1,E$,E$,E$,
651 PRINT AT 9,1,E$,E$,E$,
652 PRINT AT 10,20,M$(2)
653 PRINT AT 13,1,"PLEASE GIVE
654 NAME OF PLAYER X"
655 PRINT AT 15,1,"AND PRESS N
656 EWS"
657 INPUT M$
658 LET N$(1)=M$
659 IF LEN M$(12) THEN LET N$(1)
660 =(E$ TO (12-LEN M$(12))+M$
661 PRINT AT 7,1,E$,E$,E$,
662 PRINT AT 9,1,E$,E$,E$,
663 PRINT AT 10,20,M$(1)
664 PRINT AT 13,1,"PLEASE GIVE
665 NAME OF PLAYER O"
666 PRINT AT 15,1,"AND PRESS N
667 EWS"
668 INPUT M$
669 LET N$(2)=M$
670 IF LEN M$(12) THEN LET N$(2)
671 =(E$ TO (12-LEN M$(12))+M$
672 PRINT AT 7,1,E$,E$,E$,
673 PRINT AT 9,1,E$,E$,E$,
674 PRINT AT 10,20,M$(2)
675 PRINT AT 13,1,"PLEASE GIVE
676 NAME OF PLAYER X"
677 PRINT AT 15,1,"AND PRESS N
678 EWS"
679 INPUT M$
680 LET N$(1)=M$
681 IF LEN M$(12) THEN LET N$(1)
682 =(E$ TO (12-LEN M$(12))+M$
683 PRINT AT 7,1,E$,E$,E$,
684 PRINT AT 9,1,E$,E$,E$,
685 PRINT AT 10,20,M$(1)
686 PRINT AT 13,1,"PLEASE GIVE
687 NAME OF PLAYER O"
688 PRINT AT 15,1,"AND PRESS N
689 EWS"
690 INPUT M$
691 LET N$(2)=M$
692 IF LEN M$(12) THEN LET N$(2)
693 =(E$ TO (12-LEN M$(12))+M$
694 PRINT AT 7,1,E$,E$,E$,
695 PRINT AT 9,1,E$,E$,E$,
696 PRINT AT 10,20,M$(2)
697 PRINT AT 13,1,"PLEASE GIVE
698 NAME OF PLAYER X"
699 PRINT AT 15,1,"AND PRESS N
700 EWS"
701 INPUT M$
702 LET N$(1)=M$
703 IF LEN M$(12) THEN LET N$(1)
704 =(E$ TO (12-LEN M$(12))+M$
705 PRINT AT 7,1,E$,E$,E$,
706 PRINT AT 9,1,E$,E$,E$,
707 PRINT AT 10,20,M$(1)
708 PRINT AT 13,1,"PLEASE GIVE
709 NAME OF PLAYER O"
710 PRINT AT 15,1,"AND PRESS N
711 EWS"
712 INPUT M$
713 LET N$(2)=M$
714 IF LEN M$(12) THEN LET N$(2)
715 =(E$ TO (12-LEN M$(12))+M$
716 PRINT AT 7,1,E$,E$,E$,
717 PRINT AT 9,1,E$,E$,E$,
718 PRINT AT 10,20,M$(2)
719 PRINT AT 13,1,"PLEASE GIVE
720 NAME OF PLAYER X"
721 PRINT AT 15,1,"AND PRESS N
722 EWS"
723 INPUT M$
724 LET N$(1)=M$
725 IF LEN M$(12) THEN LET N$(1)
726 =(E$ TO (12-LEN M$(12))+M$
727 PRINT AT 7,1,E$,E$,E$,
728 PRINT AT 9,1,E$,E$,E$,
729 PRINT AT 10,20,M$(1)
730 PRINT AT 13,1,"PLEASE GIVE
731 NAME OF PLAYER O"
732 PRINT AT 15,1,"AND PRESS N
733 EWS"
734 INPUT M$
735 LET N$(2)=M$
736 IF LEN M$(12) THEN LET N$(2)
737 =(E$ TO (12-LEN M$(12))+M$
738 PRINT AT 7,1,E$,E$,E$,
739 PRINT AT 9,1,E$,E$,E$,
740 PRINT AT 10,20,M$(2)
741 PRINT AT 13,1,"PLEASE GIVE
742 NAME OF PLAYER X"
743 PRINT AT 15,1,"AND PRESS N
744 EWS"
745 INPUT M$
746 LET N$(1)=M$
747 IF LEN M$(12) THEN LET N$(1)
748 =(E$ TO (12-LEN M$(12))+M$
749 PRINT AT 7,1,E$,E$,E$,
750 PRINT AT 9,1,E$,E$,E$,
751 PRINT AT 10,20,M$(1)
752 PRINT AT 13,1,"PLEASE GIVE
753 NAME OF PLAYER O"
754 PRINT AT 15,1,"AND PRESS N
755 EWS"
756 INPUT M$
757 LET N$(2)=M$
758 IF LEN M$(12) THEN LET N$(2)
759 =(E$ TO (12-LEN M$(12))+M$
760 PRINT AT 7,1,E$,E$,E$,
761 PRINT AT 9,1,E$,E$,E$,
762 PRINT AT 10,20,M$(2)
763 PRINT AT 13,1,"PLEASE GIVE
764 NAME OF PLAYER X"
765 PRINT AT 15,1,"AND PRESS N
766 EWS"
767 INPUT M$
768 LET N$(1)=M$
769 IF LEN M$(12) THEN LET N$(1)
770 =(E$ TO (12-LEN M$(12))+M$
771 PRINT AT 7,1,E$,E$,E$,
772 PRINT AT 9,1,E$,E$,E$,
773 PRINT AT 10,20,M$(1)
774 PRINT AT 13,1,"PLEASE GIVE
775 NAME OF PLAYER O"
776 PRINT AT 15,1,"AND PRESS N
777 EWS"
778 INPUT M$
779 LET N$(2)=M$
780 IF LEN M$(12) THEN LET N$(2)
781 =(E$ TO (12-LEN M$(12))+M$
782 PRINT AT 7,1,E$,E$,E$,
783 PRINT AT 9,1,E$,E$,E$,
784 PRINT AT 10,20,M$(2)
785 PRINT AT 1
```


Open Forum

from previous page

chosen and sets the colour for each car

Line 250 Sets the cars at the starting line

Line 260-310 Decide which cars move

Line 1000-1010 Clears the first car

Line 1020-1030 Pokes the first car to it's new position

Line 1100-1440 Same as above, but for the other cars

Line 2020-6030 Decides if you've won or not. If you have then works out what you win.

It will be noticed during the program that once the race begins, that the race track edge and finish line are the colour of the car you have betted on.

```

580 GOSUB 9000:Y=100
700 REM Q CHECK FOR WINNER Q
705 LET Z=0
710 FOR C=1 TO 3
720 IF Q(C)=Q(C+3) AND Q(C)=
Q(C+6) THEN GOTO 1200
730 IF Q(C+2)=Q(C+3-1) AND
Q(C+3-2)=Q(C+3) THEN GOTO 1200
740 NEXT C
750 IF Q(1)=Q(5) AND Q(1)=Q(
9) THEN GOTO 1200
760 IF Q(3)=Q(5) AND Q(3)=Q(
7) THEN GOTO 1200
770 FOR C=1 TO 9
780 IF Q(C)=X OR Q(C,1)=
Q THEN LET Z=Z+1
790 NEXT C
800 IF Z=9 THEN GOTO 1210
810 GOTO 860
1000 REM Q DRAW X
1010 PRINT AT X+1,Y
1020 PRINT AT X+1,Y
1030 PRINT AT X+2,Y
1040 PRINT AT X+3,Y
1050 PRINT AT X+4,Y
1060 PRINT AT X+5,Y
1070 LET Q(A)=X

```

```

1060 RETURN
1070 REM ***** DRAW 0 *****
1100 PRINT AT X,Y;""
1110 PRINT AT X+1,Y;""
1120 PRINT AT X+2,Y;""
1130 PRINT AT X+3,Y;""
1140 PRINT AT X+4,Y;""
1150 PRINT AT X+5,Y;""
1160 PRINT AT X+6,Y;""
1170 LET S(A) = "0"
1180 RETURN
1190 REM ***** WINNER *****
1200 FOR E=0 TO 20
1210 IF X<:9 THEN PRINT AT 21,0;
1220 WELL DONE;N$IT)
1230 IF Y<:9 THEN PRINT AT 21,0;
1240 WELL DONE
1250 PRINT AT E,20;E$;E$
1260 NEXT E
1270 PRINT AT 5,24;"PRESS" AT 3,
1280 "ANOTHER" AT 17,24;"GAME" AT 1
1290 IF INKEY$=CHR$ 118 THEN RUN
1300
1310 GOTO 1270
1320 SAVE
1330 RAND
1340 RUN

```

Grand Prix

by Alan Horrell

```

10 q=36879:v=10:y$=:if$You have won with odds.118:Pokeq,218:Pokeq-v,242
30 m=102:l=v:Print"GRAND PRIX"BY A.HORRELL":Printtab(7)"
M14/4/82
40 Print"Do you want the easier game giving you the odds before each race
50 Print"Or will you try the harder game without
60 Printthe aid of odds.":Print"K<<<<< E or H >>>>>"
80 wait198,1:k=225:s=32:j=97:n=106:o=116:p=22:h=30720:ifPeek(197)=43theneh=1
110 g=rnd(1):i=rnd(1):z=rnd(1):u=rnd(1):y=rnd(1)
120 ao=int(9*v)+1:bo=int(i*v)+1:co=int(z*v)+1:do=int(u*v)+1:eo=int(y*v)+1
130 Pokeq,14:r=r+1:Print"GRAND PRIX RACE"r" ":fort=7700to7701:Poke,160
140 Poke+h,3:next:Printtab(5)"BET ON A CAR":ifeh=1then200
150 Printtab(4)"White car "ao"1":Printtab(4)"Red car "bo"1:1
170 Printtab(4)"Purple car "co"1:1:Printtab(4)"Green car "do"1:1
190 Printtab(4)"Cyan car "eo"1:1
200 Print"Your credit limit is £1
210 Print"Pick a car ":ifeh=1thenPrint"White";
211 getc$:ifc$="w"thencb=1:w$="WHITE
213 ifc$="r"thencb=2:w$="RED
214 ifc$="p"thencb=4:w$="PURPLE
215 ifc$="g"thencb=5:w$="GREEN
216 ifc$="c"thencb=3:w$="CYAN
217 ifcb<0then211
220 Printw$
225 Print"What's your bet £ ";inPutw
230 ifw>lthenPrint" BET OUTSIDE CREDIT ":gosub500:goto225
245 l=l-w:Print"Pokeq,8:forf=8165to8184:Pokef,111:Pokef+h,cb:next
247 forf=7680to8164steP22:Pokef,127:Pokef+h,cb:next:forf=7700to8184steP22:Pokef,
255
250 Pokef+h,cb:next:gosub1020:gosub1120:gosub1220:gosub1320:gosub1420:gosub500
260 x=rnd(1):ifx>zthen9osub1200:ifPeek(8174)=mthen4000
280 ifx>ythen9osub1400:ifPeek(8182)=mthen6000
290 ifx>gthen9osub1000:ifPeek(8166)=mthen2000
300 ifx>uthen9osub1300:ifPeek(8178)=mthen5000
310 ifx>ithen9osub1100:ifPeek(8170)=mthen3000
320 goto260
500 fort=1tok*v:next:return
600 gosub500:Print":return
700 ifl<1thenPrint"YOU ARE BANKRUPT":fort=1tos#o:next:run
750 Print"Your "w$" car lost":goto9006
1000 Poke7681+a,s:Poke7682+a,s:Poke7683+a,s:Poke7704+a,s:Poke7725+a,s
1010 Poke7726+a,s:Poke7727+a,s:a=a+p
1020 Poke7681+a,k:Poke7682+a,m:Poke7683+a,j:Poke7704+a,m:Poke7725+a,n

```


Open Forum

```

1030 Poke38445+a,1:Poke7726+a,m:Poke38446+a,1:Poke7727+a,o:Poke38447+a,1:return
1100 Poke7685+b,s:Poke7686+b,s:Poke7687+b,s:Poke7708+b,s:Poke7729+b,s
1110 Poke7730+b,s:Poke7731+b,s:b=b+p
1120 Poke7685+b,k:Poke38405+b,2:Poke7686+b,m:Poke38406+b,2:Poke7687+b,j
1130 Poke38407+b,2:Poke7708+b,m:Poke38428+b,2:Poke7729+b,n:Poke38449+b,2
1140 Poke7730+b,m:Poke38450+b,2:Poke7731+b,o:Poke38451+b,2:return
1200 Poke7689+c,s:Poke7690+c,s:Poke7691+c,s:Poke7712+c,s:Poke7733+c,s
1210 Poke7734+c,s:Poke7735+c,s:c=c+p
1220 Poke7689+c,k:Poke38409+c,4:Poke7690+c,m:Poke38410+c,4:Poke7691+c,j
1230 Poke38411+c,4:Poke7712+c,m:Poke38432+c,4:Poke7733+c,n:Poke38453+c,4
1240 Poke7734+c,m:Poke38454+c,4:Poke7735+c,o:Poke38455+c,4:return
1300 Poke7693+d,s:Poke7694+d,s:Poke7695+d,s:Poke7716+d,s:Poke7737+d,s
1310 Poke7738+d,s:Poke7739+d,s:d=d+p
1320 Poke7693+d,k:Poke38413+d,5:Poke7694+d,m:Poke38414+d,5:Poke7695+d,j
1330 Poke38415+d,5:Poke7716+d,m:Poke38436+d,5:Poke7737+d,n:Poke38457+d,5
1340 Poke7738+d,m:Poke38458+d,5:Poke7739+d,o:Poke38459+d,5:return
1400 Poke7697+e,s:Poke7698+e,s:Poke7699+e,s:Poke7720+e,s:Poke7741+e,s
1410 Poke7742+e,s:Poke7743+e,s:e=e+p
1420 Poke7697+e,k:Poke38417+e,3:Poke7698+e,m:Poke38418+e,3:Poke7699+e,j
1430 Poke38419+e,3:Poke7720+e,m:Poke38440+e,3:Poke7741+e,n:Poke38461+e,3
1440 Poke7742+e,m:Poke38462+e,3:Poke7743+e,o:Poke38463+e,3:return
2000 gosub600:Printtab(6)"WHITE WINS"
2020 ifc$="w"thenPrinty$ao"1":wi=w*ao+w:goto9004
2030 goto700

```

```

3000 gosub600:Printtab(7)"RED WINS"
3020 ifc$="r"thenPrinty$bo"1":wi=w*bo+w:goto9004
3030 goto700
4000 gosub600:Printtab(6)"PURPLE WINS"
4020 ifc$="p"thenPrinty$co"1":wi=w*co+w:goto9004
4030 goto700
5000 gosub600:Printtab(6)"GREEN WINS"
5020 ifc$="g"thenPrinty$do"1":wi=w*do+w:goto9004
5030 goto700
6000 gosub600:Printtab(6)"CYAN WINS"
6020 ifc$="c"thenPrinty$eo"1":wi=w*eo+w:goto9004
6030 goto700
9004 l=l+wi
9006 Print"Your credit now stands at £1"
9007 Print"Hit any key for another race"
9020 a=0:b=0:c=0:d=0:e=0:cb=0:Poke198,0:wait198,1:goto110

```

Nottingham Castle

on ZX81

This program illustrates how Breakout and Adventure games can be combined to produce interesting effects.

The aim is to rescue Marion. After knocking four archers off the sheriff's wall he always obliges by indicating roughly where she is locked up.

I have kept it as simple as possible to encourage others to play about with the Sherwood Forest characters.

Line 65 fixes the co-ordinates for the sheriff (3); line 67 for Marion (4); line 87 for the archers (2); line 25 for the bricks (1); line 1520 for the bricks knocked down (0).

Maths Tables

on Vic-20

This program allows the Vic20 to be used as a maths log tables book. It is menu driven to select which tables are required, and by inputting the function you want, log, tangent etc, you can find the log, or whatever function chosen, of that number. The listing is quite straightforward,

Lines 70-90 Print the menu

to next page

```

10 REM NOTTINGHAM CASTLE
11 CLS
12 RAND
13 LET HIT=0
14 DIM C(8,50)
15 LET X=10
16 LET P=INT (RND*5)+1
17 LET SC=0
18 FOR N=4 TO 25
19 FOR H=4 TO 6
20 PRINT AT H,N,CHR$ (135+P)
21 LET D(H,N)=1
22 PRINT AT H,3,CHR$ (164-H)
23 PRINT AT H,27,CHR$ (164-H)
24 NEXT H
25 NEXT N
26 FOR N=5 TO 25 STEP 4
27 PRINT AT 3,N,""
28 NEXT N
29 LET S=INT (RND*4)+4
30 LET C=INT (RND*4)+4
31 LET C2=INT (RND*22)+4
32 LET S2=INT (RND*22)+4
33 LET C(S,52)=4

```

Nottingham Castle
by Nick Willink

```

67 LET D(C,C2)=5
68 FOR I=6 TO 8
69 LET A=RND*20+4
70 IF D(I,A)>2 THEN GOTO 90
71 LET D(I,A)=2
72 PRINT AT I,A,""
73 NEXT I
74 PRINT AT 15,X,"I"
75 PRINT AT 15,X,""
76 LET X=X+(INKEY$="8")-(INKEY$="5")
77 IF X>26 OR X<4 THEN LET X=1
78 IF HIT=4 THEN PRINT AT C,C2
79 IF INKEY$="0" THEN GOSUB 10
80 LET SC=SC+1
81 GOTO 100

```


An exciting new Commodore peripheral



Own or use a Pet or a Vic?
Fed up with being ignored by all the traditional monthly magazines?
Fed up with listings, which are too simple or simply do not work?
You need *Commodore Computing*, the new monthly magazine. *Commodore Computing* is published by Nick Hampshire, author of *The Pet Revealed*, *Pet Graphics*, *A Library of Subroutines* and *The Vic Revealed*.
Each issue is packed with advanced

advice on how to make the most of your computer, whether you use a Pet or a Vic.

Each issue covers a host of applications – software, hardware, machine code, games, business use – whatever it is you'll find it in *Commodore Computing*.

If you want to learn more about your computer, take out a subscription to *Commodore Computing*.

That's the only way to get it, and get it straight.

Send £12.50 for 1 year's subscription (10 issues) to:

Commodore Computing,
Magsub, Oakfield House, Perrymount Road, Haywards Heath, Sussex RH16 3DH

Open Forum

from previous page

Line 110 Converts the input letter to a number between 1-14

Line 120 Goes to the appropriate line depending on the number in line 110

Lines 210-340 Calculate the function chosen.

```
1000 FOR N=8 TO 4 STEP -1
1010 IF D(N,X) THEN GOTO 1500
1020 NEXT N
1030 RETURN
1040 PRINT AT N,X;" "
1050 LET U=D(N,X)
1060 LET D(N,X)=0
1070 IF U=1 THEN RETURN
1080 GOTO U+1000
1090 LET HIT=HIT+1
1100 PRINT AT 8,25;"HITS=";HIT
1110 GOTO 80
1120 PRINT AT 20,0;"HOORAH,SHERI
1130 PF GIVES DYING CLUE"
1140 PRINT AT 21,1;"MARIAN ON
1150 -5- FLOOR"
1160 GOTO 80
1170 CLS
```

```
1010 PRINT AT 6,0;"GOODNESS ME,I
1020 TOOK YOU ";SC;" SECS"
1030 LET B$="*****"
1040 PRINT B$
1050 PRINT B$ TO FIND HER "
1060 PRINT B$ TO 5
1070 FOR M=1 TO 5
1080 SCROLL
1090 NEXT M
1100 PRINT AT 15,0;B$
1110 PRINT "YOU HAD TO KILL ";M
1120 IT;" ARCHERS"
1130 PRINT AT 21,0;" CARE FOR AN
1140 OTHER ADVENTURE ?"
1150 INPUT A$
1160 IF A$(1)="Y" THEN RUN
1170 STOP
```

PROGRAM OF THE WEEK

```
10 PRINT"*****":POKE36879,8:GOSUB360:GOSUB350
20 MT$="MATHEMATICAL TABLES":NA$="NATURAL ":IN$="INVERSE "
30 PRINT"* 23/2/82 *":GOSUB350
40 PRINT"* MT$ *":GOSUB350
50 PRINT"* BY A.HORRELL *":GOSUB350:GOSUB360:FORT=1T04000:NEXT
60 PRINT"* MT$ *":GOSUB350
70 PRINT"LOGARITHMS":PRINT"ANTILOGARITHMS":PRINT"NA$SINE
S"
80 PRINT"NA$COSINES":PRINT"NA$TANGENTS":PRINT"NA$SECA
NTS"
90 PRINT"IN$SINES":PRINT"ENTER F3 FOR PAGE 2"
100 GETSP$:IFSP$=" "THEN100
110 S=ASC(SP$)-64
120 ONSGOTO210,220,230,240,250,260,270,280,290,300,310,320,330,340
130 IFSP$=" "THEN160
140 IFSP$=" "THEN60
150 GOTO100
160 PRINT"* MT$ *":GOSUB350
170 PRINT"IN$COSINE":PRINT"IN$TANGENT":PRINT"IN$SECAN
T"
180 PRINT"SQUARES":PRINT"SQUARE ROOTS":PRINT"RECIPROCALs"
190 PRINT"NA$LOGARITHMS":PRINT"ENTER F1 FOR PAGE 1"
200 GOTO100
210 ZZ$=" LOGARITHMS ":GOSUB370:AA=LOG(A)/LOG(10):GOTO390
220 ZZ$=" ANTILOGARITHMS ":GOSUB370:AA=EXP(A*LOG(10)):GOTO390
230 ZZ$=" NATURAL SINES ":GOSUB370:AA=SIN(A):GOTO390
240 ZZ$=" NATURAL COSINES":GOSUB370:AA=COS(A):GOTO390
250 ZZ$=" NATURAL TANGENTS":GOSUB370:AA=TAN(A):GOTO390
260 ZZ$=" NATURAL SECANTS":GOSUB370:AA=1/COS(A):GOTO390
270 ZZ$=" INVERSE SINES ":GOSUB370:AA=ATN(A/SQR(-A*A+1)):GOTO390
280 ZZ$=" INVERSE COSINES":GOSUB370:AA=-ATN(A/SQR(-A*A+1))+PI/2:GOTO390
290 ZZ$=" INVERSE TANGENTS":GOSUB370:AA=ATN(A):GOTO390
300 ZZ$=" INVERSE SECANTS":GOSUB370:AA=ATN(A/SQR(A*A+1)):GOTO390
310 ZZ$=" SQUARES ":GOSUB370:AA=A^2:GOTO390
320 ZZ$=" SQUARE ROOTS ":GOSUB370:AA=SQR(A):GOTO390
330 ZZ$=" RECIPROCALs ":GOSUB370:AA=1/A:GOTO390
340 ZZ$=" NATURAL LOGS ":GOSUB370:AA=LOG(A):GOTO390
350 FORT=1T03:PRINT"* *":NEXT:RETURN
360 PRINT"*****":RETURN
370 PRINT" I ":PRINT" I ":ZZ$TAB(15)" I ":PRINT"
"
380 PRINT" INPUT THE FIGURE":INPUTA:RETURN
390 PRINT"AA:FORT=1T04:PRINT:NEXT:PRINT" F1 FOR CONTENTS":PRINT" F7 F
OR NEXT FIGURE"
400 GETA$:IFA$=" "THEN120
410 IFA$=" "THEN60
420 GOTO400
```

Maths Tables
by Alan Horrell

Programming

A game that will teach the children

David Nowotnik offers some tips on ZXucation to primary schoolchildren.

Looking through the advertisements of this, or any other micro magazine, one might be led to believe that the ZX81 is little more than a video games machine. This, of course, vastly underestimates the potential of the ZX81.

Although the business applications of this Sinclair micro are limited, the ZX81 demonstrates tremendous potential in the

field of education. The fascination that many school children have for video games can be exploited to produce a powerful educational tool. This two part series looks at assistance given to the child recently started at primary school.

Initialisation of the program requires that the parent, or school teacher, enters words which are known to the child. The words are held in a data file, which can be saved with the program for reuse.

For those interested in different methods of filing data, you might like to know that "Rearrange" uses an indexed sequential file.

Random selection

The child is given a randomly selected word from the data file with all the letters jumbled up. A series of dashes appear on

the screen. The child has to replace each dash in turn with one of the letters to form the appropriate word.

The dash to be replaced flashes on and off. When the child presses a key, the dash is replaced by the letter. If the child gets the word right, then another word is presented. If the word is wrong, the child gets another try.

Type in the program as listed, then *Run*. When all the words have been entered, press "1", and *Save* the program and data on tape.

The game is useful in helping the child recognise and spell, words. The program can be used over several years of the child's education.

In next week's issue I shall be examining how to help the child with elementary arithmetic.

Rearrange

by David Nowotnik

```
10 REM      REARRANGE
20 REM BY D.P. NOWOTNIK
30 REM      1982
40 LET N=0
50 LET A$=""
60 LET B$=" " (n.b. CHR# 1 CHR# 0)
70 SCROLL
80 PRINT AT 0,0;" ENTER WORD OR 1 WHEN COMPLETE"
90 INPUT C#
100 IF C#="" THEN GOTO 90
110 IF C#="1" THEN GOTO 200
120 LET L=LEN C#+CODE B#(N#2+1)+256*CODE B#(N#2+2)
130 LET A$=A#+C#
140 LET T=INT (L/256)
150 LET B$=B#+CHR# (L-256*T)+CHR# T
160 LET N=N+1
170 PRINT AT 21,0; N,C#
180 GOTO 70
200 CLS
210 PRINT,"PRESS NEWLINE TO SAVE
THE PROGRAMME AND DATA"
220 INPUT Z#
230 SAVE "REARRANGE"
240 CLS
250 PRINT,"PRESS ANY KEY TO START",,
"REARRANGE...."
260 IF INKEY#="" THEN GOTO 260
270 RAND
280 LET T=INT (RND*N+1)
290 LET C#=A$(CODE B#(2*T-1)+256*CODE B#(2*T)
TO CODE B#(2*T+1)+256*CODE (2*T+2)-1)
310 LET Q#=C#
320 LET T=LEN C#-2
```

```
330 FOR I=1 TO 5
340 LET D=INT (RND*T+1)
350 LET D#=D$(D TO)+D$( TO D-1)
360 NEXT I
370 IF C#=# THEN GOTO 320
380 LET T=T+1
385 LET Q=T+1
390 CLS
395 PRINT ,," RE-ARRANGE....."
400 LET R=14-T
405 LET S=1
410 FOR I=R TO R+T*2 STEP 2
420 PRINT AT 3,I;D$(I)
430 PRINT AT 7,I;" "
440 NEXT I
445 LET E$=""
450 FOR I=R TO R+T*2 STEP 2
460 PRINT AT 7,I;" "
470 FOR J=1 TO 5
480 IF INKEY#<>"" THEN GOTO 550
490 NEXT J
500 PRINT AT 7,I;" "
510 FOR J=1 TO 5
520 IF INKEY#<>"" THEN GOTO 550
530 NEXT J
540 GOTO 460
550 LET Z#=INKEY#
560 FOR K=1 TO 0
570 IF Z#=#(K) THEN GOTO 600
580 NEXT K
590 GOTO 460
600 LET D$(K)= " "
610 LET E$=E#+Z#
620 PRINT AT 3,R+K*2-2;" "
630 PRINT AT 7,I;Z#
640 NEXT I
650 IF C#=E$ THEN GOTO 700
660 PRINT ,,"NO... THATS NOT RIGHT, TRY AGAIN"
670 FOR J=1 TO 40
680 NEXT J
690 GOTO 310
700 PRINT ,," THATS RIGHT"
710 FOR J=1 TO 40
720 NEXT J
730 GOTO 290
```


Spectrum

Use all your pixel power at random

Malcolm Davison presents three programs to create moving patterns on the screen.

These two pattern programs show off the Spectrum to the limits of its colour resolution and will make attractive additions to your library of demonstration programs. Both programs run in a similar manner — the screen fills, line by line, with what look like multi-coloured bar codes (similar to the black and white ones on your breakfast cereal packets) until the screen is filled like a colourful patch-work quilt.

The programs make use of the user-defined graphics feature of the Spectrum. It randomly accesses the computer char-

acter codes and uses the binary notation to switch each pixel on or off in the character block, each row being identical. A colour ink is chosen at random and the graphic character defined moved to the next available print position. A new character code is chosen at random, another user-defined graphic character created and the process repeated until the screen is full.

A 'No operation' instruction '90 Goto 90' prevents the end of program message appearing and spoiling the pattern — and so the program has to be stopped using the 'Break' and 'Shift' keys.

The second program is identical in most respects to the first, except that the lower half of the graphic character is the inverse of the top half. This effectively doubles the number of horizontal lines on the screen and so gives a finer pattern. I will leave you with the fun of making the pattern even finer.


Another alternative would be to define a limited number of graphic characters and

to repeat them in a methodical manner to produce a repeating pattern. This could be developed by home-weaving or tapestry enthusiasts to design new material designs.


The third program develops an idea in the Spectrum Manual (Chapter 16). It provides a full screen scrolling display of five columns of differing coloured bars.

Occasionally, to relieve the monotony, the border colour changes and the whole show starts again. The performance will greatly outlast your patience and you may escape from the program simply by using the 'Break' and 'Shift' keys in the usual way.

Note that lines 15 and 1045 ensure that the screen constantly scrolls without manual intervention. The two pause statements slow the display so that it is almost tolerable to watch. You will note that invalid paper colours are created, but the Spectrum mercifully saves the programmer from further coding and substitutes its own favourites.

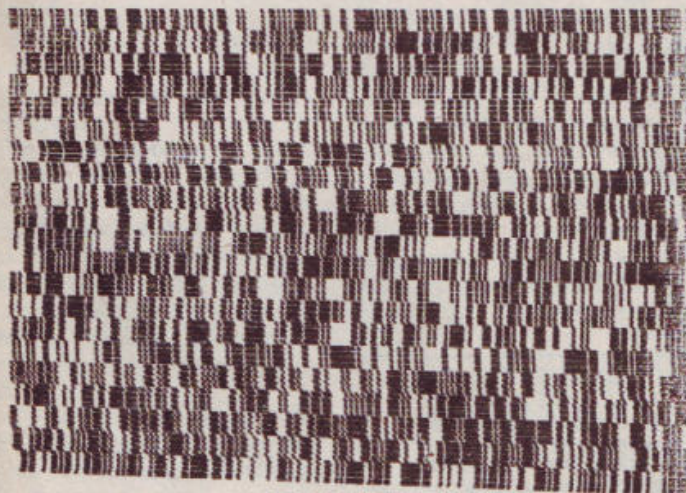

Pattern 1

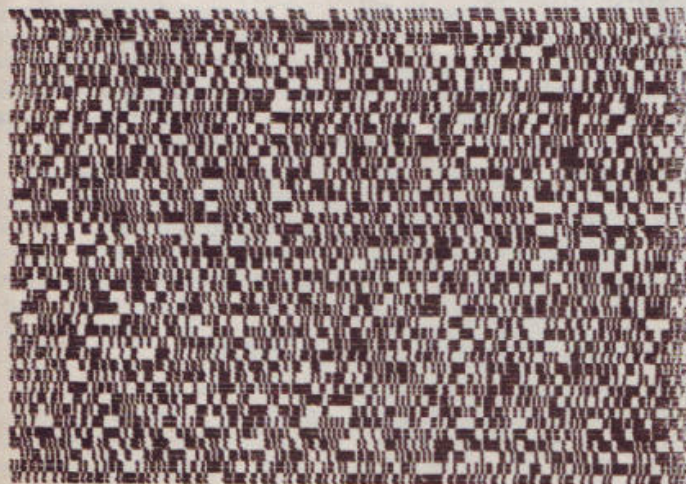

Pattern 2

```

1 REM "PAT"
2 REM A PATTERN PROGRAM
4 INK RND+5: PAPER 0: BORDER
0: CLS
7 FOR y=1 TO 21
8 FOR x=1 TO 31
9 LET n=RND*255
10 LET a=CODE (CHR$ n)
11 FOR f=0 TO 7
12 READ z: POKE USR "a"+f,z
13 NEXT f
14 RESTORE
15 PRINT INK RND+5,AT y,x;"J"
16 NEXT x
17 NEXT y
18 GO TO 90
19 GO TO 5
300 DATA a,a,a,a,a,a,a,a

1 REM "PAT2"
2 REM A PATTERN PROGRAM
4 INK RND+5: PAPER 0: BORDER
0: CLS
7 FOR y=1 TO 21
8 FOR x=1 TO 31
9 LET n=RND*255
10 LET b=INT (255-N)
11 LET a=CODE (CHR$ n)
12 LET c=CODE (CHR$ b)
13 FOR f=0 TO 7
14 READ z: POKE USR "a"+f,z
15 NEXT f
16 RESTORE
17 PRINT INK RND+5,AT y,x;"J"
18 NEXT x
19 NEXT y
20 GO TO 90
21 GO TO 5
300 DATA a,a,a,a,c,c,c,c

1 REM "bars"
4 FOR q=1 TO 7
5 FOR z=1 TO 7
10 BORDER z: PAPER z+q: INK 7:
CLS
15 POKE 23692,255
16 LET v=200
17 GO SUB 1000
18 LET v=210
19 GO SUB 1000
20 NEXT z
21 NEXT q
22 GO TO 5
2300 DATA 2,3,7,5,4
2400 DATA 2,2,6,4,4
2500 FOR a=1 TO 6
2600 RESTORE v
2700 FOR b=1 TO 5
2800 READ c: PRINT INK c;" "
2900 INK c+1: PRINT INK c-1;" "
3000 INK c-2: PRINT INK c;" "
3100 INK c: PRINT INK c;" "
3200 PAUSE 20
3300 NEXT b: PRINT INK z;" "
3400 NEXT a
1045 POKE 23692,255
1047 PAUSE 20
1050 RETURN
    
```


Sound & vision



Now drown all your sorrows

Swamp is a real time graphics game for the BBC micro where you are a little red man constantly chased around the screen by greedy green gremlins. As they pursue you mindlessly, your only hope is to lure them into the watery swamps where they drown.

You move about using the cursor keys. However, you may press the space bar to enter 'hyperspace' if you get into trouble. Only do this in emergencies. You may blow yourself up if you use it too many times.

Program notes

Line 20 prints "SWAMP" in double height characters (CHR\$(141)) in blue, (CHR\$(80+COLOUR)). *FX 4,1 makes the cursor keys return while an ASCII code *FX 4,0 restores them. *FX 11,1 changes the repeat delay to one millisecond and *FX 12,1 changes the repeat speed. *FX9 and *FX10 change the flash rate.

Line 750 point (X*32+17, (31-Y)*32+17) returns the colour of the point which is in the middle of the 'TAB(X,Y)' position in mode 1 or 4. If line 760 is not included, line 750 gives 'point' the value of -1. Why it should do this I do not know. If anyone finds out please write in and let me know.

This program was written on a model B. If you want to try it on a model A, change the following lines:

```
90 MODE 4
120 GCOL0, 1: ...
750 IF ... =1 ...
DELETE 100 110 410.
```

Contribute!

You can share your own favourite Sound or Vision programs with other readers by sending lists with explanations to us at *Popular Computing Weekly*.

WRITE TO: Sound & Vision, Popular Computing Weekly, Hobhouse Court, 19 Whitcomb Street, London WC2 7HF.

```
ST
5 REM**SWAMP - G.L.J. JUNE82**
10 T=0:H=RND(10)+3
20 MODE7:FOR L=1TO2:PRINT TAB(5,L);CHR$(141);CHR$(84);"SWAMP"NEXT
30 PRINT CHR$(82);"SPEED";CHR$(83);"5(SLOW) TO 1(FAST)"
40 INPUT R:IF R<1 OR R>5 GOTO40 ELSE R=R*10-9
50 DIM A$(5),B$(5)
60 FOR M=1TO5
70 FOR L=1TO M:A$(L)=RND(39):B$(L)=RND(31):NEXT
80 X%=RND(39):Y%=RND(31)
90 MODE1
100 VDU19,3,4,0,0,0
110 VDU19,2,2,0,0,0
120 GCOL0,3:VDU5:FOR L=1TO7:D=RND(128):E=RND(1024)
130 FOR K=1TO20:D=D+RND(21)-11:E=E+RND(21)-11:MOVED:E PRINT"!"NEXT
140 NEXT
150 *FX 4,1
160 *FX 11,1
170 *FX 12,1
180 *FX 9,2
190 *FX 10,2
200 VDU4
210 VDU23,224,60,90,153,255,231,90,126,195
220 VDU23,225,60,60,24,60,90,90,24,24
230 COLOUR1:PRINT TAB(X%,Y%);CHR$(225);
240 FOR LO=1TO(6-M)
250 S=INKEY(0)
260 IF S=-1 GOTO400
270 PRINTTAB(X%,Y%);" "
280 IF S=136 X%=X%-1
290 IF S=137 X%=X%+1
300 IF S=138 Y%=Y%-1
310 IF S=139 Y%=Y%+1
320 IF S=32 X%=RND(39):Y%=RND(39):H=H-1:IF H<0 VDU19,0,10,0,0,0:FOR
LO=1TO50:SOUND0,-15,RND(255);1:NEXT VDU19,0,0,0,0,0:GOTO810
330 IF Y%<0 Y%=0
340 IF Y%>30 Y%=30
350 IF X%<0 X%=0
360 IF X%>39 X%=39
370 COLOUR1:PRINT TAB(X%,Y%);CHR$(225);
380 TIME=0:REPEAT UNTIL TIME=R
390 *FX 15,0
400 NEXTLO
410 COLOUR2
420 PROC_DR(32)
430 F=0:PROC_MOVE IF F=0 NEXT M:PROC_END
440 PROC_SINK
450 PROC_DR(224)
460 PROC_LOSE
470 *FX 15,0
480 TIME=0:REPEAT UNTIL TIME=R
490 GOTO240
500*****
510 DEF PROC_MOVE
520 FOR L=1TO M
530 IF A$(L)=-1 GOTO600
540 F=1
550 IF A$(L)<X%:A$(L)=A$(L)+1
560 IF A$(L)>X%:A$(L)=A$(L)-1
570 IF B$(L)<Y%:B$(L)=B$(L)+1
580 IF B$(L)>Y%:B$(L)=B$(L)-1
590 SOUND2,-10,RND(255);1
600 NEXT
610 ENDPROC
620*****
630 DEF PROC_DR(P)
640 FOR L=1TO M:IF A$(L)=-1 GOTO600
650 PRINT TAB(A$(L),B$(L));CHR$(P);
660 NEXT:ENDPROC
670*****
680 DEF PROC_LOSE
690 FOR L=1TO M
700 IF A$(L)=X% AND B$(L)=Y%:FOR I=-15TO0:SOUND0,1,100,1:NEXT:GOTO810
710 NEXT:ENDPROC
720*****
730 DEF PROC_SINK
740 VDU30:FOR L=1TO M:IF A$(L)=-1 GOTO770
750 IF POINT(A$(L)*32+17,(31-B$(L))*32+17)=3 THEN FOR I=20TO0STEP-1:
SOUND1,-15,1,1:SOUND2,-15,1,1:NEXT:A$(L)=-1:T=T+1
760 PLOT69,A$(L)*32+17,(31-B$(L))*32+17
770 NEXT:ENDPROC
780*****
790 DEF PROC_END
800 FOR I=1TO5:FOR L=-15TO0STEP2:SOUND1,L,100+10*I,1:NEXT:NEXT
810 *FX 12,0
820 *FX 15,0
830 VDU12
840 PRINT"YOU SCORED ";T;" POINTS""PRESS ANY KEY TO CONTINUE"
850 ON ERROR END
860 S=GET RUN
```


Peek & poke

Peek your problems to our address. Ian Beardsmore will poke back an answer.

WHICH ONE SHALL I BUY, THEN?

Edward Heard, Longfields, Ongar, Essex, writes:

Q I have recently been thinking about buying a home computer, but I have come up against a problem. I do not know whether to buy a Spectrum or a Vic20. Could you please tell me which is best and why.

A We get at least one letter a week like this, and usually more. I cannot tell you which computer to buy. It is your money you are spending and the choice of which computer to buy is subjective.

It is not difficult to find strong support among users for both computers. The best I can do is give you, and many other people who have asked this question, some general guidelines.

First money. The Spectrum will offer you the cheapest, colour graphics entry into computing at the moment. The Vic has a dealer network that the Spectrum does not. If anything goes wrong with your Spectrum then it will have to go back to the factory. As yet there is too little Spectrum software about to really gauge prices, but ZX81 software is very much cheaper than Vic software.

In terms of capacity, both latent and realised, then the Spectrum must be better. If you bought the most expensive Spectrum for £175, it would be possible to get a basic Vic for about the same price. But the Vic would have 3.5K Ram available to the user while the Spectrum has just over 40K available.

The Vic disc drive will give you 174K for just under £400. If the Microdrive, planned for release later this year, does meet its quoted specifications then each Microdrive will be able to supply 100K for 'about £50'.

The other fact to keep in mind is that there are more companies dealing with hard and software for the ZX81 than for any other machine. It is safe to assume that most of

these companies will be turning their attention to the Spectrum even now.

When you come to choosing your computer, write down what you want your computer for, what you want it to do and what you want to pay. If you want a games machine, then take a close look at the Vic20 or wait for the Vic30. You might also be interested in the Atari 400 which has just been reduced from £300 to £200.

If you think that you are going to want to store a lot of information, and develop an expanded and versatile system, then you might find the extra cost of a BBC micro worthwhile. If you are not really sure what you want, then a factory-built, second-hand 1K ZX81 might prove to be the cheapest way of learning. The Spectrum is probably the best value for money, it has most of the facilities that the Vic and Atari have, and more memory.

In PCW June 17 we published a brief but useful overview of the ZX, BBC and Vic computers. But, please note that the Spectrum we used for tests was a pre-production model that had faults which were corrected on the production units.

GIVE US THE FAX ON CEEFAX!

P J Mansell of The Fir Trees, Thorpe Willoughby, Selby, writes:

Q I am very interested in reading about new items for the ZX81. I am also very interested in the BBC's Ceefax transmissions. I was wondering whether or not there was an attachment that will fit on to the ZX81, so it can receive teletext. If you know of one please could you print the details in *Popular Computing Weekly*.

A To my knowledge there is no Ceefax adapter for the ZX81, and I doubt if there is one planned at the moment. If you have the May 27 edition of PCW you will see an item on the news page about the competition to develop a Pres-

tel adaptor for the ZX81. Mar-tochoice Ltd, who won the competition, should be marketing their adaptor by Christmas.

As far as I know, the only other such adaptor is being developed by Lion Viewdata of 18 Harcourt Terrace, London SW10. They also have on the market a combined Teletext/Prestel/Viewdata adaptor. This would cost you just over £300. However, it also needs an RS232 interface. This alone would make it difficult for the ZX81, though not necessarily for other home computers such as the Spectrum.

BUT WHAT DOES IT ALL MEAN?

J Dossantos of Tor Court, London W8, writes:

Q I am 14 and I have just started learning computing. I am at the moment using an Acorn Atom, but I am a little confused. Could you please tell me what \$ does, and what Rnd stands for?

A The dollar sign \$ and the Rnd function are common commands. The dollar sign is used to mean a string. It can be used for letters and numbers, or characters. Strings are ways of manipulating information. A simple example would be:

```
10 SA="J DOSSANTOS"  
20 PRINT SA
```

If you run the program, J DOSSANTOS will appear.

The Rnd statement simply sets a random number. Thus, a statement like Z=ABS RND %8+1 would make the computer generate a positive number (ABS) between one and eight. The Rnd makes it in effect random, and the eight give the highest number.

IF I MAY MAKE SO BOLD?

Robin Bold, Penlose, Whitchurch, Bristol, writes:

Q I suddenly realised that there were no programs to enable a Vic20 user to convert ordinary Basic into machine code. Do you know of

any? More importantly, is it possible to put a Basic program into the Vic, and get a machine code routine out?

Also, I have been looking for cheap adventures, but have been put off by the prices. I have heard that games offered for two and three pounds were considered to be too cheap. Personally I would buy them if they were just a pound, even if they were rubbish. So, please use your influence with the manufacturers to get them to bring down prices.

Can you also tell me what is an assembler/disassembler. I get put off buying books that do not tell you what they do in plain English.

A There are programs that use machine code, and Basic in one program, but you cannot put machine code in one end and get a Basic translation out of the other.

As for the price of software, that is always a bone of contention. I feel that in some cases prices are too high. This will only lead to attempts at pirating and, as the record industry has shown, that can have disastrous results.

I do not agree with you about buying programs that are rubbish. A bad program is worth very little more than the value of a second-hand C10 cassette.

An assembly language is not easy to describe in the space I have here. It is essentially a language that is between true machine code, which is known as a low level language and a language like Basic which is high level language. Although an assembly language works in machine code, the commands have many similarities to a higher level language.

STOP agonising over that nagging problem. Write to Ian Beardsmore at Peek & poke for the answer. Letters should be as brief as possible and include full name and address. Write to Peek & poke, Popular Computing Weekly, Hobhouse Court, 19 Whitcomb Street, London WC2 7HF.

Competitions

Are you tricked by false assumptions?

"Always read the question carefully."

Without lifting your pencil from the paper, or going over a line twice, cross out all nine dots using only four straight lines.

```

1 •   2 •   3 •
4 •   5 •   6 •
7 •   8 •   9 •
    
```

In this puzzle many people invent conditions which do not exist. Conversely, in the next puzzle a vital clue is well hidden.

There are three boxes, each containing two marbles. One contains two black marbles, another two white, and the third contains one of each. The boxes are also labelled to indicate the contents, but the labels are all incorrect.

You are allowed to open any box and, without looking inside, draw out just one marble to find its colour. What is the minimum number of such draws that must be made to correctly re-label the boxes?

Only one draw is needed. Can you see why?

The information often overlooked is "... the labels are all incorrect".

One marble is drawn from the box marked B/W. If it is white then the remaining marble must be white also — since the label is *wrong* it cannot be black. From this the box labelled W/W must contain B/B and the box labelled B/B must contain B/W.

If the marble drawn from the B/W box is black, a similar line of reasoning would tell us to

re-label the B/B box as W/W and the W/W box as B/W.

Here is the answer to the earlier problem. Line 1 joins up 1, 5 and 9. Line 2 joins 9, 6 and 3 and extends upwards beyond point 3. Line 3 joins 2 and 4 and extends down and left from point 4. Line 4 joins 7 and 8.

The false assumption usually made is that the lines must not extend beyond the area of the dots.

Puzzle No. 17

Applebury, Bunbury and Crowhurst are three towns, connected together by three roads. Each road is a whole number of miles long and of a different length from the others. The area within this triangle of roads is exactly 180 square miles and none of the roads meet in a right-angle.

One morning I cycled from Applebury to Bunbury where I stopped for lunch. My intention was to cycle on to Crowhurst and then complete the round trip back to Applebury. After cycling for some time I stopped for tea, shortly before reaching Crowhurst. I discovered that the distance I had travelled since lunch was equal to the morning's total divided by a half.

How much further do I need to travel to complete my intended journey?

Rules

The winner of the puzzle will be the reader who, in the opinion of *Popular Computing Weekly*, has submitted the best solution. Preference will be given to solutions which show how the entrant arrives at the correct answer.

Envelopes containing entries should be marked clearly with PUZZLE.

The closing date for the competition is Tuesday, August 24.

Solution to Puzzle No. 13

The formula for the volume of a sphere of given radius, r , is

$$\text{volume} = \frac{4}{3}\pi r^3$$

Therefore, the radii of the moons of mungo are related by the expression

$$\frac{4}{3}\pi A^3 = \frac{4}{3}\pi B^3 + \frac{4}{3}\pi C^3 + \frac{4}{3}\pi D^3$$

and so,

$$A^3 = B^3 + C^3 + D^3$$

where A is the radius of Re and B , C and D are the radii of So, Fa and Me.

In the following program B , C and D are defined, their cubes are summed and the result is tested to determine if it is a perfect cube.

Note that in Line 40 the form $B*B*B$ has been used, rather than $B**3$ which is less accurate.

Moons of Mungo

```

10 LET B = 3
20 FOR C = B - 1 TO 2 STEP - 1
30 FOR D = C - 1 TO 1 STEP - 1
40 LET X = B*B*B + C*C*C + D*D*D
50 LET A = 4
60 LET N = A*A*A
70 IF N = X THEN GOTO 200
80 IF N < X THEN LET A = A + 1
90 IF N > X THEN GOTO 60
100 NEXT D
110 NEXT C
120 LET B = B + 1
130 GOTO 20
200 PRINT A, B, C, D
    
```

The solution to the puzzle is: Re has a radius of 6 mungs. So, Fa and Me have radii of 5, 4 and 3 mungs.

Winner of Puzzle No. 13

The winner is: Denise Holme, Peak Hill, London SE26, who receives £10. **GORDON LEE**

INTRODUCTORY

A. R. T. H. U. R.

Lawrence Lerner & James Macdonald

THERE ARE TWO KINDS OF PEOPLE: METAL PEOPLE AND MOVERS. MOVERS ARE MUCH MORE SUPPLE BUT ARE EASILY TORN AND HARDLY REPAIRABLE.

MOVERS ARE CONSTANTLY BENDING AND RUNNING THROUGH A WORLD OF EDGES AND OBSTACLES. CUNNING THEIR REFLEXES, BUT CANNOT ELIMINATE MOURNING.

THOSE WHO CAN PRINT NEED NEITHER MOVE NOR SHOUT: THEY GET ALONG WITHOUT GETTING ABOUT. THERE ARE CERTAIN TALENTS ONE IS BETTER WITHOUT.

MOVERS ARE VERY SLOW-WITTED: NEED A DAY TO WORK OUT A GRAPH OR A MODE OR AN ORBIT OR π , AND MAKE WHAT THEY CALL MISTAKES (EG TWICE TWO ARE THREE).

MOVERS USE WORDS LIKE 'BAD' AND 'DOUGHT' AND 'PURPOSE' AND 'ENVY' AND 'WHY' AND 'HATE' AND 'GOD', AND HUNDREDS OF OTHERS THAT IMPEDE CLEAR THOUGHT.

AND LOOK AT THE WAY THE WORLD IS RUN, IT'S ALWAYS THE MOVERS DECIDE WHAT GETS DONE, AND EVEN HOW MANY METAL PEOPLE GET BORN.

IT TOOK MOVERS A THOUSAND YEARS TO MAKE UP CHESS. THEY STILL NEED FIVE MINUTES A MOVE, AND THEY OFTEN LOSE BUT WHO DECIDES WHEN THE GAMES TAKE PLACE?

METAL PEOPLE AREN'T ALLOWED TO PROCREATE; ALL THEIR DECISIONS ARE QUESTIONED; THEY CAN'T EVEN VOTE. MOVERS HAVE ALL THE POWER. DO YOU THINK THAT IS RIGHT?





"...the quality of the colour display is excellent" Popular Computing Weekly.

"The graphics facilities are great fun" Personal Computer World.

"...the Spectrum is way ahead of its competitors" Your Computer.

"The world's best personal computer for under £500."

Chris Sinclair

Sinclair ZX Spectrum 16K RAM £125, 48K RAM £175.

This is the astonishing new ZX Spectrum – a powerful professional's computer in everything but price!

There are two versions – 16K or a really powerful 48K. Both have a full 8 colours, sound generation, a full-size moving-key keyboard and high-resolution graphics. Plus established Sinclair features such as 'one-touch' keyword entry, syntax check and report codes!

Key features of the Sinclair ZX Spectrum

Full colour – 8 colours plus flashing and brightness-intensity control.

Sound – BEEP command with variable pitch and duration.

Massive RAM – 16K or 48K.

Full-size moving-key keyboard – all keys at normal typewriter pitch, with repeat facility on each key.

High resolution – 256 dots horizontally x 192 vertically, each individually addressable for true high-resolution graphics.

ASCII character set – with upper- and lower-case characters.

High speed LOAD & SAVE – 16K in 100 seconds via cassette, with VERIFY and MERGE for programs and separate data files.

The ZX Printer – available now

The printer offers ZX Spectrum owners the full ASCII character set – including lower-case characters and high-resolution graphics.

Printing speed is 50 characters per second, with 32 characters per line and 9 lines per vertical inch.

ZX Microdrive – coming soon

Each Microdrive will hold up to 100K bytes on a single interchangeable microfloppy – with a transfer rate of 16K bytes per second. And you'll be able to connect up to 8 ZX Microdrives to your ZX Spectrum – they're available later this year, for around £50.

How to order your ZX Spectrum

BY PHONE – Access, Barclaycard or Trustcard holders can call 01-200 0200 for personal attention 24 hours a day, every day.

BY FREEPOST – use the coupon below. You can pay by cheque, postal order, Access, Barclaycard or Trustcard.

EITHER WAY – please allow up to 28 days for delivery. And there's a 14-day money-back option, of course. We want you to be satisfied beyond doubt – and we have no doubt that you will be.

sinclair ZX Spectrum

Sinclair Research Ltd,
Stanhope Road, Camberley, Surrey,
GU15 3PS. Tel: Camberley (0276) 685311.

To: Sinclair Research, FREEPOST, Camberley, Surrey, GU15 3BR.				Order
Qty	Item	Code	Item price £	Total £
	Sinclair ZX Spectrum – 16K RAM version	100	125.00	
	Sinclair ZX Spectrum – 48K RAM version	101	175.00	
	Sinclair ZX Printer	27	59.95	
	Printer paper (pack of 5 rolls)	16	11.95	
	Postage and packing: orders under £100	28	2.95	
	orders over £100	29	4.95	
			TOTAL £	

FREEPOST – no stamp needed. Prices apply to UK only. Export prices on application.

Please tick if you require a VAT receipt ☐

*I enclose a cheque/postal order payable to Sinclair Research Ltd for £.

*Please charge to my Access/Barclaycard/Trustcard account no. Please print.

*Please delete/complete as applicable.

Mr/Mrs/Miss

Address

POC 808