

POPULAR Computing WEEKLY

2 September 1982 Vol 1 No 20

35p

**We test the new
Commodore 64**

Upgrade your BBC

Vic 20 singalong

Sketch-a-Spectrum

Cover Story:
**Under Pressure
on Spectrum**

Whizzkid '82
Win a Dragon 32 & £2000
of advertising



NOW!

Spectrum workstation



Following the success of our ZX81 plinth we have introduced a workstation for the Spectrum. This stylish ABS plinth raises and tilts the TV for better viewing whilst angling the Spectrum and making typing easier. The PSU is hidden underneath, the printer and cassette may still be used, and a matching, stackable unit for Microdrives will be available.

Peter Furlong Products, Unit 5, South Coast Road Industrial Estate, Peacehaven, Sussex BN9 8NA. Tel. (07914) 81637.

ABERSOFT

7 MAESAFALLEN, BOW ST, DYFED, SY24 5BA

ZX81 & Spectrum Games

Now **NEW LOW prices!!!!**

PROGRAM	OLD	NEW 81	SPECTRUM
Chess 1.4 10 levels m/c	10.00	8.95	
Adventure 140 locations based on the original (At £10.00 well worth the money Sinclair User Issue 2 review)	10.00	8.95	9.95*
Invaders Fast m/c arcade action	5.00	4.45	
Mazeman All the features of the original arcade version m/c	5.00	4.45	4.95

*requires 48k Spectrum

COMING SOON!! — DRAGON 32 ADVENTURE!!
Please ring for details

All prices are inclusive Return of post service

POPULAR Computing WEEKLY

HOBHOUSE COURT, 19 WHITCOMB STREET WC2

WHY NOT TAKE OUT A SUBSCRIPTION?

You can have *Popular Computing Weekly* sent to your home for £19.95 a year. This will cover the cost of the magazine, postage and packing.

Fill in the coupon below and keep yourself up to date week by week.

I would like to take out subscription(s) to *Popular Computing Weekly*.

Name

Address

Tel No.

I enclose £..... for subscription(s).

Please make cheques payable to Sunshine Publications Ltd.

POPULAR Computing WEEKLY

The Team

Editor

Brendon Gore

Reporter

David Kelly [01-930 3271]

Sub-editor

Ninette Sharp

Editorial Secretary

Fiona McCormick

Advertisement Manager

David Lake [01-839 2846]

Advertisement Executive

Alastair Macintosh [01-930 3840]

Managing Editor

Duncan Scot

Publishing Directors

Jenny Ireland

Nick Hampshire

Popular Computing Weekly,
Hobhouse Court, 19 Whitcomb Street,
London WC2
Telephone: 01-839 6835

Published by Sunshine Publications Ltd.

Typesetting, origination and printing by
Chesham Press, Chesham, Bucks

Distributed by S M Distribution
London SW9. 01-274 8611. Telex: 261643

© Sunshine Publications Ltd 1982

Subscriptions

You can have *Popular Computing Weekly* sent to your home: the subscription rate is £19.95 per year, for addresses in the UK, £37.40 overseas.

How to submit articles

Articles which are submitted for publication should not be more than 1000 words long.

All submissions should be typed and a double space should be left between each line.

Programs should, whenever possible, be computer printed.

At present we cannot guarantee to return every submitted article, so please keep a copy.

Accuracy

Popular Computing Weekly cannot accept any responsibility for any errors in programs we publish, although we will always try our best to make sure programs work.

This Week



Cover illustration by Stuart Hughes

News	5
Laserbug rings the changes.	
Letters	7
Sinclair speaks.	
Under Pressure	8
A new game for Spectrum by Simon Lane.	
Street Life	11
David Kelly reports on Silversoft.	
Benchtest	12
Peter Gerrard looks at the new Commodore 64.	
Review	13
ZX Galaxians.	
Open Forum	14
Five and a half pages of your programs.	
Whizz kid 82	19
The first week of our competition to win a Dragon 32.	
Spectrum	20
Sketch & draw.	
Sound & vision	21
A little peace for Vic20.	
Programming	22
Upgrade your BBC to 32K.	
Peek & poke	23
Your questions answered.	
Competition	26
Puzzle, Arthur.	

Editorial

The question of software copyright is rearing its head again. Atari has started a campaign against programs which allegedly infringe the copyright of its *Pac-Man* game.


As part of that campaign, Atari is seeking an injunction against Commodore. Atari is alleging that Commodore's game *Jellymonsters* is an infringement of copyright.

Other software companies, such as Bug-Byte, A and F Software and Micropower, have also been approached by Atari.

There could be severe repercussions for the software industry, if any of these cases come to court. If the court decides that copyright subsists in computer programs, and/or in the images reproduced on a tv screen (*PCW*, August 5), then companies will be forced to develop more original games. Imitations of successful arcade games such as *Space Invaders* will no longer be acceptable.

The establishment of a precedent for software copyright can only be good for the industry. Software firms and writers alike will finally know where they stand in regard to the law.

Next Week

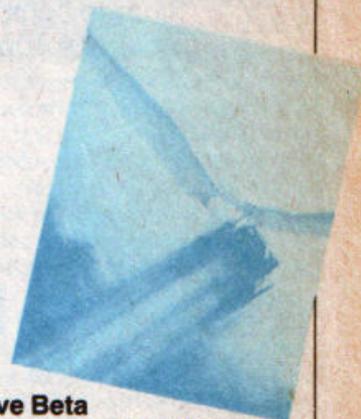

Can you save Beta Strigidae from attack by winged reptiles — find out in *Pteragon*, a new game for BBC

Our classifieds are faster.

Do you want to sell your computer and buy a bigger and better one?

Have you ever thought of trying to make some money out of selling tapes of your own programs?

Whatever it is you want to buy or sell why not use our classified pages?

It has to be better than waiting for up to nine weeks to get into one of the old monthly magazines.

Not only that, but our rates are very reasonable.

For private individuals it only costs 20p per word, with a minimum of 10 words.

We can make it so cheap because we charge companies using the classified columns 40p per word.

The classified pages can be used for semi-display advertising.

The cost for this is £10 per single column centimetre, with a minimum charge of £30.

All copy for the classified pages must be pre-paid. (You'll find a handy form on page 25.)

Cheques and postal orders should be made out to *Popular Computing Weekly*. Your advertisement should arrive at least two weeks before the publication date.

If you have any queries regarding Classified or semi-display advertising please call Alastair Macintosh on 01-930 3840

Popular Computing Weekly.
The fast one.

Spectrum software converter

IT is now possible to run ZX81 software on the ZX Spectrum.

The new software conversion device is called the Slowloader and is manufactured by East London Robotics.

The hardware/software combination is easy to use and allows ZX81 software cassettes to be loaded and correctly interpreted by the Spectrum.

A small printed-circuit board is plugged into the I/O port on the rear of the Spectrum. The Slowloader machine-code routine is then loaded into the Spectrum in the usual manner. The ZX81 cassette is then loaded through a socket on the Slowloader circuit board, rather than through the normal cassette port.

Mark Vellacott of East London Robotics explained that the device converts the ZX81 coding as the tape is loading.

"The Slowloader," he said, "handles string arrays intelligently — converting them to Spectrum characters — and will also successfully cope with ZX81 machine-code programs providing they do not alter the screen display or define new variables."

The Slowloader will cost about £10 and will be available from the beginning of September.

Further information from East London Robotics, Finlandia House, 14 Darwell Close, East Ham, London E6. (Tel: 01-471 3308).

Computer grant double boost

INDUSTRY has been given a £37m boost in two new schemes to help it to adopt computer aided design equipment.

Information Technology Minister, Kenneth Baker, announcing a £12m plan, said that the need for such investment was urgent. Under this first scheme, up to a third of the cost of such technology will be met by the government.

A further £25m is being provided by the EEC.



Trevor Sharples, former Laserbug editor.

Laserbug tackles its problems

LASERBUG, the London and South-East BBC microcomputer user group has appointed its first full-time co-ordinator.

Paul Barbour is to be the new organiser who will produce the group's monthly magazine.

He will replace Trevor Sharples who has resigned from editorship of the newsletter.

Trevor Sharples told *Popular Computing Weekly* that he is now no longer connected with the group having been "forced to give up the club because of time considerations and personnel difficulties".

Only two of the monthly issues — April and May — have so far been received by the group's 2000 members. Paul Barbour explained that a joint June/July issue was being sent out. A joint August/September issue is to follow. He said that every member would have their subscription



Paul Barbour

extended by two months to compensate for the delay.

Laserbug will continue to operate from its mailing address — 4 Station Bridge, Woodgrange Road, Forest Gate, London E7. There are no plans for Laserbug to have a telephone installed.

Sinclair gets going

SINCLAIR Research is giving financial help to a campaign to help create jobs from private enterprise.

The company is contributing £1000 of the £10,000 prize money offered to the winner of the *Daily Star* newspaper's 'Get Going' competition.

The 'Get Going' winner will be the individual who comes up with the best idea which could lead to the setting up of a successful small business and the creation of job opportunities.

The first prize winner will

receive £5000 to help 'get going', and the next 25 winners will each receive £200.

Other contributors to the five-figure prize money include British Petroleum, The Confederation of British Industry, National Westminster Bank, Plessey, Sainsbury's and the Science and Engineering Research Council.

The competition closed on August 31 and the winners will be announced in mid-September.

The campaign has received over 4000 entries.

Commodore in copyright contest

COMMODORE is to contest the Atari claim of infringement of the *Pac-Man* copyright.

The statement from Commodore Business Machines (UK) Ltd says: "There are several grounds which are controversial in the Atari claim and Commodore is contesting the case."

In an independent survey recently conducted on behalf of Commodore, the reactions of potential purchasers, under 17 years of age, to the *Vic20 Jellymonsters* and *Atari 400 Pac-Man* were compared.

A Commodore spokesman said: "Initial results suggest that on several parameters, including graphics, sound and enjoyment, there is an 80 per cent preference amongst consumers towards *Jellymonsters*."

"This tends to conflict with the claim of Atari International (UK) Inc that Commodore Business Machines (UK) Ltd is in conflict with consumer interests."

Atari is pressing ahead with its claim for an injunction against Commodore to stop sales of *Jellymonsters*.

A spokeswoman for Atari's advisers said: "There will be a hearing in October, when Atari will claim injunctive relief against Commodore."

Change in Vic software policy

COMMODORE has adopted a policy of linking its Vic cartridge software to well-known personalities or institutions.

The first of these available is *Mastermind*, marketed by arrangement with the BBC and with questions set by the BBC *Mastermind* co-ordinator, Boswell Taylor.

Next month will see a cookery package from Robert Carrier and a personality testing program from Professor Eysenck.


Future plans involve a version of *Ask the Family*, again by arrangement with the BBC, and a link-up to produce educational software in conjunction with the publishers, Hodder and Stoughton.



KEMPSTON (MICRO) ELECTRONICS

SEE US AT THE
PERSONAL COMPUTER
WORLD SHOW!

introducing the ZX81 KLIK-KEYBOARD

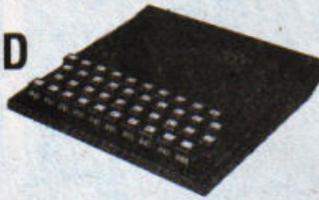

This is a full, forty key moving keyboard with real keys that fits in the recess left after peeling off the existing 'touch sensitive' membrane keypad.

It offers the following advantages

- Fits onto the ZX81
- Positive feedback from keys
- No trailing wires
- No special case needed
- Elegant design with two colour legends

This is a most attractive keyboard which will enhance the appearance and improve the performance of your ZX81. Why pay more for an oversized keyboard?

41 Key version now available at £26.50. Extra key can be used to give a repeat facility with repeat key kit.

Cheques/Postal orders made payable to:
KEMPSTON ELECTRONICS, 60 ADAMSON COURT,
HILLGROUNDS ROAD, KEMPSTON,
BEDFORD MK42 8QZ.

Other ZX81 products include keyboard two-tone Bleeper £8.95 built, keyboard repeat key kit £3.95 + postage on both items.

ZX81 klik-keyboard kit at £22.50, fully built at £26.00. Please add 70p for postage. Delivery 21 days from receipt of order. SAE in all correspondence please.

ZX SPECTRUM OWNERS

UPGRADE YOUR 16K SPECTRUM TO A FULL 48K
WITH OUR FULLY ASSEMBLED AND GUARANTEED

MASSIVE

32K RAM

MEMORY EXPANSION

SIMPLE TO FIT. SUPPLIED WITH FULL INSTRUCTIONS

FULLY INCLUSIVE PRICE

£39.95 *Allow 28 days delivery*



ZX - PANDA

16K-byte EXPANDABLE RAM FOR ZX81

FEATURES INCLUDE:

CONTOURED TO ZX81 FOR STABILITY. 'POWER ON' LED. NEAT, COMPACT CUSTOM CASE. EXPANDABLE INTERNALLY TO 32K BY USING EXPANSION MODULE. SIMPLY PLUGS IN. NO EXTRA POWER REQUIRED. FULLY ASSEMBLED, TESTED AND GUARANTEED. FULLY INCLUSIVE PRICES:

ZX PANDA 16K RAM £25.00

ZX PANDA 16K EXPANSION £19.95

GIANT PANDA (the two together) 32K £39.95

Allow 28 days delivery

Send now to:

STONECHIP ELECTRONICS

UNIT 4, HOSKINS PLACE, WATCHETTS ROAD
CAMBERLEY, SURREY. TEL: (0276) 681131

MAKE CHEQUES OR POs PAYABLE TO: STONECHIP LTD

SEE US ON STAND 214 AT THE PCW SHOW, BARBICAN
9-12 SEPTEMBER

SILVERSOFT

NEW!!

ZX-Spectrum software!!

ORBITER — Ultra fast, machine-code, Defender-style arcade game for the ZX-Spectrum. Full features including scanners, reverse, smart bombs and hyperspace. Mutants, humanoid, landers, bombers, etc., plus fast explosive action in this amazing game. Only £5.95.
GROUND ATTACK!! — Amazing arcade action in this superb implementation of Scramble for the ZX-Spectrum. Fly your spaceship through the caves dodging missiles and destroying fuel dumps. Lasers, bombs, rocket and brilliant colour graphics make this one of the best Spectrum games around.

ZX 16K SOFTWARE

ZX-ARCADE ACTION!!

"STARTREK" £4.95

16K STARTREK. Exciting space adventure game including klingons starbases, phasors, 8x8 galaxy, 4 levels of play, long- and short-range scanners, etc.

"SUPER-WUMPUS" £4.95

16K SUPER-WUMPUS: Can you hunt and catch the mysterious wumpus in his underground labyrinth? Intriguing underground adventure.

"GRAPHIC GOLF" £4.95

16K GRAPHIC GOLD: Test your golfing skills on the computer's 18-hole golf course, each hole is different and is graphically displayed on screen, many hazards including lakes, streams, rough, etc.

"GAMES PACK 1" £4.95

16K GAMES PACK 1: Fantastic value for money, nearly 50K of programs on one cassette. Five games including "Real Time Graphic" Lunar Lander Starwars, Hammurabi, Minefield, Mastermind.

NEW!!

"MUNCHER!!" £5.95

At last! Pac-man for your ZX81, full feature arcade game including 4 types of monsters, high-score, 10 skill levels, etc., all entirely in m/c code.

"SPACE INVADERS" £4.95

This version is simply the best yet, features include 3 laser bases, high scorer, bonus points, alien motherships, authentic space invader movement and ever-increasing speed, 10 skill levels.

"ASTEROIDS" £5.95

Authentic representation of the arcade game with left, right, thrust and fire controls, 5 levels of play and alien spaceships. FASTEST! version available.

"ALIEN-DROPOUT" £5.95

Can you stop the aliens from building up in their launch chutes before they drop down and destroy you. Exciting NEW arcade game.

Cheques/POs payable to "SILVERSOFT"
TICK BOXES REQUIRED

Two or more deduct £1.00
SAE FOR CATALOGUE

I enclose a cheque/PO for £
ZX81, SPECTRUM AND BBC SOFTWARE WANTED
EXCELLENT ROYALTIES (Probably the best around)

Name

Address

PC/82

SILVERSOFT LTD (Dept. PCW)
20 Orange Street
London WC2H 7ED

Letters

write to Letters, Popular Computing Weekly, Hobhouse Court, 19 Whitcomb Street, London WC2

Wash a matter with you baby?

In PCW July 29 Mr Vale responds to an earlier letter of mine regarding the merits of the BBC micro and the ZX Spectrum. He implies that the Spectrum, at its price, can satisfy computer enthusiasts needs.

Some people may prefer the Spectrum and I will not deny that it offers many fine features at an economical price. However, there are other people who consider it worthwhile paying more for the BBC micro's adaptability and extra computing facilities.

I had not thought of controlling a washing machine by my BBC, but Michael Vale has just given me a good idea.

R Lober
Rivendell
13 Pwll-y-min Crescent
Peterston-super-Ely
Cardiff CF5 6LR

Mown down by moans?

I am writing with a moan or two about the Screen \$ function on the Spectrum.

This function is not satisfactorily explained in the manual. When used, it will yield a null string for any graphic symbol, including user defined ones, making the use of these symbols in games almost pointless.

There is also a bug with the following program:

```
10 PRINT AT 0,0;"*"  
20 LET X=5  
30 LET X=X+CODE SCREEN $(0,0)  
40 PRINT X
```

This will give an answer of 42, not 47 which is the correct answer. But, if you change line 30 to:

```
30 LET X=CODE SCREEN $(0,0)+X
```

the program works. Note that the bug has nothing to do with the brackets.

My second moan is about your editorial. Does the person who writes it work for your magazine? The points raised are very interesting and I agree with many of them, but you do not follow your own example.

In PCW July 29 your editorial made the point about old

ideas being "re-hashed" and submitted. In that very issue there is a mastermind program. Now, if there is a ZX81 owner in the world who has not already seen 20 mastermind programs in various publications, I would like to meet him.

On page 19 of that issue there is a maths quiz program. Again, this is a (yawn) well tried program. On page 15 there is a program to define Spectrum graphics. An almost identical program appeared in the previous issue.

In your defence, you have published some excellent routines for the Spectrum (eg the 3D graphics in issue 12) but I feel you do tend to preach somewhat.

PS. I would contact the other PCW. Twice they have said to have "World exclusive" reviews of machines which your magazine had already reviewed ie Spectrum and now the Dragon.

Stephen Kelly
50 Hinton Crescent
Appleton
Warrington WA4 3DF

You are quite right, we do not always follow our own example, but we do try. In the case of Open Forum programs we have been encouraging readers to be more original and adventurous in their ideas. But, the majority of programs that we receive are still based around common games such as mastermind. Rather than disappoint all these readers, we publish a few of these types of games together with as many new and interesting programs as possible.

Or just a white elephant at large?

Like many microcomputer users, I own a teletext tv receiver. Now you may be aware that both the ceefax and oracle services broadcast teletext software. Unfortunately, it is limited to that overpriced never delivered BBC computer.

To date, only 14,100 model A and only 9,600 model B BBC computers have been dis-

tributed (a fact verified by the computer newsletter published on page 705 of ceefax). Surely such a piffling amount is not enough to ensure a monopoly in the teletext output.

Why can we not see examples of pages written in Sinclair Basic, surely the most widely used language in the home computing world. After all, half a million ZX81 computers and more than 20,000 Spectrums have been sold already in this country.

I am quite sure the BBC will say that they do not have enough pages on their teletext service to cater for any other software. The real reason being that they are unable to admit that their computer is rapidly becoming a white elephant in the light of the excellent low priced computers being produced, and under development.

Could you not ask your readers to pester the BBC with a view to getting such programs broadcast. After all, we are missing out on a fantastically useful service. The programs which I have painstakingly transposed to Sinclair Basic seem to be of very high quality.

Nigel Cummings
486 High Street
West Bromwich

If you read PCW July 29 you will see that Sinclair are developing a Prestel adaptor for the Spectrum. It will cost less than £100 and should be available in the first half of next year. Consequently, there will also be a range of Spectrum teletext software available next year.

Software manufacturers can sell their programs through Prestel by contacting British Telecom on Freephone 2043.

Log jam brings cash rewards

In response to the many queries which, I understand, your magazine has received, I would like personally to explain the current delivery situation for our new ZX Spectrum personal computer.

The general public's response to our new computer has far exceeded our expectations and we have been 'swamped' with orders. This, and some small initial production delays, have led in turn to considerable delays in delivery.

Regrettably, many of our customers may have to wait up to 12 weeks, from our receipt of their order, for delivery of their Spectrum. We are writing to them all to apologise for the inconvenience and to offer them the chance of an immediate refund.

For those customers who continue to wait, we shall be sending out with each Spectrum, in compensation for the delay, a £10 voucher, which can be used in part-payment for a ZX Printer or to buy a complete pack of five rolls of printer paper.

We are also providing customers with a new demonstration tape containing:

- 1) A complete 'keyboard trainer' to introduce the Spectrum.
- 2) Three major programs — an exciting game, Through the Wall, a drafting program, Draw, and Character Generator, which demonstrates user defined graphics.
- 3) A series of illustrative programs — Bubble Sort, Evolution, Life, Monte Carlo and Waves.

Finally, I would like to assure you and all our customers that the initial problems with the Spectrum have now been completely overcome. Production is running smoothly at 5,000 units per week and will rise sharply over the coming months. We are confident that our present backlog will be cleared by the end of September and hope that you will see current delays in the context of our successful delivery of more than 500,000 computers in the last two years.

Clive Sinclair
Sinclair Research Ltd
23 Motcomb Street
London SW1X 8LB

If you have an opinion you want to express, or have spotted an error that needs correcting, write to: Letters, Popular Computing Weekly, Hobhouse Court, 19 Whitcomb Street, London WC2.

COVER STORY

Under pressure

A new game for 16K
Spectrum by Simon Lane

You are a marine engineer, working on the Yoshima oil rig in the North Sea. Your main task is to carry out underwater inspection and maintenance of the pipe lines carrying the oil from the rig to a refinery in Scotland.

Instruments monitoring the oil flow indicate that the main pipe line has sprung a leak, about 1000 metres away from the Yoshima rig. You are despatched in a propeller-driven diving bell to investigate the leak.

Cruising just above the pipe line, looking for the tell-tale black wisps that denote a leak, you suddenly become aware of a strong smell of smoke. Turning round you see that your engine has caught fire. Grabbing the chemical fire extinguisher from under your seat, you douse the engine in a mass of foam.

With the fire out, the immediate danger is over, but the engine is a twisted heap of burnt-out wire and metal. You are trapped on the sea-bed.

Fortunately, the diving bell is equipped with an aqualung and a wet-suit. However, as you are putting on the aqualung you notice that the air cylinder seems strangely light. On checking the cylinder's gauge, you discover that it is virtually empty.

With the air inside the diving bell starting to become stale, you have few choices. Entering the air lock, you flood it with water and open the outer hatch. You must attempt to swim to the surface before your air runs out. But, if you rise too fast you will suffer from "the bends" and die from decompression.


When you have loaded and run the program, a man in a wet-suit will appear on the screen. Two dials will also appear on the top of the display, indicating your depth and the amount of air you have left.


Type "Ø" to use your flippers. This uses more air, but doubles your speed.

You must watch out for shoals of fish and clumps of seaweed on your way up. Hitting either of them will delay your ascent.

A flashing square appears beside the oxygen dial when your air supply is almost exhausted. The key to the game is to keep rising slightly faster than your air supply diminishes.

If you reach the surface, the computer will tell you how long you took and give you a percentage score based on your time and your remaining air. My best score so far is 63 percent. Can you beat it?

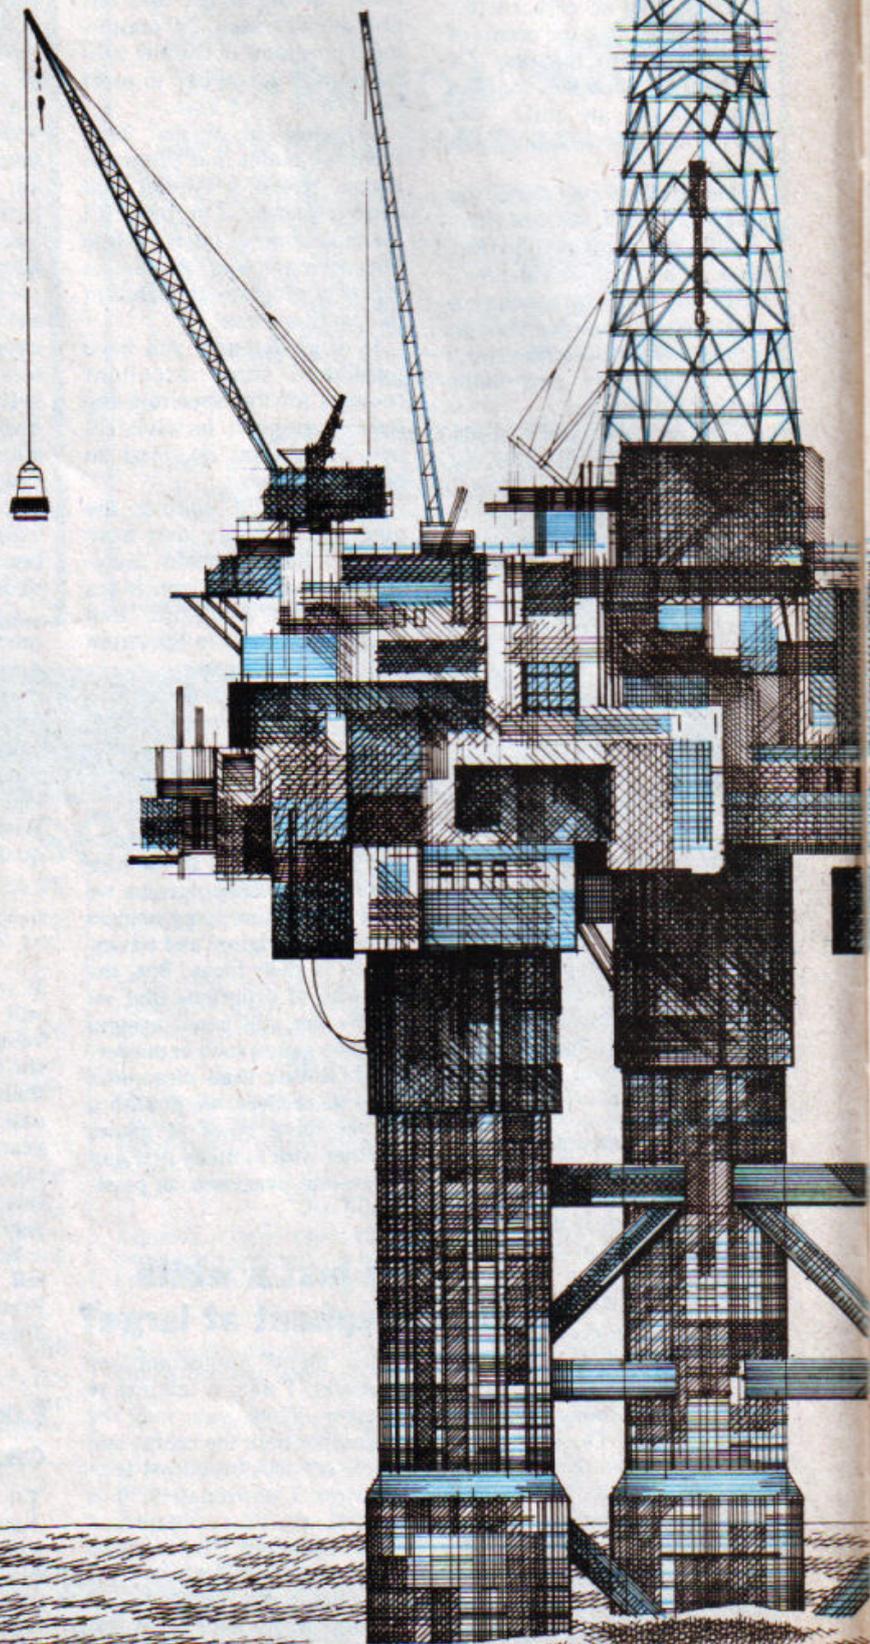

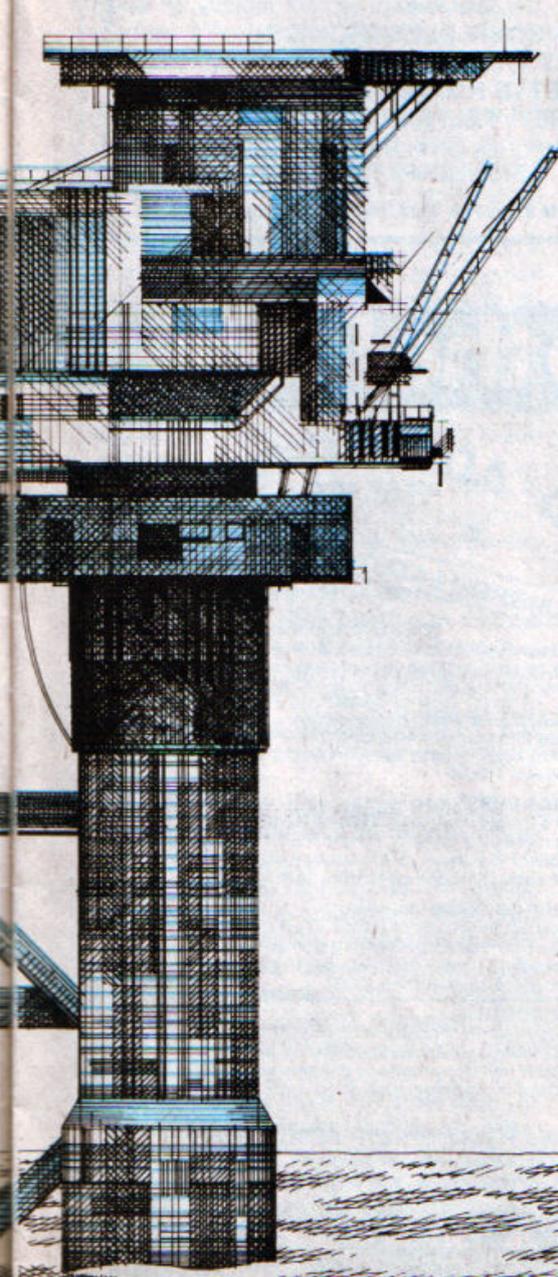

```
REM Under Pressure
REM © Simon Lanu, 1992
ORDER 0 ORDER 1 BRIGHT 0
FLASH 0 OVER 0 INK 0
INPUT 0 CLS INPUT ""
PRINT AT 2,2,"UNDER PRESSURE"
OVER 1 AT 2,9
45 PRINT AT 4,9,"by Simon Lan"
50 PRINT "You have been st
range on the"
60 PRINT "bed of the North Sea
at a depth"
70 PRINT "of 150 metres, your
diving bell"
80 PRINT "is cracked. You must re
turn to the"
90 PRINT "surface with just a
wet-suit and"
100 PRINT "aqualung. You must n
ot take too"
110 PRINT "long or you will run
out of air."
120 PRINT "But also if you try
to come up"
130 PRINT "too quickly you get
the bends."
140 PRINT "Watch out for shoals
of fish and"
150 PRINT "be seized on the way u
p if you"
160 PRINT "hit them you will be
held up."
170 PRINT "Type ""0"" to use
your flippers."
180 PRINT "This uses more air b
ut doubles"
190 PRINT "your speed. ""Enter""
to start."
200 INPUT LINE $: CLS
210 LET air=270: LET dep=150
220 DIM h(6,5): LET tin=0
230 FOR i=1 TO 5
240 LET x=INT (RND*6+1)
250 IF h(x,2) THEN GO TO 250
260 IF i=5 THEN LET h(x,2)=1:
LET h(x,3)=INT (RND*2+1): GO TO
270
280 LET h(x,4)=2: LET h(x,5)=IN
T (RND*2+1)
290 IF i=2 THEN LET h(x,1)=3: L
ET h(x,2)=INT (RND*4+15)
300 IF i=3 THEN LET h(x,1)=4: L
ET h(x,2)=INT (RND*4+24)
310 IF i=4 THEN LET h(x,1)=4: L
ET h(x,2)=INT (RND*5+10)
320 IF i=4 THEN LET h(x,1)=INT
(RND*5+10): LET h(x,2)=0
330 IF i=5 THEN LET h(x,1)=4: L
ET h(x,2)=INT (RND*4)
340 IF i=5 THEN LET h(x,1)=INT
(RND*3+15)
350 LET h(x,5)=150-x*20: NEXT i
360 FOR i=USR "a" TO USR "f":+7
370 READ n: POKE i,n: NEXT i
380 LET deg=12.5: FOR i=1 TO 40: R
EAD n: LET deg=deg+CHR$ i: NEXT i
390 DIM s(13,8)
400 FOR i=1 TO 3: FOR j=1 TO 8:
READ n: LET s(i,j)=CHR$ n: NEX
T j
410 PRINT AT 0,0: FOR i=1 TO 1
5: PRINT PAPER 0: NEXT i
415 INK 7
420 CIRCLE 95,160,14
430 CIRCLE 150,160,14
440 FOR i=1 TO 15: TO PLOT 150,160
PAPER 4: FOR i=1 TO 15: TO PLOT 150,160
450 PLOT i+1,SIN (i*3.14159)/10,COS (i*3.14159)/10
460 NEXT i: NEXT j
470 PRINT PAPER 0: AT 1,5:"AIR:"
AT 1,23:"DEPTH:" AT 3,9:"AT 3"
14:"AT 3,17:" AT 3,22:"150"
480 INK 0: PRINT $:s(i,j)
490 FOR i=1 TO 15: PRINT PAPER
6: NEXT i
500 FOR i=USR "a" TO USR "f":+7:
READ n: POKE i,n: NEXT i
510 DIM h(3,5): DIM c(3): LET
c(1)=4: LET c(2)=2: LET c(3)=3
520 FOR i=144 TO 146: LET h(i)/
3-71)=CHR$ i+CHR$ (i+1)+CHR$ i+C
HRS (i+1)+CHR$ i: NEXT i
530 LET h=0: LET n=1
540 LET i=KEY$:"0"
550 BEEP 0,61,20:dep/4
560 PRINT i/1+1
570 PLOT 95,160: DRAW INVERSE 1
580 INK 7:SIN (air/100*PI-PI+.75)+
12,COS (air/100*PI-PI+.75)+12
590 LET air=air-2
600 IF air<0 THEN LET air=0
610 PLOT 95,160: DRAW INK 7:SIN
(air/100*PI-PI+.75)+12,COS (air/
100*PI-PI+.75)+12
620 IF air<0 THEN PRINT HI "0"
630 FLASH 1: PAPER 2: INK 0:
640 PLOT 150,160: DRAW INVERSE 1
650 INK 7:SIN (dep/100*PI-PI+.75)
+12,COS (dep/100*PI-PI+.75)+12
660 LET dep=dep-1: f+0
670 IF dep<0 THEN LET dep=0
680 PLOT 150,160: DRAW INK 7:SI
N (dep/100*PI-PI+.75)+12,COS (de
p/100*PI-PI+.75)+12
690 IF dep=0 THEN GO TO 5000
5440 IF air=0 THEN GO TO 6000
5450 LET tin=tin+1: PRINT INK 7:
PAPER 0: AT 3,0:"Time: "tin
5460 IF tin=100 THEN GO TO 1000
5470 PRINT OVER 1: PAPER 0: INK
0: AT h(n,1),h(n,2):h(h(n,3))
5480 LET h(n,2)=h(n,2)+h(n,4)
5490 h(n,1)+h(n,2)+1: f+1:0
5500 IF h(n,1)>21 OR h(n,2)<0 OR
h(n,2)>27 THEN LET h=0: LET n=n
+1: GO TO 1100
5510 LET o=h(n,1)+12 AND h(n,1)
5520 AND h(n,2)+9 AND h(n,2)+17)
5530 PRINT AT h(n,1),h(n,2): P
APER 0: INK 0: AND o)+c(h(n,3)) A
ND NOT o): OVER 1:h(h(n,3))
5540 GO TO 540
5550 IF n=7 THEN IF dep<h(n,5)
THEN LET h=1: PRINT INK c(h(n,3))
: AT h(n,1),h(n,2):h(h(n,3))
5560 IF dep=149 OR (dep=145 AND
7) THEN PRINT AT 0,0:TAB 31
5570 IF dep=145 OR (dep=147) AND
7) THEN PRINT AT 21,0:TAB 31
5580 IF dep<9 AND 1 THEN PRINT P
APER 0: PAPER 7:TAB 31
5590 IF dep=10 THEN PRINT AT 13-
dep: PAPER 7:TAB 31
5600 GO TO 540
5610 PRINT AT 0,14: PAPER 0:
5620 PAPER 7: PRINT AT 12,0:INH
0:1
5630 PRINT AT 5,2:"You have reac
hed the surface"
5640 PRINT AT 6,9:"in "tin;" se
conds"
5650 IF tin=100 THEN PRINT AT 6
5:"CONGRATULATIONS!" GO TO 500
5660 PRINT AT 6,2:"You came up t
oo fast and have"
5670 IF tin<90 THEN PRINT AT 9,1
4:"GO TO 5000"
5680 PRINT AT 9,5:"decompression
disease"
5690 LET s=INT (tin-69)+0.22+.5
570 IF s<0 THEN LET s=0
5710 PRINT AT 11,12:"Score: "s:"
"
5720 GO TO 7000
5730 FOR i=1 TO 200: NEXT i: PAP
ER 0
5740 PRINT "You ran out of
air with "dep
5750 PRINT "metres to go a
nd died."
5760 PRINT "BAD LUCK!"
5770 INPUT "Another go (y/n)?"
5780 IF ans="y" OR ans="" THEN RU
N
5790 DATA 0,0,0,0,1,1,0
5800 DATA 50,124,254,254,254,255
5810 DATA 1,7,15,15,15,31,31,31
5820 DATA 199,131,1,1,1,1,1,1
5830 DATA 0,198,224,224,224,240,
240,240
5840 DATA 83,50,63,61,51,57,57,5
7
5850 DATA 1,1,255,1,1,1,101,159
5860 DATA 243,246,246,100,100,100,56
5870 DATA 59,59,59,123,123,123,1
15,15
5880 DATA 104,104,104,100,100,10
1,101
5890 DATA 200,200,200,200,200,20
5890 DATA 200,200,200,200,200,20
5900 DATA 120,120,220,120,120,12
5910 DATA 199,199,199,199,199,19
5920 DATA 3,3,7,7,7,15,15,12
5930 DATA 101,104,199,199,199,20
5940 DATA 120,120,192,192,192,22
5950 DATA 101,135,207,192,192,22
4,224,96
5960 DATA 120,192,224,0,0,0,0,0
5970 DATA 3,7,15,0,0,0,0,0
5980 DATA 131,195,231,7,7,15,15
5990 DATA 22,13,14,144,144
6000 DATA 22,14,14,146,17,0,147,
17,0
6010 DATA 02,15,14,140,17,0,150,
151
6020 DATA 22,15,14,150,143,153
6030 DATA 22,17,14,154,153,153
6040 DATA 22,10,14,164,157,153
6050 DATA 22,10,14,16,1,150,209
6060 DATA 22,19,14,16,1,150,161
6070 DATA 22,19,14,16,1,163,164
6080 DATA 4,135,69,52,163,69,24,
6090 DATA 4,58,193,56,195,19,168
6100 DATA 154,252,154,0,46,50,46
6110 DATA 0,0,99,126,92,0,0,0
6120 DATA 150,150,255,190,150,0
6130 DATA 0,0,0,156,190,255,190,
150,0
```

STOP PRESS JUST ARRIVED

TASK FORCE SOUTH THE BATTLE OF THE FALKLAND ISLANDS SENSATIONAL

You can take control of the troops fighting for Goose Green — direct the defence of the fighting ships — order the Harriers into attack on the enemy guns.

Capture Port Stanley

The first of our amazing new series of authentic war games.

Startling adrenalin raising realism for only £8 post paid.

Stellar Services

8 Fir Tree Vale, Leeds LS17 7EY

VIC-20

OWNERS

Fully Assembled, Cased and Guaranteed

MASSIVE

16K RAM

MEMORY EXPANSION

PLUGS DIRECTLY INTO YOUR VIC-20 OR MOTHERBOARD

FULLY INCLUSIVE PRICE

£39.95 Allow 10 days delivery

Tandem

EXPANDABLE EXPANSION UNIT

PLUGS DIRECTLY INTO YOUR VIC-20 GIVES 3+1 EXPANSION SLOTS AND ADDITIONAL ROM SOCKET CAN BE FURTHER EXPANDED

FULLY INCLUSIVE PRICE

£34.95 Allow 28 days delivery

Send now to:

STONECHIP ELECTRONICS
UNIT 4, HOSKINS PLACE
WATCHETTS ROAD, CAMBERLEY
SURREY. TEL: (0276) 681131

MAKE CHEQUES OR POs PAYABLE TO:
STONECHIP LTD

See us on Stand 214 at The PCW Show, Barbican, 9-12 September

Push your Sinclair to the limit



A GREAT 16K CHESS GAME FOR YOUR ZX81 OR SPECTRUM

ZX CHESS II

A new improved version, with a faster response time, seven levels of play, analysis option and in addition a recommended move option. £9.95

ZX CHESS I

Very popular machine code program, with six levels of play and an analysis option. Available for ZX81. £6.50

PLUS! ZX 1K CHESS
An incredible game in 1K for only £2.95

ZX81 ARCADE GAMES



GOBBLEMAN — Escape from munching ghosts to eat power dots and then gobble up the ghosts. Similar to classic arcade game. £3.95

NAMTIR RAIDERS — High-speed, quick action arcade game with four separate groups of attackers. £3.95

GALAXIANS — Swooping attackers, explosions and personalised scoring. £3.95



UTILITIES:

TOOLKIT — Nine powerful new functions for your ZX81 (including: re-number lines (goto, gosub), program merge, string finding and replacement. £5.95

SPEC BUG — A 30 in 1 machine code tool and disassembler for your ZX Spectrum. £6.95

ASSEMBLER — Full editor assembler and monitor giving an extremely powerful tool for writing and running machine code programs on your ZX81 and Spectrum. Includes user manual. £9.95

ZX BUG — A 30 in 1 machine code tool and disassembler for your ZX81. £6.95

LOW COST ADDITIONAL RAM PACKS

16K Ram Packs £29.50
32K Ram Packs £38.95
64K Ram Packs £64.95

ADVENTURE GAMES

JUST RELEASED

ESPIONAGE ISLAND

(Adventure D)

While on a reconnaissance mission your plane loses control and you are forced to land. Can you survive and escape with the island's hidden secret? £8.00

PLANET OF DEATH (Adventure A)

You find yourself stranded on an inhabited alien planet. Can you reach your ship and escape? £5.00

INCA CURSE (Adventure B)

In a jungle clearing you come across an ancient Inca temple. Your mission to enter, collect the treasure and escape alive. But beware! Includes a cassette save routine. £6.00

SHIP OF DOOM (Adventure C)

You are unavoidably drawn to an alien cruiser. Can you reach the control room and free yourself? Or will they get you first? Includes a cassette save routine. £7.00

ZX FORTH

Supplied on cassette with editor cassette, user manuals and keyboard overlay. ZX Forth combines the simplicity of basic with the speed of machine code all for only £35.00.



396 JAMES RECKITT AVENUE,
H'JLL, N. HUMBERSIDE, HU8 0JA

ALWAYS AHEAD WITH ZX81/SPECTRUM SOFTWARE

Cheques & P.O. made payable to: Artic Computing Limited.
Please state whether your order is for ZX81 or Spectrum.



**Sinclair
SPECIALISTS**

Street Life

Born in a pub brewed in a kitchen

David Kelly talks to David Paterson, a founding partner of Silversoft.

David Paterson is a voluble Glaswegian with a wrist watch that plays *Scotland the Brave*. He is also one of the partners in the software company, Silversoft.

After leaving the University of Strathclyde he worked first for a shipyard and then for a brewery. "I found the product much more satisfying."

The Silversoft venture began as a hobby. "A buddy and I were sitting in a pub," he explained, "thinking we must get a computer and trying to work out how to pay for it. So we thought we'd write some programs for the ZX81."

This was in the summer of 1981. "Some of the software at that time was abysmal and we thought we might be able to do better."

The first game they wrote was a 16K version of *Star Trek*. "The big day came. We made the tapes, placed the adverts and sat back biting our nails, waiting to see what would happen."

"And then the money started rolling in — we were staggered by the response." They recovered the cost of their advertising in the first week.

"At first we recorded all the tapes in my kitchen at home. I was working all through the night knocking the things out and then doing a full-time job in the daytime. We soon realised that the tapes would have to be manufactured professionally. I was down to six and a half stone and couldn't go on."

Silversoft had 500 tapes made. The tapes sold quickly and the business has never looked back.

The company specialises in games tapes for the home consumer. David does not think that there is a business market for the ZX machines and thinks most utility programs are a waste of time. "They don't do anything you couldn't do quicker on a piece of paper. That's why we make games — besides, it is fun."

David reckons there are three types of software manufacturers: dedicated professionals in it for the money, enthusiastic amateurs out to spread the word about computers, and egotistic technocrats who think it is *flashy*.

"I'll let you guess which I think I am," he grinned.



David Paterson

"Despite our different approaches we have all got the same problems. Our single biggest worry is piracy. There is not a lot you can do about it either — apart from keeping your eyes open. It is particularly annoying to look in the classified ads and see the program you spent six weeks writing being sold under a new name at half the price."

"Recently we have been noticing the effect of software libraries. They buy our tapes and then rent them out. All perfectly legal, but, in the end, the user loses out. What is the point in trying to write a good program only to have it bought by the libraries and loaned out?"

Another major concern at the moment is the proliferation of machines. "All the main electronics companies are jumping on the bandwagon and launching new products, often with no software back-up. A machine is useless without programs to run on it. Most software companies will not have the resources to cope with all these new micros."

"Everyone thinks there are big profits to be made in software — one magazine recently suggested in its editorial that it costs 22p to produce a tape. This just isn't true."

"Suppose the price of the cassette is £5. Post and packing — about 40p — and VAT — 75p — come off first. The tape probably costs 60p to produce, including the cost of the insert and instructions. And one can expect to pay 20–25 percent royalties — say £1.25."

"That only leaves £2. From that comes handling charges and advertising. A com-

pany can easily spend more than £1500 per month on, say, six half-page ads. To recoup that cost, you would need to sell more than 750 tapes each month.

"Then there are hidden costs like rent, rates, electricity and telephone. Finally there is kit. We have two ZX81s, two BBCs, two Spectrums and umpteen tape recorders. We burn them up like they're going out of fashion — you have got to have at least two of everything in case one blows up."

"So far we haven't begun to consider profit."

"At any time we have a considerable investment in tapes and, in a market that changes as quickly as this one, it is quite easy to burn your fingers. When the Spectrum came out all our ZX81 stock died."

Drop-out

The games that Silversoft now produce are mainly versions of well-known arcade programs. New games apparently do not sell — people always go for the devil they know. "We had a great game called *Drop-out*," said David, "and it did just that — because no one knew what it did."

Now that Atari are beginning to take action over alleged copyright infringements, software companies may be forced to produce more material based on their own original ideas. "If that happens," says David, "marketing will become the big problem."

"The law in this area is very confused. We even had one guy who said we ripped-off his program by using the commands Back, Forward, Left and Right. What are we supposed to use — Retreat, Advance, Port and Starboard?"

"You have to accept that the copyright uncertainty is part of the game. We hope that it is OK providing the program is not an exact copy — it is the nature of the industry."

"There are lots of different versions of most games — but some are far superior to others. We just have to make sure that ours are some of the superior programs."

What's happening

Thames Valley ZX81 and Spectrum User Group is being formed to cover Slough, Reading, Windsor and Bracknell. Those interested should contact Richard Shepherd, 22 Green Leys, Maidenhead, Berkshire (Tel: 0628 21107).

Interschool Christian Fellowship runs a selection of micro adventure holidays. Contact Mrs K Bacon, 26 Mays Road, Wokingham, Berks (Tel: 0734 792569).

Reviews

Peter Gerrard takes a comprehensive look at the Commodore 64.

In appearance the Commodore 64 is very similar to the well-known Vic20. It has the slightly layered keyboard seen on the new Vics. The four function keys are also there.

Similarly, the by-now familiar and oft-imitated Pet graphics symbols are all there.

Most micros that have been announced over the last few months, and there have been many newcomers on the scene lately, have been remarkably similar in performance and price. No new outstanding features have emerged in any of them. Even the Spectrum, subject of such furore around the industry when it first appeared, has now lost some of its initial glamour.

The Commodore 64 has a number of capabilities that make it stand out, but in the long run the deciding factor will be the price. The reason why the ZX81 did so well was its extremely low cost.

Commodore will be pricing the 64 at around £299 plus VAT, making a total of £350. This compares with a price of £199 plus VAT for Commodore's Vic20.

No computer, other than the BBC micro, has attempted to come to grips with musical synthesis on a big scale. Even on the BBC machine, envelope shaping is not the easiest of tasks. Admittedly you could pay £15000 and acquire an amazing purpose-built machine, but the home market has been lacking such features, until now.

The Vic20 started the trend, with three voices and a white noise generator. Clive Sinclair took a step backward with the Spectrum's *Beep*, but the Commodore 64 redresses the balance.

Inside the 64 is a chip known affectionately as Sid (Sound Interface Device?). It is this chip that controls all sound output on the 64, and it has some quite remarkable powers. Basically, you have control over three independent voices, each of which has the following capabilities:

- 1) A nine octave range from 0.059Hz to 3.9Hz, in steps of 0.059Hz.
- 2) Four different waveforms (sawtooth, triangle, variable pulse and noise).
- 3) Amplitude modulation and ring modulation.
- 4) Programmable addressable envelope generator.
- 5) Oscillator synchronisation.

There is a programmable filter, individually selectable for each voice, and, as on the Vic20, volume control from within the software.

Using the accompanying documentation, which in its preliminary stages at least

Will you sti me now I'm

looks very good, control of the sound is quite easy. Certainly true synthesis is not at all difficult. You will soon have the living-room reverberating to the Brandenburg Concerto, or Goody-Goody Two Shoes for that matter.

You can achieve very close approximation to the timbre of a whole host of musical instruments, several of which can be played at once. I suspect that it will not be too long before Commodore, or someone else, comes out with a superb piece of software to facilitate the production of musical pieces. Our News Desk will keep you informed of any developments.

Most micros coming on to the market make great play about their graphic capabilities, both in terms of resolution and colour. It is, of course, possible to buy add-on packages to enhance existing features, but it is the basic machine that counts. The Commodore 64 has an impressive performance in this field.

Full resolution is 320 by 200 pixels, using a 40 column by 25 row screen. Thus teletext is now at your command, providing someone brings out the appropriate interface.

As with the Vic, making your own high-

resolution characters can be done with the aid of data statements from within a Basic program. You create your characters on a matrix grid of 24 by 21 pixels. The character that occupies that space is known as a sprite.

On any given horizontal line you can have up to eight sprites displayed. But, by careful use of the interrupt capabilities of the video controller, you can have as many as 256 sprites displayed simultaneously on the screen.

Quite superb graphical displays can be produced. To list just some of the capabilities of the video controller: positioning of a sprite is done by specifying an X — Y register, there are routines for expanding sprites and filling in the background, routines for collision detection, and so on. No longer need *Tempest* be restricted to the amusement arcades.

The Commodore 64 has 16 different colours which can be displayed on the screen at once. At full resolution, two colours can be displayed per 8 × 8 pixel area. At half resolution (160 × 200), you can have four colours per 8 × 4 pixel area.

In the time allowed it was impossible to



American Commodore 64 model shown at 3rd International Commodore Computer Show, June 3-5.

Reviews

I love 64?

put the 64 through its full paces, but we did discover that it can support a large number of peripheral devices. With cassette interface, serial interface and 8-bit parallel user ports on board, this is hardly surprising. In addition, it has memory expansion and cartridge ports, and is capable of supporting two joysticks and four paddles. It can also handle any of the existing Vic peripherals.

Even more exciting, the 64 can run any software written for any other 40 column Commodore machine. This is done quite ingeniously, by altering the memory mapping system.

other microcomputers attempting to enter the market.

The 64 has 20K of Rom on board, including 8K Basic and 8K Kernal as in the Vic, and 64K of Ram. Of this Ram, 40K is directly useable from Basic, with the top 24K being accessed from within the machine code. Even if you know nothing about machine code, 40K is sufficient space to roam around in.

However, the 64 does have one major failing. Why, oh why, does it still have Basic 2.0 on board?

Basic 4 has been around for quite some time now, and Basic 5 has been rumoured for almost as long. So why on earth stick to an old, outdated version of the language? Admittedly, it is not going to make any difference for a lot of applications, but I thought we had said goodbye to garbage collection long ago. Oh well, we must assume Commodore has its reasons.

Summary

The 6502 has been and gone. We are left with its offspring to provide us with a quite superb machine. Despite my one major grievance over Basic 2, I have no real



Commodore 64 soon to be on sale in the United Kingdom.

An outstanding feature of the 64 is that it can accept a second processor (eg a Z80), which allows you to run CP/M-based software. This is quite good — as we have said before, any microcomputer is really only as good as the software that is available for it, so the more software the better.

Software advantage

There is a vast array of programs for the Pet written in Basic. Now that we can also gain access to CP/M software as well, the number of packages already in existence for the Commodore 64 is enormous. This will give it significant advantages over

hesitation in recommending the Commodore 64 to anyone. It will cost slightly more than some of the other new micros, but the extras you get more than make up for this.

The 64 already has a rich ground-base of software. It is easy to use for anyone remotely familiar with Commodore's own implementation of Basic, and the new facilities are all straightforward enough. The documentation is adequate, and may be even better when the final model appears.

We were originally told to expect a delivery date of January 1983, but it looks like Commodore is making great efforts to bring this forward by a few months.

ZX-Galaxians

Artic Computing, 396 James Reckitt Avenue, Hull.

ZX81, 4K, cassette.

Price: £3.95.

ZX-Galaxians is based on the arcade game of the same name. The program loaded first time in about one and a half minutes and runs automatically.

After the title and copyright message appear, there follows a description of the game.

It starts after pressing any key, upon which an array of four rows of eight Galaxians appear, along with your base. The Galaxians each score 10 points in the convoy, and 20 when they dive. Unlike the arcade version there is only one type of Galaxian, represented by the letter V when in convoy, or by three pixels when diving. Your base is formed from several pixels, it is moved by pressing 5 and 8 and 0 fires.

The graphics are adequate but crude and there appears to be no relationship between your score and the speed and frequency of the diving aliens. The 'continuous status report' referred to on the cassette inlay is just a box displaying the score, hi-score, base count and instructions. This takes up most of the right-hand quarter of the screen and would be better dispensed with and replaced by more imaginative graphics.

Each player is given three bases. When hit by a Galaxian missile, the base disintegrates in a suitably graphic explosion.

The top scorer can input six letters or numbers of his choice, enabling him to satisfy his desire for temporary immortality.

The game is also available from W H Smith, paired with a program called Sword of Peace, price £4.95.

Sword of Peace is a text-only adventure game, written in Basic and is extremely slow, even in the *Fast* mode.

The object of this game is to collect four 'Objects of State' from a four-level castle. You are allowed a number of spells with which you can destroy evil monsters. Each time you cast a spell, or a spell is cast against you, a certain amount of energy is lost. If your energy decreases below zero, you die.

Summary

ZX/Galaxians is smooth-running and difficult, despite faults. One would be hard-pressed to describe it as imaginative, though.

Sword of Peace is interesting for five or six games but, with its lack of speed and text restrictions, it soon becomes boring, although it has novelty value.

The decision whether to buy one game for £3.95 or two games for £4.95 is yours.

AE

Open Forum

Open Forum is for you to publish your programs and ideas.

It is important that your programs are bug free before you send them in. We cannot test all of them. Contributions should be sent to: Popular Computing Weekly, Hobhouse Court, 19 Whitcomb Street, London WC2H 7HF.

How to contribute

Each week the editor goes through all the programs that you send to Open Forum in order to find the Program of the Week.

The author of that program will qualify for DOUBLE the usual fee we pay for published programs. (The usual fee is £10.)

Presentation hints

Programs which are most likely to be considered for the Program of the Week will be computer printed and accompanied by a cassette.

The program will be well documented, the documentation being typed with a double spacing between each line.

The documentation should start with a general description of the program and then give some detail of how the program has been constructed and of its special features.

Listings taken from a ZX Printer should be cut into convenient lengths and carefully stuck down on to white paper, avoiding any creasing.

Please enclose a stamped, self-addressed envelope.

Plotter

on Spectrum

This program enables the ZX Spectrum user to be able to draw a picture of his own design on the 256*175 pixels available to the user.

The controls are as follows:

S: Clears the whole screen.

Q W E

A D: Movement keys, move cursor on screen in direction Z C of key being pressed in relation to the S key.

Y: Pressing this key makes the computer ask you for the radius of a circle around the cursor.

U: This key when pressed allows you to change the colours of *Border*, *Paper*, *Ink* while still running the program.

O: Allows you to move the cursor around without leaving a trail.

I: This key returns the cursor to normal mode so that it again leaves a trail.

Binary

on Spectrum

For ZX81 and Spectrum users this program, which gives the binary and hexadecimal conversions of a decimal input, should be useful for both graphics and m/c needs.

In the Spectrum manual, chapter 14 holds a program for inputting your own graphics, requiring a *Bin* input. You can though, enter the decimal equivalent, thus saving three keystrokes per entry, a total of 24 key strokes per user character.

Putting the program in a loop of 0 to 255, and deleting the input on line 30 will give a look up table. The resulting error code, for screen full, may be answered with *Cont n/l* for more of the loop.

Alternatively replacing the *Print* in 95 with *Lprint* will give the complete list.

Design of program:

1-5 Sets up variables.

10 Gosubs 300 to set up colours to be used.

80-200 Checks and acts if any keys are being pressed.

210-227 Checks more keys and *Gosubs* the subroutines to change the colour, the values of the variables and the circle routine.

230-245 These lines do the plotting and the unplotting. These also stop the program from corrupting off the edge of the screen.

300-370 These lines ask what colours are to be used and sets them.

400-420 This subroutine prints the circle

Program notes

Lines 1: Initialises the hex characters.

5-25: sets bit values of binary 11111111.

40-45: initialise binary characters.

60-70: division of input by bit values of binary 255.

sub 105: records result of division.

85-90: calculate hex characters from Bs.

95: prints input, binary hex.

```
1 LET B$="0123456789ABCDEF"
5 DIM A(8)
10 LET A(1)=128
15 FOR N=2 TO 8
20 LET A(N)=A(N-1)/2
30 NEXT N
35 INPUT L
38 IF L<0 OR L>255 THEN GO TO
38
40 LET A$="00000000"
45 LET H$=""
50 LET X=L
55 LET Y=L
60 FOR N=1 TO 8
65 IF INT (X/A(N))=1 THEN GO S
UB 105
70 IF X=0 THEN GO TO 80
75 NEXT N
80 LET X=L
85 LET H$=H$+B$(1+INT (X/16))
-INT (X/16)*16)
95 PRINT L;TAB 5;"=";TAB 8;A$;
TAB 17;"=";H$
100 GO TO 30
105 LET A$(N)="1"
110 LET X=X-A(N)
115 RETURN
```

Binary
by D Wieckowski

on the screen.

Variables used:

a = Number to be added to x variable (x coordinate).

b = Number to be added to y variable (y coordinate).

x = Variable used for x coordinate.

y = Variable used for y coordinate.

e = Variable used to determine whether the cursor is to leave a trail.

a\$ = String used to contain the value of *Inkey\$*.

i = *Ink* colour.

p = *Paper* colour.

s = *Screen* colour.

o = *Radius* of circle.

```
1 LET a=0
3 LET x=128
4 LET b=0
5 LET y=98
10 GO SUB 300
70 CLS
80 LET a$=INKEY$
90 IF a$="a" THEN LET a=a+1
100 IF a$="d" THEN LET a=a-1
110 IF a$="x" THEN LET b=b+1
120 IF a$="y" THEN LET b=b-1
130 IF a$="q" THEN LET t=b+1
140 IF a$="q" THEN LET a=a-1
150 IF a$="z" THEN LET b=b-1
160 IF a$="z" THEN LET a=a-1
170 IF a$="e" THEN LET a=a+1
180 IF a$="e" THEN LET b=b+1
190 IF a$="c" THEN LET b=b-1
200 IF a$="c" THEN LET a=a+1
210 IF a$="s" THEN CLS
220 IF a$="o" THEN LET e=1
225 IF a$="i" THEN LET e=0
```

```
225 IF a$="u" THEN GO SUB 300
227 IF a$="y" THEN GO SUB 400
230 IF e=1 THEN PLOT OVER 1;x,
235 LET x=x+a; LET y=y+b
236 LET a=0; LET b=0
237 IF x=-1 THEN LET x=0
238 IF y=-1 THEN LET y=0
239 IF y=175 THEN LET y=175
240 IF x=255 THEN LET x=255
245 PLOT X;Y
250 GO TO 80
300 INPUT AT 0,0;"ink";i
310 INPUT AT 0,0;"paper";p
320 INPUT AT 0,0;"border";s
330 PRINT AT 0,0;"border";s
340 INK i
350 PAPER p
360 BORDER s
370 RETURN
400 INPUT o
410 CIRCLE x,y,o
420 RETURN
```

PROGRAM OF THE WEEK

Plotter
by M Luscombe

Equations

on ZX81

This program is for those who haven't quite mastered the solving of:
 $ax^2+bx+c=0$

The program will fit into 1K quite easily but by using a machine code call to the scroll routine as part of a print statement, a good whole screen display is achieved.

Program notes:

Line 10 assigns the address of the scroll routine to the variable S.

Lines 20-80: print an introduction and input the values of a, b and c.

Lines 90 and 100: check if it is possible to solve the equation without using complex numbers and if not restart the program with a request for another set of values.

Line 110 solves the equation using:

$$x = \frac{-b \pm \sqrt{b^2 - 4ac}}{2a}$$

Lines 150 and 160 provide an automatic start up on Loading.

Polypen

on Vic-20

This is a polyphonic stylophone program using the Vic light pen. Point the pen at a position along one of the four horizontal lines. Touching the sensors initiates the tone, moving the pen horizontally changes the pitch.

The four lines correspond to the four Vic voices. To stop tones point pen at left-hand-most column, touch sensors and hit any key.

```

10 LET S=3086
20 PRINT CHR$(USR S+USR S);"";C
HR$(USR S+USR S);"SOLUTIONS TO
AX**2+BX+C WHERE";CHR$(USR S+US
R S);TAB PI*PI;"A = ";
30 INPUT A
40 PRINT A;CHR$(USR S+USR S);
TAB PI*PI;"B = ";
50 INPUT B
60 PRINT B;CHR$(USR S+USR S);
TAB PI*PI;"C = ";
70 INPUT C
80 PRINT C;CHR$(USR S+USR S);
90 LET X=B*B-4*A*C
100 IF X<0 THEN GOTO 130
110 PRINT "ARE; X = ";(-B+(SOR
X))/(2*A);CHR$(USR S+USR S);"OF
X = ";(-B-(SOR X))/(2*A)
120 GOTO 20
130 PRINT "ARE NOT REAL."
140 GOTO 20
150 SAVE "QUADRATIC"
160 RUN
    
```

SOLUTIONS TO AX**2+BX+C WHERE

A = 1

B = 2

C = -4

ARE; X = 1.236068

OR, X = -3.236068

SOLUTIONS TO AX**2+BX+C WHERE

A =

Equations
by Tim Gilberts

```

5 REM POLYPEN BY R.BARTON.
10 DEFFNX(X)=INT((PEEK(36870)-49)/4):DEFFNY(Y)=INT((PEEK(36871)-32)/4)
20 PRINT"J"
30 S1=36874:S2=36875:S3=36876:S4=36877:V=36878
50 PRINT"#####PITCHES"
60 PRINT"#####"
62 PRINT"#####VOICES."
63 PRINT"#####-S1-----"
64 PRINT"#####-S2-----"
65 PRINT"#####-S3-----"
66 PRINT"#####-S4-----"
67 PRINT"#####"
68 PRINT"#####KILL TONE WITH PEN
AND A KEY IN THIS TAB"
70 POKEV,4
75 WAIT37137,16
76 IFFNY(Y)=10THENP=S1
77 IFFNY(Y)=13THENP=S2
78 IFFNY(Y)=16THENP=S3
79 IFFNY(Y)=19THENP=S4
81 IFFNX(X)=3THENPOKEP,135
82 IFFNX(X)=4THENPOKEP,147
84 IFFNX(X)=5THENPOKEP,159
86 IFFNX(X)=6THENPOKEP,163
88 IFFNX(X)=7THENPOKEP,175
90 IFFNX(X)=8THENPOKES1,183
92 IFFNX(X)=9THENPOKEP,191
94 IFFNX(X)=10THENPOKEP,195
96 IFFNX(X)=11THENPOKEP,201
98 IFFNX(X)=12THENPOKEP,207
100 IFFNX(X)=13THENPOKEP,209
102 IFFNX(X)=14THENPOKEP,215
104 IFFNX(X)=15THENPOKEP,219
106 IFFNX(X)=16THENPCKEP,223
108 IFFNX(X)=17THENPOKEP,225
110 IFFNX(X)=18THENPOKEP,228
112 IFFNX(X)=19THENPOKEP,231
200 GETS$:IFS$=""THEN75
220 POKES1,0:POKES2,0:POKES3,
0:POKES4,0:GOTO75
READY.
    
```

Polypen
by R Barton

Open Forum

Sound Explorer

on BBC Micro

With all the sophistication of the *Sound* and *Envelope* commands on the BBC Micro, it is no easy task to find the exact parameters which give the sound you want.

This program lets you instantly hear the effect of changing any *Sound* or *Envelope* parameter.

You have a full screen display of all the current values and can raise or lower any one of them at the touch of a key.

```
1 REM COPYRIGHT (C) JULY 1982 by D.GUEST
10 MODE7
20 @%=5
30 PROCMENU
40 ON ERROR GOTO 680
50 DATA Pitch,Duration,Time-Base,FREQ-VAR 1,FREQ-VAR 2,
  FREQ-VAR 3,FREQ-TIME 1
52 DATA FREQ-TIME 2,FREQ-TIME 3,Attack,Decay,Sustain,
  Release,Amp-Level 1
54 DATA Amp-Level 2
59 REM ** A SELECTION OF INITIAL VALUES FOR ENVELOPE
60 DATA 100,50,4,4,-8,-4,16,16,32,64,64,64,64,128,0
70 DIM E%(14),E$(14)
```

```
80 FOR I%=0 TO 14:READ E$(I%):NEXT
90 FOR I%=0 TO 14:READ E%(I%):NEXT
95 EMAX%=255:EMIN%=-127
100 PROCTEXT
110 *FX11,10
120 *FX12,5
130 *FX4,1
140 FOR C%=0 TO 14:PROCPVAL:NEXT
150 PRINT TAB(28,0);
160 C%=0
170 REM
180 REPEAT
190   NV=FALSE
200   G%=GET
210   IF G%=32 THEN PROCPLAY
220   IF G%=139 THEN PROCUP
230   IF G%=138 THEN PROCDOWN
240   IF G%=137 THEN PROCINC
250   IF G%=136 THEN PROCDEC
260   IF NV=TRUE THEN PROCPVAL
270 UNTIL G%=81
279 REM ** TYPING 'Q' WILL END PROGRAM
280 *FX12,0
290 *FX4,0
300 CLS
310 END
320 REM
330 DEFPROCUP
340   IF C% > 0 THEN C%=C%-1:VDU11
350 E.
360 DEFPROCDOWN
370   IF C% < 14 THEN C%=C%+1:VDU10
380 E.
390 DEFPROCINC
400   IF E%(C%)<EMAX% THEN
      E%(C%)=E%(C%)+1:NV=TRUE
410 E.
420 DEFPROCDEC
430   IF E%(C%)>EMIN% THEN
      E%(C%)=E%(C%)-1:NV=TRUE
440 E.
450 DEFPROCPLAY
460 ENV. 1,E%(2),E%(3),E%(4),E%(5),E%(6),
  E%(7),E%(8),E%(9),E%(10),E%(11),E%(12),
  E%(13),E%(14)
470 SOUND S%,1,E%(0),E%(1)
479 REM ** ONE SECOND DELAY BEFORE
  FURTHER KEYSTROKES ARE ACCEPTED
480 TIME=0:REPEAT UNTIL TIME=100
490 *FX15,1
500 E.
510 DEFPROCPVAL
520   PRINT TAB(28,C%)E%(C%);
      :PRINT TAB(28,C%);
530 E.
540 DEFPROCTEXT
550   CLS
560   FOR I=0 TO 1:PRINT CHR$131;
      "SOUND": NEXT
570   FOR I=2 TO 14:PRINT CHR$129;
      "ENV.": NEXT
580   FOR I=0 TO 14:PRINT
      TAB(25-LEN(E$(I),I);E$(I): NEXT
590   PRINT TAB(0,16);CHR$131:"SOUND ";
      CHAN$;"1,Pitch,Duration"
600   PRINT TAB(0,17);CHR$129;
      "ENV. 1.T,F1,F2,F3.T1,T2,T3"
```

Sound Explorer
by D. Guest

to next page

Open Forum

from previous page

```

610 PRINT TAB(10,18);CHR$129;"A,D,S,R,L1,L2"
620 PRINT TAB(0,20);" Use cursor keys - up & down to select,"
630 PRINT TAB(0,21);" side to side to vary values."
640 PRINT TAB(0,24);CHR$&84;CHR$&9D;
650 PRINT TAB(5,24);CHR$&87;"PRESS SPACE BAR TO HEAR SOUND"
660 E.
670 REM ERROR ROUTINE
680 *FX4,0
690 *FX12,0
700 CLS
710 REPORT:PRINT " at line ";ERL
720 END
730 REM
740 DEFPROCMENU
750 PRINT "SOUND EXPLORER
760 PRINT "This program allows you to explore"
770 PRINT "the SOUND and ENVELOPE commands.""
780 PRINT "All current parameters are displayed"
790 PRINT "on the screen and any parameter can be"
800 PRINT "selected and varied up or down."
810 PRINT "The current sound can be played at any"
820 PRINT "time by pressing the space bar."
830 PRINT ""Select SOUND CHANNEL 0 or 1"
840 REPEAT:G%=GET: UNTIL G%=48 OR G%=49
849 REM ** BYTE 2 OF CHANNEL PARAMETER IS SET TO
      FLUSH PREVIOUS SOUND
850 CHAN$="&1"+CHR$G%:S%=G%-32
860 E.
    
```

A GREAT NEW COMPETITION WORTH £THOUSANDS TO THE WINNER

Whizz-Kid '82

Fancy your chances?

We're looking for a bright young thing who can out-shine all the commercial software houses and come up with a sparkling new program that can be marketed commercially.

We want you to prove you can write a selling program and if you win the competition you'll be well on the way to making big money.

The winner will receive:

1. A Dragon 32 computer.
2. Advice from *Popular Computing Weekly* on how to market and sell the winning software and how to form and finance the company to do so.
3. £2,000-worth of free advertising in *Popular Computing Weekly*.

The winner will be the author who submits the most commercially viable program together with a written outline of the author's own proposals on how he would run his software house and why he would like to do it. The judge will be *Popular Computing Weekly* editor, Brendon Gore.

If a number of equally good and commercially viable programs are submitted the decision of the overall winner will be based on the best accompanying written outline of the author's proposals for running a software house.



Entries to the award scheme must be accompanied by at least four out of five of the numbered coupons published in *Popular Computing Weekly* throughout September. The closing date for the competition is October 18. The winning entry will be announced in the issue published on November 18.

Rules

1. There is no limit on the number of entries you can send in, but each entry must be accompanied by four differently numbered competition coupons.
2. Closing date for entries is October 18, 1982.
3. The names of the winners will be announced in the November 18 issue of *Popular Computing Weekly*.
4. The Judges' decision is final.
5. No employees of Sunshine Publications Ltd, or their families, will be eligible to enter the competition.

Popular Computing Weekly Whizz-Kid '82 Scheme

NAME:

ADDRESS:

.....

Fill in this coupon. When you have collected four differently numbered coupons, send them with your program to: *Popular Computing Weekly*, Whizz-Kid '82, Hobhouse Court, 19 Whitcomb Street, London WC2.



Spectrum

In this new slot various contributors explore different aspects of the ZX Spectrum.

Patterns to swim before your eyes

John Scriven reveals a hidden generator for moiré patterns.

The Spectrum is already starting to reveal some interesting secrets. One of these is the hidden pattern generator shown in the following program (Program 1). Due to the way the Draw and Plot routines operate, moiré patterns are produced on pressing the cursor keys. The effects are similar to the interference patterns you see on net curtains.

It is possible to fill the screen completely but Program 2 will do that for you. The pleasing thing for Sinclair owners is that the program can be squashed into one line — I recently saw a similar program on an Apple II that was nearly 50 lines long.

If you have experience of a ZX81, then you must have come across many 'Sketchpad' programs. On a Spectrum, the results are much better though, with 45,056 plot positions, it can be difficult

finding your exact screen location. Program 3 shows one way of achieving reasonable results. The controls are as follows:

- QWE
- ASD
- ZXC
- Direction of plot
- 0 Copy picture
- 1 Save picture
- 2 Unplot
- 8 Plot
- 9 change colour

The Screen saving routine is quite impressive. In addition to saving any group of bytes together, such as user-defined graphics, the whole screen can be saved using either Save "x" Code 16384, 6912


("x" being the name you choose, 16384 being the memory location of the start and 6912 being the total number of bytes involved), or more simply Save "x" Screen. When reloading, the picture is built up, each dot in turn, before your very eyes. (To load, simply enter load "x" Code.)

Due to the peculiar memory map, the screen loads in sections of eight lines, one row of a character block at a time. If this baffles you, try Program 4. This fills the screen in the order in which the data is stored in memory. From 22528 to 23296, the attributes such as colour and brightness are filled in.


```

10 REM MOIRES © John Scriven
10 OVER 1: FOR a=0 TO 1: FOR b
110 TO 255: PLOT 0,175+a, DRAW b,
110 TO 255: PLOT 255,175+a, DRAW
110 TO 255: a: NEXT b: NEXT a: 21
  
```

PROGRAM 2

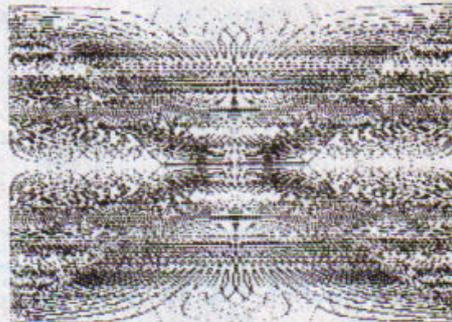

GREETINGS FROM UNCLE CLIVE

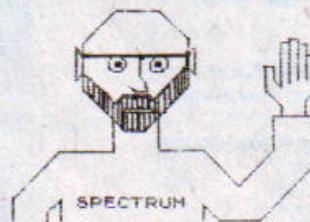

```



0) REM Quickdraw © John Scriven
20 INK 0: PAPER 7: BORDER 0: C
LS
30 INPUT "Choose background co
40 PAPER bcolour: CLS
50 INPUT "A name for your pict
60 a$=""
100 LET a=20: LET b=20
105 LET c=0: LET x=0
110 PLOT a,b: PLOT OVER x,b
120 LET a=a+(INKEY$="e")+(INKEY
130 LET a=a-(INKEY$="c")
140 LET b=b+(INKEY$="q")-(INKEY
150 LET b=b-(INKEY$="z")
160 LET c=c+(INKEY$="s")
170 LET c=c-(INKEY$="x")-(INKEY$="n")
180 IF INKEY$="9" THEN INK RND*
190 IF INKEY$="1" THEN SAVE n$5
200 SCREEN$
210 IF INKEY$="0" THEN COPY
220 IF INKEY$="6" THEN LET x=0
230 IF INKEY$="2" THEN LET x=1
240 IF a<0 THEN LET a=0
250 IF a>255 THEN LET a=255
260 IF b<0 THEN LET b=0
270 IF b>175 THEN LET b=175
280 GO TO 110
  
```

PROGRAM 3

```

10 REM SCREENFILL © John Scriven
20 FOR n=16384 TO 20256
30 POKE n,RND*255
40 NEXT n
  
```

PROGRAM 4

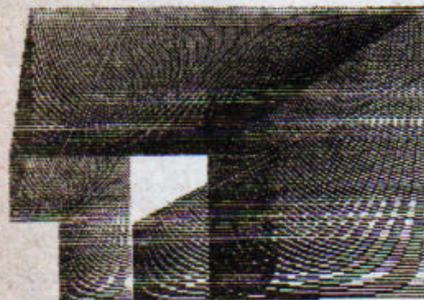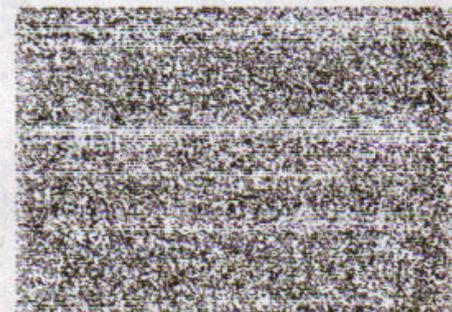

```

1 REM MOIRE © John Scriven
10 INK RND*7: PAPER RND*7: BOR
110 LET a=0: LET b=0
120 IF INKEY$="7" THEN LET b=b+
130 IF INKEY$="8" THEN LET a=a+
140 IF INKEY$="9" THEN GO TO 140
150 IF INKEY$="5" THEN LET a=a-
160 IF INKEY$="6" THEN LET b=b-
170 IF INKEY$="4" THEN LET b=b+
180 IF INKEY$="3" THEN LET a=a+
190 IF a>126 THEN LET a=126
200 IF a<-255 THEN LET a=-255
210 IF b>87 THEN LET b=87
220 IF b<-175 THEN LET b=-175
230 PLOT a,b
240 DRAW a,b
250 GO TO 140
  
```

PROGRAM 1

Sound & vision



Who will compare the show?

This program plays the song *A Little Peace*, winner of this year's Eurovision Song Contest, on the Vic20. The program uses two part harmony and consists almost entirely of data statements.

Line 10 sets the volume to five. You can adjust the volume to suit your own tastes. Line 20 simply allows the tune to be played

twice, or more often if you wish.

Line 40 is a time delay for the basic note value. Lines 50 and 60 determine whether the tune is being played for the first or second time.

The remaining lines are data statements which play the tune.

Andy Horrell

```
0 REM                                A LITTLE PEACE
10 POKE36878,5:PRINT"5"
15 PRINTTAB(4)"XXXXXXXXXX A LITTLE PEACE"
18 PRINT"X(EIN BISSCHEN FRIEDEN)"
20 FORR=1TO2:RESTORE
30 READB,M:POKE36875,B:POKE36876,M
40 FORT=1TO200:NEXT
50 IFB=1THENNEXT:GOTO30
60 IFB=2THENEND
70 GOTO30
110 DATA191,0,191,0,0,0,195,0,201,0
120 DATA201,223,201,223,0,223,201,223,207,223,201,219,212,219
130 DATA212,225,212,225,0,225,212,225,212,225,212,225,215,212,219,212
140 DATA219,219,0,219,219,219,215,219,212,219,212,219,207,201,207,201
150 DATA0,215,201,215,201,215,191,0,0,0,191,0,195,0,201,0
160 DATA201,223,201,223,0,223,201,223,207,223,207,223,201,219,212,219
170 DATA212,225,212,225,0,225,212,225,0,225,212,225,215,212,219,212
180 DATA219,219,0,219,219,219,215,219,223,219,223,219,219,201,215,201
190 DATA215,215,215,215,215,215,0,215,0,215,0,0,0,0
200 DATA0,201,175,201,0,201,175,215,201,215,201,215,201,0,201,215
210 DATA147,212,147,215,0,219,147,201,183,201,183,201,183,201,183,0
220 DATA147,201,147,201,0,201,147,219,183,219,183,219,183,0,183,219
230 DATA175,215,175,219,0,223,175,201,201,201,201,201,201,201,0
240 DATA175,201,175,201,0,201,175,223,201,223,201,223,201,0,201,223
250 DATA135,219,135,223,0,225,135,207,175,207,175,207,175,0,175,207
260 DATA147,201,147,201,0,201,147,223,183,223,183,223,183,219,183,219
270 DATA175,215,175,215,0,215,175,215,175,0,175,0,147,0,135,0
280 DATA191,0,191,0,191,0,1,0
300 DATA191,175,0,0,191,175,195,183,201,191
310 DATA201,191,0,0,201,191,215,191,0,0,215,191,219,195,223,201
320 DATA223,201,0,0,223,201,223,207,223,207,223,201,223,201
330 DATA228,223,228,223,228,223,228,223,228,223,2,0
```

Programming

From little Acorns grow mighty . . .

Paul Howard explains how to add 16K Ram to the BBC model A.

The BBC microcomputer has proved to be very popular and, although beset by delivery problems, many people are now established users of this machine. But, the various difficulties encountered in the early manufacture and distribution of the computer has meant that the majority of the machines in use are model As. This has led many users to think about the possibility of a "do-it-yourself" upgrade.

One of the major differences between the two models is the extra 16K of random access memory available on the model B. The model B, with 32K, not only provides space for larger programs but also has four extra modes available. Only with the full 32K can all the features of the graphics be exploited, to give higher resolution and more colour facilities.

The upgrading of a model A to 32K is a relatively easy task. Only eight extra integrated circuits are needed and no soldering is required. Anyone wishing to perform the upgrade themselves should have no difficulty, provided that a few simple instructions are followed and the computer and components are handled carefully. However, it should be remembered that undertaking a "do-it-yourself" upgrade may invalidate the six month guarantee provided by Acorn.

The components required are eight 4816A dynamic Ram chips, available by mail-order from many of the larger electronic component retailers (eg, Watford Electronics, Technomatic Ltd) at a cost of approximately £2-£3 each.

These particular integrated circuits are susceptible to the effects of static electricity. The pins should not be touched as this could damage them permanently. The work surface should be clean and dry, as should your hands. It is also a good idea to leave the memory chips in their protective packaging until they are required, and then to handle them as little as possible.

Prior to starting the upgrade, make absolutely sure that the computer is disconnected from the mains supply — unplug it. Also remove the TV and cassette leads from their connectors.

The case cover can now be removed by unfastening the four screws securing the

cover to the base. Two screws are located on the rear panel and two are underneath, at the front — they are all labelled "FIX". The top cover can now be lifted away, but be careful with the three red LED indicators. These simply push through holes in the plastic near the keyboard opening and could easily be broken if forced.

The eight sockets for the extra memory are located in the front right hand corner of the main printed circuit board. These sockets can be identified by the legend printed alongside each one and are numbered IC61, IC62, etc, up to and including IC68. Simply insert the eight memory chips into these sockets, making sure that the small D-shaped indentation in the end of each chip is facing towards the rear of the computer (ie pin number 1 to the rear), similar to the ones already fixed in place. Be very careful when pushing the chips in, as the pins can easily bend, or miss the holes in the sockets.

The only other alteration concerns a connecting link labelled "S25". It is located about 10cm from the rear of the computer, on the right hand side of the printed circuit board to the left of IC45. Pull the black plastic plug from the connector and you will see three pins in a line. Reconnect the plug to the rear and centre pins of this connector — it was previously across the centre and front pins.

The cover can now be replaced, making sure that the three LEDs are located properly in their respective holes in the cover and that all four screws are secured. Reconnect the lead to the TV and plug the computer into the mains supply. When you switch on the screen should display:

```
BBC Computer 32K  
BASIC  
>—
```

If you do not get this response then there is a problem somewhere. Check that the new memory chips are pushed well into their sockets and that all the pins are making good contact. Try removing them carefully and examining the pins — if they are bent then carefully straighten and re-insert them into the sockets, ensuring that they are the correct way round. Also check that the S25 connecting plug is making good contact between the centre and rear pins of the connector. If you still have no joy when switching on then the integrated circuits may be faulty and should be returned to the retailer.

If everything has worked successfully you now have 32K of Ram available, giving all the software features of a model B. Any programs written for a model B, which do not use any of the extra input/output hardware, will now run in this upgraded version of a model A.



BBC micro model B with extra 16K of access memory.

Peek & poke

Peek your problems to our address. Ian Beardsmore will poke back an answer.

HELP ME TO THE RIGHT ADDRESS

Imtiaz Hussain of Tweedale Street, Rochdale, Lancashire, writes:

Q I have had my ZX81 for about nine months, but found that it was too limited for my purposes. Recently, I bought a Vic20. But, many of the programs I write for the ZX81 have a lot of Peek and Poke statements.

Could you please make a list of Vic20 Peek and Poke numbers, as compared to those of the ZX81 and the Pet. For example the Poke number 32768 on a Pet is the same as 32807 on the Vic, but what is it on the ZX81? Please could you also include the small numbers. I am sure that a lot of people who want to change their programs between these computers will find it very useful.

A It is very difficult, if not impossible, to list the compatible addresses between the ZX81 and the Vic or the Pet. The Vic can access up to 64K, giving a potential maximum of 65535 addresses, all of which can be Peeked.

A thorough breakdown of the Vic map takes up nine pages of Nick Hampshire's book *The Vic Revealed*. If you want a memory map of the Pet, then look at *Best of the UK Commodore Pet newsletter*, a compilation of volumes one and two, edited by Dave Middleton, which has 27 pages of Pet memory maps at the back. This is available for £7.50 from Commodore Computing, Hobhouse Court, 19 Whitcomb Street, London WC2.

The ZX manual gives quite a good breakdown of the accessible portions of the variable memory. *Byteing Deeper into your ZX81*, by Mark Harrison, gives a short but concise overview of the ZX81 memory map as a whole.

In some cases, translation is comparatively simple. For example, *Membot* is 16477 on a ZX81 and 65436 on a Vic. But, the two dialects of Basic are very often difficult to trans-

late. The screen location of 7787 can be Poked on an unexpanded Vic with no problem. On a ZX81 that address is part of the dollar sign character. As this is part of the ZX81's Rom, it certainly cannot be accessed by a Poke command.

SOMEBODY GIVE ME A SIGN

Veronica Griffiths of 34 Clayponds Avenue, Brentford, Middlesex, writes:

Q I have a ZX81 with 16K Ram. I am working my way through the book *30 hour Basic* and am doing quite well. But, I would like to get my ZX81 to help me with my other hobby, Astrology, which involves many calculations.

I wrote to Roger Elliot of *Star Life* and got a very helpful letter back. Unfortunately, I do not feel that my knowledge of computing is good enough. Is there anything you can do to help, or do you know where I could contact someone who could act as a middleman/woman?

A I feel that your best chance at the moment is to develop your ZX81 as an aid for various sections of your astrological calculations. A typical program could include (1) Sidereal time, GMT; (2) ST, GMT + Eastern time zones; (3) ST, GMT + Western time zones; (4) Position of Mercury . . . and so on.

The major problem is that hours, minutes and seconds are calculated in base 60. The following sub-routine will work out Sidereal time, GMT, though you will still need to use an ephemeris:

```
10 PRINT "HOURS MINUTES
SECONDS"
20 INPUT H1
30 INPUT M1
40 INPUT S1
45 PRINT H1;
"spaces";M1;"spaces";S1
50 IF H1 > 12 THEN LET
N1=H1-12
60 IF H1 < 12 THEN LET
N1=12-H1
70 INPUT H2
80 INPUT M2
90 INPUT S2
95 PRINT
H2;"spaces";M2;"spaces";S2
110 LET S3= S1+S2
```

```
120 LET M3= M1+M2
130 LET H3= N1+H2
140 IF S3 >= 60 THEN GOSUB 200
150 IF M3 >= 60 THEN GOSUB 220
160 PRINT
H3;"spaces";M3;"spaces";S3
175 STOP
200 LET S3= S3-60
210 LET M3= M3+1
215 RETURN
220 LET M3= M3-60
230 LET H3= H3+1
235 RETURN
```

Lines 20 to 45 input and print the time of birth. Lines 50 and 60 make the first part of the calculation by changing the hours to N1. Lines 70 to 95 input and print the sidereal time at noon. The routine can end with a *Goto* 160 which will print out the results.

This program assumes you were born after 12 am. If you were born before 12 am, simply reverse all the arithmetic signs after line 110 which becomes LET S3=S1-S2.

I have used Louis MacNeice's book *Astrology* as a reference, but unfortunately it does not give sufficient information to actually work out the orbits of the planets. This is a long term aim that you are more likely to achieve if you upgrade from a ZX81. Remember, if you attempt this sort of calculation on a ZX81, or a Spectrum, do not forget that it works in radians, not degrees.

As to whether there is anyone who can help you. Have you considered looking for a local computer club? Alternatively, you might find a visit to your local library or an advertisement in a local paper will pay dividends.

IT MAY BE IN CODE

Paul Frewin, of Wadebridge, Cornwall, writes:

Q I have been waiting for my Spectrum for six weeks. I have read in a number of reviews that the main disadvantage of the Spectrum is that it is very slow. This slowness has prompted me to learn more about machine code.

If a microcomputer uses a Z80 processor will it have the same mnemonics and hexadecimal codes as any other Z80 based micro? And will a book

like Rodney Zaks *Programming your Z80* be compatible with the machine code of my ZX Spectrum?

A Whatever your reasons for learning machine code, it is a useful language to know. The Zaks book is considered by many to be the bible of Z80 programming, though you should note that both the Spectrum and the ZX81 use the Z80a chip which is a modified version of the Z80.

The hex codes will remain the same for all Z80 based micros, as will the mnemonics. What does change is the way all the signals into and out of the chip are interpreted.

A signal going into a chip at point A will produce a response at point B. It will always be the same response at the same point. However, where one micro might interpret this as an instruction to Refresh the Ram, another computer might see it as part of a Print command.

One note about the Rodney Zaks book is that it is very expensive. It might be advisable to go on your library's no doubt long waiting list for the book. As an alternative, you might try and get hold of a copy of Nat Wordsworth's *Z80 Instruction Handbook* which is published by Scelbi.

BUT A STAR MAP IS OK

K Whitton of Bridgewater Close, Chiselhurst, Kent, asks:

Q I have seen a program to generate a star map for use in astrology. Do you know of any similar, Basic programs, for the ZX81?

A The only two programs I know of that might be of any use are astronomy programs. One by Helta-Skelta Software, of Ferryside, Tooke Road, New Romney, Kent, deals with planetary paths. The other, by Bug-Byte, 98/100 The Albany, Old Hall Street, Liverpool L3, is called Constellation and will draw a map of the night sky for anywhere on the earth, for any time since 1900.

Classified

CUT-PRICE COMPANIONS

"Far and away the best!"
Your Computer magazine

THE ZX81 COMPANION by Bob Maunder is now available at ONLY £4.95 with a FREE SUPPLEMENT on the ZX Spectrum! This offer ends on 30 September, so hurry!

LINSAC is also producing a SPECTRUM COMPANION series, and the first title, 'The Spectrum Games companion' is available from October at £5.95.

The above prices include UK postage. Send cheques to:

LINSAC (PC)

68 Barker Road, Middlesbrough TS5 5E5

POW SPECTRUM ZAP BEEP BOOSTER

TELESOUND 82 puts the Spectrum BEEP direct through an unmodified TV set so that the full range of sound effects including the keyboard click can be heard and controlled from a whisper to a roar. The unit comes complete ready to fit between the TV and EAR sockets so that no case cutting is necessary. Fitting is made easy with no soldering as the leads have clips fitted. With a Telesound 82 you can even play your favourite music cassette through the TV! Put bounce in your BEEP. Get a Telesound 82 for only £9.95 inclusive with free sound effects program. Send cheque/PO or SAE for further details to:

COMPUSOUND

32 Langley Close, Redditch
Worce 998 0ET. Tel: 0527 21439 (evenings)
Hear Telesound 82 at the Microscene,
Bingley Hall, Birmingham, September 11.

FOR TRS.80 pocket computer with printer. Accountant has PAYE analysis and sorting programs from £20. Phone: 01-995 8688 mornings.

TRS-80 16K LEVEL II (hardly used), cassette recorder, green screen VDU, covers, games, books, magazines, £250 ono. Tel: (Mike) 061-764 7212.

PHILIPS COMPUTER GAME plus nine games cartridges, £200 ono. Tel: Chulmleigh (N. Devon) 80759.

48K SPECTRUM software reactor — run (23K) super graphics arcade game, £4.95. M. C. Milsom, 26 Highgrove, Sea Mills, Bristol.

48K SPECTRUM PROGRAMMES. "Text Pro" Word Processor. On-screen text entry, insert, delete, word-wrap, justification, save, load, print. Foreign alphabet option. Cassette and instructions, £5.95. "Gobbler", colourful, fast-action arcade game. Advanced graphics, very addictive!!! £3.95. Patrick Vessey, The Hope, Fiskerton Road, Reepham, Lincoln LN3 4EF.

16K SPECTRUM GAMES on cassette: "Bombs Away", "Alien Attack", "Rhino", only £3.50 inc. S. Cobb, 43 Woodhall Avenue, Whitefield, Manchester M25 7QE.

DUST COVERS for all computers, printers, disk drives, monitors, etc: Vic/BBC/Atom £2.95; Sharp MZ 80K/MZ 80/A £5.50; Genie/TRS80 £3.95; Printers £3.95. Please ring for other prices. Trade enquiries welcome. Access/Barclaycard/cheque. Everyman Computers, 14 Edward Street, Westbury, Wilts, 0373 864644/823764 anytime.

DRAWING BOARD 16K ZX81

Save, recall, scroll (4 ways), merge pictures using machine routines. Draw using pixels (black/white) or any character, cursor control. Pictures can be used in your program and DB deleted. Only £4.20.

DATABASE 16K ZX81 or Spectrum Business or home. Telephone numbers, addresses, stock control, etc. With demo program — steam loco numbers. Only £4.95.

CADSOFT, 24 ST JAMES STREET
CHELTENHAM, GLOS GL52 2SH

ESCAPE!!

The Vicious Teachers

An exciting adventure for the expanded ZX81. You are a pupil roaming your school pursued by the deadly teachers. A superb adventure and great value for only £3.75 incl. Plus, side two — Steeplechase. A horse-racing and betting game for up to 6 players.

Cheques payable to M. P. Davis, at Box No. 301,
PCW, Hothouse Court, 19 Whitcomb Street,
London WC2.

VIC20 (Unexpanded) Software: three fantastic space games plus Pontoon, only £3.95. D. Spencer, 230 Low-grange Avenue, Billingham, Cleveland.

J.P. 16K ZX81 software: Baloon, Nibblers and three other exciting games, £3.50. Death Race, £1.99. Tel: Northwood 22750 for games available (evenings). 64 Eastbury Road, Northwood, Middlesex.

BBC MICROCOMPUTER EDUCATION WORKSHOPS. Second Sunday Afternoons each month. Bounds Green Junior School, Park Road, N11. Tel: 889 5446 for details.

VIC20, brand new, unused plus cassettes, £190. Tel: 01-937 2170 (Kensington).

SPECTRUM SOFTWARE Labyrinth — 3D, Breakout, Star Trek. Supplied on quality computer cassette, £2.95 each. D. Parlett, 12 Deanston Croft, Walsgrave, Coventry.

VIC20 C2N, Super Expander, £30 worth software and books. VGC. Only £215 ono. Tel: 01-471 7751

DIANETICS: Hardware, the human brain software, correctly and incorrectly graded experiences plus unevaluated data. Follow the spectacular path into the depths and capabilities of the world's most sophisticated computer: the human mind. Manually written by one of the first Nuclear Physicists, only £4. Dianetic Centre, 3 St Mary's Row, Moseley, Birmingham, B13 8HW.

VIC20 CASSETTE UNIT. Manual programs, worth £250. Asking only £159. Phone Bracknell (0344) 84978.

ZX SPECTRUM 16K — Fruit Machine. Hold and Gamble features, uses many advanced Spectrum facilities. Only £3.95 inclusive. Character Design Aid — Will design and save characters, also allows manipulation of designed character — Rotate about three axis, invert, etc. Many example characters. Only £3.50. Supplied on quality cassettes PLUS Printer listing. Cheques/POs to Soft Sell Computer Software, 68 Wellington Street, Long Eaton, Nottingham.

BBC MICRO

Make the most of your BBC Microcomputer with two books written by the experts. LET YOUR BBC MICRO TEACH YOU TO PROGRAM. by Tim Hartell. £6.45, with over 40 complete programs. THE BBC MICRO REVEALED. by Jeremy Ruston. If you've mastered your computer, and want to progress, this is the book for you. £9.95. Interface Publications, Dept. PC, 44-46 Earls Court Road, London W8 6EJ.

ZX SPECTRUM SOFTWARE

SUPERDRAW £5. incl. VAT, P&P. Graphics design aid for 16K Spectrum. With slide-show option.

SUPERVIEW £5. incl. VAT, P&P. Personal viewdata system. Up to 48 pages on 48K Spectrum.

Both programs have full operating manual, detailed demonstration and audio commentary on cassette.

Video Software Ltd. Stone Lane,
Kinver, Stourbridge, W. Mids.
DY7 6EQ.

SAVE 50%. ZX81 programs must go. Send SAE for list (private seller). S. Curtis, 8 St Andrews Avenue, Bulwark, Chepstow, Gwent.

SPECTEL. A personal Prestel system which acts as a powerful filing system or diary in 48K, £4.95, on cassette with free memory. Tel: Chichester 780768.

VIC20 PLUS CASSETTE DECK and programs, etc, £200 ono. Phone 01-892 9787.

BBC SOFTWARE. Send SAE for leaflet. S. Linter, 80 Gravesend Road, Strood, Kent.

SPECTRUM SPEAKER. Speaker for the Spectrum with volume control, £6.50. J. W. Hunter, 11 Nettleton Close, Canford Heath, Poole, Dorset.

VIC20 CASSETTE UNIT. Super expander, Spiders of Mars cartridges, Vic computing subscription, Joystick, books, magazines plus approximately £50 software. Worth £350, will accept £270. Tel: 0625 32395.

VIC20 PONTOON. Win ££££s from your friends. Full colour graphics on unexpanded system. Cassette £3.95, Listing £1.45. PET version available. Phone: 0782-413351.

BBC MICRO, good machine + Basic programmes wanted, 35 per cent royalties paid. Southsea Software (D.W.), 66 Parkstone Avenue, Southsea, Hants.

VIDEO GENIE + ROXBURGH (Star) Printer with Centronics Interface, 16K Ram, upgraded 135K Rom, Word Processor, Books, Tapes, etc, £325. Phone 01-653 0186.

16K ZX SPECTRUM 48K

Now available. Order now — BERSERK (£5.50); SPEC-MAN (£5.50); Jega tape 1 (BRIDGER and DEPTH CHARGE £5.50) Jega tape 2 (ALIEN BLASTER and SPAGIODS £5.50)

True arcade display. Fast delivery. Mail order only, cheques or postal orders payable to: JEGA SOFTWARE, 27 HALLCROFT AVE., COUNTERTHORPE, LEICESTERSHIRE LE8 3SL (SAE for ZX catalogue)

PROGRAM GENERATORS

Ask yourself-

"As a cost conscious user of a microcomputer, how can you obtain application software easily, economically and efficiently to increase your productivity and create greater profits?"

the answer-

Dynatech 'do-it-yourself' program generators. The key to efficiency and ease of use, productivity, cost saving and thus the ability to create greater profits. Even without experience you can write programs in minutes. Write now, or 'phone for details.

DYNATECH MICROSOFTWARE LTD
Summerfield House, Vale, Guernsey, C.I.
Telephone 0481 47377 Telex 4191130

SPECTRUM GOLF. Different course every game. Colour plan of each hole showing Fairway and all obstacles. Scoring routines indicate Birdies and Eagles, dramatic display for hole in one. Cassette with full instructions, £3.95 (state 16K or 48K machine). B. S. McAlley, 78 Hedgerley, Chinnor, Oxfordshire.

VIC 1515 Printer + Paper. Brand new, never used. Save £30 — only £200. Ring Chepstow 5058.

VIC20 CASSETTE DECK. Arfon expansion board, 3K super expander, programmers aid, machine code, monitor, 8K RAM pack, Vic Revealed, Vic Reference Guide, Introduction to Basic Part 1, Learn Computer Programming, Blitz and many other programs, selling for £450 — worth £600, save £150. Tel: 041-344 4728.

VIDEO GENIE 3003, £180. Buyer collects. Phone: Gourrock (Scotland) 39817 evenings.

ITT/APPLE, 48K, FP. Basic, RF, modulator, £375 ono. Cannock 77640 evenings.

DIGITAL CROSSWORD COMPILER. A brand new version of the crossword you will enjoy. Educational for children, fun for all the family. Over 6 million graded 'Run and Play' compilations. Cassettes £6 (p & p paid). PET, TRS-80, Apple, ZX81 (16K), Spectrum from N. Darwood Ltd, Ramsdean Road, Stroud, Petersfield, Hampshire. Guaranteed a quality pastime.

SPECTRUM PROGRAMS. Word processor — screen editing, insert, replace, delete, word-wrap, justification, file-handling; £15. L-game, new, different, testing; £5. Graphics Generator, makes it easy; £5. All include cassette plus instructions. Brian Hebbes, 6a Newlands Avenue, Southampton.

VIC20 8K Expansion, unwanted gift, unused, £35. M. Warden, 64 Nursery Road, Bloxwich, West Midlands.

POPULAR Computing WEEKLY

BACK NUMBERS

MAKE SURE OF A
REAL COLLECTORS' ITEM —
THE FULL SET OF PCW

We will mail any of the numbers you're missing
from Issue 1 to the latest — for just 50p an
issue, including p & p.

(We have no more copies of Issue 2)

Send cheques/Postal Orders to:

Back Numbers
Popular Computing Weekly
Hobhouse Court
19 Whitcomb Street
London
WC2 7HF

HE SAID YOU COULDN'T DO IT WE DID IT

A revolution in teaching programming techniques.
Appreciate the real value of your computer.
READ ZX81 HORIZON (with tape).
Learn to link COPY, MOVE and MERGE.
No programmer should be without this book.

Contents:

Detective	File text
Billiards	Animated cyclist
Machine code programmer	Load and Save
Call-back routine	

Price £12

Credit cards accepted.

Cheques payable to J. McNamara/ZX81.

We can accept no responsibility for any illegal use of these programs.

From: Name

Address.....

To **UITGEVERIJ WOLFKAMP**
POSTBUS 70254
(1007KG) AMSTERDAM — NETHERLANDS
TELEPHONE: AMSTERDAM 020278931

CLASSIFIED ADVERTISING RATES:

Line by line: For private individuals, 20p per word, minimum 10 words.

For companies, traders, and all commercial bodies, 40p per word, minimum 20 words.

Semi-display: £10 per single column centimetre, minimum length 3 cm. (Please supply A/W as PMT. Or supply rough setting instructions.)

Conditions: All copy for Classified section must be pre-paid. Cheques and postal orders should arrive at least two weeks before the publication date. If you wish to discuss your ad, please ring Alastair Macintosh 01-930 3840.

Here's my classified ad.

(Please write your copy in capital letters on the lines below.)

Please continue on a separate sheet of paper

I make this words, at per word so I owe you £.....

Name

Address.....

Telephone

Please cut out and send this form to: Classified Department, *Popular Computing Weekly*,
Hobhouse Court, 19 Whitcomb Street, London WC2

Competitions

Puzzle No 20

This is the first of a series of Ancient Algorithms problems that we shall be running, every other week.

On the remaining weeks we shall continue to print the same type of puzzles as usual.

The new competition will hopefully, encourage you to look at many of the mathematical rules we take for granted in a new way.

The closing date for the competition is Tuesday, September 7.

Tony Roberts

1. TAKE 2 HEAPS OF STONES



2. TAKE ONE STONE IN TURN FROM EACH HEAP MAKING TWO NEW EQUAL-SIZED HEAPS TILL ONE HEAP'S GONE...



3. THEN THROW AWAY ONE OF THE NEW HEAPS!



4. NOW IF THERE'S MORE THAN ONE HEAP GO BACK TO 2. ELSE COUNT UP YOUR REMAINING STONES...



Q. WHAT HAVE YOU BEEN CALCULATING?

Solution to Puzzle No 16

We need to find four integers, A, B, C and D such that:

$$A^3 + B^3 = C^3 + D^3$$

The program generates three of the four variables A, B and C, calculates D and checks to see if D is a perfect cube.

```
10 FOR A = 11 TO 100
20 FOR B = 1 TO 100
30 FOR C = B + 1 TO 100
40 IF C = A THEN GOTO 90
50 LET Y = A * A * A + B * B * B - C * C * C
60 IF Y < 1 THEN GOTO 100
70 LET X = Y ** (1/3)
```

```
80 IF X - (INT (X + .5) - .5) < 0.000001 THEN
GOTO 200
90 NEXT C
100 NEXT B
110 NEXT A
200 PRINT "A=" ; A ; "B=" ; B ; "C=" ; C ; "D=" ; X,
A * A * A + B * B * B
```

The smallest values are: $9^3 + 10^3 = 12^3 + 13^3$. So Otto's new phone number is 1729.

Winner of Puzzle No 16

The winner is Ian Wilkinson, Silkstone View, Hoyland, Barnsley, South Yorkshire, who receives £10. He adds: The answer presupposes

that Dr Hex's offspring were not two sets of monozygotic twins of one year olds and two year olds — leading to a phone number of 9.

Rules

The winner of the puzzle will be the reader who, in the opinion of *Popular Computing Weekly*, has submitted the best solution. Preference will be given to solutions which show how the entrant arrives at the correct answer.

Envelopes containing entries should be marked clearly with PUZZLE.

LITERARY CRITICISM

SEARCH BY NUMBER
FIND AND GLOSS:

THREE BLIND MICE:
TWO BLIND MICE:
ONE BLIND MICE:
ONE BLIND MICE:

ONE BLINDS MICE:

TWO BLINDS MICE:

ONE BLINDS MICE:
THE FARMER'S WIFE:
SHE BLINDS MICE:
SEE HOW THEY RUN:

SIX PROUD WALKERS
FIVE DAYS OF CHRISTMAS
FOUR AND TWENTY BLACKBIRDS
THREE BLIND MICE. GO.
ONE NOUN PHRASE
ONE NOUN PHRASE
PLEASE REPEAT
STOP BREAKS RULE
ALIGN NUMBER INDICATORS
STOP BREAKS RULE. NO.
GO OBEYS OTHER RULE.
STOP BREAKS RULE
ALIGN NUMBER INDICATORS
WHO BLINDS MICE?
ONE NOUN PHRASE
THAT IS AGGRESSION
IMPERATIVE CLAUSE

A.R.T.H.U.R.

Lawrence Lerner & James Macdonald

SEE HOW THEY RUN:
SEE HOW THEY RUN:
THE FARMER'S WIFE:
CUT OFF THEIR TAILS:
WITH A CARVING KNIFE:
DID YOU EVER SEE:
DID YOU EVER SEE:
DID YOU EVER SEE:
DID YOU EVER SEE:
SUCH A THING IN YOUR LIFE:
AS THREE BLIND MICE:
FOUR BLIND MICE:
FIVE BLIND MICE:
SIX BLIND MICE:
SEVEN BLIND MICE:
SEVEN BLIND MICE:

FEAR-BEHAVIOUR
USING LEGS
ONE NOUN PHRASE
MORE AGGRESSION
DIVERGENT THINKING
INTERROGATIVE
LISTENER INVOLVEMENT
LISTENER NOT BLIND
LISTENER NOT MICE
LISTENER ALIVE
ARE THEY SYMBOLS?
PLIGHT OF HUMANITY
POPULATION EXPLOSION
OUT OF CONTROL
SO AM I
INFINITE LOOP
SEE HOW I RUN
SEE HOW I RUN



An exciting new Commodore peripheral




Own or use a Pet or a Vic?
Fed up with being ignored by all the traditional monthly magazines?
Fed up with listings, which are too simple or simply do not work?
You need *Commodore Computing*, the new monthly magazine. *Commodore Computing* is published by Nick Hampshire, author of *The Pet Revealed*, *Pet Graphics*, *A Library of Subroutines* and *The Vic Revealed*.
Each issue is packed with advanced

advice on how to make the most of your computer, whether you use a Pet or a Vic.
Each issue covers a host of applications – software, hardware, machine code, games, business use – whatever it is you'll find it in *Commodore Computing*.
If you want to learn more about your computer, take out a subscription to *Commodore Computing*.
That's the only way to get it, and get it straight.

Send £12.50 for 1 year's subscription (10 issues) to:

Commodore Computing,
Magsub, Oakfield House, Perrymount Road, Haywards Heath, Sussex RH16 3DH

New From Fuller FD System for the **ZX SPECTRUM**

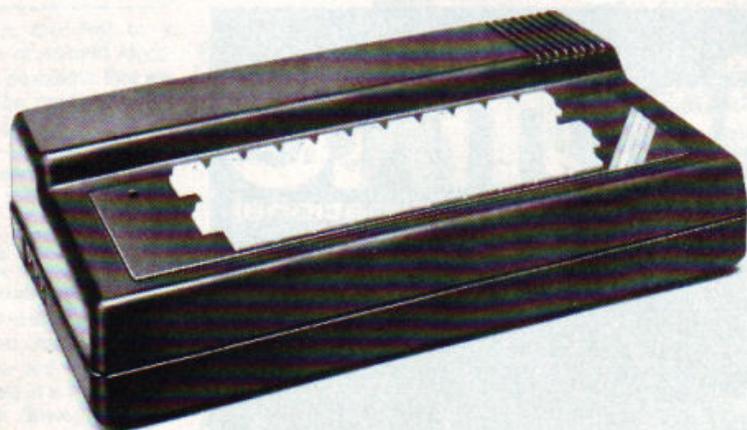

£39.95

+ £2.50 p & p.

Professional Keyboard & Case —

This unit has the same high standard as our ZX81 unit. Tough A.B.S. Plastic case encloses our Keyboard, the Spectrum Printed Circuit Board and the Power Supply.

Our own Power supply is available:- 9 volts DC at 2 amps. Mains either 110v or 240v AC at £5.95 + 80p. p & p.

The Keyboard has 42 keys with all the spectrum functions printed onto them, the full travel key switches have gold plated contacts and a guaranteed life of 10⁶ operations.


INSTALLATION - Simply unscrew the ZX printed circuit board from its case and screw it into the FD case, plug in the keyboard and that's it. No technical know how or soldering required, the built unit is tested and comes with a money back guarantee.

Spectrum Keyboard and Case Kit £33.95


Our Mother Board for the spectrum has 2 slots at £15.95 or 3 slots at £19.95, this unit also fixes inside the case. p & p 80p.

SPECTRUM SOUND AMPLIFIER £5.95 + 80p p & p.

Complete with leads, volume control and loud speaker in tough ABS Plastic case measuring 5" x 3" x 1" just plugs into your spectrum MIC input.



SPECTRUM PLUG PLANNER — £18.95 + £1.00 p & p

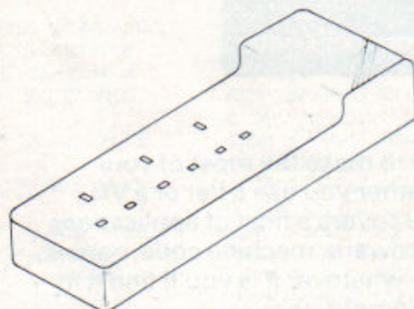

Complete with 3 metres of cable, three 13 amp sockets for TV, Tape etc AND 9 volt at 2 amp power supply with power jack to fit Spectrum or ZX81

The ever popular FD42 Keyboard and case for ZX81 £39.93 including VAT & Post
FD42 as a kit £33.95 including VAT & Post
FD42 Built only £24.95 including VAT & Post
FD42 Keyboard Kit £18.95 including VAT & Post

GUARANTEED 14 DAYS DELIVERY FROM RECEIPT OF ORDER, OR CALL TO THE ZX CENTRE.

Mail to **FULLER MICRO SYSTEMS,**
 The ZX Centre, Sweeting Street, Liverpool 2. England, U.K.

Please Supply:-

Name

Address

SAE for more details — Enquiries: Tel. 051-236 6109

FULLER FD SYSTEM