

# POPULAR Computing WEEKLY

35p 6 January 1983 Vol 2 No 1

## This Week

### Spectrum software

John Scriven takes another look at some of the latest games for the ZX Spectrum. See page 12.

### Data transfer

Kevin Griffiths presents a routine to transfer data from one program to another on the 16K ZX81 on page 23.

### Software library

David Kelly talks to Alec Fry, founder of the Sinclair Owners' Software Library. See page 11.

### Dragon graph


G Morton explains how to represent data on an x,y scale using a simple graph plotting routine on page 25.

★ **STAR**

Missile Command on Spectrum by Chris

**GAME** ★

## News Desk

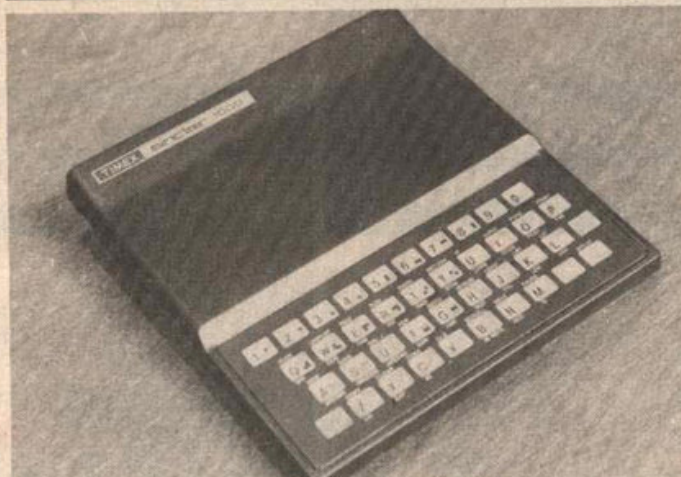

Timex-Sinclair 1000 — already selling well in the US.

## Spectrum to go on sale in US?

A US version of the Sinclair ZX Spectrum is due to go on sale in America in the first quarter of 1983, possibly as early as January.

The machine will be marketed and sold exclusively by Timex in the US.

The American company's first product — the TS1000 (a 2K version of the ZX81) — has been a runaway success

since it was first launched in August.

Timex has now exceeded the necessary sales threshold beyond which it gains an exclusive licence to sell computer products based on Sinclair technology in North America. Under the agreement between Timex and Sinclair Research, Sinclair is now required to

Continued on page 5

## Bug-Byte goes retail

BUG-BYTE is set to become the first major software house to cease trading by mail-order.

As of March the company will only be selling its range of software cassettes through retail computer shops and chain-stores.

Bug-Byte's decision to phase out mail-order selling emphasises the extent to which the micro-computer industry is now looking to the High Street for most of its trade.

"At the same time as sales to the retail trade are increasing we are seeing a dwindling mail-order demand" explained Bug-Byte co-founder Tony Milner.

"Dealing with postal sales uses up 60 percent of our workforce but only brings in about 20 percent of the turnover.

"Our last mail-order advertisement is due to appear in March and from then on we shall phase out postal selling. We are hoping that this will help our dealers — knowing that they will become our sole outlet."

## Classified

### Computer Swap 01-930 3266

Free readers entries to buy or sell a computer.  
Ring 01-930 3266 and give us the details.

**ZX81 + 16K RAM.** £100 of software, magazines and manuals, £75 ono. Tel: Wiveliscombe 23783.

**DRAGON 32.** Brand new, £199.50. Mr Delroy. Tel: Leeds (0532) 695879 evenings.

**ATOM 8K** plus 8K new keyboard, VIA joystick interface, 2MHz option, power supply, £130. Mr. Clerke, Leeds 732589.

## Classified

**ATARI 800,** £200 approx. or swap for my Super Board III system. Tel: 01-200 7028 after 6 pm.

**ATARI 800.** Offers to Tom Klimes. Tel: Bourne End 26576 after office hours or weekends.

**ATARI VCS.** Excellent condition, hardly used, complete with Combat and Asteroids cartridges, £120 ono. Tel: Whaley Bridge 3205 (evenings and weekends).

**TI 99/4** with extended Basic, Video Chess and video games cartridges, cassette lead, 5 issues of 99ER magazine and over 80 programs, £220. Tel: North Weald 2119.

**DRAGON 32** plus cassette lead, £185. Barnsley 42641 evenings after 5 pm.

## Classified

### SPECTRUM OWNERS

All the software you'll ever need... The best Spectrum programmes for a one-off payment of £10 plus a hire fee of £1.25 per tape.

JOIN TODAY. Send £10 for life membership and first free tape to:

**SPECTRAL SOFTWARE LIBRARY**  
13 Charlecote Road, Poynton  
Stockport, Cheshire SK12 1DJ  
or send SAE for details

**COMMODORE PET,** 2001 series, 32K, cassette, recorder with sound, program toolkit, 130 software cassettes, manuals and books, £325 ono. K. Berwick, Erith (38) 36358.

**VIC20** with data cassette, super expander, Galaxians, joystick and lots of software, £190. Tel: Coalle 38611.

## Classified

Got a **DRAGON 32** or **TANDY TRS80** colour computer? Then you need your own monthly magazine **RAINBOW** for colour computer users. Send £1.95 and large 26p s.a.e. for sample issue to **ELKAN ELECTRONICS (Dept. PWK, FREEPOST, 28 Bury New Road, Prestwich, Manchester M25 6LZ. Telephone 061-798 7613 (24-hour service)).**

### SPECTRUM ASSEMBLER

Enter the world of the Z-80! Full 2-pass assembler with labels — all opcodes — 11 powerful directives — easy program editing — 16/48K — manual. Written and tested by professionals. **£5.95. Cheque/PO to C. Newport, 57 Camlet Way, Hadley Wood, Herts**

**16K ZX81.** With software, in good condition, £55. Mr A. Hill, 16 Toft Avenue, Grays, Essex.

Continued on page 28

# BATTLESTAR IS COMING — SOON







## The Team

### Editor

Brendon Gore

### News Editor

David Kelly [01-930 3271]

### Sub-editor

Ninette Sharp

### Editorial Secretary

Theresa Lacy

### Advertisement Manager

David Lake [01-839 2846]

### Advertisement Executive

Alastair Macintosh [01-930 3260]

### Managing Editor

Duncan Scot

### Publishing Director

Jenny Ireland

*Popular Computing Weekly*,  
Hobhouse Court, 19 Whitcomb Street,  
London WC2  
Telephone: 01-839 6835

Published by Sunshine Publications Ltd.

Typesetting, origination and printing by  
Chesham Press, Chesham, Bucks

Distributed by S M Distribution  
London SW9. 01-274 8611. Telex: 261643

© Sunshine Publications Ltd 1983

### Subscriptions

You can have *Popular Computing Weekly* sent  
to your home:

UK Addresses

26 issues ..... £9.98

52 issues ..... £19.95

Overseas Addresses

26 issues ..... £18.70

52 issues ..... £37.40

### How to submit articles

Articles which are submitted for publication  
should not be more than 3,000 words long. The  
articles, and any accompanying programs,  
should be original. It is breaking the law of  
copyright to copy programs out of other maga-  
zines and submit them here — so please do not  
be tempted.

All submissions should be typed and a double  
space should be left between each line. Please  
leave wide margins.

Programs should, whenever possible, be  
computer printed.

We cannot guarantee to return every submit-  
ted article or program, so please keep a copy. If  
you want to have your program returned you  
must include a stamped, addressed envelope.

### Accuracy

*Popular Computing Weekly* cannot accept any  
responsibility for any errors in programs we  
publish, although we will always try our best to  
make sure programs work.

## This Week

### News 5

US Spectrum, Imagine software.

### Letters 7

The Monkey Puzzle.

### Missile Command 8


A new game for ZX Spectrum by Chris  
Wood.

### Street Life 11

David Kelly talks to Alec Fry of the Sinclair  
Owners Software Library.

### Reviews 12

John Scriven looks at some of the latest  
Spectrum software.

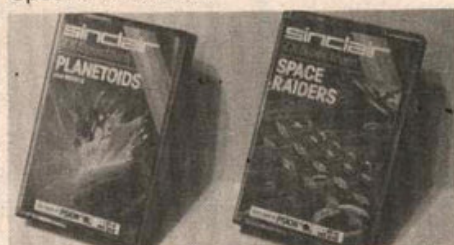

### Open Forum 14

Six pages of readers programs.

### Programming 23

Kevin Griffiths explains how to transfer  
data on a ZX81.

### Spectrum 24

David Nowotnik peeks at the display file.

### Dragon 25

G. Morton's graph plotting routine.

### Machine Code 26

End of the Line.

### Peek & poke 27

Your questions answered.

### Competitions 31

Puzzle, Ziggurat, Top 10, Losers.

## Editorial

Anyone who has ever looked inside a  
Sinclair printer will know that it is more  
complex than it appears from the  
outside. Anyone who has ever taken a  
Sinclair printer apart will testify to the  
difficulty of putting it back together.

The Sinclair printer is a mass of little  
white plastic wheels and cogs, bes-  
trewen with wires and connectors. The  
electric stylus, which burns through  
Sinclair's aluminised paper to form  
letters and characters, is attached to a  
whirling rubber band.

But, for all the intricacy of the  
Sinclair printer's design, the end result  
is at best barely adequate. Burnt  
carbon from the aluminised paper  
tends to clog up the works, causing  
already faint listings to become com-  
pletely illegible.

Mind you, even at £59.95 the Sinc-  
lair printer is still considerably cheaper  
than its rivals, so it is perhaps a little  
unfair to expect pristine copy every  
time.

But everyone who has suffered from  
the vagaries of the Sinclair printer will  
be glad to know that Sinclair is  
rumoured to be working on a four  
colour printer that will sell for around  
£70. I should emphasise that this is  
only a rumour, though Sinclair is  
known to be developing a printer of  
some sort. I shall await its appearance  
with anticipation.

## Next Thursday

At last the mystery can be revealed.  
**Battlestar**, a unique computer-  
moderated, play-by-mail game, starts  
next week. To enter **Battlestar**, a game  
which is exclusive to readers of *Popu-  
lar Computing Weekly*, simply buy  
next week's copy.

## Subscribe to Popular Computing Weekly

I would like to subscribe to *Popular Computing Weekly*.

Please start my subscription from the ..... issue.

UK Addresses: ☐ 26 issues at £9.98 ☐ 52 issues at £19.95

Overseas Addresses: ☐ 26 issues at £18.70 ☐ 52 issues at £37.40

Please tick relevant box

☐ I enclose my cheque to *Popular Computing Weekly* for .....


Name .....

Address .....

Please send this form, and cheque, to *Popular Computing Weekly*, Subscription Dept., Hobhouse Court, 19  
Whitcomb Street, London WC2 7HF.



\*\*\*\*\*SPECTRUM AND ZX81 SOFTWARE\*\*\*\*\*



Specialists in high quality intelligent games.

\*\*\*\*\*SUPERCHESS\*\*\*\*\*

Play against the most powerful ZX chess program. •10 levels of play •choice of positional or tactical evaluation •substantial book of openings, e.g. French Defense, Sicilian, Ruy Lopez, Queen's Gambit •high quality display with hi-res, pieces and board, list of moves, playing level. Many more features too •self-play •recommended move •analyse. Each cassette comes with full instructions.

16K ZX81 £6.95 ..... 48K SPECTRUM £7.95

\*\*\*\*\*DRAUGHTS\*\*\*\*\*

Did you know that a computer draughts program has beaten the world draughts champion? Draughts is an ideal game to apply tree searching techniques to. Our program analyses each position in depth, makes it a formidable opponent. Choice of colour, choice of two search strategies, 10 levels of play, at level 4 (response time — 20 seconds) it beats its own programmer!

16K ZX81 £6.95 ..... 48K SPECTRUM £7.95

\*\*\*\*\*BACKGAMMON\*\*\*\*\*

Play this fascinating game of skill and chance. High resolution colour display, with dice roll. Can be used by expert players and also has documentation to enable beginners to learn the game.

48K SPECTRUM ..... £6.95

\*\*\*\*\*SPECTRUM SPEECH\*\*\*\*\*

Yes, it's possible! Software driven speech from the Spectrum. Simple to use in your own programs. Each cassette comes with user documentation and demonstration program. No extra hardware is required, uses Spectrum speaker and top 32K Ram.

SOFTALK 1 "Maths Multiwords" 60+ words (0 to 1 million, plus add, go, limit, right, etc).  
SOFTALK 2 "Spacegames" 60+ words (numbers, red, alert, damage, fire, torpedoes, bearing, south, etc).

48K SPECTRUM ..... £6.95 each

\*\*\*\*\*SPECTRUM ASSEMBLER\*\*\*\*\*

An essential aid for m/c programmers. User documentation supplied with each cassette.

16K and 48K SPECTRUM ..... £4.95

All prices are inclusive. Dispatch within 48 hours of receipt of order. Send cheque or postal order (and state whether ZX81 or SPECTRUM) to:

**CP SOFTWARE**

Dept CPW

17 Orchard Lane, Prestwood,  
Great Missenden, Bucks HP16 0NN

# DRAGON PROGRAMS

— THE BEST VALUE ON THE MARKET —

**COMMENTS ON "FAMILY PROGRAMS"**

"Excellent" — M.H. of Bolton

"Very enjoyable, excellent quality" — C.G. of Colchester

**FAMILY PROGRAMS:** Eight full-length, original games, utilities and education programs to test your general knowledge, memory, reactions, cunning, mental arithmetic, musical knowledge, dexterity and more . . . £6

**FUN AND GAMES:** Ten games for young and old, single players and parties. Includes Noughts, Brain, Gold, Snap, Anagrams, Donkey, Dire, Artist, Musical and Circles . . . £6

**JANUARY SALE —  
£10 FOR BOTH CASSETTES!**

FULL COLOUR, SOUND AND GRAPHICS

Send Cheque/PO to:  
**SHARDS SOFTWARE**  
10 Park Vale Court, Vine Way  
Brentwood, Essex, CM14 4UR  
(or send SAE for details)

GENEROUS DEALER DISCOUNTS

## COMPUTER RENTALS LIMITED

140 Whitechapel Road, London E1 Telephone: 01-247 9004

ALL PRICES INCLUDE VAT

DEALER ENQUIRIES WELCOME

**HORSERACING (Derby Day)** for the 48K Spectrum

**ONLY £6.95 inc p&p**

Gambling on any horse in the field up to 5 players can lay bets with Honest Clive Spectrum the bookmaker as the horses circle in the parade ring. Will Clive keep that smile? Watch the race begin as the tape lifts and marvel at the amazingly realistic 3D perspective animation as the riders jockey for position. See the horses and riders in full flight as they pass Spectators (no pun intended) and into the home straight past the stands. Hold your breath at the slow motion finish. Sound and Colour is used to its fullest in this 22K of superb programming. Not recommended for compulsive gamblers.

Soon to be available in W. H. Smith

**ST GEORGE AND THE DRAGON** for the Dragon 32 **ONLY £6.95**

Can you slay the fire-breathing dragon? Can you cross the slippery bridge and smite the magic stone to lift the curse from the castle and its beautiful maidens? Don't get roasted by the dragon and mind the river and pond. If you fall in, your armour will send you to a watery martyrdom. Two versions for Joystick and keys are contained on the tape. Using sound, the program also pushes the Dragon High Resolution to its full capabilities.

**JACKPOT** for the 48K Spectrum

**ONLY £4.95**

A complete simulation of a popular fruit machine, using definable graphics to the fullest. It contains a complete introduction to the rules of its HOLD, NUDGE, GAMBLE and FEATURE BOX with animated demo. Memory mapped reels, simultaneous revolution, staggered stop, animated bet and payout, payout board and realistic sound effect re-create the original. A must and a wallet saver for any fruit machine buff.

Soon to be available in W. H. Smith

**RESCUE** for the 48K Spectrum

**ONLY £5.95**

How can we summarise in a short ad, an adventure game that needs a Special Program to detail its Rules! Very, VERY simply, you must find the Map and Radio then plot your route and monitor patrols as they scour the 40+ locations you are travelling through. If you have the right equipment you can cross into Secret Territory in search of the Castle and the imprisoned Princess. If you manage to find it and gain entrance there are many trails and tests. If you manage to find the Princess you must still return to base with her. Utilises all the Spectrum's facilities and takes hours to play.

**THE ORB** for the 48K Spectrum

**ONLY £5.95**

Quite simply The Orb brings the world of Dungeons and Dragons to your Spectrum. You must find The Orb and its Base and Studs so that the Kingdom can bloom again. Choose your role, as a Wizard, Mercenary or Philosopher etc. With a myriad of monsters, excellent sound and graphics, real time battles and a complex and evil land which will only give up The Orb after hours or most likely, days of enthralling play. Save facility provided for Survivors needing food or sleep.

Soon to be available in W. H. Smith

**HANDICAP GOLF** for the Dragon 32

**ONLY £6.95 inc p&p**

An 18 hole, 1 or 2 player handicap game. There are Bunkers, the Rough, Lakes, Trees, Gorse Bushes and Gusting Wind which all have to be taken into account as you choose the strength and direction of your shot. The Computer decides the length of the hole and its par, making sure you never, EVER play the same hole twice. Watch the Dragon 32 build up the hole in a fascinating graphics routine. Full use of sound and colour.



## US Spectrum


Continued from page 1

wind up its US computer selling operation.

The American division of Sinclair placed its last computer advertisement in September and was then given 90 days to conclude all outstanding business. But Sinclair's US office will be retained to market the company's flat-screen tv, when it becomes available.

A spokesman for Sinclair Research commented: "The Timex licence is now fully exclusive in the North American market and sales of Sinclair's own-brand computers there are now prohibited.

"The decision to sell a version of the Spectrum over there is ultimately Timex's but it must happen in the first quarter of 1983, possibly early in January."



Midwich joystick.

## Joysticks from Midwich

MIDWICH Computers has introduced a range of joystick units to its add-on collection.

For use with the Dragon 32, Acorn, BBC, ZX81 and Spectrum machines, the analogue joystick potentiometers have a life expectancy in excess of 200,000 operations.

Since neither of the Sinclair machines are provided with a built-in analogue/digital converter, Midwich has also produced a high-speed joystick controller board.

The units are available from Midwich Computers, Rickingham Hall House, Hinderclay Road, Rickingham, Suffolk and are priced as follows (including VAT): Dragon 32, £15.98 per pair; Acorn BBC, £13.00 per pair; ZX81/Spectrum, £15.98 per pair.

## Dragon lament

A SMALL bug crept into the Dragon Singalong program in our December 16/23 issue. Line 40 should have read:

40 CLS:XS=" ABCDEFG"

## Imagine software

SENIOR staff at the Liverpool-based software company Bug-Byte have broken away to set up their own firm.

Dave Lawson, former software manager at Bug-Byte, and Mark Butler, until recently sales manager at Bug-Byte, have formed a new company — Imagine Software. Also involved in the new venture is Bug-Byte's former head programmer, Eugene Evans.

The first fruits of Imagine Software have appeared in the form of *Arcadia*, a new game for the Spectrum and Vic20. Two more games will follow on January 14.

"What we are doing now is entirely different from Bug-Byte," said Dave Lawson. "We hope to be able to produce at least two new games each month — and all our software will be original rather than versions of existing arcade games."

At the moment Imagine software is available only by mail order. By the end of January, however, the program will be available in the high street chain stores and



specialised computer shops.

Bug-Byte remains undaunted by the departures.

"I gather some of our old people have set up an outfit just up the road," said Bug-Byte's Tony Milner. "We are not at all worried — if anything we have become more efficient since they left."

"We're still good friends. They are not any competition yet but it will keep us on our toes," he said.

## Young Computer Brain 1982



Derek Reynolds (left) and Peter Hall.

A FOURTEEN-year-old schoolboy from Newcastle-upon-Tyne has been chosen as Young Computer Brain of 1982.

Derek Reynolds' winning program — designed to help handicapped people to teach themselves to use a computer — was selected from over 320 entries. As the winner he receives £2,000-worth of computer equipment from Commodore Business Machines and a trophy from the *Sunday Times Magazine*, joint sponsors of the event. The trophy was presented by Peter Hall,

Chairman of the Council of the British Computer Society at a ceremony held on December 13.

The competition was divided into three classes. Derek Reynolds was also chosen as winner in the 13-14 age section.

Rachael Goberman from Oldham won first prize in the under 13s category for her entry on how computer-aided design could be applied to police Identikit methods. Lionel Tun from Mitcham won the 16-18 section with a program to provide computerised sleep therapy.

The aim of the competition, held every year, is to encourage young people to use computers to benefit society.

## Scottish show

THE *Personal Computer World Show* is travelling north.

The *Scottish Personal Computer World Show* is to be held on April 16-18 (Saturday to Monday) at the MacRobert Pavilion, Ingliston, Edinburgh. More details from Jenny King on 01-486 1951.

## High Street training is 'essential'

DEREK Moon, managing director of Currys Micro Systems has hit out against selling microcomputers without specialist sales staff and aftersales support.

"The market is not ready for cash and carry computers," he said. "Uncontrolled selling of home computers will cause retailers problems they haven't begun to imagine. If the shop staff are ill-informed or misinformed there will be a queue of customers dissatisfied with the retailer and disenchanted with the idea of home computing."

In line with this thinking Currys will only at present be selling microcomputers in high street branches in proximity to their nine Micro-C specialist computer shops. This will ensure that customers will not have to go far to sort out any problems they may have. By the New Year 37 of Currys's 512 branches will be selling micros.

● Dixons is to send over 300 of its staff on a two-day intensive microcomputer training course. The 20-hour scheme will teach computer selling and also simple program writing. Dixons already sell the Commodore Vic20 computer and will shortly begin sale of the Computers Lynx.

## Dragon schools' software

DRAGON Data plans a move into the educational software market early in the new year.

Initially the company is to produce a range of programs aimed at 4- to 11-year-olds. The software will be split into two groups devoted to teaching numeracy and literacy.

Later the catalogue will be extended with material for the 12- to 15-year-old range.

This expansion into educational software is to complement the company's plans to produce a schools version of its Dragon32 microcomputer. The model, which will have a built-in RGB monitor and cassette player, is currently under development.



HUGE SELECTION—OVER 400 IN STOCK!

# HIRE ZX81/SPECTRUM PROGRAM TAPES

Get the most from your ZX81 or Spectrum at minimum cost by hiring program cassettes for just £1 each per fortnight (plus 40p p/p).

Our stock of over 400 tapes (up to 20 maker's original copies of the more popular ones) covers most of the best cassettes advertised in this magazine—and more: thrilling m/c arcade and adventure games, tests of skill, realistic simulations and a wide range of utilities for business, multi-indexing, banking, toolkit and graphic aids.

You can switch from ZX81 to Spectrum membership at any time by paying the balance, and hire up to three tapes at a time. Our regular illustrated magazine "Computerchat" is posted free to all members, with its product and software reviews plus our unique "Top Twenty" ZX tapes chart based on members' scores, and some special offers.

**"An exceptionally professional and thriving organisation with, even, a most readable newsletter"—review in Eric Deeson's "Guide to ZX Spectrum Resources."**



**The Sinclair Owners' SOFTWARE LIBRARY** DEPT PCWK  
Heather Cottage, Warren Road,  
Liss, Hants GU33 7DD.

Yes, please—I'd like to join for the next 12 months. Please send on money-back approval my magazine, descriptive library catalogue and order forms, on the understanding that if I'm not delighted with your service within 28 days you will refund my money in full.

NAME.....

ADDRESS.....

.....Tel.....

I enclose cheque/Postal Orders for:

- ☐ £8.50 for ZX81 membership (overseas £2 extra in each case)  
☐ £9.50 for Spectrum membership

## THE SOFTWARE BANK

LEND A TAPE  
AND BORROW ONE OF YOUR CHOICE


NOW IS YOUR CHANCE  
TO TRY OUT PROGRAMS BEFORE YOU BUY  
FAST RELIABLE SERVICE  
ALL TAPES CHECKED BEFORE DESPATCH

**COMPUTERS REPRESENTED:**  
ZX81 SPECTRUM BBC VIC20  
DRAGON 32

(ENQUIRIES WELCOME FOR OTHER COMPUTERS)

Only 50p per tape borrowed plus p&p. Send £5 Annual Membership Fee on full money-back approval and we will supply you with our information sheet and order form.

**Office:**  
**The Software Bank**  
**35 Alexandra Road**  
**Stoneygate**  
**Leicester**  
**LE2 2BB**



# ABERSOFT

7 MAESAFALLEN, BOW ST, DYFED, SY24 5BA

## ZX81 & Spectrum Games

**Chess 1.4:** Ten levels m/c graphic screen display.  
**16K ZX81 £8.95**

**Invaders:** Very fast m/c action. Includes mystery ship and increasingly difficult screens.  
**16K ZX81 £4.45**

**Mazeman:** A fast action m/c game that reproduces the spirit of the original. The Spectrum version includes excellent graphics.  
**16K ZX81 £4.45 – Spectrum £4.95**

Can also be used with AGF joystick.

**Adventure 1:** Based on the original game by Crowther, this game was the start of the Adventure craze. Reviewed Sinclair User, issue 2. Features Save game routine as the game can literally take months to complete.

**16K ZX81 £8.95 – 48K Spectrum £9.95**

See us at the 5th ZX Microfair.

We have full stock of all programs and supply by return of post (which is included in the price)

## BOND SYSTEMS FOR SPECTRUM 16K and 48K

The SPECTRUM computer can be used to play games. It can also be used to improve your abilities. Our programs play games which improve your abilities.

**VOCAB FRENCH AND VOCAB GERMAN** provide you with a vocabulary of the really useful 700 words, the most commonly used words, derived from word frequency lists; the most frequently used words at the beginning. Find out how much you already know, and how easy it is to put unknown words into your "memory".

VOCAB FRENCH	SPECTRUM	£5.00
VOCAB GERMAN	SPECTRUM	£5.00

(Spanish and Italian in preparation)

**STAGE 1.** Our **MATHS** does not ask you to type in an answer; that takes time and does not improve your speed.

It presents you with a simple sum (addition, multiplication, subtraction, division) and measures the time you take to decide if it is right or wrong. Useful and compulsive for all ages from 7 to 70. You really have to mind your P's and Q's. Also **TYPEEZ** to help you to find those letters on the keyboard which seem to disappear when needed; with typing speed per minute. Also a simple **SORT** program for any number of entries, without adjustment to the program. Also **BARGRAPH** and **DOTGRAPH**.

STAGE 1.	SPECTRUM	£4.00
----------	----------	-------

BOND SYSTEMS, 15 BELMONT ROAD, HARROGATE, NORTH YORKS, HG2 0LR.

Name.....	German	£5.00 <input type="checkbox"/>
Address.....	French	£5.00 <input type="checkbox"/>
.....	Stage 1.	£4.00 <input type="checkbox"/>
.....	Total .....	£



## Joining the majority

Re 'The Monkey Puzzle', November 18, page 35: If the question was formulated by Seymour Papert exactly as quoted by your contributor, then it is not surprising that three-quarters of the students asked by Papert gave 'wrong' answers. As the question stands, the answer given as correct (that the rock goes up), is actually incorrect.

You stated that the monkey and the rock are of equal weight. In this case, in order to balance one another, as also stated, *both* must be resting partly on the ground; or *both* must be completely clear of the ground. The question asks whether the rock moves up, or down, or stays still, thus implying that it is free to move down, which means that it cannot be resting, even partly, on the ground. This means, in turn, that the monkey also must be completely clear of the ground, with the *whole* of its weight already on the rope.

Starting to climb up the rope will have no effect on the weight of either monkey or rock, so the rock will stay where it is.

S Kane  
66 Haw Road  
Co Antrim

Boris Allan replies: by pulling on the rock (to raise himself) the monkey effectively applies a turning force to the pulley (ie a "couple") and thus the rock rises. The solution is a case of action/reaction, and the monkey rises at exactly the same rate as the rock.

## On a winning ticket

May I express through your columns, my thanks to David Lawrence for his *Working Spectrum*, a copy of which arrived this morning (November 17). As I ordered it on November 12, this must set something of a record in the world of micro-computers.

On a first swift look through the book it would appear to be invaluable and credit must also go to the designer for the very clear way in which the information is presented. No large chunks of indigestible text.

Thank you and the team for *Popular Computing Weekly*,

I'm a committed fan and look forward to each issue.

Marion Taylor  
504 Ben Jonson House  
Barbican  
London EC2Y 8DL

## Niggardly bug examples

Dare I say that the examples of Spectrum bugs offered by your correspondents (so far) have been niggardly, almost insignificant examples.

This one produces an entire incomprehensible screen display. First enter:

```
10 PRINT "xxxx"; GOTO 10 and
RUN it.
```

The screen will fill up and the computer stops to ask *Scroll?* Press both shift keys together and then *Enter*.

Can anyone tell me what's going on?

John Bloxham  
18 Lea Close  
Stratford-upon-Avon,  
Warwickshire CV37 9JS

## When a bug is not a bug

David Edwards's Spectrum "bug" reported in your December 9 issue is not only not a bug, it is actually documented on page 114 of the Spectrum manual, which fully explains the phenomenon.

For the uninitiated, 6 in extended mode generates a "paper yellow" control code sequence, ie *Chr\$17 + Chr\$6*. Pressing *Delete* once deletes the *Chr\$17* leaving *Chr\$6*, which reference to the character code chart on page 183 will show is the control character corresponding to a comma in a *Print* statement, hence the cursor moves to column 16.

None of the other colour codes (0-5 and 7) have any meaning to the tv display, hence they are displayed as a question mark.

All this does is illustrate the interesting fact that *Delete* works on control code sequences starting with the first code and working through to the last, rather than the other way round as with normal displayed characters. Incidentally 9 in extended mode sets the *Bright* attribute, not colour white as stated by Mr Edwards.

There seem to be very few "real" bugs in the Spectrum, most of those reported are interesting quirks with little or no practical significance. My contribution to the "real but avoidable" category is that *Clear* does not do a *Restore*, contrary to the manual. This problem is overcome by the good practice of putting a *Restore* before any critical *Read* statements.

Kevin Gordon  
41 Fennel Crescent  
Broadfield  
Crawley  
West Sussex

## Bugged up and interesting

I think I have found another bug in the Spectrum — an interesting one. Normally when the computer gives an error code, the cursor disappears. Then, when a key is pressed, the message disappears and the cursor returns. But the following program gives a different result:

```
10 INPUT 3; a$
```

When the program is run, the error message "J Invalid I/O device, 10:1" is given — but the cursor appears at the end! Any typing done then will appear on screen at the same time as the error report, which cannot be deleted. This does not disappear until *Enter* is pressed, when the message is removed before syntax checking starts.

Has anyone else noticed this fault? It seems to arise from the fact that you are telling it to accept data from the printer rather than the keyboard.

Bill Longley  
388 Ipswich Road  
Colchester  
Essex CO4 4EX

## In a minority with only 16K

As a reader of your magazine since No 1, I wonder if you (or anyone else) can explain to me why the authors of programs, and especially software companies who retail the various program cassettes, always assume that the maximum capacity of the ZX81 is only 16K.

I have a ZX81 32K. There must be many thousands like me, and also many thousands with 64K Ram packs, yet there

do not seem to be any cassettes on the market to take advantage of this.

The real reason I am writing is that recently I purchased a ZX81 machine code compiler only to find out that it just had variables A-Z, no strings and no arrays unless you used *Peek* and *Poke*.

As I wanted it to process the loops in programs using strings and arrays, but am not too familiar with the *Poke* command, the compiler couldn't help me a lot. The reason given in the instruction leaflet was lack of space as the ZX81 only had 16K Ram.

I would like to gamble that if a check could be made on all ZX81 users throughout the country that the 16K Rammers would be in the minority.

J Ashbourne  
212 Cherry Sutton  
Hough Green  
Widnes

A moot point. It is a gamble I would like to take, but the thought of conducting a nationwide survey of ZX81 owners is a little daunting.

If you feel 16K owners are a majority/minority, please let us know.

## Request for Vic adventures

After seeing the letter in your September 23 issue about Vic adventure games, my friends and I decided to write to you asking for some.

We all own Vics and enjoy buying your magazine a lot.

A M Smith  
E Midwinter  
P Eastman  
N Oakley  
21 Willingdon Park Drive  
Eastbourne  
East Sussex

There was not a massive response to our request for Vic adventures, but there was enough interest to justify further action. We hope to run an adventure feature some time in the New Year.

If you have an opinion you want to express, or have spotted an error that needs correcting, write to: Letters, Popular Computing Weekly, Hobhouse Court, 19 Whitcomb Street, London WC2.



# Missile command


A new game for the 16K Spectrum by Chris Wood

After a visit down my local arcade for ideas for games for my ZX Spectrum, I decided that *Missile Command* would be fast enough in basic. Below is an outline of the program.


Lines  
10 to 23 Set colours, and print instructions. Line 20 makes the cursor into the word *Continue* to look neater.  
24 to 38 Creates the user definable graphics. Run when you get this far so that you know which ones to put in lines later.  
40 to 85 Defines the remaining variables and sets up the screen. Line 47 enables you to print on line 22.  
90 to 140 The main game routine. Line 130 sends the program to the subroutine at 200 to check if a missile has been shot down if the 1(one) key has been pressed and there is still some ammunition.  
150 Scans the *Attributes* of the cities on line 20 to see if they have been hit by missiles.

170 Sends the program to the 'enemy satellite' routine at 400.  
171 to 194 Works out the bonus for the remaining ammunition and cities according to the wave attack number.  
200 Checks to see if a missile has been correctly hit; if it has it decreases the number of missiles by one and to ensure the correct missile is stopped the position of the last missile replaces the destroyed one. A mushroom cloud is printed at the end of the missile trace.  
400 to 480 This is in effect a game on its own. It has had to be written like this to make it very fast and difficult, and to avoid clutter by putting it earlier. It is fast because the bonus is very large and there would be no point in making it too easy.

Full instructions for playing are included in the program.

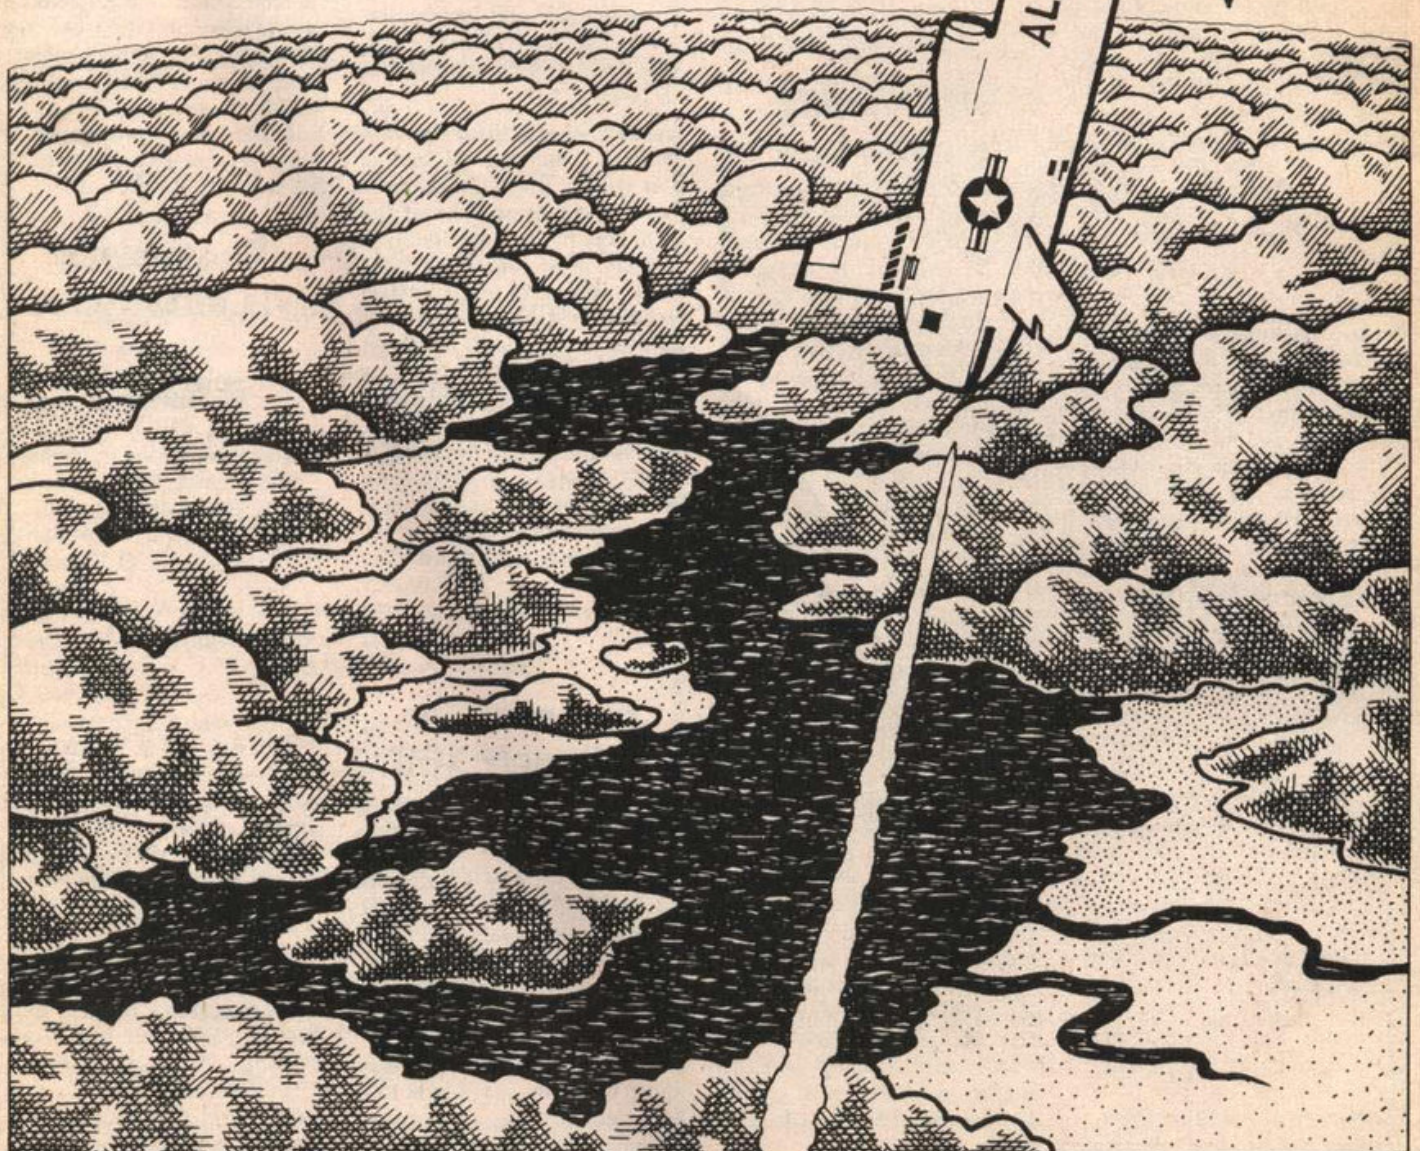



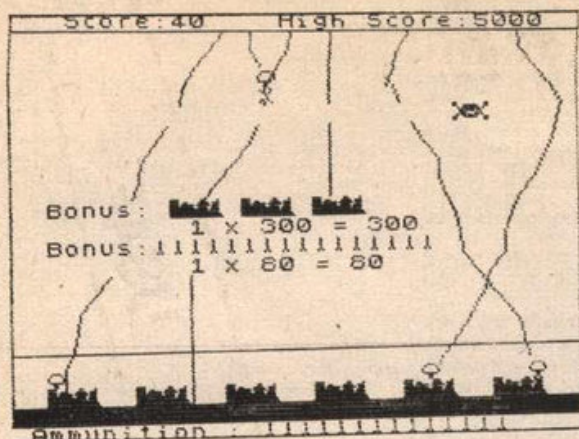

### Missile Command

```

10 RESTORE 0: PAPER 1: INK 7:
BORDER 6: CLS: PRINT TAB 7;"Mis
site Command":TAB 7;"
12 PRINT "An enemy power is
sending it's Intercontinen
tal Ballistic Missiles to des
troy your cities."
14 PRINT "It is up to you t
o intercept them with your la
ser cannon defense system, be
fore they level your cities."
16 PRINT "The controls are a
s follows: Up Down Left
Right Fire 7 6 5
8 1"
18 PRINT "You get a bonus fo
r the cities you save and yo
ur unused ammunition."
19 FOR B=1 TO 40: BEEP .1,RND*
20: NEXT B
20 POKE 23617,210: INPUT FLASH
1:"PRESS ENTER TO ": LINE a$:
POKE 23617,0
22 CLS: PRINT "You canno
t go below the line and if
you try you cannot raise yo
ur sights again. So be
careful and"
23 PRINT "At the end of ea
ch wave an enemy satellite wi
ll go across the screen. If
you can aim at it your automa
tic jamming transmitter will
destroy it."TAB 9;"GOOD LUCK"
24 PAUSE 500: LET HS=5000
25 POKE 23658,6: LET s3=0: LET
s2=0: LET sc=0: LET bn=1
30 FOR q=144 TO 150: FOR n=0 T
O 7: READ a: POKE USR CHR$ q+n,a
: NEXT n: NEXT q
35 DATA 0,16,16,16,16,16,40,0,
240,243,247,255,255,255,255,255
36 DATA 0,7,239,231,255,255,25
5,255,4,156,120,120,120,254,
255,0,60,66,129,129,128,24,24
38 DATA 3,227,244,216,55,180,2
27,3,192,199,47,27,28,46,199,192
40 LET s=0
43 PAPER 5: INK 2: BORDER 6: C
LS: PRINT AT 21,0: PAPER 4:TAB
31;"
44 PRINT AT 0,0: PAPER 0;" S
core: High Score:
45 PRINT AT 0,9: PAPER 0: INK
7;sc;AT 0,26;hs
46 LET bn=bn+.5: LET r=3*(6-s)
: LET e=6
47 POKE 23659,1: POKE 23689,2:
PRINT AT 22,0: INK 7: PAPER 0:T
AB 31;"":AT 22,0:"Ammunition:"
: FOR w=1 TO r: PRINT PAPER 1;"
1": NEXT w: POKE 23659,2
48 PLOT 0,30: DRAW 255,0
50 LET x=10: LET y=10: LET x1=
x: LET y1=y
55 PRINT AT x,y: OVER 1: INK 0
:"X"
60 DIM b(6): FOR i=1 TO 6: LET
b(i)=-1+INT (RND*3): IF NOT b(i
) AND i>3 THEN LET b(i)=-1
65 IF NOT b(i) AND i<3 THEN LE
T b(i)=1
70 NEXT i

```


```

71 PRINT AT 20,0:" ";
75 FOR n=1 TO 6-s: PRINT INK 0
:"BCD":NEXT n
80 DIM a(6): DIM d(6): FOR i=1
TO 6: LET d(i)=8: LET a(i)=167:
NEXT i
85 DIM f(6): FOR i=1 TO 6: LET
f(i)=INT (RND*40)*(6-s/2)+12: N
EXT i
90 FOR j=1 TO 20
95 FOR i=1 TO 6: PLOT f(i),a(i
): DRAW b(i)*(INT (RND*8)),d(i)
: LET f(i)=PEEK 23677: LET a(i)=
PEEK 23678
100 PRINT AT x1,y1: OVER 1: INK
0:"X"
105 IF PEEK 23677<9 AND b(i)<0
THEN LET b(i)=-b(i): GO TO 115
106 IF PEEK 23677>245 AND b(i)>
0 THEN LET b(i)=-b(i): GO TO 115
110 IF INT (RND*4)=4 THEN LET b
(i)=-b(i)
115 IF x<17 THEN LET x=x+(INKEY
$="6")-(INKEY$="7")
120 LET y=y+(INKEY$="8")-(INKEY
$="5")
125 PRINT AT x,y: OVER 1: INK 0
:"X": LET x1=x: LET y1=y
130 IF INKEY$="1" AND r>0 THEN
GO SUB 200
135 BEEP .001,45-j/2
140 NEXT i: NEXT j
150 FOR n=2 TO 27-(5*s) STEP 5:
FOR g=0 TO 2: IF ATTR (20,n+g)=
42 THEN LET s=s+1: PRINT AT 19,n
+g: INK 7: FLASH 1:"E": NEXT n:
IF n>27-(5*(s-1)) THEN GO TO 170
160 NEXT g: NEXT n
170 GO SUB 400
171 PRINT AT 10,2:"Bonus:";: FO
R v=1 TO 6-s: PRINT INK 0:"BC
D":BEEP .25,6-v: LET s2=s2+100
*INT (bn): NEXT v
172 PRINT TAB 10:INT (bn);" X
":v-1:"00=":s2
175 PRINT AT 12,2:"Bonus:";: FO
R v=1 TO r: PRINT INK 0:"1":
BEEP .1,-10: LET s3=s3+5*INT (bn
): NEXT v
176 PRINT TAB 10:INT (bn);" X
":r-5:"=":s3
177 LET sc=sc+s2+s3: LET s2=0:
LET s3=0
178 IF sc>hs THEN LET hs=sc
180 IF s=6 THEN GO TO 190
185 FOR u=1 TO 200: NEXT u: GO
TO 43
190 PRINT PAPER 0: INK 7:AT 0,9
;sc;AT 0,26;hs: FOR g=1 TO 48: B
EEP .01,g: BEEP .01,48-g: NEXT g
: INPUT "Another go? (Y/N) ":as
192 IF a$="Y" THEN CLS: RESTOR
E 0: GO TO 25
194 STOP
200 LET r=r-1: POKE 23659,1: PO
KE 23689,2: PRINT AT 22,12+r: PA
PER 1:"": POKE 23659,2: BEEP .0
1,40: FOR d=1 TO 6: IF INT (f(d
)/8)=y AND 21-(INT (a(d)/8))=x TH
EN LET f(d)=f(e): BEEP .03,-10:
PRINT AT x-1,y: INK 7: FLASH 1:"
E": LET e=e-1: LET sc=sc+INT (bn
):20: PRINT AT 0,9: PAPER 0: INK
7;sc
205 NEXT d
210 RETURN
400 PRINT AT x,y: OVER 0:"": L
ET x2=INT (RND*10)+3: LET x=10:
LET y=10: LET x1=x: LET y1=y
405 FOR k=1 TO 29: PRINT AT x2,
y:"GF"
406 PRINT AT x1,y1: OVER 1: INK
7:"X"
410 IF y<28 THEN LET y=y+(INKEY
$="8")-(INKEY$="5")
420 IF x<17 THEN LET x=x+(INKEY
$="6")-(INKEY$="7")
430 PRINT AT x1,y1: OVER 1: INK
7:"X": LET x1=x: LET y1=y
440 IF x1=x2 AND y1=k+2 THEN GO
TO 460
445 IF x1=x2 AND y1=k+1 THEN GO
TO 460
450 NEXT k: PRINT AT x2,29;"
455 RETURN
460 PRINT AT x2,k+1: FLASH 1:"E
"
470 LET sc=sc+500*INT (bn)
475 PAUSE 50
480 RETURN
1000 FOR n=0 TO 7: PRINT PEEK (U
SR "F"+n): NEXT n

```



# BEST OF POPULAR Computing WEEKLY

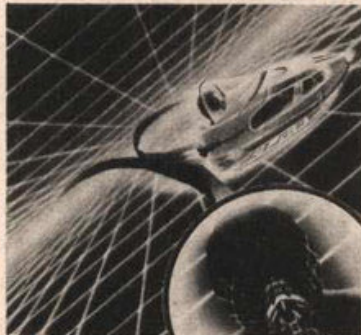

Four of the top Spectrum and ZX81 games from *Popular Computing Weekly* on sale on one cassette at a special price of only £4.45 inc p&p. **Laserchase**, by Simon Lane. This top game for the 16K Spectrum now has the added feature of a Bomb facility.

**Kong's Revenge**, by Jonathan Flint. This Kong game for the 16K Spectrum is one of the best you will see.

**Robot Control**, by Simon Lane. This 16K game for the ZX81 uses machine code routines to make your flight from the robots even more deadly.

**Alien Attack**, by Jeff Naylor. This machine code Space Invaders type program fits into 1K on the ZX81.

You will not find better value for money Spectrum and ZX81 software. Order now from:

**Popular Computing Weekly, Hobhouse Court  
19 Whitcomb Street, London WC2 7HF**

Please make cheques/postal orders for £4.45 payable to Sunshine Publications. We can normally deliver within four to five days.

# ROMIK SOFTWARE

24 Church Street, Slough SL1 1PT. Telephone: Slough (STD 0753) 71535

## SHARK ATTACK

For unexpanded Vic20

You are in shark-infested waters after being thrown overboard from a pirate ship. Your only protection being an atomic net which you trail behind you, trying to cover all the visible ocean and ensnare the sharks at the same time. Beware of stopping or covering your tracks for too long, if you do, then the sharks will escape and come after you. Watch out for the ever increasing deadly octopuses (sometimes the sharks will eat part or all of one!)

## MOONS OF JUPITER

For expanded Vic20, 3K, 8K or 16K

You are the Commander of a fleet of destroyers looking on from the safety of a mother ship, you send in one destroyer at a time to blast a passage through the **MOONS OF JUPITER**. Your destroyers have to dodge, and blast the UFOs... Watch out for the **Gologs** they can smash your destroyers, but you cannot harm them.

## A Machine Code

Arcade Quality Game

## SEA INVASION

Unexpanded Vic20

Fight off the attacking sea creatures for as long as you can. Shoot the whale for a surprise score, watch out for the crabs, starfish and octopuses.

## MARTIAN RAIDER

For unexpanded Vic20

Skim as close as you dare to the surface of the planet, devastating the Martian cities, destroying ammunition dumps (gaining more time), shooting down the ground-to-air missiles.

## SPECIAL OFFER...

C4 COMPUTER CASSETTES

£2.50 for 10; £20 for 100

Available post free from the above address only

**ROMIK PROMISE  
A MINIMUM OF  
ONE NEW GAME  
EVERY MONTH**



## MULTISOUND SYNTHESIZER

For the unexpanded Vic20

The Vic Multisound Synthesizer is very flexible and can be played in more ways than can ever be explained here, to create music and special effects. For example, create any tune, up to 255 notes (after following appropriate instructions), then press 'F1' or 'F3', then key '9' and enjoy the added effect. Now hit '+', listen to the difference. For a surprise — hit '-'. Now add a melody over the top — hit key '8' then '7' — now play a melody, or experiment. Have fun!

## MIND TWISTERS

For unexpanded Vic20

Four games to stretch your brain

Blackjack, Decipher, Four Thought and Teaser are our computerised versions of very popular home games and will test your mental agility and skill for many a long hour.

## SPACE ATTACK

For the unexpanded Vic20

**Space Attack** is a game of skill. You as the pilot of an intergalactic battleship have to fight your way through wave after wave of various alien spaceships.

ALL PROGRAMS ARE £9.99

**Machine Code Arcade Quality Game  
STRATEGIC COMMAND**

Our first game for the Dragon

A strategy game for two players. Will keep you active for many hours. Air, sea and land battles!

ALL PROGRAMS ARE £9.99

**OUR GAMES ARE AVAILABLE FROM ALL  
GOOD HOME COMPUTER STORES**

**FOR THE FIRST TIME  
ANYWHERE IN THE WORLD!**

# ASTROLOGY ON YOUR SINCLAIR ZX81 (16K) AND SPECTRUM

**USER PROMPTING PROGRAMS:** merely key in birth information as requested by the computer — READ OUT (and/or PRINT OUT) what is normally the result of many hours of painstakingly tedious and complex mathematical calculations using tables, ephemeris, etc.

Cassette I ZODIAC I ONLY £10.00

makes truly AVAILABLE AT YOUR FINGERTIPS

THE SIDEREAL TIME OF BIRTH.

THE ASCENDANT AND MIDHEAVEN in Sign, Degrees, Minutes, and Seconds for EQUAL HOUSE SYSTEM.

THE SIGNS AND POSITIONS OF THE HOUSE CUSPS in Sign, Degrees, and Minutes for the PLACIDEAN SYSTEM.

THE SUN AND MOON POSITIONS in Sign, Degrees, Minutes and Seconds.

ALL THE PLANETS POSITIONS in Sign, Degrees and Minutes. THE LUNAR NODE — THE PART OF FORTUNE — THE VERTEX, AND A HOST OF OTHER BIRTHCHART INFORMATION AT THE TOUCH OF A KEY.

Cassette II ZODIAC II ONLY £8.00

GIVES YOU THE ASPECTS

Other programs in course of preparation include: PROGRESSING THE HOROSCOPE; RECTIFICATION OF THE BIRTH TIME, etc.

**STELLAR SERVICES**  
8 FIR TREE VALE, LEEDS LS17 7EY  
Tel: (0532) 692770



## New Generation Software

Professionally Written and Produced  
Software for the Home Computer  
From M.E. Evans the author of

# 3D MONSTER MAZE DEFENDER

comes a game for the  
ZX81/Spectrum

## ESCAPE

Can you find the axe to break down the exit door of the maze and ESCAPE? The maze is inhabited by 5 hunting dinosaurs including a TRICERATOPS who has the habit of hiding behind the hedges, and a PTERANODON that soars over the maze to swoop down on you.



Send to: **NEW GENERATION SOFTWARE**  
FREEPOST, oldland Common Bristol BS15 6BR

(no stamp reqd. in UK)

or for INSTANT CREDIT CARD sales ring 01-930 9232

Please send me a copy of Escape for the 16k Spectrum.  
I enclose cheque/P.O. for £4.95

Mr/Mrs .....  
Address .....  
..... post Code .....





Alec Fry, at work with some of his staff.

## At the library in Liss

**David Kelly talks to Alec Fry, founder of the Sinclair Owners' Software Library.**

Mention the idea of a software library to some software producers and they turn puce and have to be restrained. They see the library as an institution set up specifically to deprive them of sales.

Other software companies are content to coexist with libraries and take an altogether different view.

Alec Fry runs one such venture — the Sinclair Owners' Software Library, based in deepest Hampshire. After only six months — the service started in July 1982 — the library has over 1,000 members and has more than 150 ZX81 and ZX Spectrum titles for hire.

"Last Easter I bought a ZX81," says Alec, "and I quickly realised that it was easy to spend as much on software as on the machine."

"So it seemed like a good idea to build up a stock of programs and start a library — I was surprised that nobody had done it before."

Membership of the Sinclair Owner's Software Library costs £8.50 or £9.50 a year, depending on whether you wish to hire ZX81 or Spectrum cassettes. For this you get a quarterly newsletter, a library catalogue and your first order form. In addition to the membership fee, a charge is made every time a tape is loaned out.

The library has to keep more than one copy of many of its titles. There are as many as 20 copies of some of the most popular cassettes.

Each cassette has a surprisingly short life. "Usually a cassette won't last much more than 15 or so lendings," says Alec. "By that time someone has creased the tape or it gets damaged in the post."

Each cassette is loaned for a two-week period but, in practice, most are returned before the time expires. Just like a book library, every cassette has an accompanying card stamped with its return dates.

Looking at these it is easy to see that the library stock seldom languishes on the shelves — tapes are often taken out and returned several times a month.

"When members return their programs we encourage them to give it a score. These assessments are then fed into my ZX81 and we compile a top 20 list of cassettes — based on how the members rate the programs rather than on the number of times it is taken out. The ones most in demand do not necessarily get the highest score."

Most members hire new tapes immediately after returning the old ones. This means over 50 returns every day. So the library now employs three people part-time, as well as Alec and his wife Erna.

"Nearly all our tapes are out on hire at any one time — if we have tapes on our shelves they tend to be the 1K ZX81 programs. At the moment adventures are going well and we get a lot of demand for Spectrum utilities."

To a software house the main headache a library throws up is that of illegal duplicating. Copying cassettes while they are out on hire is a very difficult problem to control.

"To start with I wasn't sure what sort of reactions we would get from software suppliers. I made one or two tentative enquiries before we set up the library and those software companies we spoke to seemed quite happy with our idea."

"Our service operates just like any other lending library — it's all perfectly legitimate. In fact, many public lending libraries now offer a music cassette lending facility — the local library in Liss certainly does. We are only doing the same with computer cassettes."

"At first all the money we earned went into building up our catalogue. We soon discovered there was a big demand for what we were doing. Luckily, all my business experience has been in mail-order. For the last 16 years I have been the managing director of a photographic supplies mail-order company."

"I knew roughly what we would be in for if the library turned out to be a success. If I had not been prepared we would certainly have been swamped — we are still getting 50 to 60 new members per week!"


"We cater equally for ZX81 and Spectrum owners — in fact our membership is split right down the middle. Our range of ZX81 programs is greater, simply because the machine has been around longer."

"We choose which tapes we stock. There is often more than one program that does much the same thing, particularly with utilities. Selection is made on the basis of manufacturer's literature and all our main suppliers keep us informed of new products."

"Of course there are a few suppliers who just don't want to know about software libraries. Some state on the cassette that it may not be hired out."

"We always make our intentions clear when ordering tapes for the library. Of all the companies we have contacted, only eight will not sell to us — and we respect that view. In such cases we simply do not have those programs in our library."

"All the tapes we hire out are bought from the manufacturer and many companies regard us as a good customer because of the quantities we buy. We could never stock all of the material from each company. If a member hires a tape

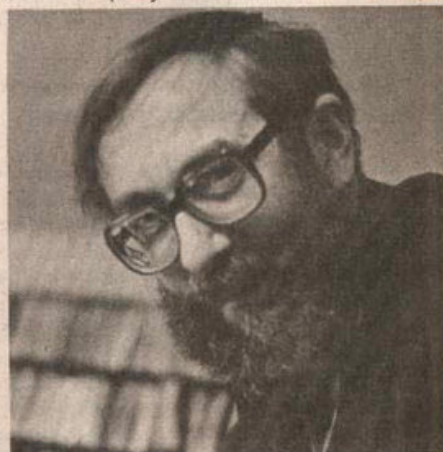

Luckily, all his business experience has been in mail order.

from us and likes it then he or she may well go out and buy it for themselves. Alternatively, they may find that the programs from a particular company are very good and, when they have a new product, buy it."

"Obviously we discourage them from illegally making copies. Many of our suppliers send us special versions of their programs which auto-run and cannot be saved."

"It is a rule of membership that library cassettes must not be duplicated."

"It has been suggested that we should pay a royalty to software companies. A figure of 20 percent has been mentioned which would be ludicrous — it would be more than the hire fee."

"The software houses get their cut anyway — both on the new tapes we buy and on the replacements bought later. I'm sure tapes wear out much more quickly than books do in public libraries."



# Escape!

**John Scriven** finds out whether the latest Spectrum games are good enough to save you money in the arcades.

A friend of mine said last year that he'd recently bought a micro to save money. On enquiring how this might be achieved, I was surprised to discover that it was not to help with home finances, producing sales graphs or calculating odds on football pools. He had calculated that he spent £1.50 on video games every time he visited his local hostelry.

If he were to buy a ZX81, he could stay in and play arcade games and, in less than four months, he'd have saved himself the purchase price. Needless to say, he was back at the 20p slot within a month, disillusioned with the standard of the games he'd acquired.

Most were in Basic, very slow and could not compete with the colour and sound of the real thing. In the 18 months since this happened, micros have advanced considerably. The speed has been improved by the use of machine code in many games.

This review will consider how far the successor to the ZX81, the Spectrum, can emulate the original arcade games, or even surpass them.

There are several games based on the Pacman theme as well as one or two Invader look-alikes. It would be pleasant to find rather more innovation in game concepts, but it seems the great British arcade-playing public prefers tried and tested ideas and new games take time to catch on.

*Mazeman* from Abersoft is a maze-pursuit game that involves eating dots while avoiding four little ghosts who pursue you. If you've recently eaten a power pill, the hunters become the hunted for about eight seconds. Tackling them gives you extra points. There is on-screen display of men left, screens eaten, individual score and hi-score. On the whole it is a competent high-speed version but the choice of cursor control keys for movement, although logical, does not make for ease of playing.

*Spookyman* from Abbex is similar in concept to *Mazeman* and does have the advantage of easier control keys. In fact any key in the top row of the keyboard moves your player up, the bottom row moves it downwards, and the middle two rows are divided in half for left and right movement. This means you can select which keys are most suitable for you.

The reason why this is preferable to the cursor keys is that the movement on the screen is related to the geographical positions on the keyboard. It is more suitable for high-speed action games. The answer,



John Scriven, games evaluator.

of course, is to use joysticks, and few games mention this facility.

This will doubtless change in 1983 when Sinclair, as well as Kempston, produce a joystick. *Spookyman* is very fast and does have a one- or two-player option, although all your turns have to be taken consecutively.

*Spectres* is the Bugbyte maze game and is similar to the two previous games. The graphics are more advanced and there is the entertaining story of Eddie the electrician trying to turn the lights on in a haunted house. But it is still a Pacman sheep in wolf's clothing. This is a fine product, but at £8, it is £3 more than the other two games, and as such, rather over-priced.

In its newly-announced collection of



software, Sinclair has included what appears to be yet another Pacman in the guise of *Hungry Horace*. It is soon clear, however, that a spark of originality lifts this game above run-of-the-mill maze games.

The maze has bridges and tunnels, an exit and an entrance through which an endearing little man appears. He has to be steered round, munching fruit that occasionally appears, while you avoid purple guards. If you reach what appears to be a bell, you can temporarily turn the tables on the guards and chase them. Should you negotiate the first maze successfully, there are three others that increase in complexity, the last one leading back to the first, but with an increase in difficulty. There is a sensible choice for movement keys and the sound of munching is very realistic.

This is one of the best Spectrum games and very addictive. It is noticeable that all

the Sinclair cassettes produced in conjunction with Psion are easily loaded and well-written.

New Generation Software has managed to achieve a maze games (*Escape*) that is both original and entertaining. The maze appears viewed from an angle of 45°, giving a 3-D effect. Vertical paths are obvious, horizontal ones often obscured by hedges. Difficulty is selectable from 1 to 5, and the object is to find a hidden axe and use it to batter down the exit.

No problem, you may think, except that dinosaurs (the same number as the difficulty level) pursue you. The graphics are excellent, especially a horrifying pterodactyl from which it is almost impossible to escape. Top scores are recorded, as is the time taken. My one criticism is the familiar difficulty of using the cursor keys for control.

There are two versions of *Asteroids*: *Planetoids* from Sinclair/Psion, and *Meteoroids* from Softek. The original arcade game provided you with a small triangular spaceship in the centre of the screen. Two buttons controlled rotation, and two more thrust and lasers. A panic button could hyperspace you to another part of the video universe.

The main enemy consisted of large chunks of interplanetary detritus that broke up until they were eventually vaporised. Additional excitement was provided by enemy saucers that shot at you. Avoiding this collection while destroying it was a challenge, but the graphics belonged to an earlier generation of arcade money-spinners.

*Planetoids* copies the original faithfully, but uses the user-defined graphics facility to produce a much more life-like ship. Unfortunately the movement is not realistic, being both jerky and too easy to control. The original needed great skill to learn to use reverse thrust to prevent the ship careering off screen.

Softek's version suffers from a similar disregard for the laws of physics and has a simpler spacecraft. The meteoroids, however, are very solid in appearance and the game is more involved than Sinclair's, having shield and movement for protection. There is also the option to temporarily halt the game while you do the washing-up, the gardening or your homework without destroying your brilliant score. These are two versions of a rather dated game. Softek just wins on points. Sinclair's version does have a short game called *Missile* on the reverse which probably makes them of equal value.

Next come the obligatory versions of *Space Invaders* (yawn!), one from Sinclair/Psion, *Space Raiders*, and one from Quicksilver, *Space Intruders*. Both include banks of invaders, laser cannons and buildings to shelter beneath. Sinclair's game has better graphics but is painfully slow. Quicksilver's version produces neat little invaders but rather simplistic ground shelters that disappear in big chunks and





cannot be used to fire through. This was a favourite trick on the arcade version. It is, however, fast enough to keep you awake during play, which is more than can be said for *Space Invaders*.

Another game that involves protecting a base from falling objects is *Rox III* from Llamasoft. You will need plenty of practice with this game to become proficient at destroying meteors as they crash near your moon base. Unfortunately, the advertising calls these Cruise missiles, which is factually incorrect — Lunar ballistic missiles would be more accurate — and in any case probably offends the not inconsiderable number of unilateralists in this country. The game itself is exciting and well written, as well as being good value at only £2.95.

Two games that push the potential of the Spectrum to its limits both originate from Silversoft. Perhaps "originate" is not the best word as they are both extremely good copies of complex arcade games. *Ground Attack* is a version of *Scramble*, in which you negotiate a tortuous tunnel system, bombing fuel dumps and shooting at rockets. There are controls for up, down, and sideways movement as well as bombs and laser buttons. It is a test of real dexterity to cope with the later stages of the tunnel. Good value at £5.95.

Silversoft's *Orbiter* seems to have reached the limits of Spectrum graphics. It reproduces almost all the features of *Defender* and is only slightly slower. The attack waves are all there, complete with little men, mutants, aliens, cluster bombs and the ability to fly to the left or the right. There is also the small radar screen at the top to show what sort of nasties are approaching.

I even found that using *Orbiter* for a few days improved my score on the arcade version. My small criticism is that there was no provision for a table of best scores. I'm sure that a great incentive to play arcade games is the ability to flash your name to all and sundry when you reach the top ten. Notwithstanding this, it's well worth £5.95.

There are two recently released games that attempt to boldly go where no arcade games have gone before. *Cosmos*, from Abbex, puts you at the controls of a spacecraft defending a convoy from the ravages of marauding aliens and the odd meteoroid. A radar screen in the corner of the main screen shows your relative position while the rest of the screen is taken up with the view from the cockpit.

Rushing into the game without studying the clear, on-screen instructions caused me to blast away at my own convoy, thus scoring the minimum points in about 10 seconds flat. The next time, I took more care to explore the possibilities of the game. Although novel in concept, I felt it lacked the speed one expects from this type of game. It is interesting enough, however, to find a place in many people's collections.

*Time-Gate* from Quicksilver is described as a "4-D adventure". It is the most complicated cassette that is reviewed here, and contains not only the program of the game, but also a short training prog-

ram explaining the scenario and the use of the controls. This is obligatory viewing otherwise you will not have the faintest idea what is happening.

The sleeve notes on the cassette contain the traditional Quicksilver Sci-Fi story just to put you in the right mood. To be honest, I would have preferred a list of the large number of control keys. Meanwhile, the story so far... this end of the universe has been invaded for several millennia by reptilian thugs. In order to eradicate them it is necessary to discover time-gates that lead you back to the time when they first appeared. Destroy them before they breed and mankind is saved for posterity, or at least until you run the game again.

The screen display consists of the view from the front of the craft, a galactic co-ordinate chart, and a target computer. Steering and fire controls are simplified by a keyboard template that slips over a section of the keys. There is provision for use of a joystick. It is possible to change speed, to jump to another sector of the universe, and to land on a planet to refuel.

This graphic sequence is particularly striking, as is the 3D effect as you battle it out with assorted aliens. In spite of the excellent graphics and use of screen to show spacecraft condition, I was not alone in finding the initial excitement beginning to pall as I waded back through time. Waiting to catch up with fleeing aliens was irritating.

Although I have reservations, *Time-Gate* is a complex, visually superb game that is to be commended on its novelty.

All the games here show how far home computers have progressed over the past 18 months. I wanted to show my friend with the ZX81 what he was missing, but he wasn't at home, I discovered him later in the corner of my local, scampering up video trees as he played "Donkey Kong". "Now here's a real game," he said, feeding another 20p into the slot.

Name	Type	Supplier	Cost	Value
<i>Planetoids/Missile</i>	A	Sinclair	£4.95	7
<i>Space Raiders</i>	I	Sinclair	£4.95	5
<i>Hungry Horace</i>	M	Sinclair	£5.95	10
<i>Spookyman</i>	M	Abbex	£4.95	7
<i>Cosmos</i>	3D	Abbex	£4.95	7
<i>Escape</i>	M	New/Gen	£4.95	9
<i>Orbiter</i>	*	Silversoft	£5.95	10
<i>Ground Attack</i>	*	Silversoft	£5.95	9
<i>Meteoroids</i>	A	Softek	£4.95	7
<i>Rox III</i>	*	Llamasoft	£2.95	8
<i>Spectres</i>	M	Bugbyte	£8.00	6
<i>Space Intruders</i>	I	Quicksilver	£4.95	6
<i>Time Gate</i>	3D	Quicksilver	£6.95	7
<i>Mazeman</i>	M	Abersoft	£4.95	7

Sinclair Research, Freepost, Camberley, Surrey GU15 3BR.

Abbex, 20 Ashley Court, Gt Northway, London NW4.

New Generation Software, 16 Brendan Close, Oldland Common, Bristol BS15 6QE

Silversoft, 20 Orange Street, London WC2H 7ED.

Softek, 329 Croxted Road, London SE24.

Llamasoft, Lindon House, The Green, Tadley, Basingstoke, Hants

Quicksilver, 92 Northern Road, Southampton SO2 0PB.

Abersoft, 7 Maes Afallen, Bow Street, Dyfed.

Bugbyte, Freepost, Liverpool L3 3AB.

A — Asteroids

I — Invaders

M — Maze pursuit

3D — 3D simulation

\* — see article



## OPEN FORUM

**Open Forum** is for you to publish your programs and ideas. Take care that the listings you send in are all bug-free. Your documentation should start with a general description of the program and what it does and then give some detail of how the program is constructed. We will pay the *Program of the Week* double our new fee of £6 for each program published.

## Race Maze

on ZX81

This is a games program, in which you are challenged to race your car through a complicated maze in the shortest possible time. If you are unlucky and crash, five seconds are added to your final time. At the very beginning of the program the

instructions are printed out, then the screen is cleared and the maze is printed out in fast-mode.

The movement of the car and the checking to see whether you have crashed is all done using *Peek* and *Poke*. Then the rest of the program is made up of the subroutines, one for crashing and one for printing out the end time and crashes.

```

5  REM "HAZE"
6  LET G=1
7  LET H=1
8  LET Z=0
9  LET A$=""
10 LET C=173
11 FAST
12 PRINT AT 5,6;"THIS IS EASE"
13 PRINT AT 6,0;"STEER YOUR CA
R THROUGH THE HAZE"
14 PRINT AT 7,1;"USEING ARROW
KEYS S,G,H"
15 PRINT AT 8,1;"YOU ARE SCORE
D IN THE TIME IT TAKES YOU TO
COVER THE COURSE"
16 PRINT AT 10,1;"5 SECS ARE A
DDED TO YOUR TIME EACH TIME YO
U CRASH"
17 PRINT AT 11,1;"PRESS N/
L TO START"
45 INPUT T$
46 CLS
47 LET E=0
50 FOR A=1 TO 21
55 PRINT " "
60 NEXT A
75 LET S=21
80 FOR A=1 TO 21
85 PRINT AT 3,31;" "
90 LET S=S-1
100 NEXT A
110 PRINT AT 0,0;" "
111 PRINT AT 21,0;" "
115 LET F=1
120 FOR D=1 TO 20
130 PRINT AT F,1;" "
140 LET F=F+1
150 NEXT D
160 LET K=7
170 FOR J=1 TO 3
175 PRINT AT 14,22;" "
176 PRINT AT 4,20;" "
177 PRINT AT 11,20;" "
180 PRINT AT K,12;" "
190 LET K=K+1
191 FOR N=6 TO 13
192 PRINT AT N,13;" "
199 NEXT N
200 NEXT J
201 FOR O=9 TO 12
202 PRINT AT 0,14;" "
203 NEXT O

```

```

205 PRINT AT 10,15;
206 PRINT AT 11,15;
207 PRINT AT 8,13;
208 PRINT AT 13,13;
209 PRINT AT 12,14;
210 PRINT AT 1,2;
211 PRINT AT 2,2;
212 PRINT AT 1,6;
213 PRINT AT 2,15;
214 LET U=3
215 FOR L=1 TO 14
216 PRINT AT U,2;
217 LET U=U+1
218 NEXT L
219 PRINT AT 20,2;
220 LET R=2
221 FOR B=1 TO 13
222 PRINT AT 1,30;
223 LET R=R+1
224 PRINT AT R,5;
225 LET R=R+1
226 NEXT B
227 PRINT AT 20,5;
228 PRINT AT 19,5;
229 PRINT AT 17,6;
230 PRINT AT 18,6;
231 PRINT AT 16,8;
232 PRINT AT 19,25;
233 PRINT AT 3,8;
234 PRINT AT 5,10;
235 PRINT AT 15,10;
236 PRINT AT 15,19;
237 LET Y=3
238 FOR S=1 TO 18
239 PRINT AT Y,29;
240 LET Y=Y+1
241 NEXT S
242 PRINT AT 7,29;
243 PRINT AT 8,29;
244 LET O=5
245 FOR N=1 TO 12
246 PRINT AT O,8;
247 LET O=O+1
248 NEXT N
249 LET D=6
250 FOR K=1 TO 10
251 PRINT AT D,10;
252 LET D=D+1
253 NEXT K
254 PRINT AT 9,10;
255 PRINT AT 10,10;

```

```

395 LET T=0
400 FOR N=1 TO 10
401 PRINT AT T,21,"圖"
402 LET T=T+1
403 NEXT N
404 PRINT AT 12,21,"圖";AT 13,21,"圖"
405 LET U=4
406 FOR N=1 TO 14
407 PRINT AT U,23,"圖"
408 LET U=U+1
409 NEXT N
410 PRINT AT 8,23,"圖";AT 9,23,"圖"
411 LET U=2
412 FOR N=1 TO 15
413 PRINT AT U,25,"圖"
414 LET U=U+1
415 NEXT N
416 PRINT AT 4,25,"圖";AT 5,25,"圖"
417 SLOW
420 LET PI=20676
425 POKE PI,136
426 LET PI=1
430 LET PI=PI+(INKEY$="8")-(INKEY$="5")+33*((INKEY$="6")-(INKEY$="7"))
433 IF PEEK PI=137 THEN GOSUB 3000
435 IF PEEK PI=136 THEN GOTO 600
440 IF PEEK PI=8 THEN GOSUB 2000
445 IF PEEK PI=3 THEN LET PI=01
446 IF PEEK PI=5 THEN LET PI=01
447 IF PEEK PI=131 THEN LET PI=01
450 IF INKEY$="S" OR INKEY$="8" THEN LET C=174
501 IF INKEY$="6" OR INKEY$="7" THEN LET C=173
603 POKE PI,C
605 LET Z=1
700 GOTO 425
999 STOP
1000 PRINT "*****"
1001 RETURN
1999 STOP
2000 LET Z=Z+5
2010 LET E=E+1
2020 POKE PI,23
2025 PAUSE 30
2030 RETURN
3000 LET U=1
3001 FOR A=1 TO 20
3002 PRINT AT U,30,"A"
3003 LET U=U+1
3004 NEXT A
3010 FOR N=7 TO 14
3011 PRINT AT N,12,"*****"
3022 NEXT N
3025 PRINT AT 7,12,"*****"
3030 PRINT AT 8,14,"E"
3050 PRINT AT 10,14,"GAME"
3060 PRINT AT 11,14,"OVER"
3070 PRINT AT 13,12,"TIME=";Z;
3070 FOR F=1 TO 10
3200 NEXT F
3300 PRINT AT 10,14,"OVER"
3305 PRINT AT 11,14,"OVER"
3307 PRINT AT 13,12,"TIME=";Z;
4001 NEXT G
4005 GOTO 3050
5000 FOR N=20000 TO 30000
5010 IF PEEK N=8 THEN POKE N,128
5020 NEXT N
6010 CLS
6020 FOR N=1 TO 4
6030 FOR J=1 TO 20
6040 PRINT "BEST TIME SO FAR"
6045 SCROLL
6046 NEXT J
6047 NEXT N
6050 LET P=Z
6055 RETURN

```

## Race Maze

by Mark Greer

## Hoi Sin

on Spectrum

This not so ancient Chinese game will run happily on your equally not so ancient ZX Spectrum. It will require oriental patience and much eastern ingenuity.

There are no difficulty levels to choose between because there is only one level —

difficult. The instructions are included in the listing and are very comprehensive.

There are no aliens to shoot down, no mazes to get through, nor time limits to beat: all you have to beat is your own ability to think logically.

There is an old Chinese proverb which says the man who can be defeated is the man who does not try.

```

5 LET S=0: LET M=0: LET N=1:
DIM L(16): DIM B(16)
10 INPUT "do you want instruct
ions ? (Y/N)";A$
200 BORDER 1:CLS
POKE 23659,60
20 SUB 1130
IF A$="N" THEN GO TO 180
55 PRINT AT 8,0:
60 PRINT INK 7; PAPER 1;"the b
oard positions are", randomly o
cupied with the letters of the
game.
70 PRINT "The object of the game i
s", "to rearrange the letters int
o a", "word", by ROTATING a group
of", "four letters CLOCKWISE on
e", "position.", INK 0; PAPER
5;" You Specify the upper l
eft position for the four you wi
sh to rotate.

65 PRINT AT 21,3; PAPER 7; INK
2; BRIGHT 1;"Press any key to c
ontinue. PAUSE 9000: PRINT AT 4
,14;"PAPER 7; INK 2;"valid move

```

```

5 70 PRINT PAPER 7; INK 1; AT 5,1
5 1 2 3 5 6; AT 6,15; 7 9 10 11
75 PRINT OVER 1; FLASH 1; AT 3,
1 1; AT 3,4; AT 3,7; AT 4,
4 1; AT 4,2; AT 4,5; AT 4,7; AT 4,
T 5 7; AT 5,3; AT 5,5; AT 5,8;
50 FOR f=8 TO 21: PRINT PAPER
1; AT f,0; NEXT f
85 PRINT AT 21,3; PAPER 7; INK
2; BRIGHT 1; Press any key to c
over line: PAUSE 9000; CLS : BORD
ER 7
90 PRINT PAPER 1; INK 7; "If th
e board looked ", like this :-
95 FOR i=1 TO 16: LET b$(i)=CH
R$(i+64); NEXT i
100 LET b$(2)="c"; LET b$(3)="s
"; LET b$(6)="b"; LET b$(7)="f"
105 GO SUB 320
110 PRINT PAPER 6; OVER 1; BRIG
HT 1; AT 3,3; AT 3,5; AT 4,
1 1; AT 4,5; PAUSE 150
115 PRINT PAPER 5; AT 3,10; INK

```

```

0: and you " : AT 4,10; "rotated
: AT 5,10; "position : AT 6,10; "
: AT 7, "PRINT OVER 1; FLASH 1;
: AT 3,3; " : FOR f=0 TO 700: NEX
T f
120 PRINT PAPER 1; INK 7; AT 9,1
0: "The board"; AT 10,10; "becomes
125 FOR i=2 TO 7: LET bs(i)=CHR
$(1+64+i)NEXT i
130 GO SUB 1230
135 LET Q=1: PRINT PAPER 1; INK
7; AT 16,10; "And you " ; AT 17,10
; "would WIN."
150 PRINT AT 21,3; PAPER 7; INK
2; BRIGHT 1: "For any day to c
ontinue" PAUSE 9000: CLS : BORD
ER 7
155 CLS
160 PRINT PAPER 1; INK 7: " AN
D you also have one SPECIAL mov
per game" which you may
e allows you" "The special mov
ent letters" "in a row.

```

**Program notes:**

1 to 175	Setting up arrays and instructions.
185	Clears b\$.
190 to 210	Sets up a random board.
230 to 260	Inputs and checks move.
265 to 275	Makes the move.
280 to 285	Checks for completion.
290 to 315	Displays score, asks for another game.
335 to 380	Special move.
Subroutine 1130	prints reference board.
Subroutine 1230	prints the up-to-date working board.



## PROGRAM OF THE WEEK

```

165 PRINT PAPER 1; INK 7; "
to make this move input 1" as you
u move and you will be "asked
for the two positions of the
letters you wish to exchange"
170 PRINT : PRINT PAPER 5; INK
0; "REMEMBER ONLY ONE SPECIAL MOV
E"
175 PRINT PAPER 1; INK 7; "
to give up at any time inp
ut 0" : PAUSE 100
180 PRINT AT 21.3: PAPER 7; INK
0; BRIGHT 1; "Press any key to c
ontinue" : PAUSE 0: CLS : BORDER
190 GO SUB 1120
195 PRINT PAPER 1; INK 7; AT 10;
0; "O.K. I'M THINKING UP A HARD O
NE" : "
FOR I=1 TO 16: LET S$(I)="
NEXT I
190 FOR I=1 TO 16.
195 LET T$=CHR$(INT (RND*16+65
))
200 FOR J=1 TO I: IF S$(J)=T$ T
HEN GO TO 195
205 NEXT J
210 LET S$(I)=T$: NEXT I
215 PAUSE 150
220 LET H=0: LET S=0: GO SUB 12
30
225 PRINT PAPER 1; INK 7; AT 10;
0; "MOVES TAKEN SO FAR ="
230 PRINT AT 12.0:
235 INPUT PAPER 1; INK 0; "Posit
ion to ROTATE ? " : i$
240 FOR h=1 TO LEN i$: IF CODE
$(h) <45 OR CODE $(h) >57 THEN G
O TO 235
245 NEXT h: LET i=VAL i$
250 IF i=0 THEN GO TO 330
255 IF i=-1 THEN GO TO 335
260 IF i=-4 OR i=8 OR i=12 THEN
PRINT AT 19.0: PAPER 1; INK 7; "

```

```

100 ILLEGAL MOVE--TRY AGAIN
110 GO TO 235
120 LET M=M+1: LET T=B$(I): LE
130 B$(I)=B$(I+1): LET B$(I+4)=B$(
140 I+5): LET B$(I+5)=B$(I+1): LET B
150 (I+1)=T$
160 GO SUB 1230
170 PRINT PAPER 7:AT 19,0;" ";
180 PAPER 1: INK 7:AT 10,0;" MOVES
190 TAKEN SO FAR = ";M;" "
200 FOR I=1 TO 16: IF CHR$(I+6
210 )<B$(I) THEN GO TO 235
220 NEXT I
230 PRINT PAPER 1: INK 7:AT 10,
240 0;"YOU ORDERED THE BOARD IN
250 ";M;" MOVES
260
270 LET M1=M+M: LET G=B+1
280 INPUT "Play again (y/n) ?";
290
300 IF B$(1)="" THEN GO TO 10
310 FOR Q=1 TO 60: BEEP .005,9:
320 NEXT Q
330 PRINT PAPER 1: INK 7:AT 10,
340 0;"you played ";G;" games and h
350 ave an average score of ";M1/G;"
360 moves/game STOP
370 PRINT PAPER 7: INK 0:AT 2,0
380
390 FOR I=1 TO 16: STEP 4
400 PRINT PAPER 6: INK 0;" ";B$
410 (I):";B$(I+1):";B$(I+2):";B$
420 (I+3):";B$(I+4):";B$(I+5):";B$(I+6)
430
440 B$(I+6)=B$(I+5): B$(I+5)=B$(I+4): B$(I+4)=B$(I+3): B$(I+3)=B$(I+2): B$(I+2)=B$(I+1): B$(I+1)=B$(I)
450
460 B$(I)=B$(I+1): B$(I+1)=B$(I+2): B$(I+2)=B$(I+3): B$(I+3)=B$(I+4): B$(I+4)=B$(I+5): B$(I+5)=B$(I+6)
470
480 B$(I+6)=B$(I+5): B$(I+5)=B$(I+4): B$(I+4)=B$(I+3): B$(I+3)=B$(I+2): B$(I+2)=B$(I+1): B$(I+1)=B$(I)
490
500 B$(I)=B$(I+1): B$(I+1)=B$(I+2): B$(I+2)=B$(I+3): B$(I+3)=B$(I+4): B$(I+4)=B$(I+5): B$(I+5)=B$(I+6)
510
520 B$(I+6)=B$(I+5): B$(I+5)=B$(I+4): B$(I+4)=B$(I+3): B$(I+3)=B$(I+2): B$(I+2)=B$(I+1): B$(I+1)=B$(I)
530
540 B$(I)=B$(I+1): B$(I+1)=B$(I+2): B$(I+2)=B$(I+3): B$(I+3)=B$(I+4): B$(I+4)=B$(I+5): B$(I+5)=B$(I+6)
550
560 B$(I+6)=B$(I+5): B$(I+5)=B$(I+4): B$(I+4)=B$(I+3): B$(I+3)=B$(I+2): B$(I+2)=B$(I+1): B$(I+1)=B$(I)
570
580 B$(I)=B$(I+1): B$(I+1)=B$(I+2): B$(I+2)=B$(I+3): B$(I+3)=B$(I+4): B$(I+4)=B$(I+5): B$(I+5)=B$(I+6)
590
600 B$(I+6)=B$(I+5): B$(I+5)=B$(I+4): B$(I+4)=B$(I+3): B$(I+3)=B$(I+2): B$(I+2)=B$(I+1): B$(I+1)=B$(I)
610
620 B$(I)=B$(I+1): B$(I+1)=B$(I+2): B$(I+2)=B$(I+3): B$(I+3)=B$(I+4): B$(I+4)=B$(I+5): B$(I+5)=B$(I+6)
630
640 B$(I+6)=B$(I+5): B$(I+5)=B$(I+4): B$(I+4)=B$(I+3): B$(I+3)=B$(I+2): B$(I+2)=B$(I+1): B$(I+1)=B$(I)
650
660 B$(I)=B$(I+1): B$(I+1)=B$(I+2): B$(I+2)=B$(I+3): B$(I+3)=B$(I+4): B$(I+4)=B$(I+5): B$(I+5)=B$(I+6)
670
680 B$(I+6)=B$(I+5): B$(I+5)=B$(I+4): B$(I+4)=B$(I+3): B$(I+3)=B$(I+2): B$(I+2)=B$(I+1): B$(I+1)=B$(I)
690
700 B$(I)=B$(I+1): B$(I+1)=B$(I+2): B$(I+2)=B$(I+3): B$(I+3)=B$(I+4): B$(I+4)=B$(I+5): B$(I+5)=B$(I+6)
710
720 B$(I+6)=B$(I+5): B$(I+5)=B$(I+4): B$(I+4)=B$(I+3): B$(I+3)=B$(I+2): B$(I+2)=B$(I+1): B$(I+1)=B$(I)
730
740 B$(I)=B$(I+1): B$(I+1)=B$(I+2): B$(I+2)=B$(I+3): B$(I+3)=B$(I+4): B$(I+4)=B$(I+5): B$(I+5)=B$(I+6)
750
760 B$(I+6)=B$(I+5): B$(I+5)=B$(I+4): B$(I+4)=B$(I+3): B$(I+3)=B$(I+2): B$(I+2)=B$(I+1): B$(I+1)=B$(I)
770
780 B$(I)=B$(I+1): B$(I+1)=B$(I+2): B$(I+2)=B$(I+3): B$(I+3)=B$(I+4): B$(I+4)=B$(I+5): B$(I+5)=B$(I+6)
790
800 B$(I+6)=B$(I+5): B$(I+5)=B$(I+4): B$(I+4)=B$(I+3): B$(I+3)=B$(I+2): B$(I+2)=B$(I+1): B$(I+1)=B$(I)
810
820 B$(I)=B$(I+1): B$(I+1)=B$(I+2): B$(I+2)=B$(I+3): B$(I+3)=B$(I+4): B$(I+4)=B$(I+5): B$(I+5)=B$(I+6)
830
840 B$(I+6)=B$(I+5): B$(I+5)=B$(I+4): B$(I+4)=B$(I+3): B$(I+3)=B$(I+2): B$(I+2)=B$(I+1): B$(I+1)=B$(I)
850
860 B$(I)=B$(I+1): B$(I+1)=B$(I+2): B$(I+2)=B$(I+3): B$(I+3)=B$(I+4): B$(I+4)=B$(I+5): B$(I+5)=B$(I+6)
870
880 B$(I+6)=B$(I+5): B$(I+5)=B$(I+4): B$(I+4)=B$(I+3): B$(I+3)=B$(I+2): B$(I+2)=B$(I+1): B$(I+1)=B$(I)
890
900 B$(I)=B$(I+1): B$(I+1)=B$(I+2): B$(I+2)=B$(I+3): B$(I+3)=B$(I+4): B$(I+4)=B$(I+5): B$(I+5)=B$(I+6)
910
920 B$(I+6)=B$(I+5): B$(I+5)=B$(I+4): B$(I+4)=B$(I+3): B$(I+3)=B$(I+2): B$(I+2)=B$(I+1): B$(I+1)=B$(I)
930
940 B$(I)=B$(I+1): B$(I+1)=B$(I+2): B$(I+2)=B$(I+3): B$(I+3)=B$(I+4): B$(I+4)=B$(I+5): B$(I+5)=B$(I+6)
950
960 B$(I+6)=B$(I+5): B$(I+5)=B$(I+4): B$(I+4)=B$(I+3): B$(I+3)=B$(I+2): B$(I+2)=B$(I+1): B$(I+1)=B$(I)
970
980 B$(I)=B$(I+1): B$(I+1)=B$(I+2): B$(I+2)=B$(I+3): B$(I+3)=B$(I+4): B$(I+4)=B$(I+5): B$(I+5)=B$(I+6)
990
1000 B$(I+6)=B$(I+5): B$(I+5)=B$(I+4): B$(I+4)=B$(I+3): B$(I+3)=B$(I+2): B$(I+2)=B$(I+1): B$(I+1)=B$(I)
1010
1020 B$(I)=B$(I+1): B$(I+1)=B$(I+2): B$(I+2)=B$(I+3): B$(I+3)=B$(I+4): B$(I+4)=B$(I+5): B$(I+5)=B$(I+6)
1030
1040 B$(I+6)=B$(I+5): B$(I+5)=B$(I+4): B$(I+4)=B$(I+3): B$(I+3)=B$(I+2): B$(I+2)=B$(I+1): B$(I+1)=B$(I)
1050
1060 B$(I)=B$(I+1): B$(I+1)=B$(I+2): B$(I+2)=B$(I+3): B$(I+3)=B$(I+4): B$(I+4)=B$(I+5): B$(I+5)=B$(I+6)
1070
1080 B$(I+6)=B$(I+5): B$(I+5)=B$(I+4): B$(I+4)=B$(I+3): B$(I+3)=B$(I+2): B$(I+2)=B$(I+1): B$(I+1)=B$(I)
1090
1100 B$(I)=B$(I+1): B$(I+1)=B$(I+2): B$(I+2)=B$(I+3): B$(I+3)=B$(I+4): B$(I+4)=B$(I+5): B$(I+5)=B$(I+6)
1110
1120 B$(I+6)=B$(I+5): B$(I+5)=B$(I+4): B$(I+4)=B$(I+3): B$(I+3)=B$(I+2): B$(I+2)=B$(I+1): B$(I+1)=B$(I)
1130
1140 B$(I)=B$(I+1): B$(I+1)=B$(I+2): B$(I+2)=B$(I+3): B$(I+3)=B$(I+4): B$(I+4)=B$(I+5): B$(I+5)=B$(I+6)
1150
1160 B$(I+6)=B$(I+5): B$(I+5)=B$(I+4): B$(I+4)=B$(I+3): B$(I+3)=B$(I+2): B$(I+2)=B$(I+1): B$(I+1)=B$(I)
1170
1180 B$(I)=B$(I+1): B$(I+1)=B$(I+2): B$(I+2)=B$(I+3): B$(I+3)=B$(I+4): B$(I+4)=B$(I+5): B$(I+5)=B$(I+6)
1190
1200 B$(I+6)=B$(I+5): B$(I+5)=B$(I+4): B$(I+4)=B$(I+3): B$(I+3)=B$(I+2): B$(I+2)=B$(I+1): B$(I+1)=B$(I)
1210
1220 B$(I)=B$(I+1): B$(I+1)=B$(I+2): B$(I+2)=B$(I+3): B$(I+3)=B$(I+4): B$(I+4)=B$(I+5): B$(I+5)=B$(I+6)
1230
1240 B$(I+6)=B$(I+5): B$(I+5)=B$(I+4): B$(I+4)=B$(I+3): B$(I+3)=B$(I+2): B$(I+2)=B$(I+1): B$(I+1)=B$(I)
1250
1260 B$(I)=B$(I+1): B$(I+1)=B$(I+2): B$(I+2)=B$(I+3): B$(I+3)=B$(I+4): B$(I+4)=B$(I+5): B$(I+5)=B$(I+6)
1270
1280 B$(I+6)=B$(I+5): B$(I+5)=B$(I+4): B$(I+4)=B$(I+3): B$(I+3)=B$(I+2): B$(I+2)=B$(I+1): B$(I+1)=B$(I)
1290
1300 B$(I)=B$(I+1): B$(I+1)=B$(I+2): B$(I+2)=B$(I+3): B$(I+3)=B$(I+4): B$(I+4)=B$(I+5): B$(I+5)=B$(I+6)
1310
1320 B$(I+6)=B$(I+5): B$(I+5)=B$(I+4): B$(I+4)=B$(I+3): B$(I+3)=B$(I+2): B$(I+2)=B$(I+1): B$(I+1)=B$(I)
1330
1340 B$(I)=B$(I+1): B$(I+1)=B$(I+2): B$(I+2)=B$(I+3): B$(I+3)=B$(I+4):
```

```

360 FOR h=1 TO LEN Y$. IF CODE
Y$(h)<48 OR CODE Y$(h)>57 THEN G
O 355
365 NEXT h: LET Y=VAL Y$
370 IF X>Y+1 AND X>Y-1 OR X>=
17 OR Y>17 THEN PRINT AT 19,0:
PAPER 1: INK 7: " ILLEGAL MOVE
TRY AGAIN: " : PAUSE 120: PRI
NT AT 19,0: " : GO TO 340
375 LET S=S+1: IF S>1 THEN PRINT
AT 21,0: INK 2: BRIGHT 1: " ONL
Y ONE SPECIAL MOVE PER GAME " : P
AUSE 120: PRINT AT 21,0: " : GO T
O 235
380 LET t$=b$(x): LET b$(x)=b$(
y): LET b$(y)=t$: GO TO 270
1120 FOR i=1 TO 16: LET b(i)=i:
NEXT i: PRINT " :
1135 FOR i=1 TO 13: STEP 4: PRINT
1140: 6: TAB 1: b(i): TAB 4: b(i+1)
: TAB 7: b(i+2): TAB 11: b(i+3): NEX
T i:
1140 PRINT PAPER 6: AT 3,12: " : A
T 4,12: " : PLOT 1,152: DRAW 104
: 0: DRAW 0,-33: DRAW -104,0: DRA
W 0,33
1150 RETURN
1230:PRINT PAPER 7: INK 0:AT 12,
0:" :
1235 FOR i=1 TO 13: STEP 4
1240 PRINT PAPER 6: INK 0: " : b$
(i): " : b(i+1): " : b(i+2): " :
b(i+3): NEXT i: PLOT 0,39: DRA
W b(i): DRAU 0,33: DRAU -64,0: DR
AU 0,-33: RETURN

```

**Hoi Sin**  
by D. Wieckowski

## Screen scrolls

on ZX81

The ZX81's *Scroll* and *CLS* routines are very slow, and this can be frustrating when you are trying to write fast-action games in Basic. Also the lack of lateral scrolls and a downward scroll can be quite maddening. To get over this I have written five short machine code routines that are totally relocatable in Ram.

To work through, these routines need at least 3¼K of Ram.

The first listing is ready for treatment by Bug-Bytes ZXAS program — for those fortunate enough to own one. I have also given a simple Hex Loader program and a Hex Dump of the machine code, for programmers without the ZXAS program. To relocate the program just change the addresses set in line 20.

To enter the machine code type in the simple Hex loader and *Run*. Now key in the complete Hex Dump. If you make a mistake type "S" and *Run* again. When you have finished delete lines 10-130. The machine code is now held in line 2 and is ready for use.

To enter the machine code with an assembler enter line 2 as in the simple Hex loader and type in the Mnemonics. Now GOTO 9000 and then delete lines 3-9060.

If you do relocate the program, starting at address X then the call up points are as follows:

Scroll Up	= x
Scroll Down	= x + 27
Scroll Right	= x + 56
Scroll Left	= x + 85
CLS	= x + 110

The routines only scroll the first 22 lines leaving the bottom two free for scores/times to be *Poked* in and left unchanged after using the *Scrolls* or *CLS* routine.

Only one line is moved at once, like the

ZX81's scroll command does. It also blanks the line that is left stationary by the routines.

## The Assembler Listing

Line 2 holds the machine code.

Line 10 opens the assembler file.

Lines 30-150 scroll the screen up by using the instruction LDIR. The routine uses registers DE, HL and BC.

Lines 170-330 scroll the screen down by using LDDR. It uses registers BC, HL and DE.

Lines 350-530 move the screen to the right. It uses LDDR in a different configuration to before. The registers used are A, HL, DE and BC.

Lines 550-720 move the screen left.

The routine uses the instruction LDIR to do all the moving. Registers used are A, HL, DE and BC.

Lines 740-890 clear the screen. By adding lines:

the CLS routine can become a screen invert routine. But to do this line 2 needs one extra "X" and the RESET-PRINT POSITION routine moves up by one byte but the label system on the Assembler automatically corrects this. The registers used are HL, BC and A.

Lines 910-980 are the reset print position routine. This is required by all routines otherwise some important system variables will be set incorrectly upon returning to Basic.

Line 990 closes the assembler file.  
Lines 9000-9060 are the assembler control program. Line 9010 should be changed if you wish to relocate the program.

I have also written a very simple demonstration program just to show one way of using the routines, but they have limitless capabilities.

HEX DUMP OF SCREEN SCROLLS

165514	ED	55	05	05	D5	21	ED	00
165522	ED	01	40	02	21	ED	50	00
165530	ED	09	06	03	36	ED	00	00
165538	ED	15	06	01	D3	02	00	10
165545	4D	05	09	54	5D	01	20	00
165553	ED	05	00	55	58	00	00	00
165562	ED	06	00	50	00	16	24	00
165570	ED	06	00	5D	0C	40	01	D5
165578	ED	19	54	52	C3	11	11	00
165586	00	ED	55	18	18	25	25	00
165594	C1	10	18	1B	ED	06	16	00
165602	2D	0C	40	ED	13	13	13	00
165610	00	23	C1	10	F2	17	00	00
165618	00	23	C1	10	D6	02	23	00
165626	0C	40	02	D1	D6	00	00	00
165634	75	28	01	36	20	00	00	00
165642	20	20	00	36	20	00	00	00
165650	40	20	00	36	20	00	00	00

# SIMPLE HEX LOADER

```

2 REM ( 150 "X"S )
10 FAST
20 FOR A=16514 TO 16663
30 SCROLL
40 PRINT A;"=";
50 SLOW
60 INPUT B$
70 FAST
80 IF B$=" " THEN GOTO 50
90 IF B$="S" THEN STOP
100 PRINT B$
110 L=CODE B$+16+CODE B$(2)
120 POKE A,B
130 NEXT A

```

## MACHINE CODE CALL ADDRESSES

```
16514=SCROLL UP
16541=SCROLL DOWN
16570=SCROLL RIGHT
16599=SCROLL LEFT
16624=CLS
```

## DEMONSTRATION PROGRAM

[illegible]

```


3 LET UP=16514
4 LET DOWN=16541
5 LET RIGHT=16570
6 LET LEFT=16599

```

Continued on page 18



# SPECIAL OFFER

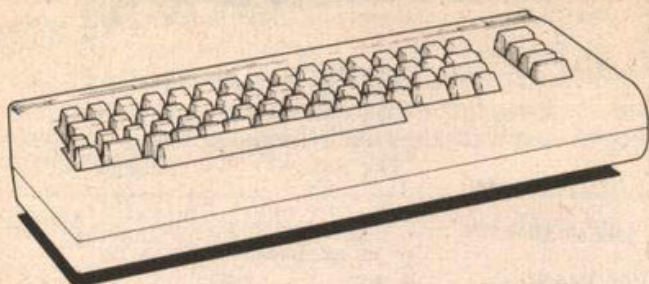

## Vic-20 Computer £144.95 (incl. VAT)

The Vic Centre has London's most comprehensive range of Vic-20 and Commodore 64 hardware and software. Telephone or call at The Vic Centre, 154 Victoria Road, North Acton, London W3 (opposite North Acton tube station) just off the A40.

Telephone: 01-992 9904

Monday-Saturday 10.00am-5.00pm

VISA, ACCESS, AMEX



FAST M/CODE

ARCADE ACTION

## WINGED AVENGER

7 LEVELS, RAPID FIRING, LASER SHIELD, MOTHER SHIP, RE-FUELLING, SMART BOMBS, 3 WAVES, HIGH SCORE SPECTRUM VERSION HAS SOUND AND GRAPHICS. ONLY £4.50. FOR SPECTRUM OR 16K ZX81. P.C.W. "ONE OF THE BEST SINCLAIR GAMES YET". Y.C. "THE ACTION IS FAST."

### AND NOW SPECTRUM SCRAMBLE

"CONDITION RED", M/CODE ACTION, 8 DIRECTIONAL KEYS, MISSILES, FUEL DUMPS, METEORS, USER GRAPHICS, SOUND, MOVE, FIRE AND BOMB AT THE SAME TIME. HIGH SCORE, FAST ACTION AND DELIVERY. £4.95

"ZX81 CONDITION RED", ZX81 VERSION. MOVE UP/DOWN, FIRE LASERS. FAST M/CODE. HIGH SCORE TABLE. BY ARCADE GAMES FOR ZX81 USERS. £3.95.

DRAGON, ZX81, SPECTRUM PROGRAMS WANTED

WORK FORCE. 140, WILSDEN AVENUE, LUTON, BEDS.

NEW . . . BIGGER . . . BETTER

## BUFFER micro shop

We are MOVING up the road to

310 STREATHAM HIGH ROAD  
LONDON, SW16



The world's oldest Sinclair-orientated software shop packed with goodies for

## ZX81 & SPECTRUM



Try before you buy — continuous demonstrations

Open 10.30 am to 5.30 pm

Tuesday to Saturday (closed Monday)



Please send large S.A.E. for catalogue  
and indicate for which computer

MEANWHILE, our telephone number

remains the same: 01-769 2887

## BEEB BITS

FROM

## CLARES



BBC CASSETTE LEADS DIN to DIN + REMOTE (ref 01) at £2.50  
BBC CASSETTE LEADS DIN to THREE JACKS (ref 02) at £2.50  
MONITOR LEADS BNC to PHONO (ref 03) at £2.95  
MONITOR LEADS PHONO to PHONO (ref 04) at £1.50  
DRAGON CASSETTE LEADS DIN to THREE JACKS (ref 05) at £2.50  
SERIAL PRINTER LEADS (ACORN SPECS) (ref 06) at £7.50  
ALL LEADS ARE TOP QUALITY WITH UNCONDITIONAL GUARANTEE

BEEBSTICK: A high quality proportional joystick with a super action as reviewed in this magazine and November Beebug. Reviewer says, "Robust, useful and reasonably priced."

COMPLETE WITH FOUR FREE PROGRAMS £29.95

### BBC SOFTWARE:

GRAFSTIK allows the drawing of lines, rectangles, triangles and circles in up to 8 colours. Shapes are drawn by plotting a point and moving to the next point, a line is then drawn between the two (triangles need 3 points). Drawing can be labelled and the whole picture saved to tape to be redrawn later or included in a host program. Additional facilities allow painting and doodling — A REAL TOOL. Use it for technical drawing, flowcharting, schematics, graphics, etc.

FREE REDRAW — include it in your own program and you can create complex graphics with ease.

JOYSTICK GRAPHICS: is similar to GRAFSTIK but only allows drawing in the line mode. The memory saved is used to provide greater control of the screen, lines, array and scale. Can also be saved to tape for later use.

JOYSTICK PACK 1 (free with BEEBSTICK): contains 2 programs ZAP and SKETCH ZAP is a space war game requiring accuracy and speed to beat the aliens. SKETCH is an etch a sketch with some unusual features courtesy of the BBC. 8 colours, painting, flashing, ORing, EXORing, ANDing, etc.

All the above programs are compatible with ANY Joysticks. GRAFKEY. All features of Grafstik but using keyboard.

ALL SOFTWARE IS AN INCREDIBLE £5.75 per cassette and offers incredible value.

OUR PRICES ARE FULLY INCLUSIVE OF VAT AND CARRIAGE. NO EXTRAS.

Orders to CLARES, 222 TOWNFIELDS ROAD, WINSFORD, CHESHIRE CW7 4AX.  
TEL: WINSFORD 51374.



## AMAZING NEW PRODUCT TELESOUND 84 BBC/SPECTRUM SOUND BOOSTER

Telesound 84 outputs the computer sound direct through your unmodified TV set. Sound effects then can be controlled from a whisper to a roar. Three easy snap-on connections eliminate soldering.

Telesound 84 measures 2½ x 2 x 1½ cm. and requires no separate power supply. This unique device (patent pending) uses some of the very latest ultra miniature components and costs only **£9.95** inclusive of post, packing, etc.

Full instructions with connection diagrams are supplied so that the unit can be fitted in minutes without any previous experience.

Cheques/PO to  
**COMPUSOUND**  
32 Langley Close  
Redditch, Worcs. B98 0ET  
Please state your computer when ordering

## 3.5K VIC20 SOFTWARE

**PLANETFALL:** Lunar lander with a difference. Escort your fleet to a safe planet landing, under alien attack. Use joystick or keyboard. Only £4.95

**SPACEBLITZ:** 2,000 AD and aliens are laying waste the city of London. Defend your capital and destroy their mothership for a big bonus. Totally addictive. Use joystick or keyboard. Only £4.95

**GAMES PACK 1:** Unbelievable value for money. Consists of Turtle Race, Volleyball, Pelmanism, Catch 22, Onslaught. Only £4.95

**SPECIAL OFFER:** All three cassettes for £12. Any 2 for £9

*All prices include VAT, postage etc.  
Prompt delivery assured*

**SOFTWARE WRITERS:** Have you written a quality program for one of the popular home computers? If so why not send it to us? If it meets our standards we will market it and pay you 20 per cent royalties on each cassette we sell

**SHADOW SOFTWARE, 8 HALLGATE, THURNSCOE  
Nr ROTHERHAM, SOUTH YORKSHIRE S63 0TU**

## BBC MICRO/B 'MUSICSOFT'

5 music games of memory and dexterity

Mode 2 graphics

Fun for 5 year olds

Frustrating for graduates

Variable speeds and score levels

Cassette and instructions

**£3.50**

Cheques to **MUSICSOFT**  
12 Fallowfield, Amptill, Beds

## C.P.S. GAMES

LYNTONIA HOUSE

7/9 PRAED STREET, LONDON W2

Tel: 01-402 7964

We have now completed our move. We wish to apologise for the delay this may have caused. The last of the delayed orders should be with you now. If you are still expecting something from us, please give us a ring now.

### ADVENTURE GAMES

**TOWER OF BRASHT:**

Role playing adventure for up to seven players. 4 cassettes. **£9.50**

**GHOST OF RADUN:**

Adventure for one player. 3 cassettes. **£9.50**

**WIZZARD OF SHAM:**

Adventure for one player. 3 cassettes. **£9.50**

**SEVEN CITIES OF CIBOLA:**

Adventure for one player. 3 cassettes. **£9.50**

### WAR GAMES:

**KING ARTHUR:**

Battle in 6th Century England. 3 cassettes. **£9.50**

### CHILDREN'S GAMES:

Peter Rabbit Series and Tummy Digs Series. See previous ads in this magazine. 1 cassette. **£4.50**

**FOR ATARI 16K AND SPECTRUM**  
Please add 50p P&P for order

## ZX81 Workstation...



...is a stylish and ergonomic plinth for the ZX81. It raises and tilts the TV to avoid eyestrain, holds the 16KRAM in place and hides the wiring and power supply. This very professional unit costs £15, a built-in power switch is £3, plus postage at £1.50, inc. VAT.

Peter Furlong Products, Unit 5 (PK), South Coast Road, Industrial Estate, Peacehaven, Sussex BN9 8NA. Telephone 07914 81637 for C.O.D. and Credit Card sales.







## Trace

on Vic 20

This program is an analogue display for Vic20 with 3K Super Expander, which uses a twin moving trace resembling that used in electrocardiographs, oscilloscopes, etc. The various parameters can be quickly altered to suit any particular

application. I reckon this program could be of immense value to hobbyists and experimenters for monitoring and displaying various inputs from external equipment.

The inputs are made through the control port of the Vic using the two paddle inputs. The program as I've supplied it runs as fast as possible (fastest trace scan) but should the user need a more rapid trace, he can dispense with the Vertical numerical col-

umn or alternatively, increase the increments in lines 50, 52 and 55.

The "unaffected" position of the two traces can be changed by altering the plussed-on values in lines 28 and 30. The traces automatically renew after each scan using line 56. Sound could be added to give a signal if the traces or just one trace, perhaps, reaches a certain position, to sound an alarm.

```

1 REM TWIN-TRACE DISPLAY
2 REM R.BARTON.
3 A=50
4 GRAPHIC2
5 COLOR0,3,1,1
10 CHAR0,0,"9":CHAR1,0,"8":CHAR2,0,"7":CHAR3,0,"6":CHAR4,0,"5"
11 CHAR5,0,"4":CHAR6,0,"3":CHAR7,0,"2":CHAR8,0,"1":CHAR9,0,"0"
12 CHAR10,0,"9":CHAR11,0,"8":CHAR12,0,"7":CHAR13,0,"6":CHAR14,0,"5"
13 CHAR15,0,"4":CHAR16,0,"3":CHAR17,0,"2":CHAR18,0,"1":CHAR19,0,"0"
28 Y1=PEEK(36872)+35
30 Y2=PEEK(36873)+560
50 DRAW2,A,Y1TOA+30,Y1
52 DRAW2,A,Y2TOA+30,Y2
55 A=A+30
56 IFA>=1020THEN:SCNCLR:A=50
100 GOTO10
    
```

Trace  
by Richard Barton

## Screen store

on Spectrum

This program is based on a very short machine code routine, stored above Ramtop, which will load one of up to five screens stored in memory immediately into the screen memory area. It needs only a small Basic program to display these screens instantly. The Spectrum can produce high resolution pictures, but it takes a long time. This program will not speed up that process, but at least they can be called up fairly rapidly.

A screen of data on the Spectrum is 6912 bytes long, so starting at the top of memory, and subtracting, we end up with the following addresses: 58624, 51712, 44800, 37888, 30976. The machine code is 12 bytes long giving us address 30964. So to reserve the space in memory we CLEAR 30963.

I used "prog 1" to load the machine code and if all has gone well on running it,

the result shown should be printed. The machine code is based on the LDIR instruction which will perform a transfer of a block of memory from one place to another. BC is loaded with the length of the block, HL with the address the block starts at and DE with the destination address. So BC is loaded with 6912, HL with 58624 — the first address of our screens and DE is loaded with 16384 the starting address of the display file. A RANDOMIZE USR 30964 will now call up this machine code.

When this space has been reserved and the code entered it is possible to load up to five different high resolution screens into memory. This is done by using a pre-recorded screen and using the direct command LOAD " " CODE 'address'. Where 'address' can be one of the five mentioned previously. To move a different screen to the one at location 58624 we must change the value of HL. So different values must be poked directly to addresses 30968 and 30969. Fortunately the length of the Spectrum's display file is an

exact multiple of 256 so we can leave address 30968 at '0' and poke 30969 with the required value. These are: 229, 202, 175, 148, 121.

The driver program will (from line 2) display a different screen every few seconds, depending on the Pause value in line 5. Once all five screens have been entered above Ramtop they can be stored on tape by SAVE "name" CODE 30964,34572. What I did was to save "SL" line 1, the driver program, just before all the code so that it would load and run the code automatically.

It is possible to lower Ramtop even further and get another screen in but this leaves only enough room for about three lines of Basic! Alternatively Ramtop could be raised to store the minimum required number of screens. This program allows a high resolution screen to be instantly available in an ordinary Basic program and so it does not have to be loaded in separately at the beginning directly on to the screen.

```

1 REM
SCREEN LOADER
Five screens may be loaded, at
locations: 58624 : 51712 : 44800
37888 : 30976 using the command
LOAD " " CODE (location).
10 CLEAR 30963
20 FOR n=30964 TO 30975: READ
a: POKE n,a
30 PRINT n;" ";PEEK n: NEXT n
40 DATA 1,0,27
50 DATA 33,0,229
60 DATA 17,0,64
70 DATA 237,175
80 DATA 201
30964 1
30965 0
30966 27
30967 33
30968 0
30969 229
30970 17
30971 0
30972 64
30973 237
30974 175
30975 201
    
```

```

30974 175
30975 201
30964 LD BC,6912
1 0
27 0
30967 LD HL,58624
33 1
229 RESTORE
30970 LD DE,16384
17 0
64 0
30973 LDIR
237 GO SUB
175 VAL
30975 RET
201 ( )
30964 LD BC,6912
30975 RET
30976 NOP
30977 NOP
    
```

```

30967 LD HL,58624
30970 LD DE,16384
30973 LDIR
0>REM
    
```

```

1 BORDER 0: PAPER 0: INK 7: C
LEAR 30963: PRINT " LOADING LE
AVE TAPE RUNNING " : LOAD "COD
E
2 DATA 175,202,229,202,175,14
8,121,148,1
3 READ a: IF a=1 THEN RESTORE
: GO TO 3
4 POKE 30969,a: RANDOMIZE USR
30964
5 PAUSE 5: GO TO 3
    
```

Screen store  
by Keith Robertson



## Polar plotting

on BBC Micro

This program is written in Basic for a BBC Microcomputer with 32K of Ram. It uses Mode 2 to produce a series of shapes with the high-resolution graphics. The computer will draw screens of circles, ellipses, spirals, and flowers.

Between each screen there is a brief pause, the screen will then clear and the next set of shapes will be drawn. Pressing *Escape* at any point will end the program, otherwise it will loop continuously.

### Program notes:

50 to 80 Initialise — Calls PROCintro, which prints

a brief introduction, ON ERROR set by line 790, the cursor is turned off by line 70 and a graphics window is defined in line 80.

100 to 580 Main loop — Draws screenful of each of the shapes, each one being separated by a delay of several seconds. PROCplot is called to do all the drawing.

600 to 770 PROCplot — This procedure controls all of the plotting used to draw the various shapes. Eight parameters are passed from the main loop to this procedure. The first is the polar equation of the shape to be plotted. The other parameters control the size of the shape, its position on the screen and whether it is to be filled in or not. Lines 640 to 690 is the loop that converts each polar co-ordinate supplied from the equation into ordinary X-Y co-ordinates. Lines

710 to 760 fill in the shape if required, i.e.: if FL1% is passed as true.

780 to 930 PROCintro — initialise.  
940 PROCwait — Provides delay of required number of seconds.

The technique used to draw all the shapes is that of polar plotting, which allows points to be represented by a distance and an angle rather than two distances. All this does is allow complex shapes to be represented by simple equations, i.e.: the equation of a spiral is  $r = \text{theta}$ .

The program is quite slow, since it is written in Basic, however, it does produce some nice effects. With Rem statements removed it occupies under 2K.

```

10 REM Polar Plotting Demonstration
20 REM Written for the BBC MICRO
30 REM Model B by M.J. Dunn
40 REM Initialise
50 MODE 7:PROCintro
60 MODE 2
65 REM Turn off cursor
70 VDU 23,11,0,0,0,0
75 REM Define graphics window
80 VDU 24,0,0,1279,975,
90 REM Main Loop
100 REPEAT
110 COLOUR 1:PRINT TAB(6);"CIRCLES"
120 FOR N%=1 TO 8
130 GCOL 1,RND(7)
140 PROCplot("2",RND(1279),RND(1023),RND
(100)+40,1,2,TRUE,FALSE)
150 NEXT
160 PROCwait(3)
170 CLG
180 FOR N%=1 TO 8
190 GCOL 1,RND(7)
200 PROCplot("2",RND(1279),RND(1023),RND
(100)+40,1,2,FALSE,TRUE)
210 NEXT
220 PROCwait(3)
230 CLS
240 COLOUR 2:PRINT TAB(6);"ELLIPSES"
250 FOR N%=1 TO 8
260 GCOL 1,RND(7)
270 PROCplot("3/(2+COS(theta))",RND(1279),
RND(1023),RND(100)+40,1,2,TRUE,FALSE)
280 NEXT
290 PROCwait(3)
300 CLG
310 FOR N%=1 TO 8
320 GCOL 1,RND(7)
330 PROCplot("3/(2+COS(theta))",RND(1279),
RND(1023),RND(100)+40,1,2,FALSE,TRUE)
340 NEXT
350 PROCwait(3)
360 CLS
370 COLOUR 3:PRINT TAB(6);"SPIRALS"
380 FOR N%=1 TO 7
390 GCOL 0,N%
400 PROCplot("theta",640,512,10,N%,4,FALSE,
FALSE)
410 NEXT
420 PROCwait(3)
430 CLG
440 FOR N%=1 TO 7
450 GCOL 1,N%
460 PROCplot("theta",640,512,10,N%,4,FALSE,
TRUE)
470 NEXT
480 PROCwait(3)
490 CLS
500 COLOUR 4:PRINT TAB(5);"FLOWERS"
510 FOR N%=1 TO 8
520 GCOL 0,RND(7)
530 A%=RND(16)+4
540 PROCplot("1+COS(theta*A%)",RND(1279),
RND(1023),100,1,2,FALSE,FALSE)
550 NEXT
560 PROCwait(3)
570 CLS
580 UNTIL FALSE
590 END
600 REM Procedure to Plot shapes

610 DEFPROCplot(eqn%,X%,Y%,SF,S,N%,FL%,FL2%)
620 LOCAL theta,r,x,y,x1%,y1%
630 IF FL2% THEN x1%=RND(200)-100:y1%=RND(200)-100
640 FOR theta=0 TO N%*PI STEP .063
650 r=(EVAL(eqn%)*S)
660 x=r*COS(theta)*SF+X%:y=r*SIN(theta)*SF+Y%
670 IF theta=0 THEN MOVE x,y ELSE DRAW x,y
680 IF FL2% THEN PLOT 1,x1%,y1%:MOVE x,y
690 NEXT
700 IF NOT FL% THEN ENDPROC
705 REM Fill Shape
710 MOVE X%,Y%
720 FOR theta=0 TO N%*PI STEP .063
730 r=(EVAL(eqn%)*S)
740 MOVE r*COS(theta)*SF+X%,r*SIN(theta)*SF+Y%:
PLOT 85,r*COS(theta+.063)*SF+
X%,r*SIN(theta+.063)*SF+Y%
750 MOVE X%,Y%
760 NEXT
770 ENDPLOT
780 DEFPROCintro
790 ON ERROR MODE 7:END
800 VDU 23,11,0,0,0,0
810 V=RND(-TIME)
820 PRINT TAB(6,6);CHR$(141)CHR$(131);"GRAPHICS
DEMONSTRATION";TAB(6,7);CHR$(1
41)CHR$(131);"GRAPHICS DEMONSTRATION"
830 PRINT
840 PRINT "This program draws on the screen a
series of geometrical figures, such as
circles, ellipses, spirals etc."
850 PRINT
860 PRINT "After each screen there will be a
short pause, the screen will clear
and the next section will be drawn."
870 PRINT
880 PRINT "Press";CHR$(129);"ESCAPE";CHR$(135);
"to halt the program."
890 PRINT
900 PRINTTAB(6);CHR$(134);"Press any key to
start"
910 *FX 15,1
920 A=GET
930 ENDPROC
935 REM Delay Procedure
940 DEFPROCwait(S):LOCAL T:TIME:REPEAT UNTIL
TIME>T+S*100:ENDPROC

```

Polar plotting  
by M Dunn


## Hypnotist on Spectrum

This compact program gives an infinite array of changing patterns.

As you can see from the examples the pattern is generated on plain and vertically-striped backgrounds, thus giving differing effects. Sound is produced at the end of each drawing sequence.

To copy on to the printer, press 'Break-Copy' and when printed 'Continue'. The pattern will then commence from the last drawing sequence. Try alternative patterns by adjusting line 40.



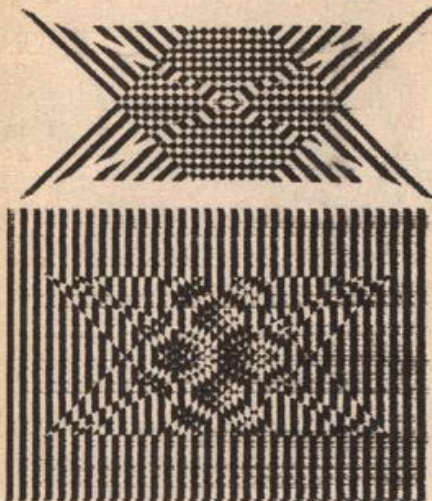

## Bird and caterpillar

on Vic-20

A hungry caterpillar is crawling over your screen. The caterpillar spots a nice piece of lettuce and it is up to you to see that it gets the lettuce. You have full control over the direction in which the caterpillar moves. The direction can be changed by pressing one of four keys as follows:  
Z for LEFT.  
X for RIGHT.

/ for UP.  
for DOWN.

Danger lurks. The caterpillar must not hit the wall (the edge of the screen display), otherwise it gets squashed. Also the caterpillar musn't suddenly go backwards, otherwise it bites itself and the game ends. Thus, for example, if the caterpillar is going down don't press / for up, press Z or X first. As soon as a piece of food is eaten another piece appears.

There is more danger around. A bird is

flying around the screen, it may eat the caterpillar or the food. The bird usually heads straight towards the food and hovers around the food, waiting for you. If you are fast you'll be able to make the caterpillar eat the food and escape from the bird. You'll do well if the caterpillar eats more than ten bits of food.

The program will run on any Vic20, expanded or not, lines 11 and 12 take care of the necessary changes. The many *Rem* statements explain the program.

```
10 REM BY HYPNOTIST
20 BORDER 0: GO SUB 120
30 LET a=175: LET c=24: OVER 1
40 LET b=INT (RND*16)
50 FOR b=1 TO 6*b: LET d=40
60 PLOT d+b,d: DRAW b,b
70 PLOT d-a-b,d: DRAW -b,b
80 PLOT d+b,d+c: DRAW b,-b
90 PLOT d-a-b,d+c: DRAW -b,-b
100 NEXT b: BEEP .1,b-40
110 GO TO 30
120 PAPER 0: CLS: INK 1+6*RND
130 IF RND>.5 THEN RETURN
140 FOR a=0 TO 87
150 PRINT "a=CHR$ 133";
160 NEXT a
170 RETURN
```

Hypnotist

by Paul Reynolds

```
1 REM %%%%%%%%%%%
2 REM %
3 REM % BIRD AND CATERPILLAR %
4 REM %
5 REM % BY CZES KOSNIOWSKI %
6 REM %
7 REM %%%%%%%%%%%
8 REM
9 REM
10 REM %%%%%%%%%%% INITIAL SETTINGS %%%%%%%%%%%
11 PP=7680+(PEEK(44)*16)*3584
12 QQ=38400+(PEEK(44)*16)*512
13 VO=36870: SO=VO-1
14 POKE VO+1,26
20 REM %%%%%%%%%%% CONTROLS %%%%%%%%%%%
21 PRINT CHR$(147)
22 PRINT " BIRD AND CATERPILLAR "
23 PRINT "CONTROLS":PRINT
24 PRINT "Z LEFT / UP"
25 PRINT "X RIGHT . DOWN":PRINT
26 PRINT "PRESS ANY KEY TO GO"
27 GET G:IF G="" THEN 27
30 REM %%%%%%%%%%% SETTINGS FOR EACH NEW GAME
31 REM %%%%%%%%%%% CATERPILLAR %%%%%%%%%%%
32 A(0)=PP+230
33 A(1)=A(0)-1
34 A(2)=A(1)-1
35 X=1:Y=0
36 SA=0
40 REM %%%%%%%%%%% BIRD %%%%%%%%%%%
41 B=PP+10
42 U=0:V=1
50 REM %%%%%%%%%%% SCREEN %%%%%%%%%%%
51 PRINT CHR$(147)
52 FOR J=0 TO 22
53 POKE QQ+22*J,2
54 POKE PP+22*J,160
55 POKE QQ+22*J+21,2
56 POKE PP+22*J+21,160
57 FOR I=1 TO 20
58 POKE QQ+1+22*J,5
59 NEXT NEXT
60 REM %%%%%%%%%%% FOOD %%%%%%%%%%%
61 K=PP+463+INT(RND(1)*20)
62 POKE K,88
63 M=INT((K-PP)/22)
64 N=K-PP-22*M
70 REM %%%%%%%%%%% START %%%%%%%%%%%
```

```
71 REM %%%%%%%%%%% CATERPILLAR CONTROLS %%%%%%%%%%%
72 GET A$
73 IF A$="Z" THEN X=-1:Y=0
74 IF A$="X" THEN X=1:Y=0
75 IF A$="." THEN X=0:Y=-1
76 IF A$="/" THEN X=0:Y=1
80 REM %%%%%%%%%%% HAS CATERPILLAR HIT WALL? %
81 W=A(0)+X+22*Y-PP+1
82 IF W<5086 OR W<1 THEN Z=1:GOTO 170
83 W=W-22*INT(W/22)
84 IF W=1 OR W=0 THEN Z=1:GOTO 170
90 REM %%%%%%%%%%% HAS CATERPILLAR BIT ITSELF?
91 IF A(0)=A(2) THEN Z=2:GOTO 170
100 REM %%%%%%%%%%% THE CATERPILLAR %%%%%%%%%%%
101 POKE A(2),32
102 A(2)=A(1):A(1)=A(0)
103 A(0)=A(0)+X+22*Y
104 POKE A(0),160
110 REM %%%%%%%%%%% HAS CATERPILLAR EATEN FOOD?
111 IF A(0)=K THEN SA=SA+1:GOSUB 200
120 REM %%%%%%%%%%% RANDOM CHANGE OF BIRD'S DIRECTION
121 IF M=INT(D/22) THEN V=V*V:GOTO 124
122 IF M=INT(D/22) THEN U=1:V=0
123 V=-V*V
124 IF M=DD THEN U=U*U:GOTO 129
125 IF M=DD THEN U=0:V=1
126 U=-U*U
127 IF M=INT(D/22) THEN V=V*V:GOTO 129
128 V=-V*V
129 ON INT(RND(1)*9) GOSUB 220
130 REM %%%%%%%%%%% MAKING SURE BIRD DOES NOT CRASH
131 D=D+U+22*V-PP+1
132 DD=D-22*INT(D/22)
133 IF D>5086 OR D<1 OR DD<2 OR DD>21 THEN U=-U:V=-V
140 REM %%%%%%%%%%% THE BIRD %%%%%%%%%%%
141 POKE B,32
142 B=B+U+22*V
143 POKE B,65
150 REM %%%%%%%%%%% HAS BIRD EATEN CATERPILLAR
151 FOR I=0 TO 2
152 IF B=A(1) THEN Z=3:GOTO 170
153 NEXT
160 REM %%%%%%%%%%% HAS BIRD EATEN FOOD %%%%%%%%%%%
161 IF B=K THEN GOSUB 200
162 GOTO 72
170 REM %%%%%%%%%%% CATERPILLAR DEAD %%%%%%%%%%%
171 POKE SO,223
172 FOR I=15 TO 0 STEP -2
```

```
173 POKE VO,1
174 FOR J=1 TO 100:NEXT
175 NEXT
176 POKE SO,0
177 POKE VO,0
178 PRINT CHR$(147)
179 PRINT " BIRD AND CATERPILLAR "
180 PRINT " THE CATERPILLAR ATE " SA
181 IF SA=1 THEN PRINT "BIT OF FOOD":GOTO 183
182 PRINT "BITS OF FOOD"
183 PRINT
184 IF Z=1 THEN PRINT "CATERPILLAR SQUASHED"
185 IF Z=2 THEN PRINT "CATERPILLAR BIT ITSELF"
186 IF Z=3 THEN PRINT "BIRD ATE CATERPILLAR"
187 FOR I=1 TO 1000:NEXT
188 POKE 198,0
189 PRINT PRINT "ANOTHER GO? Y OR N "
190 GET G:IF G="" THEN 190
191 IF G="Y" THEN 30
192 END
200 REM %%%%%%%%%%% FOOD HAS BEEN EATEN %%%%%%%%%%%
201 REM %%%%%%%%%%% FOOD NOISE %%%%%%%%%%%
202 FOR I=15 TO 0 STEP -1
203 POKE SO,225+I
204 POKE VO,1
205 FOR J=1 TO 10:NEXT
206 NEXT
207 POKE SO,0
208 POKE VO,0
210 REM %%%%%%%%%%% NEW FOOD %%%%%%%%%%%
211 M=INT(RND(1)*23)
212 N=INT(RND(1)*20)+1
213 K=N+22*M+PP
214 IF K=8 THEN 211
215 FOR I=0 TO 2
216 IF A(1)=K THEN 211
217 NEXT
218 POKE K,88
219 RETURN
220 U=V:V=U:U=U:RETURN
```

Bird and caterpillar  
by Czes Kosniowski





AUTOMATA Ltd. (P)  
65a Osborne Road  
Portsmouth PO5 3LR  
England

## PIMANIA

THE ADVENTURE GAME THAT'S FOR REAL! £6,000 PRIZE!

Will you be the first to locate the Golden Sundial of Pi in time and space, and be rewarded with the original? Exquisitely crafted by the winner of the De Beers Diamond International Award, from gold, diamond and the most precious of the earth's riches.

PIMANIA... where saxophones turn into hanggliders, where music meets madness and where the Pi Man rules supreme! He'll talk with you, he'll befriend you, he'll betray you, he'll even do the Hoky-Kokey! Animated cartoon graphics! Full musical score! Spectacular colour and sound effects! Includes free hit single "Pimania", with vocals by Clair Sinclair and the Pi Men!

It could take you a week to play, it could take you a lifetime! PIMANIA, the best evidence that computer gaming has come of age... an adventure enthusiast's dream! (Computer & Video Games)

An investment at £10 (48K Spectrum) £8 (16K ZX81)



\*SPECTRUM MONITOR  
\*SPECTRUM EDITOR/  
ASSEMBLER  
\*ZX81 SCREEN KIT 1  
\*ZX81 ZX-MC \*ZX81 REMLOAD

FAST MAIL ORDER-SEND TODAY!

**SPECTRUM MONITOR.** Machine Code Debug/Disassembler  
• Enter, Run, Debug machine code programs. • Compatible with Basic • Breakpoints and Registers Display • Disassembly to screen and/or ZX Printer • 16K and 48K versions on one cassette + 30 page manual. **£7.50**

**SPECTRUM EDITOR/ASSEMBLER.** A powerful and essential machine code programming aid. 16K & 48K on same cassette with full documentation. Major features include:  
EDITOR with Auto Line Numbering: 40 Column screen display, tabulated into fields for easy reading; 5 character Label Names: simple Line Editing and Cursor Control.

SAVE/LOAD Text Buffer to cassette: output to ZX PRINTER  
TWO-PASS ASSEMBLER accepts all 280 mnemonics (plus many unpublished mnemonics): Decimal or Hex numbers: simple arithmetic on operands. Assembler Directives — ORG, END, DEFB, DEFW, DEFL, EQU, DEFM.

WE CANNOT FULLY DESCRIBE THIS IMPORTANT UTILITY HERE, AND ASK YOU TO SEND S.A.E. FOR COMPLETE DETAILS OF THIS AND ALL OUR PROGRAMS. **£8.50**

**ZX81 SCREEN KIT 1.** More power to your screen in all your Basic programs. BORDERS any size, anywhere on screen. SCROLL in all 4 directions. CLEAR and REVERSE PART OF SCREEN. FLASHING CURSOR anywhere on screen — simulates INPUT. DATA FILES SAVE AND LOAD Basic variables: Double Speed, 880 bytes machine code for INSTANT RESPONSE. Becomes part of Basic Program. **£5.70** 4K to 64K

**ZX81 ZX-MC.** Machine Code Debug/Monitor  
• ENTER, RUN, DEBUG machine code programs • SAVE, LOAD, VERIFY at double speed • BREAKPOINTS and REGISTERS DISPLAY • Self contained — cannot be used with Basic • Cassette plus 36 page manual. **£7.50** 4K to 64K

**ZX81 REMLOAD.** Machine Code Debug/Monitor  
• A version of ZX-MC without the Save/Load/Verify facility • Compatible with Basic • CREATE A REM LINE of any length • BREAKPOINTS and REGISTERS DISPLAY • Cassette plus 30 page manual. **£6.95** 16K to 64K

SEND S.A.E. NOW FOR DETAILS  
6 Corkscrew Hill, West Wickham,  
Kent BR4 9BB.  
Prices include VAT & P&P

PICTURESQUE  
PICTURESQUE  
PICTURESQUE  
PICTURESQUE

## Software For The Vic

M/C-SOFT .....£7.50

M/C monitor and disassembler .....£7.50

DATABASE .....£7.50

Create your own custom files .....£5.00

BANK MANAGER .....£4.50

Computerise your bank account .....£4.50

CHARACTER EDITOR .....£4.50

Create your own Hi-res pictures .....£6.00

'CUSTOM COMMANDS' .....£6.00

Tape 1

SCROLL (X);SET X, Y;DISABLE; ENABLE;GRAPHIC;TEXT

Full documentation with all tapes

Send S.A.E. for details; cheques/P.O.s to:

MR CHIP, DEPT PKW

1 Neville Place, Penrhynside, Llandudno, Gwynedd

North Wales LL30 3BL

## DRAGON BYTE

HARDWARE, SOFTWARE AND BOARDGAMES

In Morley to serve West Yorkshire

SINCLAIR SPECIALISTS

But our range grows daily

Ring Keith Nathan on (0532) 788377

After 7.00 pm

For more information and mail order details

Manufacturers are invited to contact us

## AT LAST

Tidy, neat, easy to find.

Springloaded Storage

Drawers for

your software

Interlocking stack of

10 drawers £1.95

ALSO

Blank C12 Computer

Cassettes £4.90 for 10

OR


10 Storage Drawers complete with C12 Cassettes, £6.50

Post and packing: £1 — stack of 10 drawers or 10 C12 cassettes. £1.50 for two stacks of 10 drawers, complete with cassettes.

Cheques and POs to:

BATCHSTORE LTD

4A PRAED STREET, LONDON W2



## SOFTWARE FOR YOUR ZX81, SPECTRUM AND VIC20

FIRST RETURN OF POST SERVICE  
FOR YOUR 16K OR 48K SPECTRUM

Crazy Kong .....£5

Spectres .....£8

Spectral Invaders .....£5

Spectrum Arcade Pack — no less than 8 Super Games, only.....£5

For your unexpanded Vic20

Cosmiads, Asteroids and Panic, superb action, only .....£7 each

Get Constellation for your 16K ZX81 and view the night sky without a telescope for only.....£8

Also for your 16K ZX81 Startrek £5; Invaders £4

Games Pack: Six Action Games, only.....£5

All prices inclusive of P&P

Cheques and Postal Orders to

BYTEWELL, 203 COURT ROAD

BARRY, SOUTH GLAMORGAN. Telephone 0446 742491



## Storing data above ramtop

**Kevin Griffiths** explains how to transfer data between programs on the 16K ZX81.

The programs in this article show how to Load separate data files from cassette into the ZX81 while a program is already in the machine, by storing data above ramtop. All the programs require a 16K Ram pack.

On many occasions it may be beneficial to transfer data used in one program to another, so that it may be handled in a different format. Let us take an example. Suppose you were selling software and you wanted to store customers' records on computer, eg create a datafile, produce labels to stick on the packages, produce a cheque schedule for the bank and update your computer-stored accounts. If you received say, 50 orders on a given day, then you would need to type in name, address, cheque number and amount of each order into four separate programs. A far less time consuming and daunting task would be to type the information in once and pass it into each program.

Here are one program and two routines to enable you to do just that. The two routines are included within two example programs.

Program 1 will be repeated each time you use the technique. It would be advisable therefore to type in this program and Save it on to tape before following the example.

We are going to use a simple telephone directory, which will contain just five records as a demonstration. The directory will use the following arrays A\$(5,10), B\$(5,50), C(5) and the string Z\$. These have been used to show that any type of data may be passed.

First, enter program 1. Then add the following lines to the beginning of the program.

```
10 DIM A$(5,10)
20 DIM B$(5,50)
30 DIM C(5)
40 LET Z$ = "(6 spaces) TELEPHONE DIRECTORY
(7 spaces)"
```

Any arrays which you *Dimension* must always be at the beginning of the program for this technique to work (if you wanted machine code routines you would need to store them in an array instead of a Rem line).

After entering the above lines, type Run followed by *Newline*. The number of bytes that will need to be made available to hold your data above ramtop should appear on the screen. If you are satisfied with your arrays, do as the computer asks and type Y followed by *Newline*, if not type N and correct your arrays. After typing Y the computer will automatically *New* the program and the K cursor will appear in the bottom left-hand corner. Now enter program 2.

The beginning of the second program already contains our *Dimensioned* arrays. This program would normally be your data entry type program. If you Run the program the computer will ask for name, address and telephone number five times. As it does so, you should invent some data and enter it. On completion, the computer will go into *Fast* mode and store a copy of your data above ramtop. Having done so, it will ask you to *New* and enter the next program. Lines 200 to 290 are the lines you would need to add to your data entry program.

The next program will recall the data and handle it as necessary, eg print labels. In our example, this program is merely going to print the data that we have entered. However, before you enter program 3, type in as a direct command:

```
PRINT Z$
```

```
or
```

```
PRINT A$(2)
```

On both occasions the computer will return a report code of 2/0, proving that it cannot find the data. Now enter program 3 and simply type Run followed by *Newline*.

Again the computer will go into *Fast* mode and, after a few seconds, will return to *Slow* mode and print the data on the screen.

The routine for recovering the data is between lines 60 and 120 and must be entered in any program which needs to access the data. Note the word access, as this is all the program does. It copies the data from above ramtop, it does not destroy it so all you need to do is keep *Loading* programs with the above routine to keep using the same data.

The most important point to remember is that you must *Dimension* your arrays at the beginning of each program and in the same order. Programs 1 and 2 *Dimensioned* Zs using a *Let* statement. Zs was 32 characters long and contained the title. Program 3, however, just defined Zs as an empty string 32 characters long. This is necessary for the computer to have an area to put the title in when recalling data from above ramtop.

The program and routines are simple to use and a little bit of thought by the user about program ideas and design can open up endless possibilities. ■

### PROGRAM 1.

```
200 LET A=PEEK 16400+256*PEEK 1
5401 LET B=PEEK 16404+256*PEEK 1
5405
30 PRINT "YOUR DATA WILL REQUI
C-7
40 PRINT "BYTES ABOVE RAMTOP."
45 PRINT
50 PRINT "IF YOU WISH RAMTOP T
BE SET "
55 PRINT "TO ACCOMODATE YOUR A
RRAYS THEN"
60 PRINT "PLEASE TYPE ""Y""", T
HEN LOAD"
65 PRINT "NEXT PROGRAM."
70 PRINT
80 PRINT "IF YOU WISH TO CHANG
E THE ARRAYS"
90 PRINT "IN ANY WAY PLEASE TY
PE ""N""
100 PRINT "AND AMEND."
110 INPUT Z$
120 IF Z$<"Y" THEN CLS
130 IF Z$<"Y" THEN LIST
140 LET X=C-7
150 POKE 16369,INT (126-(X/256)
)
160 POKE 16368,(256*(126-PEEK 1
6369))-X
170 NEW
```

### PROGRAM 2.

```
10 DIM A$(5,10)
20 DIM B$(5,50)
30 DIM C(5)
40 LET Z$=" TELEPHONE DIR
ECTORY
50 FOR I=1 TO 5
55 CLS
60 PRINT "NAME ";I
70 INPUT A$(I)
80 PRINT
85 PRINT A$(I)
90 PRINT
95 PRINT "ADDRESS"
100 INPUT B$(I)
110 PRINT B$(I)
120 PRINT
130 PRINT "TEL. NO."
140 INPUT C(I)
150 PRINT C(I)
160 NEXT I
170 CLS
200 REM THE SECTION FOLLOWING
TRANSFERS THE DATA
ABOVE RAMTOP.
205 FAST
210 LET A=32768-(PEEK 16368+256
*PEEK 16369)
220 LET B=PEEK 16400+256*PEEK 1
5401
30 FOR X=0 TO (A-1)
40 POKE (32768-A)+X,PEEK (B+X)
50 NEXT X
60 SLOW
70 PRINT "DATA HAS BEEN STORED"
280 PRINT "PLEASE ""NEW"" AND L
OAD NEXT"
290 PRINT "PROGRAM."
```

### PROGRAM 3.

```
10 DIM A$(5,10)
20 DIM B$(5,50)
30 DIM C(5)
40 LET Z$=""
50 REM THIS SECTION RECALLS
THE DATA TO BE USED
IN THE REST OF THE
PROGRAM
60 FAST
70 LET A=32768-(PEEK 16368+256
*PEEK 16369)
80 LET B=PEEK 16400+256*PEEK 1
5401
90 FOR X=0 TO (A-1)
100 POKE B+X,PEEK (32768-A+X)
110 NEXT X
120 SLOW
125 REM EXAMPLE PROGRAM
130 CLS
140 FOR I=1 TO 5
150 PRINT Z$
160 PRINT
170 PRINT A$(I)
180 PRINT
190 PRINT
200 PRINT B$(I)
210 PRINT
220 PRINT "TEL. NO. ";C(I)
230 FOR P=1 TO 25
240 NEXT P
250 CLS
260 NEXT I
```



# At your command

**David Nowotnik** explains how you can Peek and Poke to the Spectrum display file.

Because of the complex layout of the Spectrum display file, the handbook suggests that you are unlikely to want to use *Peek* or *Poke* to this area of Ram. However, for high resolution interactive games or animation effects, you probably will want to use these commands. The problem lies in the calculation of addresses in the display file from row and column data.

To demonstrate the order in which the display file is arranged, try this one-line program. It can be entered as a direct command:

```
FOR i = 16384 to 22527: POKE i, BIN 11111111:
NEXT i
```

The Bin number causes all pixels to be Ink. A mixture of 0s and 1s will produce a striped pattern. You should notice several things from this routine:

1. The display file is divided into three groups of eight character rows each.
2. Each character square is made up of eight rows of pixels.
3. Each character square is also eight pixels across, this eight pixel row forms one byte in the display file.
4. In each group of eight rows, the top pixel row of all character squares is filled in first, then the second row, and so on.

To be able to calculate addresses, this pattern has to be expressed mathematically. One method of doing this is to turn to binary arithmetic. Expressing display file addresses as a 16-bit binary number, I found that certain groups of bits controlled certain aspects of the screen position corresponding to that address. This is demonstrated in figure 1.

Fig 1. Groups of binary bits within the screen address

```
0 1 0 0 0 0 0 0 0 0 0 0 0 0 0 0
 1   2   3   4   5
```

#### Group

- 1 — Bit 14 is set to indicate values above 16383.
- 2 — These two bits hold values 0,1, or 2; they indicate which group of eight rows.
- 3 — Pixel row number within a character (0-7).
- 4 — Character row number within a group (0-7).
- 5 — Column number (0-31).

From this relationship, I obtained the following expression for calculating screen addresses:

$$\text{Address} = 16384 + 32 * (y \text{ AND } 192) + 256 * (y \text{ AND } 7) + 4 * (y \text{ AND } 56) + x$$

Where y is the pixel row number (0-191) and x is the byte column number (0-31). Position 0,0 is at the top left of the screen.

Unfortunately, the Spectrum does not carry out conventional *And* or *Or* operations (unlike the ZX80 and ZX81), so, this routine will not work using the Spectrum

*And*. To overcome this problem, I turned to three simple machine code routines to perform *And* in the demonstration program in figure 2.

Written for the 16K Spectrum, the *Read/ Data* lines (100-140) *Poke* the machine code into the UDG area. Lines 140-180 set columns in the attribute file to random Ink colours, whilst lines 200-230 draw a random high-resolution bar chart. The length of the bars grows one pixel row at a time as

you watch the display. The subroutine in lines 20-30 *Pokes* the y value into the three machine code routines; line 30 calculates the addresses according to the aforementioned formula. All the machine code does is:

```
LD B,0
LD A,y
AND 7
LD C,A
RET
```

similarly for *And* 56 and *And* 192. ■

fig 2. Barcharts

```
10 GOTO 100
20 POKE 32747,y: POKE 32755,y:
   POKE 32763,y
30 LET a=16384+32*USR 32760+
   256*USR 32744+4*USR 32752+x
40 RETURN
100 FOR i=32744 TO 32767
110 READ a: POKE i,a
120 NEXT i
130 DATA 6,0,62,0,230,7,79,201,
   6,0,62,230,56,79,201,6,0,62,0,
   230,192,79,201
140 FOR i=22528 TO 22559
150 LET a=56+RND*7
160 FOR j=0 TO 767 STEP 32
170 POKE i+j,a
180 NEXT j: NEXT i
200 FOR x=0 TO 31
210 FOR j=190 TO INT(RND*120)
   STEP -1
220 GO SUB 20: POKE a,254
230 NEXT y: NEXT x
```





## Plotting data according to scale

*G Morton presents a graph plotting routine to represent data on an x, y scale.*


I devised this program to enable me to quickly plot the results obtained from electrical experiments.

Lines 10-100 input the experimental results in the form x,y. Lines 110-150 and lines 160-200 determine the peak values of x and y respectively, so as to be able to scale the screen axis correctly. Lines 210-220 determine the scaling factors for the x and y axis.

Lines 240-270 are required because the Dragon cannot print text to the graphics screen. These lines merely tell the operator the values corresponding to the graduations on the axis.

Line 280 gives the operator time to read the previous screen. Please note that the print statements have been laid out correctly to fill the lines without breaking any words, so don't miss the spaces. Line 280 could be changed to a *press "a" to continue* form, but I found the time allowed quite adequate.

Lines 310-340 adjust the data by using the scaling factors. Lines 330-340 change the data to integer form suitable for the *Pset* statements. This produces an error of less than 1/2 percent, quite suitable for experimental data.

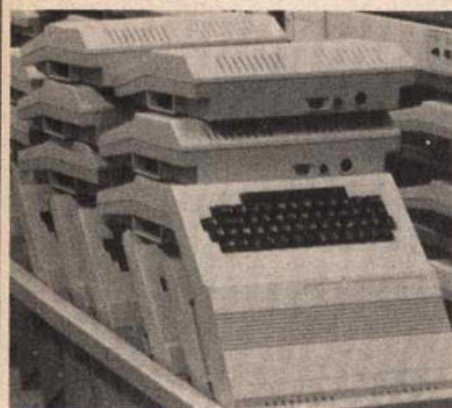

Line 350 prints the data to the screen while lines 370-380 plot the x and y axis. Lines 390-440 plot the graduations on the axis.

Line 290 defines the mode as 3. This is not the highest definition, but does allow the simultaneous plotting of several sets of data in different colours.

While I do not think this is the most efficient method of setting out the program, it is quite quick enough for this purpose. If required, an added line at 355 could be used to plot lines between each data point.

For more than 40 points of data, change the dimension statements in line 30.



```

10 CLS1
20 INPUT "HOW MANY POINTS ? MAXIMUM OF 40";L
30 DIM A$(40),B$(40)
40 FOR M=1 TO L
50 CLS
60 PRINT "INPUT X COORDINATE OF POINT ";M
70 INPUT A$(M)
80 PRINT "INPUT Y COORDINATE OF POINT ";M
90 INPUT B$(M)
100 NEXT M
110 B=VAL(A$(1))
120 FOR M=2 TO L
130 IF VAL(A$(M))>B THEN GOTO 140 ELSE GOTO 150
140 B=VAL(A$(M))
150 NEXT M
160 C=VAL(B$(1))
170 FOR M=2 TO L
180 IF VAL(B$(M))>C THEN GOTO 190 ELSE GOTO 200
190 C=VAL(B$(M))
200 NEXT M
210 D=230/B
220 E=170/C
230 CLS
240 PRINT"THE FOLLOWING GRAPH REPRESENTS THE
DATA PREVIOUSLY DEFINED"
250 PRINT"THE PEAK VALUE OF X IS ";B
260 PRINT"THE PEAK VALUE OF Y IS ";C
270 PRINT" HENCE EACH LINE REPRESENTS
1/10TH OF THESE ANSWERS ON THE RESPEC
TIVE SCALES"
280 FOR S=1 TO 8000:NEXTS
290 PMODE 3,1:SCREEN 1,0:PCLS
300 FOR M=1 TO L
310 A$(M)=STR$(D*(VAL(A$(M))))
320 B$(M)=STR$(E*(VAL(B$(M))))
330 X=INT(VAL(A$(M)))
340 Y=INT(VAL(B$(M)))
350 PSET(X+22,170-Y,3)
360 NEXT M
370 LINE(22,170)-(22,0),PSET
380 LINE(22,170)-(252,170),PSET
390 FOR F=1 TO 10
400 LINE(230*F/10+22,172)-(230*F/10+22,168),
PSET
410 NEXT F
420 FOR F=1 TO 10
430 LINE(20,170*F/10)-(24,170*F/10),PSET
440 NEXT F
450 GOTO450

```



# In principle it's easy

*This is the last article in our current series on machine code. Further machine code articles, programs and routines will follow shortly.*

To get a horizontal line, 10 characters long, on the top line of the display, we could execute the following code:

LD A, 88	3E 88	set value to be displayed
LD B, 0A	06 0A	set loop count
LD HL, (400C)	2A 0C 40	point to first character in display file
INC HL	23	
LD (HL), A	77	display
INC HL	23	point to next character
DJNZ LOOP	10 FC	do it again

To do the same job anywhere else on the display, all we need to do is alter the start value of *HL* by an appropriate offset. In principle it's easy to calculate the necessary offset. Let's think about the display file (see figure below).

If the *HL* is incremented after having been loaded from *D-file* so that it points at column 0, row 0, then we simply multiply the row number we want by 33 and add on the column number. That is:

```
offset=row * 33+column
```

Provided the row value never exceeds 7, we could use our 8-bit multiplier here. But there's a neater way:

```
offset=row * (32+1)+column
      =row * 32+row+column
```

Despite the fact that this expression for the offset seems more complicated than the original, it has the advantage that the multiplication is now by a power of 2 ( $2^5$ ), so all we have to do is shift row left 5 times to evaluate  $\text{row} * 32$ .

Now let us imagine that the row value is available in the *E*-register, and the column value is in the *C*-register. We can calculate the offset like this:

LD B, 05      06 05  
SHIFT: SLA E      CB 23  
DJNZ SHIFT 10 FC

But it's not quite as easy as that! This piece of code shifts the *E* register contents left 5 times all right. That's fine if row \* 32 is less than 255, but it could easily be more

than that, and then the *E*-register will overflow.

So we need a 16-bit register. If we use  $D$ , the above code can be used as a basis for the routine, but there are some pieces to add on. First, we will have to make sure that  $D$  contains zero to begin with. Second, as bits shift left off the end of  $E$  we want them to appear in  $D$  and then shift along  $D$ .

This will work:

LD D, 00	1600	clear D
LD B, 05	06 05	load loop count into B
SHIFT: SLA D	CB 22	} shift left DE
SLA E	CB 23	
JRNC EOL	30 01	go to End of loop on no carry
INC D	14	put the carry into the junior bit of D

Now we want to add this into *HL*, having first loaded it with the address of the first character in the display file:

```
LD HL, (400C) 2A 0C 40
INC HL        23
ADD HL, DE    19
```

Well, there was:

LD HL, (400C)2A 0C 40	} compute address of first character in display file add row value to it
INC HL 23	
LD D, 00 16 00	
ADD HL, DE 19	
LD B, 05 06 05	

```
as before      , compute 32 * row
```

```
EOL: DJNZ SHIFT 10—
      ADD HL, DE 19
      ADD HL, BC 09
```

add this into HL  
add column value into  
HL

Now we simply execute the "draw a line" routine as before:

LD A, 88      3E 88 (or whatever)

	LD B, 0A	06 0A
LOOP:	LD (HL), A	77
	INC HL	23
	DJNZ LOOP	10 FC

The hex codes are given below, tidied up.

There's no test in the routine to check

that the line being drawn doesn't go over the right-hand edge of the display, and of course, such a check should be included. Otherwise a pile of end-of-line returns could get clobbered. The easiest way of doing this would be to test whether the character we're about to overwrite is a newline. If so, dont.

This routine produces a horizontal line because of the *Inc Hl* instruction in the loop. Change *Hl* by some value other than 1, and we get different shapes. *Inc Hl* twice, and every other print position will display the character, for instance. Add 33 (decimal) into *Hl* in every loop and we get a vertical line. Add 34 (decimal) into *Hl* in each loop and we get a diagonal line.

You could have a library of such routines and simply call one whenever you want that kind of line.


Here is the complete code. This time we won't bother with addresses in the listing: they're not important (thanks, once again, to *relative* jumps).

```

to relative jumps):
      LD C, 00      0E 00
      LD E, 00      1E 00
      LD HL, (400C) 2A 0C 40
      INC HL        23
      LD D, 00      16 00
      ADD HL, DE    19
      LD B, 05      06 05
SHIFT: SLA D        CB 22
        SLA E        CB 23
        JRNC EOL     30 01
        INC D        14
EOL:    DJNZ SHIFT  10 F7
        ADD HL, DE   19
        ADD HL, BC   09
        LD B, 00     06 00
        LD A, 00     3E 00
LOOP:   LD (HL), A   77
        LD DE, 00 00 11 00 00
        ADD HL, DE   19
        DJNZ LOOP    10 F9

```

The zero bytes underlined must be poked before calling the routine, as follows:

- Start address+ 1: starting column (e.g. 05 for column 5)
- Start address+ 3: starting row e.g. 07 for row 7)
- Start address+25: number of characters to be plotted (e.g. 0A)
- Start address+27: code of graphics character (e.g. 86 for )
- Start address+30: value added to HL between plots (e.g. 01 for a horizontal line, 21 for a vertical line, 20 or 22 for diagonal lines)
- Start address+31: not normally used unless the value to be added exceeds 255, otherwise set to 00

Once you have loaded this up, and seen what it does, think about incorporating it into Basic programs to generate, say, a series of squares. Use *Rnd* to find the top left-hand corner (column and row) and the length of side. Then *Poke* the relevant addresses in the machine code routine, and call it via *Usr*. Do this four times for the four sides of the (open) rectangle. Don't forget to test the sizes to see if it will all fit on the screen!

Reproduced from *Machine Code and better Basic*, by Ian Stewart and Robin Jones (price £7.50), by kind permission of Shiva Publishing Ltd, 4 Church Lane, Nantwich, Cheshire CW5 5RQ.

		1										2										3															
Column→	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1					
Row	0	>																															>				
↓	1																																>				
	2																																>				
	3																																>				
	4																																>				
and so on																																					



# PEEK & POKE

Is there anything about your computer you don't understand, and which everyone else seems to take for granted? Whatever your problem **Peek** it to Ian Beardsmore and every week he will **Poke** back as many answers as he can. The address is **Peek & Poke, PCW, Hobhouse Court, 19 Whitcomb Street, London WC2 7HF.**

## COMPLICATIONS IN COLOUR

Julian Bowden of London SE9, writes:

**Q** I own a ZX81, and read with interest your article about its US counterpart the Timex 1000. Jeff Naylor said that he adapted his for use over here by by-passing the US modulator and attaching the unit from his own ZX81.

This reminded me that I had been given an Atari video games machine for a Christmas present, and of course I could not use it. I contacted Atari who said that a modification would cost £28.75. I am wondering why it cost this much when a US computer can be adapted quite easily to run on British television.

**A** You miss one important fact. The ZX81 and Timex 1000 are both black and white video output. Your Atari games machine is colour. Therefore, this requires a much more complex conversion from NSTC to PAL. It would include some internal modification. I am sure that Atari could do it as they have all the plans, but it would be a very different matter for anyone else to attempt it.

The other point is that a conversion done by a non-registered dealer would void your guarantee. Unless you go to the opposite extreme and buy an NSTC compatible television, I would suggest that the only practicable way out of this situation is to send the machine to Atari.

## YOU WILL NEED SPECIAL INTERFACING

M Ridgeway of Taylor Road, Southcourt, Aylesbury, Bucks, writes:

**Q** Hopefully, at Christmas I will be getting an Atari 400 computer. I would like to ask some questions. Can the Amber 2400 printer be used with the Atari 400 without special interfacing? Will the track ball for the Atari VCS,

which is available in America, be able to fit the 400, and will it be released over here?

Lastly, as yet you have not published any programs for the Atari. Now that the price has been lowered to £199, I am sure that a lot more people will be buying it. So, will you publish some programs for it in the future?

**A** The Amber 2400 will need special interfacing for use with either of the Atari machines. A cable will be needed to interface the Amber to one of the joystick ports. You will also need a special routine, which comes on cassette, to add the controls to the computer.

The price of the printer is £80.40, the conversion cable and cassette is £18.34, and postage and packing is £2.95. All these prices are fully inclusive of VAT. You will also receive complete instructions, a spare inking ribbon and a spare roll of paper.

A couple of people have asked about the track ball. At the moment, Atari does not make one, either here or in America. The one in the US is manufactured by an independent company. A track ball is being considered for the new Atari computer based on the 400, but it is not due for release over here until well into 1983. None of the current games software employs the track ball, so you would have to write your own routines.

As for publishing Atari programs, we are more than happy to consider programs for any micro computer. But so far we have had little response from Atari owners. So, how about sending some in?

## IS THE FAULT AT THE MAINS

C Stenenson of Military Road, Pembroke Dock, Dyfed, writes:

**Q** I own a Vic20 which I have had for a week. However, after being on for half an hour, it constantly

crashes or resets itself. The power light also flashes on and off. Is this a fault in my Vic or are mains fluctuations causing this.

**A** I cannot see how mains fluctuations can cause this, unless you are having similar trouble with other domestic appliances in your house. If you are, then you will have to call an electrician quickly.

Far more likely is a fault in your Vic. I have not met this problem before on the Vic, which has a good record for reliability. It would seem that somewhere along the line the power input is being overloaded, or else there is a loose wire. If the power light goes out then obviously you have lost power, which is the reason why the computer resets itself — it has the same effect as turning your machine off.

The only thing that puzzles me slightly is why the computer waits half an hour before going off. Is this time pretty constant, or is it variable? If it is constant then it might be a component at fault, such as a capacitor not discharging properly. If the time varies a great deal, then it is more likely to be a loose wire.

It would be as well to check the external wiring, which in effect means checking the plug, to see that a wire has not come loose. If not, you will have to take your computer back to where you bought it and ask for it to be changed or repaired.

## CONTRAST CONTROL CUTS DAZZLE

Norman Peckett of Court Close, High Wycombe, Buckinghamshire, writes:

**Q** I have had my Spectrum for two and a half weeks. Right from the start it has dazzled me. Should the colours be less bright?

Could you also explain to me how I can ask a question in a program, (eg with a Y/N answer) so that I can redirect the user to the beginning of the program, or the end, using the **Inkey\$** function. By the way, I received my Spectrum after cancelling my order and buying a Dragon for cash.

**A** It is most likely that the television is not set cor-

rectly, which is the cause of your being dazzled. It should not happen. Try re-setting the contrast slightly.

To use **Inkey\$** all you need is a line like **If Inkey\$ = "Y"** **Then Goto ...** and **If Not Inkey\$ = "Y"** **Then Goto ...** You are not restricted to **Goto**, but can use any of the statements that can be put after a **Then**, for example **Print**, **Gosub**, **Let** and **Stop**, are all possible.

## LOADING AND SAVING NOT ZX81 PROBLEMS

R W Denney of Taunton, Somerset, writes:

**Q** I would appreciate your advice on my ZX81 with QS 3K expansion. After initial problems with **Loading** and **Saving**, I found that it worked if I took out the Ear jack when **Loading**. However, after about three weeks my programs failed to **Load**. The first to go wrong were those near the memory limit.

I wrote to Sinclair Research and they sent me a printed sheet on this problem. The sheet advised that 'output from the cassette should be 2 to 4½ volts, peak to peak.' This output seems excessive — the output from my hi-fi is only 2½ volts. Although pleased with the ZX81, I am disappointed with the storage facilities. I did think of buying a Spectrum, but not if the programs are going to become difficult to store, and can only be stored for a short while.

**A** **Loading** and **Saving** remains the largest single problem with the ZX81. You do not actually say if the measures advised by Sinclair have been of any use. You need not worry about the output of 4 volts from the Ear socket. The output is AC and there are capacitors in the circuitry to cut down any overload. Also remember that 4-4½ volts is the peak voltage — much of it is less than that.

The 2½ volts from your hi-fi is probably DC, to which different laws apply.

As I have said on several occasions before, whatever problems you might or might not get with a Spectrum, there is no evidence that **Loading** and **Saving** will be among them.



# CLASSIFIED

Semi-display — £5 per single cc  
Trade lineage — 20p per word  
Private lineage — 10p per word

New book for Spectrum

## THE WORKING SPECTRUM

A LIBRARY OF PRACTICAL SUBROUTINES AND PROGRAMS



DAVID LAWRENCE

Published in association with *Popular Computing Weekly*. 228 pages Over 150 subroutines and programs.

Send cheques/postal orders, for £5.95, to The Working Spectrum, Sunshine Books Ltd., Hobhouse Court, 19 Whitcomb Street, London WC2 7HF

We can normally deliver in four to five days.

**MORSE TUTOR BBC A/B.** For the beginner or just for practice. Teaches you the code. Tests with random letters. Generates and sends grammatical random messages. Becomes a Morse key. Professionally recorded tape. £4.95 including p & p. Carlton Computing, Carlton Cottage, Little Glemham, Woodbridge, Suffolk.

### SPECTRUM

**SHEEPDOG TRIAL (16K).** Pen up to six very obstinate sheep. Good graphics. £2.95 including P&P.

**GOLF (48K).** 18-hole course, holes not randomly generated. Bag of clubs. 0-24 handicap. Includes course design notes. £3.45 including P&P.

GM Software, 1 Rhiwasaen, Cross Inn Pontyclun, Mid Glamorgan

**ACORN ATOM, 10K plus 16K** including 4K RTTY Eprom and software, £150 ono. 06614 2648.

**VIC, 8K Ram cartridge, £27 ono.** Tel: 021-440 2124 (eveings).

**WOULD** anyone help a desperate student, by producing a hard-copy of his program on a ZX Spectrum/Printer? Small reward paid. Contact: G. King, 10 Dove Crescent, Harwich.

**MEMORY UPGRADE, 16K-48K,** for the new P.C.B. Spectrum. Ring: 0293-36187.

**SPECTRUM SOFTWARE: "ZXtext"** Teletext simulation for 48K (60 pages), 32K (34 pages) or 16K (8 pages) Spectrum. Full simulation including colour, flashing, 24-hour clock, alarm, tape-microdrive storage, save/verify/load with auto-run, freely mixed text and graphics (including user-defined graphics), etc. Set up your own personal databank. Cassette with full instructions and 12-months guarantee, £5; "Defender" — can you save the Federation base from an all-out Romulan attack? Dramatic sound effects, deep-space background, fantastic user-defined graphics. Defend the base using high-powered phasor banks. Cassette with full instructions and 12 months guarantee, £4.20. All products available on 10-day delivery. Details (SAE): Iain Stewart, 17 Torry Drive, Alva, Scotland, FK12 5NQ.

**WANTED: PERSONAL COMPUTERS,** all models bought for cash. Morgan Camera Co., 160 Tottenham Court Road, London W1.

## DRAGON 32 SOFTWARE

Quality software at sensible prices

Gamestape 1	£1.95
Caterpillar & Space Attack	£2.95
Meteor Run & Breakout	£3.95
Haunted House	£3.95
3-D Maze	£3.95
Forbidden City (adventure)	£4.95
Pharaoh's Curse (adventure)	£4.95
Goblin Caves (3-D graphics)	£4.95

All prices include p&p  
Send sae for complete list

**APEX TRADING LTD (PCW)**

115 Crescent Drive South  
Brighton BN2 6SB

Tel: Brighton (0273) 36894

Access/Barclaycard accepted

### ZX81 High Res Graphics Unit £32 (excl. VAT)

Tel: William Haynes 01-969 0819

Tools for Living

Notting Dale Technology Centre  
191 Freston Road, London W10 6TH  
cheque/PO (add 15% VAT)  
plus 75p p+p

## TAIPAN A game for DRAGON 32

Be the James Onedin of the FAR EAST. Make your fortune trading in exotica — IF you can ride out the storms and repay SUM YAM, the evil money lender.

Also available for the ZX81 and ZX Spectrum.

Price £4.95

**JAYSOFT**

6 Wentworth Drive  
Bishops Stortford, Herts.

**BBC (32K) GAMES.** Breakout, Missile Command, Crazy Balloon, Mastermind, Simon, Cyclic, Defences, Galactic Fighter, Blitz. All on one cassette, £3.90. Excellent graphics and sound, cheques or POs to Mr J. Chaytor, 32 Moorside Crescent, Fishburn, Cleveland.

**DRAGON 32 and Vic20 owners.** Top quality dust covers, £5.50. Cotswold Computers, Church View, Park Hill, Hook Norton, Oxon.

**OFFERS INVITED** for surplus PER-TEC 9 track tape transporters, Model T7840/9/12.5, c/w Formatter, Interface and PSU one unit, cabinet mounted, one set of four items boxed. Tel: 06076-66539 day, 0602-392802 evenings.

**DRAGON 32 software cassette,** price £2.95. Programs include 3D maze, Hotrod a car race against the computer, also Colour Artist Sketch Pad. APG Computer Software, 24 Mountain View, Peel, Isle of Man.

**VIC20 OWNERS.** At last! All-action arcade games for the unexpanded Vic at low prices. Written entirely in m/c for exciting colour graphics, animation and sound. Super games cassette — three games on one cassette, Super Breakout, Galaxians and Scrambler. Full feature games with defined graphics, hi-score, free ships and bonus points. Only £4.95. Fast delivery. J. P. Shay, 51 Meadowcroft, Radcliffe, Manchester.

## BEST OF POPULAR Computing WEEKLY



Four top games on one cassette for £4.45.

Laserchase and Kong's Revenge for the 16K ZX Spectrum.

Robot Control (16K) and Alien Attack (1K) for the ZX81.

Order now from *Popular Computing Weekly*, Hobhouse Court, 19 Whitcomb Street, London WC2 7HF.

We can normally deliver in four to five days.

### COMMODORE 64 £264 (excl. VAT)

Tel: Chris Gurney, Dave Walsh

or Floyd Paterson:

Tel: 01-969 4658 or send SAE

Image Science Micro Computers Ltd

189 Freston Road, London W10 6TH

or cheques PO (add 15% VAT)

and £5 for p+p

### Why pay more?

MEMOTECH 16K Memopak

### ZX81 16K RAM pack Only £28.50

(all inclusive)

Extendable memory — 16K Memopaks

may be stacked with other Ram

A quality product — fully guaranteed


As sold at W. H. Smith

Sent promptly by first-class mail

Dept. PO, BRIDGE SOFTWARE

36 Fernwood, Marple Bridge

STOCKPORT, Cheshire SK6 5BE



**VIDEO GENIE MK I, 16K, software,** good condition, £200 ono. Aitken, Annan (04612) 4551.

**DRAGON 32.** Change sheet music to computer input easily with Mimupak, £3.50. Cotswold Computers, Church View, Park Hill, Hook Norton, Oxon.

**JOYSTICKS FOR DRAGON 32.** Essential to games enthusiast or graphic artist, £7 each or £13 pair (+50p p&p), Microcare, 1 Oakwood Road, Rode Heath, Stoke on Trent, Staffs. Tel: (09363) 5695.

**T199/4A EXTENDED BASIC PROGS.** Car Race, Shooting Gallery, Space Wars, Bomb Run, Defender, Invader etc, £8.50 including P&P. Mr A. Chalcraft, 63 Queens Road, North Weald, Epping, Essex.

**WABASH DISKETTES 5 1/4" SSSD,** £13.50 per box, P&P free. Add VAT to your order. Make cheques payable to Marlowfield Ltd, Hesketh Bank House, 7-11 Yellow House Lane, Southport. Tel: 0704 36082.

**16K VIC20 C2N CASSETTE DECK,** one month old, £150. Reply post only to 72 Highfield Rise, Sheffield.

**VIC20 SOFTWARE.** The Raider, Spacewar, Breakout, all three games for the unexpanded Vic20 for just £3.95. Send cheques/po payable to A. Carter, Ewelme, Ewen, Cirencester, Glos GL7 6BU.

Computer Ware for popular computers  
SAVE POUNDS ON VIC20 RRP £169.99 H and S price £139.15 inc. ATARI 400 RRP £199.99 H and S price £192.50 inc. ATARI 800 RRP £399.99 H and S price £384.99 inc.  
Other computers to be announced soon  
THORN EMI cassettes and cartridges £12.40 to £28.88 inc. Other hardware and software at discount prices

FASTEST mail order company with LOWEST prices. Large SAE for full price list.

\*Orders under £20 add 50p P&P

Sales Office: 85 Snowden Avenue, Hillingdon, Middlesex UB10 0SE. Telephone: Uxbridge (0895) 54751. Mon-Fri till 9 pm.

### DRAGON 32 SOFTWARE

—THE BEST VALUE ON THE MARKET

**FAMILY PROGRAMS:** Eight full-length games, utility and educational programs  
**FUN AND GAMES:** Ten exciting games for young and old, solo or groups

£6 for each cassette, £10 for the pair

GENEROUS DEALER DISCOUNTS

Send cheque/P.O. to Shards Software, 10 Park Vale Court, Vine Way, Brentwood, Essex, CM14 4UR.

### SPECTRUM ASSEMBLER

Enter the world of the Z80! Full 2-pass assembler with labels all opcodes — 11 powerful directives easy program editing — 16/48K — manual written and tested by professionals £5.95 Cheque/PO to C. Newport, 57 Camlet Way, Hadley Wood, Herts.

### DRAGON SOFTWARE

Improve your understanding of the Dragon 32 with our quality cassette of demo programs. Program listings and notes included.

£5.50 (inc. P&P)

P. Allcock, Constable Croft

Hixon, Staffs. ST18 0PD

### ZX81 VIDSWITCH

The Original Inverse Video Module

(April 82)

Sharp white characters on completely black screen (no border). Switchable between modes. Size only 27mm x 15mm including switch. Easybuild easyfit kit £3.95. Built only £4.95. All prices inclusive. Overseas 50p extra. Any excess refunded. SAE with enquiries: B. A. Reader, Dept W 45 Alford Street, King's Heath, Birmingham B14 7HG.

**TRS80, Level II, 16K, memory, VDU,** cassette, software + manuals, £230 ono. Tel: Sevenoaks 454707.

**FOUR INTELLIVISION CARTRIDGES,** 1 Space Battle, 1 Auto Racing, 2 Sea Battles. Good condition, £14 each. Tel: 021-471 2557.

**48K SPECTRUM arcade games.** Three fantastic arcade games on one cassette, Cheeky Chimp, Spectral Panic and Spec-Man. Each game has on-screen score, Hi-score and an attract mode. All games include colour, sound and amazing graphics. All this for just £4.95. Make cheques payable to Stephen Culley, Long Acre, Epperstone Road, Lowdham, Nottingham.

**ZX-SPECTRUM 16/48K.** A clever character designer plus six high class games including Pac-Monster, Galaxians, Grandprix, Catacombs. £3 inclusive. Send to Crown House, Ford, Argyll PA31 8RH.

**AC LINEAR CIRCUIT ANALYSIS** on 48K Spectrum with ZX printer. 30K program performs frequency and time domain analyses on large networks consisting of resistors, capacitors, inductors, transformers, transistors, and amplifiers. Tackles most topologies, tabular or plot options (over 96 output options). Menu driven. Supplied on professional certified data cassette with manual. Send £12 to R. Watts, 119 Richmond Road, Montpelier, Bristol, BS6 5EP.



# Computer Swap

## 01-930 3266

Free readers entries to buy or sell a computer.  
Ring 01-930 3266 and give us the details.

### Spectrums for sale

**SPECTRUM**, 48K, as new, with Horizon and Cambridge colour collection tapes, £155. Also over £60 worth of software, £35 only. Tel: 01-749 1454, between 7 pm and 10 pm.

**ZX SPECTRUM 16K plus PRINTER**, very good condition, £150. Call Redhill 61612 evenings.

**SPECTRUM**, 16K, five rolls of printer paper, magazines + pre-program cassettes, £120 ono. Tel: Worthing 211439.

**SPECTRUM**, 48K, almost new, with all leads + manuals + sample cassettes, £160. Tel: 0262-601 859, after 6 pm.

### ZX81s for sale

**SINCLAIR ZX81**, 16K with 32 cassettes, worth over £200, sell for £80 ono. Vincent Quah, 01-882 5919, after 5 pm.

**SINCLAIR ZX81**, 1K, one month old, £40 ono. Baulsom, 01-527 5287.

**ZX81**, 16K plus games plus manuals. Tel: Crawley 517361.

**ZX80**. Complete with power supply and leads plus manuals, £20. Tel: Grays (0375) 72150.

**ZX81**. Memotek 64K, Harris-Lockyer keyboard, £140. Will sell items separately if need be. Tel: 0628 30966 after 7 pm.

**ZX81 COMPUTER**. As new in box plus 16K RP, tape recorder plus mike plus VDU (not brilliant but works), tapes and magazines, £110 ono. Tel: 0942 216396.

**ZX81**, with 16K, instruction manual plus leads plus one tape, £50. Tel: 01-883 9417.

**ZX81 1K**. Unwanted gift, boxed, £30. Tel: 01-435 9732.

**16K ZX81**. 6 cassettes, two months old, good condition, £100 ono. Tel: Adam, Chesham (0494) 785285.

**48K MEMO TECH**, Ram pack for ZX81, £25. Mr Sharp 01-732 7493.

**ZX81 16K**, with tapes, books, £70. Telephone Nuneaton 327203.

**ZX81**, 16K, with software. Tel: Calne (0249) 812038, Mr L. Delpozo.

**ZX81**, £35 ono. Three months old, perfect working order, upgrading to BBC. Tel: 061-223 1301 extension 2708 (Mr. Javed).

**ZX81, 16K**, keyboard, filesixty, £70 ono. Paul Baillie, Battle 2717.

**16K ZX81**, £100-worth of software plus mags and all leads, £90. (Whitley Bay) 528886.

**ZX81**, 16K, Sinclair built, £30 of software including Asteroids, 3D Monster Maze, Sourcerers Island, as new, £50. Tel: 0501 40469.

**ZX81 + 16K Ram + printer**, two months old, hardly used, £87.50. Tel: 01-464 0845.

**ZX81**, 16K (boxed) + manual + leads, also two books + game tape, £60. D. Haskins, 20 West Road, Old Colwyn. Colwyn Bay. Tel: (0492) 515011.

**ZX81**, 16K, keyboard, case, green screen 14" TV, cassette, printer, learning lab, magazines, 70 cassette programs, £160 ono. David Sitwell, 01-886 6356 (day).

**ZX81**, 1K, hardly used, seven months old, all leads + manuals + a book of 30 programs, many on tape, in very good condition, sell for £35. Tel: 01-464 0692 (weekdays after 6 pm).

### Commodores for sale

**COMMODORE VIC20**, 14K, high res. Super Expander data cassette, Bug Byte, Vic Men game, under guarantee, £250 ono. Tel: Southam 3245.

**VIC20**, Graphic Printer, brand new, unwanted gift, £150 ono. Telephone: Southampton 739734.

**VIC20**, 16K Ram pack, £300 of software, value £530, want only £300. Tel: Amit, 01-888 0510, after 6 pm.

**VIC20**, + cassette unit, with Blitz + AMOK cassette, joystick + intro to Basic, £160 ono; Super Exp. Ram, £24; Vic 20, Graphic Printer complete with 1,000 sheets of paper, 150; Vic20, programme reference guide, £10. Telephone: Chandlers Ford (04215) 67411 (1 pm-2 pm).

**VIC20** plus data cassette and dust cover, £140; super expander cartridge, £25; Jelly Monster cartridge, £12; processing reference guide, £8; Dragon Maze game cassette, £5. Tel: 0443 203573 evenings.

**VIC20** plus cassette deck, both boxed plus tapes and magazines, £160. Contact Mark on Longfield 6164 evenings and weekends.

**THE COUNT**, Commodore adventure cartridge, perfect condition, yours for £22 or other CBM adventure in perfect condition. Tel: Leamington Spa (0926) 632901 after 6 pm.

**COMMODORE VIC20 FOR SALE**. Only £100 ono. Tel: Horley, Surrey, 3025.

**CARTRIDGES FOR VIC20**. Road Race, Star Battle and Jelly Monsters, only £16 each or 3 for £37. Tel: 01-981 7158 evenings.

**SWAP** the Count or Mission Impossible for Pirate's Cove. Tel: 0494 28470 after 6 pm.

**VIC20**. 1 month old with 12 months guarantee, plus C2M cassette unit, plus introduction to Basic part one, plus three software cassettes (boxed), £180. Tel: S. Bradshaw, Rainford 3767.

**2001 PET**. Tool kit, sound board, manuals, much software, Basic courses, exchange for 48K Spectrum and printer or sell for £230. Tel: 061-973 8846.

**VIC20 COMPUTER** with C2N recorder, as new. Offers. Tel: Llantwit Major 3671.

**VIC20** plus 16K RP, both excellent condition, as new, only £160. Tel: Barry (0446) 732282.

**CBM 3032**, CBM 3040, dual disc drives, CBM 3022 printer, counting + word processing software, £1,500 ono. Tel: 01-677 9077.

**PET 4032** (Fat 40), 32K + printer, built in sound box, tool kit, picture kit, super chip, many programs including word processor, £650. Tel: Mr. Clines, Bourne End 26576.

**PET 2001**, 8K, with internal, cassette and screen, with manuals, software, etc., £225. Tel: Gosforth, Cumbria (09405) 332 (evenings).

**COMMODORE PET 2001**, 32K, complete with cassette deck, all in mint condition, £295 ono. Tel: 01-722 2166.

**COMMODORE VIC 20** plus AF Rom mother board and leads, and 3K Ram, £200. Tel: Scott, after 5 pm. Tel: 0462 40405.

**PET 4000**, Series K, manuals, cassette deck, Pet graphics, 90 programs approximately, cover, £490 ono; MRK assembler, £48 ono; tool kit, £29 ono. Michael Thompson, Histon 022023.

**PET 32K**, new Rom, large keyboard, cassette, tool kit, microassembler, Basic 4, Eprom programmer, software and many books, £450 ono. Tel: David on 01-543 1890 (after 5 pm and weekends).

### Ataris for sale

**ATARI 400**, new, Basic + cassettes, joysticks, various extras, £300 ono. P. Hawkins, Bracknell (0344) 57659.

**ATARI VCS** games system with 6 cartridges, Defender, Missile Command, Asteroids, Champion Trip, Soccer, Outlaw, Combat. New £330, offer £140. Tel: 01-997 2017.

**ATARI VCS**. Very good condition, complete with 4 cartridges, Space Invaders, Nightdriver, Outlaw, Combat, £89. Tel: Reigate, Surrey 44120 evenings.

**ATARI VCS**. 9 cartridges, Defender, Missile Command, Asteroids, Pacman, Nightdriver, Slaying, Boxing, Video Pinball, Combat. Excellent condition, £190 ono. Tel: 021-356 9788.

**ATARI VCS**. 7 cartridges, Combat, Breakout, Space Invaders, Asteroids, Video Pinball, Missile Command, Defender, £140. Tel: 821159.

**ATARI VCS**. Very good condition with 2 cartridges, Asteroids and Combat, £55. Tel: 0202 983583. Mark, anytime.

**ATARI 400** plus 48K plus Basic cartridge plus 9 cassettes (Eastern Front, Caverns of Mars, Airstrike, 4T Tutorials, Galactic Chase), £350 ono worth £480. Tel: 01-274 7897.

**ATARI VIDEO GAME**, Space Invaders cartridge, £70 ono. Tel: 01-452 7048 (evenings only). Ask for Rajesh Patel.

**ATARI 400**, 16K Basic cartridge, program recorder, chess cartridge, two manuals, £250. Tel: 01-883 3420.

### Acorns for sale

**ACORN ATOM**. 12+12K with disk pack, FP Rom, toolkit and BBC Rom, all books and leads, £400. Tel: Falmouth 314599 (day), 312718 evenings or weekends.

**ACORN ATOM**, 64K Ram plus 20K Rom, books + software, £220 ono. Tel: 061-747 8822.

**ACORN ATOM**, 12K Rom, 12K Ram, and power pack, plus basic book, £125 ono. Tel: 01-501 1629 (eves).

**ACORN ATOM**. 12K Ram, 12K Rom and 4K utility Rom, cassettes, leads, 3 amp power supply and £60 of software. Price £190 ono. Tel: 051-677 7326 evenings.

**ACORN ATOM**. 8K + 12K PSV, £50 of games, books etc, 12 months old, £100. Tel: Swanage (0929) 424423 evenings.

**ACORN ATOM**, 12K + 12K, floating point Rom, leads, power supply, manual + approximately £60 of software including Pacman, Invaders, Galaxians, £130. Tel: Harlow 419 659.

**ACORN ATOM**, 12K + 12K, floating point Rom plus toolbox PSU plus expansion board giving 5K, with all leads and manual, condition as new, £200 ono. Tel: 0843 582852, after 6 pm.

**ACORN ATOM**, 12K RAM + 16K ROM, 3 amp p.s.u., tape recorder, manuals and software. £175.00. Tel: 0480-890 803.

### Tandys for sale

**VIDEO GENE 1** with sound and arrow key modification, includes Tandy monitor and 72 programs, very good condition, £350. Workshop 476413.

**TRS80**, 16K, Level II, Tandy cassette + Tandy monitor, Teletype 33 + custom interface + some software, £350. Tel: 01-677 9077.

**VIDEO GENIE**, 16K, Level II Basic + 9" green screen monitor, micro sort editor/assembler + large selection of books, manuals, cassettes and software, £275 ono. Tel: 021-745 5684.

**TRS80**, Model 1, Level II, 16K with monitor, cassette recorder, joystick + sound, also manuals, magazines and approximately 100 arcade machine language games, £450. Tel: Workshop 477053.

**GENIE I**. 16K, 10 months old plus Green Screen Monster, 12in EG 101, manuals etc, £350 ono. Tel: Stevenage (0438) 721216 after 5 pm.

**TANDY TRS80**, Model I, Level II (16K memory), expansion interface unit (additional 16K memory), disc drive (5 1/4" mini disc), disc drive interface cable, Seikosha GP100A printer, printer interface cable, bulk eraser, disc drive, head cleaner, £1,280 ono (all as new). Tel: (0392) 72035.

**TANDY SYSTEM**. 8K Ram, Basic, lots of software. Cost £300, offers around £65. Tel: 0229 54766 after 6 pm.

**VIDEO GENIE**, 16K, excellent condition, £140. Tel: 01-657 3000 evenings. (Croydon area).

**TRS80**, Model 1 Level II, 2 1/2 years old, 48K expanded interface, high res. character generator, upper/lower case, green screen, cassette rewriter, £350 of software, complete £800 ono. Tel: Long Crenon 208232.

**TANDY TRS80**, Level II, 16K, screen + cassette recorder, editor assembler, magazines + books, £250 ono. Roscoe, Worcester 352623.

**VIDEO GENIE LG 3003**, 16K, + extra keys + sound box, built in cassette deck, software + magazines, sell for £200 ono. Telephone 01-946 1429.

**TRS80** Model 1, level II, 16K with Green Monitor VDU, 18 months old with £100 of s-ware, £70 of books, £250 ono. Tel: 06076 65930.

**TRS80** level I, 4K, with game tape and manual, 10 months old, little used, £150 ono. Tel: Wetherby, W. Yorks 63824 (evenings).

**GENIE 1**, + £50 of s-ware, 2 books, mint condition, £250. Tel: South Bensley 56348.

**TRS80**, 16K level II, Green monitor cassette, many programs + Tandy speech synthesiser, £350. Tel: Farnborough 61133.



**TRS80** model 1, 16K, with cassette player + monitor, + s-ware manuals, £260 ono. Tel: Gary, Harlow 412242.

**TANDY TRS 80**, level 1, 4K, with 15 cassettes, £100. Telephone 01-729 5302 (late evenings).

## For sale

**SEIKOSHA, GP80A PRINTER**, as new, boxed, scarcely used, £130, negotiable. Tel: 01-552 1467 evenings.

**59K CASED NASCOM**, Nassys plus Nasbug, colour teletext graphics, Naspen, Zeap, Nasdis, Debug, Roms, Sargon plus chess, graphics, Xtal basic, extended colour command. New baby, so best offer. Tel: 051-327 4984.

**CENTRONICS 737 PRINTER**. As new, Centronics cable, manual, £250 ono. Tel: Robert 01-674 5534.

**DRAGON 32** + £60 extras, 1 month old. Quick sale, £230 ono. Mr A. Mills, Flat C, 11 Agar Grove, London NW1.

**DRAGON 32**, + computer voice cassette, + books, 4 weeks old, £179.00. Tel: 01-661 1466.

**ACULAB FLOPPY TAPE SYSTEM**. Plus a number of programs suitable for early Video Genii or TRSAT model I, £100. Tel: 0634 65539.

**VOICE CHESS CHALLENGER**. 10 playing levels, speaks its moves, 50 word vocabulary, 64 pre-programmed games. Excellent condition. Cost over £200 new. Only £70 ono. Tel: 01-979 4432 after 6 pm and weekends.

**4K GRAPHIC ROM** plus 2K VDG complete with all available software, £30; ZX81 16K Dktronics keyboard and £57 worth of software, £900, together £110. Palmer, Norwich 611133 ext 5008.

**DRAGON 32**, 2 months old, perfect condition, with cass leads and two Dragon data cass progs, £190. Tel: 0273 688859 (after 6 pm).

**DRAGON 32**, as new, 4 months old, inc cassette lead and over £30 of tapes + books, £180. Tel: Reading (0734) 690935 (after 6.30 pm).

**T1994A**, prog, language cartridge, Invaders cartridge, 4½ months old, worth £345, yours for £260 ono. A. Collier, Northwood (65) 22559.

**SHARP MZ80K**. 48K, plenty of programs including Space Invaders, Stark Trek, Doctor Livingstone etc. Also Zen assembler plus 2 extra manuals, £390 ono. Tel: 01-894 5455.

**SHARP MZ80K**, 48K, 4MHZ hi-res graphics, green screen, software, includes basic fortran, forth, assembler and many games and books, £425 ono. Telephone: 01-316 1692.

**BLACK AND WHITE MONITOR**. Motor roller based screen, home-made casing, suitable for BBC, £50. Tel: Lee Valley 710764.

**DRAGON 32**, new, £160. Telephone 01-732 4777, Mr John Aldred.

**FIVE ROLLS SINCLAIR PRINTER PAPER**, £8 inc. p&p. 01-866 1444, after 7 pm.

**DAI COLOUR COMPUTER**, 48K, 24K Basic, RS232, paddles, cassette, sound, £400 or swap for Atari 800. Bognor Regis (0243) 861066.

**SONY C7 BETAMAX**, recorder, six months old, swap for any computer (not Sinclair) to the value of £430 (second-hand). (Open to any offers — can offer cash.) Tel: 01-672 8376.

**SHARP MZ 80K**, 48K, as new with guarantee, £325. Tel: 051 638 3378.

**TANGERINE COMPUTER**, 16K Ram, two high res. boards, all options, Apple PSU keyboard + keypad, extended Basic, fully cased with fan, lots of software. Offers. Tel: 0483 31949.

**DRAGON 32**, six weeks old, still under guarantee, £165 ono, Space Invader cartridge, £12. Mrs Mawlavaux, 01-304 3659.

**T1994/A THERMAL PRINTER** for sale, offers over £150. H. Jones, Kerry, Wales (068688) 502 (evenings and weekends).

**SHARP PC1500**, colour printer plotter + 8K Ram, one month old, hardly used, £279. Tel: 01-464 0845.

**9" MONITOR**, black and white, £20 ono. Tel: 01-301 4763.

**8K PACK BASIC III**, cassette deck, dust cover, manuals, games, boxed, £400 ono. Tel: 01-363 8901 (Nick).

**VIC20 CARTRIDGE** for exchange, Pirates Cove, Super Lander, Super Shot. Tel: 0438 811634 after 6 pm.

## Wanted

**SWAP VIC20** Adventure, Golden Baton, for Time-Machine or Arrow of Death or other Vic adventure. Phil McDonald, Bournemouth (0202) 682974.

**WANTED**. ZX Spectrum, 16K or 48K. John Ireland, Cardionoe (0492) 77439.

**VIC20 SOFTWARE** to swap. Star Battle cartridge plus Lair 16K Adventure for any CBM Adventure cartridge, except Private Cove. Harland, Aycliffe (0325) 316956.

**SWAP**. Adventure land cartridge for any other adventure. Tel: 0733-237101.

**ZX SPECTRUM**. Any K. Mr Holt. Tel: 061-794 5172 evenings.

**ZX81**, Sinclair built, 16K, power pack, leads, etc, full size moving key keyboard + software, £70. Tel: 01-301 1482, Mr. Sims, evenings.

**SWAP VIC20**. Audio genie, Tank Attack cartridge for any other Commodore cartridge. Tel: 0772 744439, after 5 pm.

**ALIEN FOR NIGHTRACER** or Super-slot. Phone 051-487 7840. Phone between 5.15 and 6.00 pm.

**SWAP VIC20** Pirate Cove cartridge for another adventure. Tel: Stevenage (0438) 811634 (after 6 pm).

**VIC20 OR SINCLAIR** (possibly extras), locally. Tel: Bromsgrove 75225, Mr. Swan.

**VIC20** + cassette deck. Will offer cash. Tel: 01-575 3779. Martin (evenings).

**WANTED**. ZX81, 16K, about £50. Tel: Arundel (0903) 883063 (evenings or weekends).

**DRAGON OR SIMILAR**, exchange musical instruments. Tel: Stephen, after 7 pm, Bradford 603500.

**1 QUICKSILVA CHARACTER BOARD**, any price considered. Tel: Gregory 0349 882026.

**WANTED: 48K SPECTRUM**. Mr. Toorad, 01-834 7743827 (daytime).

**WANTED: VIC20**, super expander or 3K Ram, or any other cartridges, in exchange for software. Tel: 01-888 0510, after 4 pm.

**WANTED: TWO BOOKS** from Melbourne House Publishers, *The Complete Sinclair ZX81 Basic Course*, *Machine Language Programming Made Simple*. Tel: 0271 64184.

# THE WORKING SPECTRUM

A LIBRARY OF PRACTICAL SUBROUTINES AND PROGRAMS



DAVID LAWRENCE

The Working Spectrum is the first well-documented collection of serious programs for the ZX Spectrum.

The programs include a Basic Renumber which can handle Gotos and Gosubs. You will read in other books that this can't be done. We prove it can.

With some of the other programs you can define your own characters, store them in a dictionary, design geometric shapes without using maths, draw pictures for use in other programs and recall them at will, draw different graphs from the same subroutines, create a file-handling program for up to 28,000 characters, create a data-base handling program, learn how to sort your data, learn how to touch-type, handle your accounts and play sophisticated games such as Missile and Tracker.

Each program is explained in detail, line by line. And each of the programs is built up out of general purpose subroutines which, once understood, can form the basis of any other programs you need to write.

Advanced programming techniques spring out of the discussions explaining each subroutine. The result is not only to advance your programming skills but also to leave you with a wide range of practical application programs which might otherwise only be available to those prepared to buy cassettes or those capable of writing substantial programs for themselves.

Expert or novice — whatever your experience, you will find this the most useful and valuable book for the Spectrum.

228 pages. Over 150 separate subroutines and programs.

Also available through your local computer bookshop

Please send me a copy of The Working Spectrum.

I enclose a cheque/postal order for £5.95.

Name.....

Address.....

Signed.....

Please make your cheques payable to Sunshine Books Ltd.

Please send your order to The Working Spectrum, Sunshine Books Ltd, Hobhouse Court, 19 Whitcomb Street, London WC2 7HF.

We can normally deliver within four to five days.



## Ziggurat



## Beautiful programs

There is a German proverb which, roughly translated, says "Could everything be done twice, everything would be done better". What this boils down to is that it is easy to be wise after the event — hindsight is twenty-twenty!

In computing, I wonder if those critics who pontificate about this and that have ever produced an original work themselves. Aristotle wrote (in *Politics*) "They who are to be judges must also be performers".

This introduction is intended to set the stage for some critical comments of my own, about a program published in *Open Forum*. I am not going to say which issue — it was some time ago — or use the exact lines from the program, but I assure you that the program is no mirage. It is easy to knock with the experience of, hindsight, but as I have published programs myself for others to criticise (and they certainly have) perhaps I might be allowed a few observations.

The program was written by a ten-year-old child, which I think is very important. To have written a program of the complexity of that child's attempt, at the age of ten, is commendable. However, at that age it is very easy to get carried away with a program and it is difficult to hold oneself back.

When I was looking through the listing of the program, my attention was attracted to lines such as:

```
1000 IF T = A OR U = 1 THEN PROCBANG
1010 IF T = B OR U = 2 THEN PROCBANG
1020 IF T = C OR U = 3 THEN PROCBANG
1030 IF T = D OR U = 1 THEN PROCBANG
```

1040 IF T = E OR U = 2 THEN PROCBANG

There seemed to be a rather obvious regularity. The repetition consisted in the five *If* statements which all referred to the same procedure.

This repetition was compounded in my search to discover the nature of the variables *A* to *E*. The original assignments to the variables were contained in one line:

```
10 A = RND (9): B = RND (9): C = RND (9): D =
   RND (9): E = RND (9)
```

The form was there for all to see. All the five variables *A* to *E* were the same, though of different value.

When faced with such a display of repetition, it is difficult to understand why it was not exploited in some way when the program was written. The reason of course is that form and symmetry are in the eye of the beholder — and such an eye is sharpened by hindsight. The ten-year-old in question obviously did not see the program as a whole, just as a collection of parts.

So what is wrong with that? Nothing, except it is a very inefficient way of programming.

The aforementioned program could be improved by finding a way of coping with variables which are the same, yet can take different values:

```
5 DIM VAR(5)
10 FOR I = 1 TO 5:VAR(I) = RND(9):NEXT I
```

When we come to the *If* statements, we can see that the numbers to which *U* is compared have a logical pattern. So we can write:

```
1000 FOR I = 1 TO 5
1010 IF T = VAR(I) OR U = I - INT((I - 1)/3) * 3
   THEN PROCBANG
1020 NEXT I
```

Sad to say, however, as far as the routine programming one tends to see published is concerned, both the use of arrays (dimensioned variables) and modular (or clock) arithmetic is rare.

The potential saving in programming space is considerable though. The amount to which we can economise depends on the way we approach programming. Beauty is all!

Boris Allan

## Puzzle

## A's down

Puzzle No 36

		1		2	
3		4			
5					

Across: 1.  $A - B$ ; 3.  $A * B$ ; 5.  $A^2$ .

Down: 1.  $B^2$ ; 2.  $8B$ ; 3.  $B$ ; 4.  $A - B$ .

### Solution to Puzzle No 32

This algorithm produces Pascal's triangle. The number of families in each cave is given by the sum of the numbers of families in the two adjacent caves immediately above.

1							Row 0
1	1						Row 1
1	2	1					Row 2
1	3	3	1				Row 3
1	4	6	4	1			Row 4
1	5	10	10	5	1		Row 5

The numbers in the rows correspond to terms in the Binomial expansion  $(a + x)^n$ . For example, to find the terms in the fifth row we expand:  $(a + x)^5 = 1a^5 + 5a^4x + 10a^3x^2 + 10a^2x^3 + 5ax^4 + 1x^5$ .

The numbers in front of the terms (called the coefficients) give the numbers of families at each level of the cave system.

The sum of the coefficients in each row gives the probability of successive tossing of a coin producing a head (or a tail) repeatedly. For example — what is the probability of getting four heads in four tossings? Look at the fourth row of the triangle.  $1 + 4 + 6 + 4 + 1 = 16$  — so the probability is 1 in 16.

### Winner of Puzzle No 32

The winner is: W R Masfield, Slade Road, Holland-on-Sea, Essex, who receives £10.

## Top 10

**Atari**

- (1) Preppie (Adventure International)
- (2) Scott Adams Adventures (Adventure International)
- (3) Air Strike (English Software)
- (4) Jumbo Jet Pilot (Thorn EMI)\*
- (5) Submarine Commander (Thorn EMI)\*
- (6) Snooker and Billiards (Thorn EMI)
- (7) Hell Cat Ace (Microprose Software)†
- (8) War (Adventure International)†
- (9) Soccer (Thorn EMI)\*
- (10) Snooper Troops 1 (Spinnaker)†

\*Cartridge. †Disc.  
(Figures compiled by Calisto Computers, Birmingham 021 632 6458)

**ZX81\***

- (1) Frogger (DJL Software)
- (2) 3D Defender (JK Greye)
- (3) Mazogs (Bug-Byte)
- (4) Mazeman (Abbersoft)
- (5) Gulp II (Campbell Systems)
- (6) Gauntlet (Colourmatic)
- (7) Flight Simulation (Psion)
- (8) Adventure 1 (Abbersoft)
- (9) 3D Monster Maze (JK Greye)
- (10) Chess (Artic)

\*All 16K.  
(Figures supplied by Buffer Micro Shop, London 01-769 2887)

**Spectrum**

- (1) Time Gate (Quicksilver)\*
- (2) Spectres (Bug-Byte)
- (3) Escape (New Generation)
- (4) Orbiter (Silvasoft)
- (5) Adventure 1 (Abbersoft)
- (6) Football Manager (Addictive Games)\*
- (7) Master File (Campbell Systems)\*
- (8) Espionage Island (Artic)\*
- (9) Night Flite (Hewson)
- (10) Gulpman (Campbell Systems)

\*Requires 48K.  
(Figures compiled by Buffer Micro Shop, London 01-769 2887)

**Vic20**

- (1) Traxx (Llamasoft)†
- (2) Sargon II Chess (Commodore)\*
- (3) Jellymonsters (Commodore)\*
- (4) Defenda (Llamasoft)†
- (5) Grid Runner (Llamasoft)
- (6) Abductor (Llamasoft)
- (7) Myriad (Rabbit)
- (8) Blitz (Commodore)
- (9) Adventureland (Commodore)\*
- (10) Spiders of Mars (Audiogenic)\*

\*Cartridge. †Requires 8K or 16K.  
(Figures compiled by the Vic Centre, London 01-992 9904)

**Books**

- (1) Spectrum Machine Language for the Absolute Beginner, Tang (Melbourne House)
- (2) ZX Spectrum Explored, Hartnell (Sinclair/Brown)
- (3) Assembly Language Programming for the BBC Micro, Birnbaum (Macmillan)
- (4) BBC Micro Revealed, Ruston (Interface)
- (5) The Spectrum Handbook, Langdell (Century)
- (6) Programming the 6502, Zaks (Sybex)
- (7) 35 Programs for the Dragon 32, Langdell (Century)
- (8) Over the Spectrum, various authors (Melbourne House)
- (9) Machine Code and Better Basic, Stewart and Jones (Shiva)
- (10) Programming the Z80, Zaks (Sybex)

(Figures compiled by Watford Technical Books, Watford, 0923 23324)  
(Last week's position in brackets)

## LOSERS

pulling the plug out,  
denying the computer  
a goal scoring  
opportunity. OFF!





# ABBEX

## A simple line drawing of a Pac-Man character on the left, facing right, and three ghosts on the right, each with a sad face and wavy lines below them.

POPULAR COMPUTING WEEKLY