

60p

YOUR COMPUTER

AUGUST 1982

Vol.2 No.8

Can you survive ZX Demon's Domain?

Dragon reviewed


Vic duck shoot

BBC techniques

Spectrum sound

Atom file handling

Ecological modelling

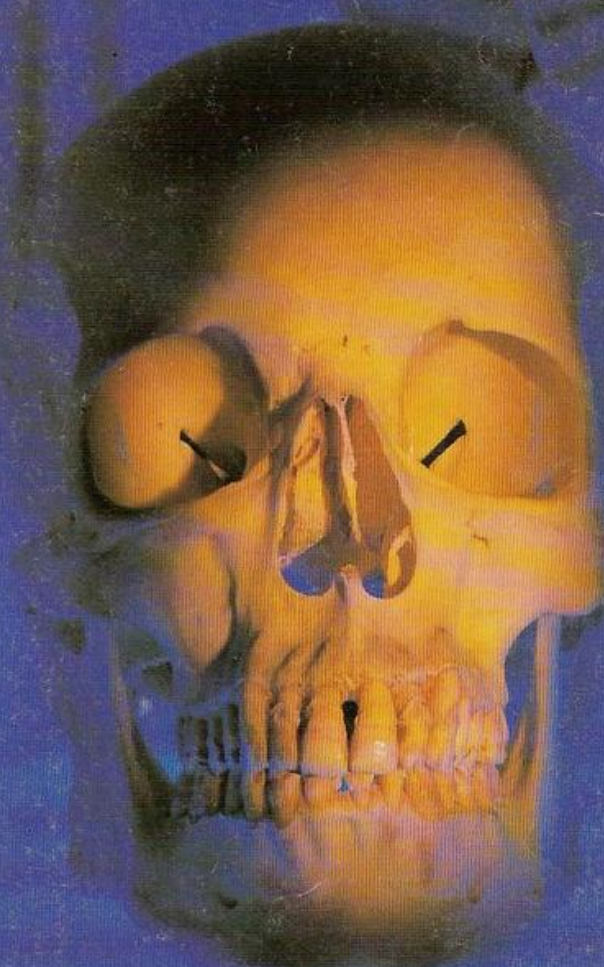


Win a Dragon

MORE MEMORY FOR MICROS!


look at what we can offer:




RAMPACKS
for SINCLAIR ZX81




VCS 8K for VIC
8k RAM+3 slots **£44**

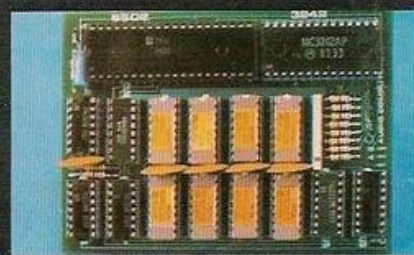

DU01 for ATOM
64k RAM only **£70**

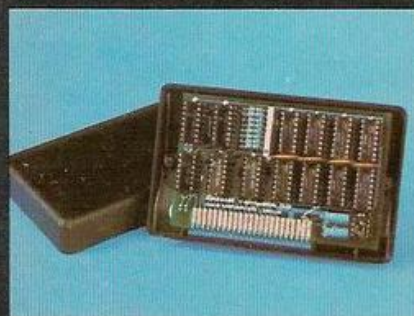


16K - the only upgradable
to 56k on the market **£36**

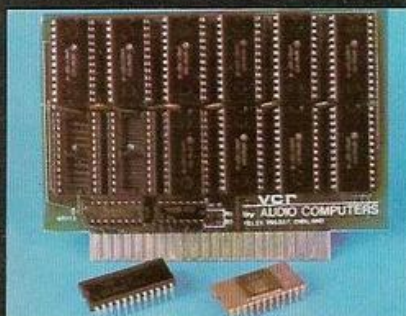


add up to 20k RAM+16k ROM


VCR 20 for VIC
4K-£24, 2k increment-£5





DRC for PET
64K-£80 128K-£130

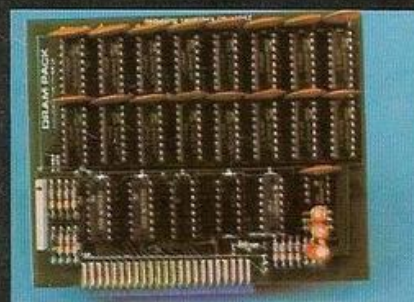


32K bytes — **£29**

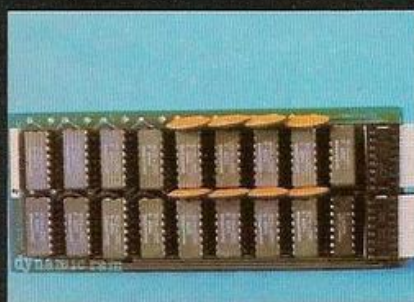

32K add on RAM **£46**

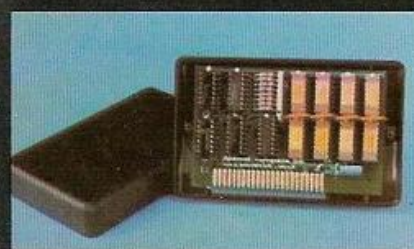

56K — exceptional low
power consumption — **£44.90**



64K + Eprom programmer &
user port — only **£79**

FOR A FREE BROCHURE, RING LINDA OR
SUE ON SOUTHEND (0702) 613081
FOR CREDIT CARD ORDERS, RING JACKIE
OR PAM ON SOUTHEND (0702) 618144

CHEQUES AND P.O.'s TO:

AUDIO-COMPUTERS

87 BOURNEMOUTH PARK ROAD,
SOUTHEND ON SEA — ESSEX SS5 2JJ

ALL PRICES INCLUDE V.A.T. AND POSTAGE

TELEX 995337 G AUDCOM

A TRADEMARK OF SOLIDISK LTD

We can adapt the above products for ZX81 to fit your new Spectrum for just £5 Extra.

YOUR COMPUTER

YOUR LETTERS:

ZX-81 Verify; BBC tips; Pet to Vic.

NEWS:

New £70 printer; Binatone's £50 colour micro; BATS microdisc; first shots exchanged in £200 price war.

COMPUTER CLUB:

This month we visit MC² — Manchester's most energetic micro group.

DRAGON 32:



Tim Hartnell evaluates Mettoy's 32K Dragon, a colour micro for just under £200.

VIC MEMORY EXPANSION:

Some of the major units that can expand the Vic's insubstantial memory are assessed here by Boris Allan.

SPECTRUM SOUND:

The Spectrum's critics maintain that its sound is only good for annoying bats. Tim Langdell's routines set the record straight.

Editor

TOBY WOLFE

Assistant Editor

MEIRION JONES

Staff Writer

SIMON BEESLEY

Sub-editor

JOHN LIEBMANN

Editorial Secretary

LYNN COWLING

Editorial: 01-661 3144

Advertisement Manager

PHILIP KIRBY 01-661 3127

Advertisement Executives

BILL ARDLEY 01-661 8484

PETER RICE 01-661 8441

Midlands Office

DAVID HARVETT 021-356 4838

Northern Office

RON SOUTHALL 061-872 8861

Advertisement Secretary

JEANETTE MACKRELL

Publishing Director

CHRIS HIPWELL

Your Computer, Quadrant House, The

Quadrant, Sutton, Surrey SM2 5AS.

Typesetting by In-Step Ltd, London EC1.

Printed by Riverside Press Ltd,

Whitstable, Kent.

Subscriptions: U.K. £8 for 12 issues.

©IPC Business Press Ltd 1982

Published by IPC Electrical-Electronic Press Ltd, Quadrant

House, The Quadrant, Sutton, Surrey SM2 5AS. Tel: 01-661

3500 Telex/grams: 892084 BIPRESG. ISSN 0263-0885

DEMON'S DOMAIN:

You must survive ordeals such as the hail of barbs and the crusher if you want to emerge unscathed from Joseph Nicholson's devilish game for the 16K ZX-81.

INTERVIEW:

Tony Baden of Bug-Byte reveals how he turned a student hobby into a business which has sold over 500,000 cassette games.

VIC DUCK SHOOT:

Safe from irate game-keepers, *Your Computer* opens the duck-shooting season prematurely with David Prosser's sporting game for the would-be marksman.

ECOLOGICAL MODELLING:

Ecological relationships such as that between predator and prey can be simulated with William Masfield's program for the ZX-81.

BBC TECHNIQUES:

User-defined keys and the teletext mode are the subjects we cover this month in two comprehensive articles.

ZX-81 MACHINE CODE:

Part one of a new series which aims to make machine code accessible to the average Sinclair Basic user.

BASIC TRANSLATIONS:

Tony Edwards offers more ideas and hints which open the door to easier translations.

ATOM FILE HANDLING:



George Byrns presents the software you need to manipulate files in a database.

ASIMOV AS DATABASE:

How a word-processing system can be adapted to a role as a database controller.

RESPONSE FRAME:

More answers to your technical queries.

FINGERTIPS:

Our regular column for calculator enthusiasts.

SOFTWARE FILE:

This month there are nine full pages of your programs for the ZX-81, Spectrum, BBC Micro, Vic, Atom, Sharp and others.

COMPETITION CORNER:

The result of the Golden Nugget puzzle and a new competition for a £15 book token. The Dragon 32 crossword falls between pages 18 and 19.

Cover photograph by Stephen Oliver.


EDITORIAL

IN A CRUEL WORLD where peripherals such as printers and disc drives appeared to be the prerogative of only the big-spender, networking micros together to share such costly resources made sound economic sense. But now that colour micros complete with high-resolution graphics, printers and adequate storage will soon be available for less than £200, a question mark hangs over the future of "the network". Yet for major firms such as Sinclair Research and Acorn, their machines' potential to be networked is still considered important enough to figure prominently in their sales literature. This is obviously intended as an extra enticement, particularly to the educational market where spending cuts make austerity the rule and networking an attractive way round it.

Clearly then, given the recent falls in hardware prices, one might be forgiven for believing that networks are an outmoded idea. In reality, however, they are a good instance of a solution to a problem leading technology down a path it might not otherwise have taken — a path which leads to unexpected benefits as often as it leads to wasted time and money. Local-area networks have been the traditional domain of the low-cost micro. Now communication between more remotely-located machines should become an affordable prospect. An amateur group in Montreal has even formed a network linked by citizens' band radio.

In the States bulletin-board networks are becoming commonplace. With this kind of system you use your machine as a communications medium through which you can send and receive messages from fellow users. Networks will enable home computers to be used for tasks other than purely computing. Cheaper Modems bring in their train less expensive Prestel adaptors which in turn lead us to telesoftware and the advantages of being able to access large and remote databases with a small machine. Sinclair Research, with its sights set firmly on the software market, believes that its proposed £20 Prestel adaptor for the Spectrum will make downloading software directly from a Sinclair database the norm, and software piracy and distribution a thing of the past.

So, even if some of the original economic arguments for networking are no longer valid, there is every reason to assume that it is assured a future on different but equally important grounds.

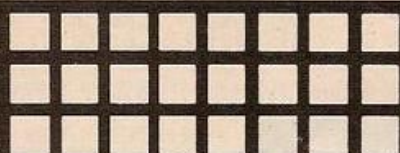

Cambridge Computer Store

Two Great Micros in stock now!

**BBC
Computer**



A to B
UPGRADE
AVAILABLE

SINCLAIR
16K RAM
DOWN TO
£29.95



**Sinclair
ZX81**

Price includes VAT.

Cambridge Computer Store

1 Emmanuel Street, Cambridge CB1 1NE

Phone (0223) 358264/65334

Also in our 'Budget Micros' Dept: Commodore VIC-20

**KEMPSTON
(MICRO)
ELECTRONICS**



NEW ZX SPECTRUM HARDWARE

AVAILABLE NOW — A 24 LINE
INPUT/OUTPUT PORT, WHICH MAKES
USE OF THE BASIC COMMANDS
IN AND OUT ON THE SPECTRUM

The Port is built around a M.O.S. chip which imposes virtually no D.C. load on the datalines. The device is Port Mapped and can be configured in a variety of modes dependent on the particular application. We must stress that this is not a modified ZX81 Port, but a purpose built unit designed exclusively for the Spectrum (16 line I/O port is also available for the ZX81)

The prices for the above items are as follows:

ZX SPECTRUM USER I/O PORT £16.50
ZX 2 SLOT MOTHERBOARD £16.95
STACKABLE CONNECTOR £5.50

The prices are inclusive of VAT, but postage must be added at 70p for a single item, £1.00 for two or more items.

Cheques/Postal orders made payable to:
**KEMPSTON ELECTRONICS, 60 ADAMSON COURT,
HILLGROUNDS ROAD, KEMPSTON,
BEDFORD MK42 8QZ.**

SAE FOR FURTHER DETAILS.

Delivery 14 days from receipt of order. A. Pandaal, B.Sc P.G.C.E.

NEW ZX PRODUCTS FROM PRINT 'N' PLOTTER



**ZX GRAPHICS PROGRAMMING
MADE EASY**

Professionally-produced full
colour A4, 24 page Manual
packed with ZX Graphics
Programming techniques.
Information Graphics.
Sketchpads. Saving your 'Art'
Graphics Stringing and ZX
Printer Graphics.
Only **£1.50**

Illustrated
at every
stage

ZX PRINTER PAPER £10.95!

**GOOD NEWS
FOR
PRINTER
OWNERS**

ZX PRINTER PAPER
Five rolls of Printer paper —
identical to Sinclair's but a
quid cheaper! each roll is
approximately 65 feet long
— excellent printing
standard ... fast delivery

£10.95 for 5 rolls.

Also available:

Print 'n' Plotter Jotters — 100 pages of Print and Plot
grids in fully-bound Pad. only £3.50.
Print 'n' Plotter Films — The re-usable transparent film
version of the Jotter ideal for copying graphics from
photos, illustrations, charts etc
only £2.25.

Post today to: Print 'n' Plotter Products (Y6) 19 Borough High Street
London SE1 9SE (or detail your requirements in a letter).

Please forward me Manuals @ £1.50 each.

..... Packs of Printer Paper @ £10.95 each.

..... Print 'n' Plotter Jotters @ £3.50 each.

..... Print 'n' Plotter Films @ £2.25 each

All prices include U.K. VAT, postage and packing.

☐ Remittance enclosed. ☐ Please bill my Access/Barclaycard/Visa

No: _____

Name _____

Address: _____

**Print 'n' Plotter
Products**



**We're only a few minutes
from your Post Box.**

So why not try our mail order service.

FREE DELIVERY

**On all advertised items
Simply complete coupon below**



**ATARI®
400**
FROM
£199.95



**ATARI®
800**
ONLY
£499.90

**ATARI®
810 DISK DRIVE**
WITH DOS II
£299.95



**ATARI 400/800
PAC MAN
CARTRIDGE** **£29.95**

New from Epsilon Software

Beebtrek A real time space
adventure,
with sound effects & colour graphics works in 16K **£7.95**

B.B.C Games Packs

No. 1 STARWARS - BLACK JACK
SIMON - FORTUNE
ALIEN INVASION

No. 2 STAR TREK - PUCK CHASE
MASTERMIND

No. 3 ROBO - SWAMP - SNAKES
J.R. (16K and 32K Versions)



ONLY £10 each

FREE DELIVERY OFFER

Please send me:-

..... £

..... £

..... £

I enclose Cheque/P.O. for - £

Name

Address

Send to: COMPUTERS FOR ALL,
72 North Street, Romford, Essex.
Tel: Romford (0708) 752862

**Computers
for All**

**72 NORTH STREET,
ROMFORD, ESSEX.
TEL 0708 752862**



Spectrum

Spectrum is a new, rapidly expanding group of independent retailers who specialise in selling a range of popular home computers.

Our group policy is simple: we won't be beaten on price and 'know-how'. We can make this claim because our bulk buying power ensures that we select and buy at the best prices and then can pass on the benefits to you.

We guarantee if you find an item advertised and in stock at any other retailer at a better price than us, we will match that price.

You will see we quote our prices both including and excluding VAT - no hidden 15% to suddenly uplift your bill but also making our prices easier to compare with our competitors.

To ease payment we accept Barclaycard and Access as well as our own Spectrum Charge Card. Longer term credit terms are also available.

We believe our product 'know-how' is crucial to you as a customer. In every one of our centres there are personnel who have been trained by the manufacturers or distributors themselves. So we know what we are talking about on the products we sell and can help every customer, including the complete beginner, find and understand the equipment to suit his or her needs. For us it's not just a matter of simply handing over a box and leaving you on your own to figure it out. Our service includes 'hands on' experience that we can pass on to you.

After sales care is also well catered for. Our own Spectrum Service Centres will insure that should your machine 'go down' we will get it up and running as quickly as possible. We can also offer extended warranties at reasonable prices.

When it comes to mail order delivery we use Securicor for despatch to anywhere in the British Isles. The cost is low and the service is good. Further details are available from your local shop at the time of ordering.

Finally, we should point out that although not every Spectrum centre carries every advertised item, they can always be obtained quickly from our central warehouse. If you have any difficulty, please telephone Spectrum Customer Service on (0727) 66646.

Spectrum Computer Group is a division of Spectrum (UK) Ltd - Britain's largest photographic retailing group.

ATARI



Developed by the Company famous for its TV and arcade games the Atari Computers have superb colour graphics and facilities for the manipulation of visuals on the screen.

In-built 'player-missile-graphics' enable the user to compose games to very professional standards. Any key on the keyboard can be made to produce any character the user wishes on the screen. Atari Computers have an extra microprocessor onboard especially to enable these unique features. There are over 200 programmable colours and tones and a wide range of programmable sounds.

Plug a "BASIC" cartridge in and you have a comprehensive computer.

ATARI 400

£217.30

£249.90 INC.VAT

The model 400 has 16K of RAM and a touch sensitive keyboard. The 800 model has a professional style typewriter keyboard and a memory which is user expandable to 48K. Add disk drives (up to 4) and a printer and you have a system of adequate power for business uses.

	EXC VAT	INC VAT
ATARI 800 16K COMPUTER (EXPANDABLE)	£434.70	£499.90
ATARI 410 PROGRAM RECORDER	£43.48	£50.00
ATARI 810 DISK DRIVE	£260.83	£299.95
ATARI 822 THERMAL PRINTER	£230.43	£264.99
ATARI 850 INTERFACE FOR DOT MATRIX PRINTER	£117.39	£134.99
ATARI 16K RAM EXPANSION FOR 800	£56.52	£64.99
ATARI GAMES PADDLES (PAIR)	£12.13	£13.95
ATARI GAMES JOYSTICKS (PAIR)	£12.13	£13.95
ATARI THERMAL PRINT PAPER (2 ROLLS)	£3.48	£4.00
ATARI BLANK DISKETTES (5)	£13.91	£15.99
SOFTWARE		
INVITATION TO PROGRAMMING (1)	£13.87	£15.95
INVITATION TO PROGRAMMING (3)	£19.96	£22.95
CONVERSATIONAL FRENCH	£34.74	£39.95
CONVERSATIONAL GERMAN	£34.74	£39.95
CONVERSATIONAL ITALIAN	£34.74	£39.95
CONVERSATIONAL SPANISH	£34.74	£39.95
MUSIC COMPOSER	£31.26	£35.95
TOUCH TYPING	£13.87	£15.95
ASTERIODS	£26.04	£29.95
MISSILE COMMAND	£26.04	£29.95
PACKMAN	£26.04	£29.95
SPACE INVADERS	£26.04	£29.95
STAR RAIDERS	£26.04	£29.95
SUPER BREAK-OUT	£21.30	£24.50
VIDEO EASEL	£21.30	£24.50
COMPUTER CHESS	£21.30	£24.50
GRAPHIT	£12.13	£13.95
WORD PROCESSOR (DISK)	£66.91	£99.95
ASSEMBLY EDITOR	£34.74	£39.95
DE-RE ATARI	£17.00	No VAT

commodore



The VIC 20 really is extraordinary value for money. It does so much for so little. It's fully expandable to 27½K user RAM, has a full size typewriter keyboard and plugs straight into your home TV.

COMMODORE VIC 20

£173.90

£199.99 INC.VAT

Micro soft 'BASIC' is standard but additional machine language is available via plug in cartridges. There is also a choice of other programs for chess, music and languages as well as games. Printer disk drive and other peripherals, software and books are all available to further expand your use and enjoyment.

	EXC VAT	INC VAT
VIC C2N cassette unit	£39.09	£44.95
VIC Printer (plain paper, tractor)	£200.00	£230.00
VIC Single floppy disc drive (5¼")	£344.35	£396.00
3K RAM expansion cartridge	£26.04	£29.95
8K RAM expansion cartridge	£39.09	£44.95
16K RAM expansion cartridge	£65.17	£74.95
Super expander Hi Res cartridge	£30.39	£34.95
Joystick	£6.52	£7.50
Games paddles (pair)	£11.74	£13.50
GAMES		
Programmers Aid cartridge	£30.39	£34.95
Machine Code Monitor cartridge	£30.39	£34.95
Introduction to Basic (1)	£13.00	£14.95
'Avenger' (ROM)	£17.35	£19.95
'Star Battle' (ROM)	£17.35	£19.95
'Jelly Monsters' (ROM)	£17.35	£19.95
'Super Lander' (ROM)	£17.35	£19.95
'Road Race' (ROM)	£17.35	£19.95
'Rat Race' (ROM)	£17.35	£19.95
'Blitz' cassette	£4.34	£4.99
BOOKS		
Learn Computer Programming with the Commodore VIC	£1.95	No VAT
VIC Revealed	£10.00	No VAT
VIC 20 Programmers Reference Guide	£14.95	No VAT
VIC Computing Magazine	£0.95	No VAT

ACCESSORIES

	SPECIAL PRICE	EXC VAT	INC VAT
Prince PC31 - 12" Green Monitor		£86.91	£99.95
SANYO			
Slim 36 Cassette Recorder (for use with Nascom)		£26.04	£29.95
CTT 3106 14" Colour TV Set		£199.96	£229.95
ACCUTRAK			
C12 Cassettes		£0.43	£0.50
Single sided, double density disks (for Commodore, Atari, Apple, Tandy etc.)		£1.70	£1.95
Double sided, double density disks (for Sharp and Superbrain)		£2.87	£3.30
Single sided, double density, double track disks (for Nascom and Commodore 8050)		£2.30	£2.65
Disk Bank Interlocking cases for diskettes		£3.91	£4.50
Disk head cleaner		£13.00	£14.95
Single part 11" x 9½" printer paper, box of 2200 sheets		£10.39	£11.95

ALFRETON
Gordon Harwood
69/71 High Street
Alfreton Derbyshire
Tel: 0773 832076

BASILDON
Godfrey's
28-32 East Walk
Town Centre
Basildon
Essex
Tel: 0258 289378

BASINGSTOKE
Fishers
273 Market Place
Basingstoke
Hants
Tel: 0256 22079

BIRMINGHAM
Sherwoods
Great Western Arcade
Birmingham 2
Tel: 021 236 7211

BRADFORD
Photocopy
18 Cheapside
Bradford BD1 4JA
West Yorkshire
Tel: 0274 308598

BRIGHTON
Capricorn
1 Queens Road
Brighton
Sussex
Tel: 0273 29634

CAMBRIDGE
KP Ltd
12a Kings Parade
Cambridge
Tel: 0223 68087

CARDIFF
Randall Cox
18-22 High St Arcade
Cardiff
Tel: 0222 31960

DERBY
CT Electronics
The Spot
Derby
Tel: 0332 44760

GUILDFORD
The Model Shop
23 Swan Lane
Guildford
Surrey GU1 4EQ
Tel: 0483 39115

HARROW
Camera Arts
(Micro Computer Division)
24 St Ann's Road
Harrow Middlesex
Tel: 01 427 5469

LEEDS
Bass & Bligh
4 Lower Briggate
Leeds W Yorkshire
Tel: 0532 45445

LONDON SE9
Square Deal
375 Footscray Road
New Eitham
London SE9
Tel: 01 859 1516

LONDON W11
Electrolisure
120 Notting Hill Gate
London W11
Tel: 01 221 7029

MACCLESFIELD
Camera & Computer Centre
118 Mill Street
Macclesfield
Cheshire
Tel: 0625 27468

MIDDLESBROUGH
McKenna & Brown
190 Linthorpe Road
Middlesbrough
Tel: 0642 248345

NEWCASTLE
Turners
29-31 High Friars
Eldon Square
Newcastle
Tel: 0632 612901

NEWCASTLE-ON-TYNE
Newcastle Camera & Computer Mart
16 Northumberland Court
Newcastle-on-Tyne
Tel: 0632 327461

NOTTINGHAM
Cameo Computers
8/9/10 Trinity Walk
Nottingham
Tel: 0602 42912

READING
David Saunders
Computer Centre
8 Yield Hall Place
Reading
Berkshire
Tel: 0734 580719

TEDDINGTON
"Andrews"
49 Broad Street
Teddington
Middlesex
Tel: 01 977 4716

WALLINGTON
Surrey Micro Systems Ltd
53 Woodcote Road
Wallington
Surrey
Tel: 01 647 5636

WATFORD
SRS Microsystems Ltd
94 The Parade
High Street
Watford
Herts
Tel: 0923 26602

WEST BROMWICH
Bell & Jones
39 Queens Square
West Bromwich
Tel: 021 553 0820

WIGAN
Wilding Ltd
11 Mesnes St
Wigan
Lancs
Tel: 0942 44382

WOKING
Harpers
71-73 Commercial Way
Woking
Surrey
Tel: 04862 61061

WORCESTER
David Waring Ltd
1 Marmion House
High Street
Worcester
Tel: 0905 27551

We won't be beaten on prices. *Just compare them!*

NASCOM



SPECIAL EDITION! UNIQUE TO SPECTRUM

The Nascom is a British designed and built microcomputer and one of the first home micros to appear in this country, some five years ago.

Since then, it has been developed into one of the most powerful and expandable systems around.

It can have up to 206K onboard memory, combined with superb colour graphics, disk drives, printers and various input/output facilities can be added.

Such is the versatility of this micro that it has been adopted for numerous commercial applications including hotel booking systems, blood grouping, weaponry and satellite tracking.

Previously looked upon as a machine for the knowledgeable hobbyist only Spectrum now bring you the opportunity to embark upon this remarkable sphere of computing in the easiest possible way. A ready to plug in and use 'SPECIAL EDITION' Nascom programmable in machine code or BASIC is now available from us. If you are serious about computing the 'SPECIAL EDITION' is your starter pack. The initial machine provides 8K of memory but a simple plug in board upgrades your computer to 56K.

	EXC VAT	INC VAT
THE NASCOM 'SPECIAL EDITION'	£429.95	£494.44
'SPECIAL EDITION' 48K RAM BOARD	£130.00	£149.50

THE NASCOM 'SPECIAL EDITION'

£429.95

£494.44 INC. VAT

SHARP

The MZ80A is the newcomer to the Sharp range with the serious user very much in mind in the design. A complete stand-alone 48K system incorporating a profiled typewriter keyboard with numeric pad and a 9" green display screen. The "BASIC" contains a number of very useful additions over the previous models.

A full line up of peripherals further add to the versatility of this machine. INCLUDES £75 OF FREE SOFTWARE.

SHARP MZ80A

£477.38

£548.99 INC. VAT

SHARP PERIPHERALS FOR MZ80A

- * Twin floppy disk unit (5 1/4")
- * Single floppy disk unit
- * Floppy disk interface card
- * Floppy disk cable
- * Master diskette and manual
- * 80 col printer inc. cable, I/O card and ROM
- * 80 col printer I/O card and ROM
- * 132 col printer inc. cable, I/O card and ROM
- * Expansion unit (required for disk drive and/or printer)
- * Universal interface card
- * Assembler tapes and manual
- * FDS
- * MZ80K to MZ80A converter tape

Hand held computers from Sharp give you a pocket genius at your command. We sell the well established PC1211 and the new 1500.

The PC1211 packs high performance functions with Basic language into a slim, compact body. You can extend your PC1211 with a cassette interface or printer/cassette interface.

The new PC1500 takes technology close to personal computer ability. Its compact body has 16K bytes of ROM and 3.5K bytes of RAM. With an extended alpha basic numeric. You can then go further with the 4K or 8K RAM upgrades. There's also, for the first time in hand held computers, a four colour graphic printer or a combined printer and cassette interface.

PC1211 Computer	£65.00	£74.75
PC1211 Cassette interface	£11.26	£12.95

	EXC VAT	INC VAT
Twin floppy disk unit	£590.00	£678.50
Single floppy disk unit	£400.00	£460.00
Floppy disk interface card	£100.00	£115.00
Floppy disk cable	£24.00	£27.50
Master diskette and manual	£31.00	£35.66
80 col printer inc. cable, I/O card and ROM	£415.00	£477.25
80 col printer I/O card and ROM	£475.00	£546.25
132 col printer inc. cable, I/O card and ROM	£845.00	£971.75
Expansion unit (required for disk drive and/or printer)	£100.00	£115.00
Universal interface card	£45.00	£51.75
Assembler tapes and manual	£42.00	£48.30
FDS	£85.00	£97.75
MZ80K to MZ80A converter tape	£10.00	£11.50

£75 OF FREE SOFTWARE WITH THE MZ80A



- PC1211 Cassette and printer interface
- PC1500 Computer
- PC1500 Printer/cassette interface
- PC1500 4K RAM upgrade

SHARP PERIPHERALS FOR MZ80K

- * Twin floppy disk unit (5 1/4") including I/O card, diskette, manual and cable
- * Dot matrix printer
- * Expansion interface (required for either/both above)
- * Machine code language tape and manual
- * Assembler tapes and manual
- * Basic compiler
- * Pascal
- * Double precision basic


	EXC VAT	INC VAT
Twin floppy disk unit	£60.83	£69.95
Single floppy disk unit	£147.78	£169.95
Floppy disk interface card	£130.39	£149.95
Floppy disk cable	£43.43	£49.95
Master diskette and manual	£702.49	£807.86
80 col printer inc. cable, I/O card and ROM	£378.91	£435.75
80 col printer I/O card and ROM		
132 col printer inc. cable, I/O card and ROM		
Expansion unit (required for either/both above)	£96.00	£110.40
Machine code language tape and manual	£17.57	£20.20
Assembler tapes and manual	£36.00	£41.40
Basic compiler	£40.00	£46.00
Pascal	£40.00	£46.00
Double precision basic	£38.00	£43.70

STOP PRESS! At the time of going to press we still have a few of the very popular Sharp MZ80K computer. It has 48K RAM (approx 34.5 user when operating BASIC), a BASIC tape manual as well as an application tape and demo tape. It's an incredible package at the price. Phone now for availability.

SHARP MZ 80K

£369.57

£425.00 INC. VAT

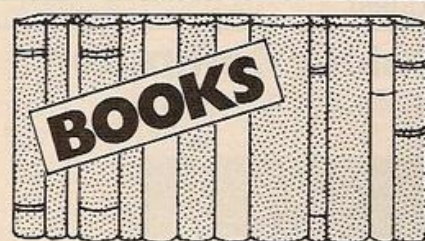

We stock an extensive range of books to help you. Check below and we're sure you'll find something to whet your appetite.

	EXC VAT	INC VAT
CP/M Handbook	£11.50	
Q&A	£9.65	
Programming the Z80	£11.95	
Programming the 6502	£10.75	
Your First Computer	£7.75	
BASIC Handbook (2nd edition)	£14.95	
A-Z of Computer Games	£5.60	
Atari Basic	£5.95	
Basic 'BASIC'	£9.95	
BASIC Computer Games	£6.95	
BASIC Computer Programs for Business (VOL I)	£8.55	

NO VAT ON BOOKS

- BASIC Computer Programs for the Home
- BASIC. A self teaching guide (2nd edition)
- Microsoft Basic
- More Basic Games
- Software Secrets (Sharp)
- Getting Acquainted with your Acorn Atom
- Instant Basic
- Why do you need a Personal Computer
- 24 Tested Games and Programs
- 33 Games for Apple - TRS 80 - PET
- Byteing Deeper into your ZX81
- Gateway Guide ZX81
- Getting Acquainted ZX81
- Hints and Tips ZX81
- Mastering Machine Code ZX81
- Not Only 30 Programs ZX81
- ZX81 Companion
- ZX81 Pocket Book
- What can I do with 1K ZX81
- PEEK POKE BYTE RAM ZX81
- Executive Computing
- Computers for Everyone
- Some Common Basic Programs Atari
- 49 Explosive Games ZX81
- Practical Programs BBC & Atom
- 34 Amazing Games
- 30 hr Basic BBC

NO VAT ON BOOKS

	EXC VAT	INC VAT
BASIC Computer Programs for the Home	£9.50	
BASIC. A self teaching guide (2nd edition)	£6.75	
Microsoft Basic	£8.95	
More Basic Games	£6.95	
Software Secrets (Sharp)	£5.95	
Getting Acquainted with your Acorn Atom	£7.95	
Instant Basic	£8.95	
Why do you need a Personal Computer	£5.75	
24 Tested Games and Programs	£5.60	
33 Games for Apple - TRS 80 - PET	£5.95	
Byteing Deeper into your ZX81	£4.95	
Gateway Guide ZX81	£6.45	
Getting Acquainted ZX81	£5.95	
Hints and Tips ZX81	£4.25	
Mastering Machine Code ZX81	£7.50	
Not Only 30 Programs ZX81	£6.95	
ZX81 Companion	£7.95	
ZX81 Pocket Book	£3.95	
What can I do with 1K ZX81	£4.95	
PEEK POKE BYTE RAM ZX81	£4.95	
Executive Computing	£5.75	
Computers for Everyone	£6.15	
Some Common Basic Programs Atari	£11.10	
49 Explosive Games ZX81	£5.95	
Practical Programs BBC & Atom	£5.95	
34 Amazing Games	£4.95	
30 hr Basic BBC	£5.50	

DEALERS: Spectrum Computer Centres operate on an exclusive area basis and if you would like to know more about our group, contact Mike Stern or Alan Warren now on (0727) 66646.

Spectrum (UK) Limited, Unit 6, Marlborough Trading Estate, Latimore Road, St Albans, Herts.

Prices correct at time of going to press. E. & O. E.

Spectrum

COMPUTER GROUP

INTEREST FREE CREDIT

*** Subject to
approval which can
take up to 48 hours
(APR = 0%)**


**from
MAPLIN
(until August
31st 1982)**

On Atari & VIC computer hardware

If your order contains over £120 worth of computer hardware apply now for interest free credit by telephoning: Mail-order: (0702) 552911
London Shop: 01-748 0926 Southend Shop: (0702) 554000 or write to P.O. Box 3, Rayleigh, Essex SS6 8LR

You pay 10% down, then 10% per month for a further nine months. (to nearest penny) Example: VIC20 Colour Computer. Cash Price £199.99.
Credit terms: £19.99 down then £20 per month for nine months: Total £199.99.
Credit quotations on request.

The VIC20 Colour Computer

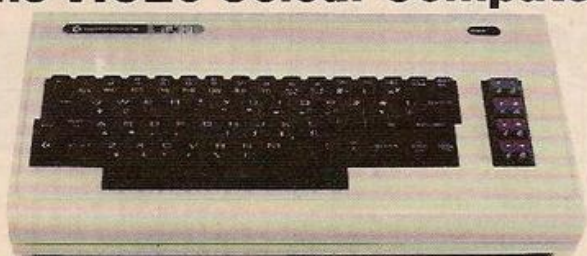

**could be yours this week for just
£19.99 down.
Cash price and total credit price £199.99.
Order as AF47B**

VIC 20 ACCESSORIES:

C2N Cassette Unit (AF48C) £44.95

VIC20 Printer: (AF49D) £230.00
80 characters per line, 30 characters per second, tractor feed, full alphanumerics and graphics, double size character.

VIC20 Disk Drive: (AF50E) £396.00
170K storage on standard single-density, single-sided, soft-sectored floppy disks.

Add-on RAM Cartridges:
3K RAM (AF51F) £29.95
8K RAM (AF52G) £44.95
16K RAM (AF53H) £74.95

Memory Expansion Board:
6 ports for plug-in cartridges (AF54J) £125.95

Introduction to BASIC Cassettes

Part 1 (AC57M) £14.95
Part 2 (AC58N) £14.95

Joysticks and Paddles:

Single Joystick (AC53H) £7.50
Pair of Joysticks (AC37S) £13.95
Le Stick (AC45Y) £24.95
Pair of Paddles (AC30H) £13.95

Programming Aid Cartridges

Super Expander: 3K RAM and Hi-res graphics (AC54J) £34.95

Programming Aid: Additional commands, function key programming etc.

(AC55K) £34.95
Machine Code Monitor (AC56L) £34.95

Game Programs

Avenger Cartridge (AC59P) £19.95
Star Battle Cartridge (AC60Q) £19.95
Super Slot Cartridge (AC61R) £19.95
Jelly Monsters Cartridge (AC62S) £19.95
Alien Cartridge (AC63T) £19.95
Super Lander Cartridge (AC64U) £19.95
Road Race Cartridge (AC65V) £19.95
Rat Race Cartridge (AC66W) £19.95
Blitz Cassette (AC67X) £4.99

Books About VIC

Learn Programming on the VIC (WA31J) £2.50
VIC Revealed (WA32K) £11.50
VIC Programmers Reference Guide (WA33L) £16.50

See us at the
**Personal
Computer
World Show**
Barbican Centre
9-12 Sept



3 Consoles available:

Atari 400 with 16K RAM (AF36P)	£299
Atari 400 with 32K RAM (AF37S)	£395
Atari 800 with 16K RAM (AF02C)	£599

AF36P and AF02C special price for limited period only

Lots of other hardware:

Cassette Recorder	(AF28F)	£50.00
Disk Drive	(AF06G)	£345.00
Thermal Printer	(AF04E)	£265.00
Printer Interface for 400	(AF41U)	£59.95
Printer Interface for 800	(AF42V)	£59.95
Interface Module	(AF29G)	£135.00
Versawriter	(AF43W)	£169.00

16K RAM Module	(AF08J)	£65.00
32K RAM Module	(AF44X)	£125.35
32K Upgrade for 400	(AF45Y)	£75.00
Floppy Disk	(YX87U)	£2.75
Le Stick	(AC45Y)	£24.95
Joystick Controllers	(AC37S)	£13.95

For full details ask for our hardware leaflet
(XH54J) SAE appreciated



NOW YOU CAN JOIN THE U.K. ATARI COMPUTER OWNER'S CLUB. An independent user's group.

Four issues of the club magazine for only £1.60! Address your subscription to Ron

THE CHOICEST GEMS OF ATARI SOFTWARE FROM MAPLIN

Adventure Games

Star Warrior	-C-32K-(B024B)	£28.95
Rescue At Rigel	-C-32K-(B021X)	£22.45
Invasion Orion	-C-32K-(B023A)	£18.95
Dalestones of Ryn	-C-32K-(B022Y)	£14.95
Galactic Empire	-C-24K-(B014Q)	£14.95
Hi-Res Adventure // 2	-D-48K-(B025C)	£24.95
Analog Adventure	-D-32K-(B033L)	£24.95
Adventure Land	-C-24K-(B000A)	£14.95
Pirates Adventure	-C-24K-(B001B)	£14.95
Mission Impossible	-C-24K-(B002C)	£14.95
Voodoo Castle	-C-24K-(B003D)	£14.95
The Count	-C-24K-(B004E)	£14.95
Strange Odyssey	-C-24K-(B005F)	£14.95
Mystery Fun House	-C-24K-(B006G)	£14.95
Pyramid of Doom	-C-24K-(B007H)	£14.95
Ghost Town	-C-24K-(B008J)	£14.95
Savage Island I	-C-24K-(B009K)	£14.95
Savage Island II	-C-24K-(B010L)	£14.95
Golden Voyage	-C-24K-(B011M)	£14.95
Energy Czar	-C-16K-(Y053H)	£9.95
Kingdom	-C-8K-(Y055K)	£9.95

Teach-Yourself Programs

Conversational French	-5C-16K-(Y044X)	£39.95
Conversational German	-5C-16K-(Y045Y)	£39.95
Conversational Spanish	-5C-16K-(Y046A)	£39.95
Conversational Italian	-5C-16K-(Y047B)	£39.95
Touch Typing	-2C-16K-(Y049D)	£15.95
States & Capitals	-C-24K-(Y056L)	£9.95
European Countries & Capitals	-C-16K-(Y057M)	£9.95

Learn Programming

Invitation to Programming	-C-8K-(Y043W)	£15.95
Basics of Animation	-C-32K-(B057M)	£9.95
Basics of Animation	-D-32K-(B058N)	£10.95
Player Missile Graphics	-D-24K-(B059P)	£18.95
Player Missile Graphics	-D-24K-(B060Q)	£19.95
Display Lists	-C-16K-(B051F)	£9.95
Display Lists	-D-24K-(B052G)	£10.95
Horiz/Vertical Scroll	-D-16K-(B053H)	£9.95
Horiz/Vertical Scroll	-D-24K-(B054J)	£10.95

Page Flipping

Page Flipping	-C-16K-(B055K)	£9.95
Page Flipping	-D-24K-(B056L)	£10.95
Master Memory Map	-Book-(XH57M)	£4.00

Business Programs

Visicalc	-D-32K-(Y139N)	£119.95
Word Processor	-D-32K-(Y042V)	£99.95
Calculator	-D-24K-(Y050E)	£16.95
Graph—H	-C-16K-(Y051F)	£13.95
Statistics	-C-16K-(Y052G)	£13.95

Arcade Games

Star Raiders	-E-8K-(Y066W)	£29.95
Asteroids	-E-8K-(Y0600)	£29.95
Space Invaders	-E-8K-(Y070M)	£29.95
Missile Command	-E-8K-(Y064U)	£29.95
Super Breakout	-E-8K-(Y067X)	£24.50
Tari Trek	-C-24K-(Y136P)	£8.95
Star Trek 3.5	-D-32K-(Y137S)	£11.95
Race In Space	-C-32K-(B015R)	£14.95
Shooting Gallery	-C-16K-(B035Q)	£14.95
Mountain Shoot	-C-16K-(B036P)	£14.95
Jawbreaker	-C-16K-(B012N)	£10.95
Basketball	-D-48K-(B026D)	£22.95
Tank Trap	-E-8K-(Y061R)	£24.50
Tank Trap	-C-16K-(Y134M)	£8.95
Tank Trap	-D-32K-(Y135Q)	£11.95

Home Game Programs

Scram	-C-16/24K-(Y058N)	£17.50
Cypher Bowl	-C-32K-(B020W)	£29.50
Thunder Island	-C-16K-(B037S)	£10.95
Rotating Tilt	-C-16K-(B048C)	£14.95
Lunar Lander	-C-16K-(B016S)	£10.95
Sunday Golf	-C-16K-(B013P)	£10.95
Darts	-C-16K-(B042V)	£19.95
Tournament Pool	-C-16K-(B045Y)	£19.95
Snooker & Billiards	-C-16K-(B044X)	£19.95
Chess	-E-8K-(Y063T)	£24.50
Microchess	-C-16K-(Y140T)	£15.95
Checker King	-C-16K-(Y141U)	£15.95
Cribbage & Dominoes	-C-16K-(B043W)	£14.95

Poker Solitaire

Poker Solitaire	-C-16K-(B017T)	£10.95
Blackjack	-C-8K-(Y062S)	£9.95
Fast Gammon	-C-8K-(Y133L)	£13.95
Reversi (Othello-type)	-C-16K-(B019V)	£14.95
Gomoko	-C-16K-(B018U)	£14.95
Hangman	-C-8K-(Y054J)	£9.95
Humpty Dumpty & Jack & Jill	-C-16K-(B038R)	£19.95
Hickory Dicky Dock	-C-16K-(B039N)	£19.95
British Heritage	-C-16K-(B040T)	£19.95
Jig-Saw Puzzles	-C-16K-(B041U)	£19.95
European Scene	-C-16K-(B042V)	£19.95
Jig-Saw Puzzles	-C-16K-(B043W)	£19.95
Atari Safari (25 Programs)	-D-16K-(B050E)	£24.95
Atari Safari (25 Programs)	-D-16K-(B050E)	£24.95
Mind Bogglers (3 Programs)	-C-16K-(Y138R)	£8.95

Utilities

3D-Super Graphics	-D-48K-(B028F)	£29.95
3D-Super Graphics	-C-48K-(B029G)	£29.95
Atari World (Graphics)	-D-48K-(B027E)	£43.95
Assembler Editor	-E-8K-(Y068V)	£39.95
Assembler	-C-16K-(Y132K)	£16.95
6502 Disassembler	-C-8K-(Y130H)	£8.95
6502 Disassembler	-D-8K-(Y131J)	£11.95
Character Generator	-C-16K-(Y127E)	£9.97
Character Generator	-D-16K-(Y128F)	£12.50
Telelink	-E-8K-(Y059P)	£21.50

Music Programs

Music Composer	-E-8K-(Y048C)	£35.95
Movie Themes (use with Music Composer)	-C-16K-(B034M)	£9.95

Computer Languages

Operating System A+	-D-48K-(B030H)	£52.50
OS Forth	-D-24K-(Y129G)	£49.95
Pilot (Consumer)	-E-8K-(Y069A)	£54.00

Key: C=Cassette, D=Disk, E=Cartridge
2C=2 Cassettes etc. 8K, 16K etc. shows
minimum memory requirement

Send sae now for our new software leaflet with details of all the above programs. Order As XH52G — Issue 2.

Subscribe now to America's leading Atari-only magazine — Analog — 6 issues per year for just £9.00. Order as GG24B.

New titles this month

Learn Programming:	
Invitation to Programming 2	-C-16K-(B067X) £22.95
Invitation to Programming 3	-C-16K-(B068Y) £22.95

Business Programs:	
Personal Financial Management	-D-32K-(B065V) £49.00
Mortgage and Loan	-C-16K-(B066W) £13.95

Arcade Games:

Caverns of Mars	-D-32K-(B069A) £24.50
Centipede	-E-16K-(B070M) £29.95
Pac-Man	-E-16K-(B071N) £29.95
K-Razy Shoot Out	-E-16K-(B063T) £29.95
Mous kattack	-D-32K-(B077J) £26.95
Ghost Hunter	-C-16K-(B064U) £24.50
Galactic Chase	-D-32K-(B061R) £17.95
Galactic Chase	-C-16K-(B062S) £15.95

Home Programs:

Video Easel	-E-16K-(B072P) £24.50
-------------	-----------------------

Computer Languages:

Microsoft Basic	-D-32K-(B074R) £59.95
Pilot (Educator)	-E-2C-16K-(B075S) £79.95

Utilities:

Macro Assembler	-D-32K-(B073Q) £59.95
K-DOS (Superior disk operating system)	-D-32K-(B076H) £53.95

MAPLIN

Maplin Electronic Supplies Ltd
P.O. Box 3, Rayleigh, Essex.
Tel: Southend (0702)
552911/554155.

Demonstrations at our
shops NOW
See Atari and Vic in action at
159-161 King St., Hammersmith W6
Tel: 01-748 0926
or at 284 London Road,
Westcliff-on-Sea, Essex.
Tel: (0702) 554000

Note: Order codes shown in brackets.

Prices correct at time of going to press.

(Errors excluded)

ZX81 GAMES

from

J.K. GREYE SOFTWARE LTD
THE NEW GENERATION SOFTWARE HOUSE

"Without question the finest machine code games available today!".....J.N. ROWLAND Product Manager for W.H. SMITH.

GAMESTAPE 1 for 1K only £3.95
10 Games incl. ASTEROIDS, UFO, CODE, BOMBER, GUILLOTINE, KALEIDOSCOPE, etc.
PROBABLY THE BEST VALUE 1K TAPE AVAILABLE.



We've done in 1k, games which some of our competitors require 16k to do!



GAMESTAPE 2 for 16K only £3.95
***STARFIGHTER** Superb machine code Space Battle. Set against a background of twinkling stars, with stunning explosions — if you can hit the enemy!
PYRAMID Can you move the Pyramid? Make a mistake and it will collapse! A Thinkers game.
ARTIST The ultimate Graphic Designers aid. 8 Directions, 10 Memories, SAVE, COPY, RUBOUT, CLS, etc.

GAMESTAPE 3 for 16K only £4.95
***CATACOMBS** A Multi-Level Graphics Adventure. Each level can contain up to 9 Rooms, 8 Passages, 7 Monsters, Food, Gold, Traps, Phantoms, an Exit (to the next level), and there's an infinite number of levels.
NOTE: ... This is NOT one of the necessarily limited text Adventures as sold elsewhere.
"An excellent addictive game which will keep you amused for hours."... COMPUTER & VIDEO GAMES.



GAMESTAPE 4 for 16K only £4.95
***3D MONSTER MAZE** The Game to Top All Others. Unbelievable Graphics! Can you find your way through the Maze? The EXIT is there somewhere, but then so is a T.REX, and its after YOU! All in 3D (the T.REX will actually run towards you in full perspective!), you've never seen anything like this before!
"3D MONSTER MAZE is the best game I have seen for the ZX81".... COMPUTER & VIDEO GAMES

"If I had to choose just one programme to impress an audience with the capabilities of the ZX81, then J.K. Greys 3D MONSTER MAZE would be the one without doubt"..... ZX COMPUTING. "Brilliant, brilliant, brilliant!".....POPULAR COMPUTING WEEKLY

GAMESTAPE 5 for 16K only £4.95
***3D DEFENDER** The Ultimate Space Game. Super fast Machine Code 3D version of the Arcade favourite. You have to save your home planet from the marauding Alien Spacecraft. This is all in 3D, your viewscreen shows you the view out of your fighters cockpit window. The backdrop moves when you turn, or fly up or down (8 flight directions), just as if you were really flying it! But then YOU ARE! The Enemy Saucers will actually zoom towards you in 3D, and shoot you if you let them! Your display includes Score, Shield Strength, Altitude, Proximity, Forward Radar and your viewscreen, which shows your rotating home planet, backdrop of Stars, Meteors, Explosions, Plasma Blasts, your Photon Beams, up to 4 Enemy Saucers and of course its all in full 3D!
A SMASH HIT at the ZX Microfair (most of the other software houses wanted a copy), a game not to be missed!



GAMESTAPE 6 for 1K only £1.95
***BREAKOUT** Super Fast Full Screen Display Game. Your all time favourite with an added twist. See how much Money you can win and watch the pounds convert to Dollars. All in Machine Code for Fast Action with 3 Speeds, 2 Bat Sizes and three angles of rebound! The best BREAKOUT around and at this price you can't go wrong!

GAMES MARKED * INCL. MACHINE CODE.

Prices include VAT and U.K. P. & P.

(Add appropriate Postage on Foreign Orders). Cheques/P.O.s to

J.K. GREYE SOFTWARE LTD

16 Brendon Close, Oldland Common, Bristol BS15 6QE

CREDIT CARD SALES: Phone: 01-930-9232 (9 a.m. - 7 p.m.)
FOR INSTANT DESPATCH

If you prefer to see before buying, our range of **GAMESTAPES** are stocked by the following stores.

BUFFER MICROSHOP 374A Streatham High Rd., London SW16:
GAMER 24 Gloucester Rd., Brighton;
GEORGES 89 Park St., Bristol, Avon;
MICROSTYLE 29 Belvedere, Lansdown Rd., Bath, Avon;
MICROWARE 131 Melton Rd., Leicester;
SCREEN SCENE 144 St. Georges Rd., Cheltenham, Glos;
W.H. SMITH Over 200 Computer Branches;
ZEDXTRA 5 School Lane, Kinson, Bournemouth, Dorset.

TRADE & EXPORT ENQUIRIES WELCOME

EVERYTHING SPECTRUM OFFER... PLUS

SHARP

We have in stock the full range listed by Spectrum.

PLUS The MZ 80B and a full range of peripherals.

APPLE

Apple II and III Computer Systems in stock and we are an authorised Service Centre for Apple.

PLUS We are an appointed dealer for Jarman Business Systems.

NASCOM

	EXC VAT	INC VAT
Nascom 2 (kit) No user RAM	£225.00	£258.75
Nascom 2 (built) No user RAM	£285.00	£327.75
Nascom Power Supply (kit)	£35.00	£40.25
Nascom Micro-ed 8K Computer	£399.00	£458.85
Nascom "Special Edition" 8K Computer	£429.95	£494.44

	EXC VAT	INC VAT
Nascom 3 48K Computer	£499.00	£573.85
Nascom RAM B 16K Board (kit)	£80.00	£92.00
Nascom RAM B 16K Board (built)	£100.00	£115.00
Additional 16K RAM	£15.00	£17.25
Additional 32K RAM	£30.00	£34.50
48K Add-on Memory Board for "Special Edition"	£130.00	£149.50
I/O Board (kit)	£45.00	£51.75
PIO Option	£12.00	£13.80
CTC Option	£14.00	£16.10
UART Option	£16.00	£18.40
Nascom Single Disk Drive inc FDC Card	£470.00	£540.50
Nascom Double Disk Drive inc FDC Card	£685.00	£787.75
NAS-DOS Operating System	£45.00	£51.75
CP/M 2.2 Operating System	£100.00	£115.00
NAS-SYS 3 Operating System	£20.00	£23.00
ZEAP Z.1 for NAS-SYS (EPROM)	£37.00	£42.55
8K Microsoft Basic ROM	£20.00	£23.00
Nascom 2 Graphic ROM	£15.00	£17.25



SRS MICROSYSTEMS

94 The Parade, High Street, Watford, Herts.
Telephone (0923) 26602.

YOU'LL VALUE OUR EXPERIENCE, YOU'LL VALUE OUR PRICES. FREE SECURICOR DELIVERY OR POST ON ORDERS OVER £50

Keen prices and knowledgeable staff have created a need for bigger and better new premises in Watford. Access & Barclaycard welcome.
Hire purchase and part exchange available. E & O.E.

NEW LARGER PREMISES

If you own a ZX81 or a ZX SPECTRUM then you need the ABACUS CONTROLLER

ZX81

Developed to eliminate tedious swapping of plugs when LOADING or SAVING programs on cassette. One switch operation allows selection TALK, SAVE, CUE and LOAD modes. Using a built-in microphone/speaker to allow fast and reliable program name and cueing.



SPECTRUM

Single switch selection of SAVE, LOAD & LAMP modes. Built-in amplifier and loudspeaker boosts Spectrum sound out-put
£14.95

BBC & TRS-80 owners:

Your controller has a cassette motor override switch.

Send cheque or P.O. for £12 (£13.95 for TRS-80 or BBC controller) including P&P to:

ABACUS ELECTRONICS

186 St. Helens Avenue

Swansea, W. Glam.

Tel: (0792) 50282

ZX81..SPECTRUM..B.B.C. MICRO..ATOM..VIC



Spectral INVADERS

The very first, perfect arcade
quality Machine Code game
on cassette for the sensational

sinclair
ZX Spectrum



Just
£5
inclusive
12 months guarantee

ORDER YOURS TODAY!

BUG-BYTE
SOFTWARE

BUG-BYTE SOFTWARE, FREEPOST (No Stamp req.) LIVERPOOL L3 3AB.

BBC **SPACEWARR (32K)**

Space Warp is a fantastic space adventure game, far more sophisticated than most 'Star-Trek' type games. Makes full use of the sound and graphics facilities, and comes with a 15 page instruction booklet and a function key template. Probably the most complex space game yet! Includes high-resolution sector and battle displays, full status reports, energy allocation displays, and much more.

£11.50 inclusive

SPACE PIRATES (16K)

Space Pirates is a new arcade-style game for the model A or model B B.B.C. Micro, using high-resolution graphics and sound. Protect your space eggs from the invading pirates. Written in machine code for fast action and incredible graphic effects.

£8.00 inclusive

BBC CHESS (32K)

Very powerful chess game for the B.B.C. Micro. One thousand levels of play, plus many options including setting up board for chess problems, saving game on tape etc. Deals with castling and en passant.

£11.50 inclusive

POLARIS (32K)

You are the captain of a Polaris submarine sailing through enemy waters. The enemy are attempting to get a large convoy across the sea to support their troops - your mission is to sink a vital tonnage to prevent this.

Computers responses are very fast

£8.00 inclusive

sinclair ZX81

MAZOGS	£10.00	INVADERS	£4.00
STARTREK	£5.00	DICTATOR	£9.00
ZXAS ASSEMBLER	£5.00	DAMSEL & THE BEAST	£6.50
ZXDB DEBUGGER	£6.50	CONSTELLATION	£8.00
ZXTK TOOLKIT	£6.00	PROGRAM PACKS 1-8 (each)	£4.00
MULTIFILE	£17.50		

VIC-20

VICMEN	£7.00
ANOTHER VIC IN THE WALL	£7.00
VICGAMMON	£7.00
ASTEROIDS	£7.00
VIC PANIC	£7.00
VIC COSMIADS	£7.00



ATOM



INVADERS	£8.00	FRUIT MACHINE	£4.00
CHESS	£9.00	PINBALL	£4.50
747 FLIGHT		LABYRINTH	£7.00
SIMULATION	£8.00	LUNAR LANDER	£5.50
GALAXIANS	£8.00	GOLF	£5.00
BREAKOUT	£4.00		

ALL PRICES INCLUDE POSTAGE

Please send me
 I enclose cheque/P.O. for
 OR Please debit my Access 5224
 BARCLAYCARD 4929
 Name
 Address
 Code
 Dealers Discount Available
 ACCESS, BARCLAYCARD ORDERS WELCOME ON 24hr
 ANSAPHONE 051-227 2642, or mail to:
 BUG-BYTE SOFTWARE,
 FREEPOST (No stamp req.)
 LIVERPOOL L3 3AB.

Expiry date
 YC.8.82
 VISA

ZX 81..SPECTRUM..B.B.C. MICRO..ATOM..VIC

BIG VIC SAVERS from the Experts

The VIC CENTRE



FOR STARTERS

The complete VIC-20 colour computer kit to get you started.

The VIC is friendly, clever and very powerful. Our Starter Kit comes complete with:

- The VIC 20 colour computer
- The VIC cassette deck
- 10 blank cassettes
- The VIC games joystick
- The teach yourself "Introduction to Basic, Part 1" and the VIC User Manual.
- We supply a 13 amp plug and give you the VIC Centre twelve months warranty

SAVE £20!

£217 excl VAT

Total price £249.56 incl VAT + £4 post & packing and insurance.



GETTING BIGGER

Got a VIC 20? Then you will probably want to expand its memory capacity and use cartridges such as the Programmers Aid or the Super Expander. With the VIC Centre Expansion Package you can take your VIC up to 30K with the Arfon Expansion Unit with its seven slot mother board and integral power supply. The aluminium cover will allow you to neatly position your monitor or TV set.

A 16K Ram expansion cartridge
A choice of either *Programmers Reference Guide* or *VIC Revealed* and a choice of *Super Expander* or *Programmers Aid* or *Machine Code Monitor* cartridges

SAVE £20!

£180 excl VAT

Total price £207.00 incl VAT + £4 post & packing and insurance.

HAVE FUN AT OUR EXPENSE

Any three VIC Centre cassette games for just £17.50 excl VAT

Choose from:

- Blitz
- Canyon Fighter
- Star Wolf
- Tunesmith
- PR Software
- Packman
- Invader Fall
- Vic Cube
- Othello
- Super Moon Lander

Total price £20.12 incl VAT + £2 post & packing

Any 3 excl VAT

£43.50

Any three VIC cartridge games from the VIC Centre for just £43.50 excl VAT

Choose from:

- Super Slot
- Road Race
- Avenger
- Super Lander
- Alien Game
- Amok
- Bounce Out
- Alien Blitz
- City Bomber
- Black Hole

Total price £50.02 incl VAT + £2 post & packing

Any 3 excl VAT

£17.50

The VIC Centre, 154 Victoria Road, Acton, London W3 (near North Acton tube station) has the widest range of VIC accessories. All the items below are available mail order—just telephone with your credit card number

Hardware and Peripherals	Price excl VAT		
RS 232C Cartridge	30.39	Simple Simon	6.08
IEEE Cartridge	47.39	Masterwits	6.08
Vic 3K Rampack	26.04	Kiddie Checkers	6.08
Vic 8K Rampack	39.09	Wallstreet	6.08
Vic 16K Rampack	65.17	Alien Blitz	6.95
Programmers Aid	30.39	Vicalc	7.82
Super Expander (High Resolution)	30.39	Hangman-Hangmath	6.95
Machine Code Monitor Cartridge	30.39	Ski-Run	4.34
Joystick	6.52	Dune Buggy	4.34
Lightpen	25.00	Super Worm	4.34
Joystick (plotting)	13.00	Worm	3.47
Lowcost RS232C	22.99	Cosmic Battle	4.34
Tool Kit	25.00	Codebreaker	2.60
Vic Kit II	29.00	Vterm A	8.49
Games Port Adaptor Cable	17.25	Star Wars	6.08
ROM Switchboard	29.00	Crazy Balloon	7.82
RS232C fully implemented	49.00	Jungle	4.34
		Rabbit Functions	4.34
Cartridges		Cassettes requiring additional 3K memory	
Satellites & Meteorites	21.73	A-Maz-Ing	6.08
Cloudburst	17.38	Missile Command	7.82
Renaissance	21.73	3D-Maze	6.95
Star Battle	17.35	Dragon Maze	6.95
Jelly Monsters	17.35	Asteroid Belt	7.00
Spiders from Mars	21.73	VPM	7.82
Meteor Run	21.73	Vicat	7.82
Omega Race	17.35	Skymath	6.08
Cassettes		Space Division (Level 1)	6.08
Introduction to Basic (Part II)	13.00	The Alien	6.95
Codebreaker Codemaker	6.95	Frogger	7.82
Vic Seawolf, Trap, Bounce Out	7.82	Charset 20	4.34
Monster Maze, Math Hurdler	6.95		
Amok	6.08		

All the above prices are excl VAT, add £1 per order, postage & packing.

To order Send mail order to:

ADDA Home Computers Ltd, FREEPOST, London W3 6BR — you do not need a stamp — enclosing details of your order + cheque to include VAT + postage & packing
Instant telephone orders: Telephone the VIC Centre on 01-992 9904 and quote your Visa, Access or American Express number

adda
HOME COMPUTERS LTD

YOUR LETTERS

FLEXIDISC FAN

Congratulations on your far-seeing flexidisc experiment; I hope we are to see many more. Here are a few notes on my own findings when attempting to Load the program.

First, being flexible, the disc tended to distort and slip on the normal turntable. This gave a variable frequency signal which can cause problems with the internal clock on the computer. This was easily overcome by Cellotaping the flexidisc to a thicker backing and further Cellotaping the assembly to the turntable. The method of transferring disc to tape was then used and immediately problems became apparent with the automatic level control on one type of music centre.

The signal was far too weak on playback and Loading unsuccessful. Changing to a stereo recorder having a VU meter with a range 0 to 6, and experimenting with different levels showed that level 3, i.e., the middle of the range, gave the best results.

A clear undistorted recording on TDK tape loaded successfully and back-up copies on C12 were made immediately utilising the cheap tape recorder normally used with the computer. The game itself is good fun to play and, as yet, unbeaten.

G L Smith,
Slough,
Berkshire.

FAIR PRESS?

As far as I am aware, Eric Deeson has not published the parameters by which he judges software. Perhaps he should include that information with every review. I accept that a large part of his reviews will be an expression of his personal opinion, and that certain elements must be a purely personal view, and cannot be quantified against a given scale, for example, format or screen layout, quality of graphics and novelty.

However, the quality of a pre-recorded tape is one factor which can be more accurately assessed, and I feel that Deeson's approach to this element of his reviews may require some modification. In the May review, Deeson writes: "A tape recorder for £18.50 from G J Henderson ... is the Hong Kong-made Duette, which had the task of loading all the programs for this review ...".

In view of the known problems of the compatibility of cassette machines with the ZX-81, is it a fair test of ZX-81 software to use only one cassette machine, and to condemn all of a company's software if a sample fails on that particular machine? The two tapes from my company which he believed to be un-loadable were checked by five independent exhibitors at the ZX Microfair in Manchester and were loaded successfully by them.

Perhaps the quality of the record-

ing on the tape should be evaluated electronically, and if the tape fails to load on one machine, others should be tried.

Surely the main purpose of a software review is to impart information about a program to the buying public, which they would only be able to obtain themselves by buying the product. On this basis, I believe that a reviewer should persevere until he successfully loads a program, and can fulfil his main aim, and if that requires him returning tapes to a supplier for replacement, he should do so.

Martin Ridout,
Picturesque,
West Wickham,
Kent.

NO GUARANTEE

No doubt as in common with many other readers of your magazine, I purchased a full-size keyboard for my ZX-81. I removed the computer board from its casing and fixed it lovingly into my new keyboard. Away I went, fingers dashing all over the keyboard, everything was rosy.

Then one day my ZX-81 developed a fault; not to worry, it was "fully" guaranteed — or so I thought. According to Sinclair Research, I had invalidated my guarantee by opening and removing the computer board from its casing and it would cost me a minimum of £20 to have it repaired.

So to all those who have, or are contemplating purchasing a keyboard, you have or will have thrown away your "fully comprehensive" guarantee.

P J Shaw,
Reading,
Berkshire.

PURE ARTISTRY

The Pure Artistry program by John Marshall, *Your Computer* June, does have one disadvantage. Everywhere the spot goes it draws a line. Using the space bar in conjunction with the arrow keys produces a new set of values for Z and can be used to move the spot without drawing a line, or to erase a line already drawn.

The change makes use of the Reset command to darken the position behind the moving spot. Line 50 is not required. Lines 60, 70, 80 and 110 should be modified to Else 66, 76, 86 and 116 respectively.

The following new lines are required:

```
66 IF Z = 136 THEN 67 ELSE 70
67 Y = Y - 1: GOSUB 200
68 RESET (X, Y + 1): GOTO 30
76 IF Z = 144 THEN 77 ELSE 80
77 Y = Y + 1: GOSUB 200
78 RESET (X, Y - 1): GOTO 30
86 IF Z = 160 THEN 87 ELSE 90
87 X = X - 1: GOSUB 200
88 RESET (X + 1, Y): GOTO 30
116 IF Z = 192 THEN 117 ELSE 120
117 X = X + 1: GOSUB 200
118 RESET (X - 1, Y): GOTO 30
```

```
200 IF X < 0 THEN X = X + 1 ELSE IF
X > 127 THEN X = X - 1
210 IF Y < 0 THEN Y = Y + 1 ELSE IF
Y > 47 THEN Y = Y - 1
220 RETURN
```

The values of Z for diagonal movement are 168, 200, 208 and 176. This can easily be incorporated into the program if required.

K J Maris,
Cotgrave,
Nottingham.

PET TO VIC

Many people will have experienced the frustrating fact that Pet-produced data tapes will load on the Vic but not vice-versa. This can be remedied by the following procedure.

Before loading the program type the following, which is for the standard 5K Vic.

```
POKE 4096,0
POKE 41,16
CLR
```

For a Vic with 16K expansion type:

```
POKE 4608,0
POKE 40,1
POKE 41,18
CLR
```

I can assure you this method works as I have been using it for months without fail.

T Wilson,
Preston,
Lancashire.

BBC TIPS

Here are some discoveries I made using my newly-acquired BBC model A, which are not in the manual.

Peek and Poke are virtually redundant on the BBC Micro except for screen control. To find the character number of a character on the screen use:

```
PRINT ?(HIMEM + X + Y * 40)
```

where X equals the number of columns across and Y the lines down. To Poke the screen with, say, a 2 use:

```
?(HIMEM + X + Y * 40) = ASC "2"
```

Notice the equals sign instead of the usual comma. In Mode 7 (teletext) only a black and white text is apparently available. However, there are in fact six other colours, chunky graphics, double-height and flashing characters. To obtain the colours, you must Print a control character by using

```
PRINT CHR$(X)
```

or

```
VDU X:PRINT;
```

These codes are: 129, red; 130, green; 131, yellow; 132, blue; 133, magenta and 134, cyan. For instance:

```
PRINT CHR$(134); "Mark Stephens"
```

would print the name in cyan.

For chunky teletext graphics, add 16 to the colour code that you want. Chunky graphics replace numbers, lower-case letters, and some symbols:

```
PRINT CHR$(150); "55"
```

would print two cyan rectangular graphics. For flashing letters:

```
PRINT CHR$(136);
```

To obtain double-height characters: PRINT CHR\$(141); "Your Computer"; PRINT CHR\$(141); "Your Computer" will print *Your Computer* in double-height characters.

Mark Stephens,
Portsmouth,
Hampshire.

VOYAGER ERRORS

There are two errors in *Voyager* Views in the July issue on page 82:

```
170 PLOT 6, SIN(RAD(Y + INC))
    X + M, etc
120 FOR X = R * 1.2 TO R * 2.5 STEP
    R * 0.06
```

These faults are by no means obvious, and they stop the program giving meaningful results. Also, how about a bit of colour? For example

```
50 VDU 19,1,0,0,0,0
110 VDU 19,1,3,0,0,0
```

will give yellow on a black background.

A S Day,
Fetcham,
Surrey.

TRANSFER CODE

In the June 1982 issue you published a program by Nick Godwin for transferring machine-code from Rem to RAMtop. It seemed to require about 1.5K. This program is 24 bytes long and does the job about 100 times faster. I am assuming that RAMtop has been Poked with 124 — that is, Poke 16389,124.

```
01 LD BC
14,00 Number of bytes to be
transferred
11,00,7D To 32,000 on
21,82,40 From 16514
ED,BO LD1R
C9 RET
```

To reverse the transfer exchange the addresses so

```
11 82 40
21 00 7D
```

John Nilson,
Redhill,
Surrey.

ZX-81 VERIFY

I do not own a Spectrum, but I do verify my programs on my ZX-81. If the Break key is pressed while in the load mode it will either: New, if part of a program is loaded; or Break if the program has loaded or if no program has loaded, giving a report code of 0/0.

Therefore, to verify a program follow this routine:

- Save the program
- Do not press New
- Load the program
- If the loading is completed satisfactorily — 0/0. If the loading failed then either pull out the ear plug then Break, Newline or wait until the screen displays the "I'm looking for a program" picture then Break, Newline. This will result in 0/0 then return the listing — try again.

P Alcock,
Castle Cary,
Somerset. ■



£50 Binatone will offer 16K, colour, sound and keyboard

BINATONE'S new machine may knock the bottom out of the micro market. At £49.95 for typewriter keyboard, 16K RAM, colour and sound it would be formidable enough, but the news that it is to be sold in the High Street through Woolworths, Argos, Rumbelows, as well as by mail order, should frighten Sinclair and that company's rivals.

Binatone is planning to sell 400,000 machines in the first year alone. This has raised fears of a

Japanese takeover of the British market. Binatone will make the machine in Hong Kong using Japanese components. The Binatone will use Tandy TRS-80 software and will be expandable up to 64K.

By January, when the Binatone is launched, at least six new machines will probably have beaten it to the market but Binatone is bound to be a strong contender because of its experience in selling consumer electronics products.

Price war is new game from Texas and Atari

TEXAS INSTRUMENTS and Atari have fired the first missiles of a price war that should make Space Invaders look like a vicar's tea party. Atari's 400 and the Texas TI-99/4A will sell for less than £200 — a saving of £100. With the new Dragon weighing in at the same price, there are now five similar computers —

Fry's software library

LEASING BUSINESS software packages for minis and mainframe computers is not uncommon. Alec Fry intends to emulate the practice, in a small way, with a ZX-81 and Spectrum software library. He means to offer a range of 30 programs for hire at £1 each per three-week period. The range will include games, utility and toolkit programs, all commercially produced and on sale elsewhere.

Several software companies are a little unhappy about the scheme. Apart from the scope it offers for copying programs, the scheme raises the delicate question of copyright. Fry aims to operate a payment system similar to that used by public libraries. The Public Lending Right meant that authors gained a copyright fee on books loaned out. At the rate of a few pence per hire this would be a small sop to any disgruntled software writer.

It is very difficult to ensure program security. Most commercial programs start by disabling break and interrupt keys. But with a degree of expertise it is usually possible to circumvent these and other measures. An American firm is even selling a program called Pick A Lock, which is designed to assist breaking and entry — into software, of course.


Midlands show

SINCLAIR users in the Midlands will be able to enjoy an exhibition at the Bingley Hall, Birmingham on Saturday, September 11. The new Spectrum will be on show, so if you are still waiting, at least you can see one.

including the Vic-20 and 48K Spectrum — battling for the public's favour. All offer colour and sound.

The Spectrum's strength is its memory, while the Atari and Texas rely on wide ranges of plug-in software cartridges — although the Dragon's ability to use certain Tandy Color Computer cartridges may diminish this advantage.

Ever since the *Your Computer* show where Vic-20s were on sale for £135, rumours have been rife that Commodore will drop its prices before launching new models this autumn.

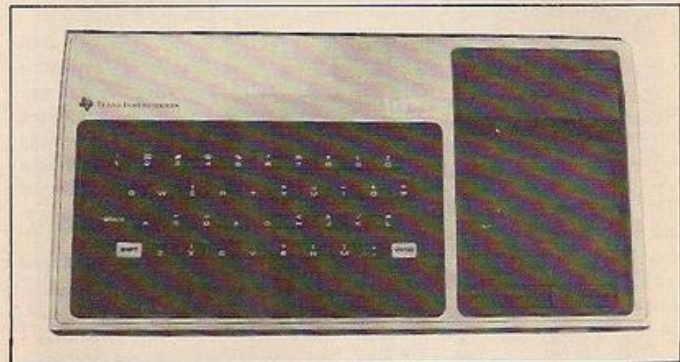


Spectrum is late for school

FIRST THE good news — twice as many Spectrums are now made as are needed to fulfil incoming orders. Now the bad news — the Sinclair claims that the backlog would be cleared and new orders satisfied within four weeks have proved un-

founded. Many who ordered the larger Spectrums have waited eight weeks or more. In addition to the problems with the printed-circuit board, Sinclair's power supply packs have also caused problems on the Spectrum.

Casio has now introduced a printer for pocket computers and its programmable calculators. The FP-10 mini printer is expected to sell for around £50 and is compatible with the FX-702P hand-held computer, the FX-601P and FX-602P calculators. Printout is at a rate of two lines a second, 20 characters a line. Sales enquiries to Casio Electronics Ltd, 1000 North Circular Road, London NW2 7JD. Telephone 01-450 9131.

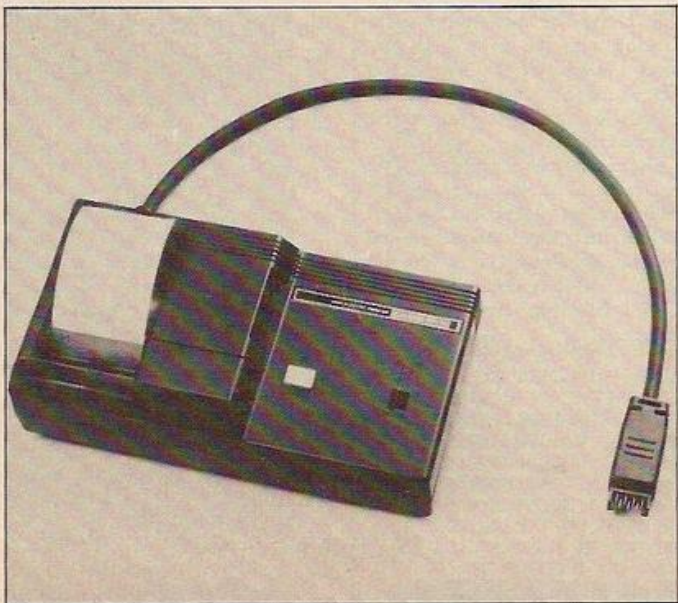


Sinclair Research has had to wait almost as long for the Government to fund schools purchasing the company's computers, as customers have for the delivery of Spectrums. Now the Industry Department have added the Spectrum to its approved list. Previously the Government would only pay half the cost if a secondary school bought a Research Machines 380-Z or a BBC Micro.

Once your Spectrum arrives there will be no shortage of software for it. Many programs — old favourites and new games — have just been launched. Ex-Sinclair engineer Richard Altwasser, interviewed in last month's *Your Computer*, has produced the Cambridge Colour Collection. 20 programs from Lunar Landing to Home Accounts are supplied on a cassette with a free book for £2.95. Available from Richard Altwasser, 22 Foxhollow, Bar Hill, Cambridge CB3 8EP.

Campbell Systems has produced a disassembler for £5.95 from 15 Rous Road, Buckhurst Hill, Essex IG9 6BL. Newsoft will allow you to add a few extra chips to your Spectrum with Roulette for £4.95 from 12 Whitebroom Road, Hemel Hempstead, Hertfordshire. Jega Software can offer Alien Command from 27 Hallcroft Avenue, Countesthorpe, Leicester LE8 3SL. Quicksilver charges £5.95 for QS Space Intruders, available from 92 Northam Road, Southampton SO2 0PB.

Green light for the cut-price Amber printer

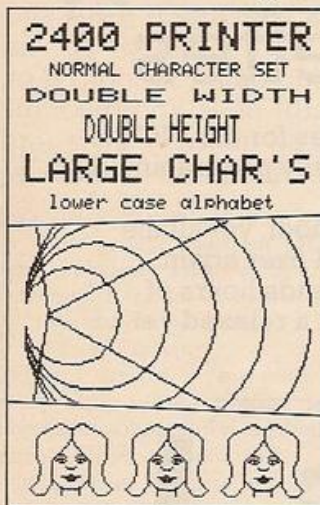

AT LAST, a reasonably-priced printer has appeared for a wide range of personal computers. Amber has produced a dot-matrix printer for £69.95 plus VAT, suitable for the Vic, BBC, Atom and others. The company aims to be able to interface with as many different micros as possible including the ZX-81 and Spectrum, although some will need a separate interface adaptor.

Looking rather like a calculator printer's output, the printout gives 24 characters a line on plain paper. This should prove more economical than Sinclair's thermal paper, while providing better quality print.

The Amber 2400 is supplied by Amber Controls, Central Way, Walworth Industrial Estate, Andover, Hampshire. Telephone 65951.



Maestro's Microdrive is beaten to the mark by Balkan BATS

SINCLAIR'S HOPES that his Microdrive would be the first rapid-access low-cost mass-storage device on the market have been smashed by the Hungarian-built BATS MCD-1.

The hardware for the Sinclair drive is now complete and a planned launch, later this year, just awaits some finishing touches to the operating system. Details of its mechanism remain secret.

In the meantime MCD-1, a micro cassette disc drive supplying 150K of memory, is already available for the Vic-20, Video Genie, TRS-80 and the ZX-81. Although the drive is cheaper than conventional disc drives, the cost of a complete system is far higher than cassette systems.

However, there is no doubt many users will consider the gain in saving and loading speed, as well as memory capacity, a worthwhile return for the extra outlay. Having used a disc it is difficult to muster the patience needed for cassette systems.


Many software suppliers believe

Audiogenic Vic cartridge

ANOTHER VIC-20 utility cartridge has appeared on the market — Audiogenic's programmer's aid, Buti, offers the usual range of facilities — such as Renumber and Trace — plus two new features.

Buti supplies an extra 3K of memory, hex-to-decimal conversion and a command which reformats the Vic to 3K or 8K memory configurations.

Retailing at £39.99, it is available from Audiogenic Ltd, PO Box 88, Reading, Berkshire or from Vic dealers.

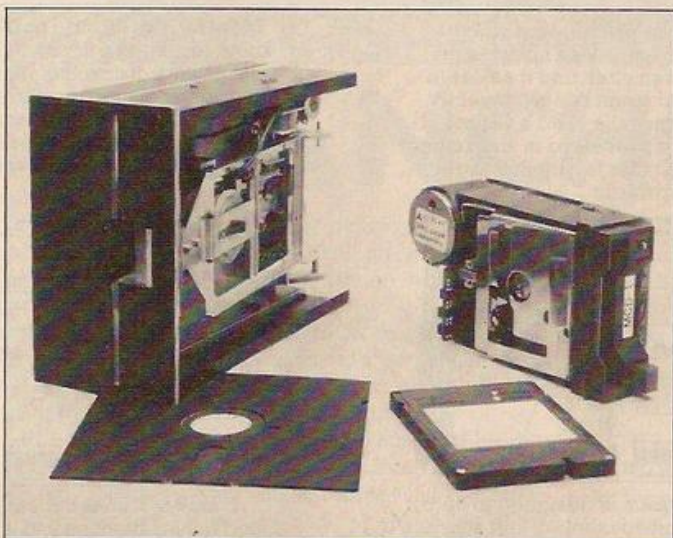

that small discs will eventually replace cassettes as a medium for games.


Macronics has beaten Sinclair Research to the post by offering drive and interface for the ZX-81 at £160. The package includes disc drive, interface card with disc-interface programs, an expansion motherboard to permit extra RAM and printer to be attached, connecting leads, and 2K RAM.

The drive, which is notably compact, runs a 3in. floppy disc encased in an audio-type cassette. BATS-NCI, the distributor, claims two advantages for it over other floppy disc drives. It maintains that the disc is better protected by a rigid cassette and the drive motor is said to be more robust.

BATS-NCI, which supplies a drive on its own for £60, can be contacted at 375b Regents Park Road, London N3 1DG. Telephone 01-349 4511. Macronics can be found at 26

Spiers Close, Knowle, Solihull, West Midlands B93 9ES. Telephone Knowle 3693.

Eric, stage left, is examining the Tangerine Users' Group latest add-on for the Microtan 65. The new EPROM storage card will accept 32/64K of 2716 or 2732 EPROMs allowing fast mass data of transfer of stored programs into user RAM. Programs can be accessed manually or automatically under software control. Up to four cards can be banked on the system rack. Available for £38 plus VAT from TUG, 16 Idlesleigh Road, Charmminster, Bournemouth, Dorset BH3 7JR. Telephone 0202 294393.

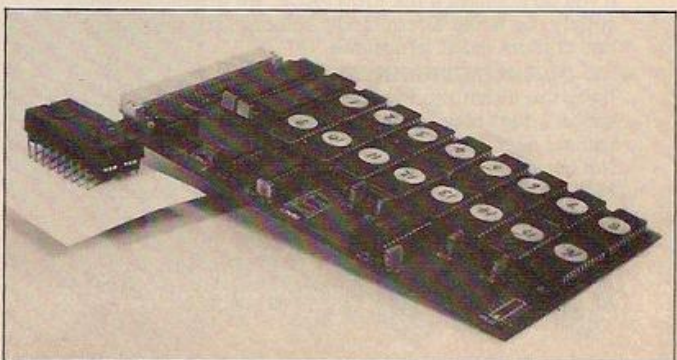

ASK for more education

SOME USERS have criticised much of the available educational software for being insufficiently aware of teaching techniques and requirements. A teacher writing recently complained that there were too many drill-type programs. In response to this kind of criticism, several software companies have developed programs designed by people with classroom experience.

ASK Ltd has assembled an impressive battery of educational experts to design their programs, which are then implemented by programmers. It has released four games with an educational purpose for the Vic-20. Intended for children at primary school level, three of them are engrossing enough for those in other age brackets.

These cassettes cost £8.95 each and are available direct from ASK, London House, 42 Upper Richmond Road West, London SW14 8DD, or selected dealers. Telephone 01-876 0102.

Very Important Cassettes

Educational

£8.95
plus 55p p+p

A.S.K. announce the first four programs in a series of educational cassettes for the VIC 20. These programs have been written by a team of teachers and professionally programmed specifically for use in the home.

They are of proven educational value, complementing work done at school, yet all the programs are designed to be fun to use – not just once, but over and over again.

We believe that these programs will give you and your family and friends hours of worthwhile enjoyment. They will help your children to learn at home in a relaxed yet stimulating way.



We Want To Count. A program for young children learning to count which involves the numbers 1 to 5. Children often find it easier to recite numbers than to count things correctly. Four different games give the child a variety of objects to count, and are presented in an exciting and stimulating way. Suitable for children aged 3 and upwards.



Twister. A geometric puzzle that will tie you in knots, testing and improving your thinking skills and powers of concentration. The purpose is to rearrange coloured squares so that no row or column contains a repeated colour. Set your own puzzle and test the whole family. Suitable for children aged 8 and upwards.



Facemaker. This program is designed to help improve spelling, expand vocabulary and sharpen observational skills. There are thousands of characterful faces you can make with the program. Perhaps someone you know? Suitable for children aged 5 to 12.



Number Chaser. A car race provides an opportunity to practice and improve estimating and multiplication skills. You can choose the level of difficulty you want making it different every time you play. Suitable for children aged 5 to 12.

Each cassette comes in an attractively labelled box together with a colour booklet which gives detailed loading instructions and tells you how to use the program.

N.B. Because these programs make extensive use of computer memory and colour graphics, a 16K RAM PACK (or 8K RAM PACK for Numberchaser only) and colour T.V. are essential for their operation.

If you do not have a 16K RAM PACK, we will be pleased to supply one at the discounted price of £67.50 with your order for one or more A.S.K. programs.

NO QUIBBLE GUARANTEE

If you are dissatisfied with any A.S.K. program, return it to us within 7 days of delivery and we will give you a full refund without question.

Not convinced? Then see our programs at The Vic Centre, 154 Victoria Road, London W3, opp. North Acton tube.



A.S.K. LIMITED, London House,
42 Upper Richmond Road West,
London SW14 8DD

To A.S.K., Freepost, London SW14 8BR (no stamp required)

Please send me:

	Quantity	Unit price inc. VAT + 55p p+p	Total
We Want To Count		£9.50	
Twister		£9.50	
Facemaker		£9.50	
Number Chaser		£9.50	
16K RAM PACK		£67.50	
TOTAL			

I enclose my Cheque/P.O. for £ _____ made payable to A.S.K. LTD

Name _____

Address _____

Please allow 28 days for delivery

YC8

COMPUTER CLUB

Computer Club is here to encourage you to start your own local computer club or, if one already exists, to join it and become involved. We would like to hear of anything which has made your club a success, or of any projects or programs you are developing.

Boris Allan discovered a CB freak using a UK 101 in a pub, and a monitor made out of a cardboard box — in true Blue Peter style — when he visited Manchester Computer Club.

MANCHESTER COMPUTER CLUB is so energetic that it has become known as MC². Twice a month the members meet at the University of Manchester Regional Computer Centre. The first Thursday in the month is a lecture, and the third a workshop.

When I arrived at a workshop session, having warned the secretary Dave Wade beforehand, nobody knew anything about my visit — "We're very informal".

I told one of the members, "I come from *Your Computer*", to much merriment. They all thought that his computer was too stupid even to give simple orders.

Machines were scattered all round. Many looked out of the ordinary, particularly the one whose monitor had sides made out of cardboard boxes. Members own everything from ZX-81s to a home-brewed 6809. Advice was plentiful if slightly unhelpful, "Why don't you buy a decent machine?"

Ken Horton, a committee member, gave a talk on the possibilities of MC² members linking their computers over the telephone lines. MC² hopes to set up a bulletin board once the members decide how to send information down the telephone line.

After Ken's talk, Peter Hill put up an idea for an MC² project — implementing a general system to produce adventure games for common microprocessors 6502, Z-80 and 6809. Fortified by general support, Peter went away to develop his ideas and report back to the next workshop.

Club members range from 14-year-olds to pensioners and although some work with computers, usually mainframes, others were



MANCHESTER

building surveyors or newspaper printers. At £5 per year and £2.50 for juniors for 20 meetings, the subscription is reasonably priced.

The meeting adjourned to a local hostelry where, with the landlord's permission, Peter Fasoli plugged in his Computit UK101. He is a keen citizens' band user as well as a computer freak and he demonstrated his disc-based record system for keeping track of citizens' band handles, names and addresses.

MC² is friendly and knowledgeable. If you

live in the Manchester area, and want to find out more, contact Dave Wade, 28 Hazel Road, Altrincham, Cheshire. Telephone: 061 941 2486.

Local news

Blackburn

BLACKBURN Computer Club meets on the first Monday of every month. Dave Walsh the secretary is planning a monthly newsletter. More details from Mark Brummier, the membership secretary, Vulcan Hotel, Nab Lane, Blackburn, Lancashire. You can telephone Dave Walsh on 0254-661518 or Mark Brummier on 0254-52431 for venues.

Harlow

HARLOW Advice Centre hosts the Harlow Microcomputer Club every third Tuesday of the month. Bob Robson of 81 Stile Croft, Harlow, Essex will be pleased to send you information about the club. Telephone Harlow 20730.

Fife

FIFE Computer Club relies on its newsletter more than some of the metropolitan clubs do. Members have to travel long distances to attend meetings. Membership is, however, limited to people between the ages of 12 and 20. More details from Murray Simpson on 0334-72485.



THE Northern Computer Fair

Personal computers
Home computing
Small business systems

MANCHESTER,
NOV 25-27



Bringing it all back home...

... to Manchester, birthplace of computing in Britain. To Belle Vue from November 25th to 27th — the obvious place for the Northern Computer Fair.

Following the incredible success of our London show 'the biggest-ever personal computer exhibition' where over 38,000 people visited us in 3 days, we're going to repeat the performance in Manchester.

Whatever your specialised line of business — personal computers; home computing; small business systems; associated software — this is the exhibition designed for you.

It's the ideal showcase for companies who need to demonstrate to a fast expanding and increasingly well informed audience all aspects of personal computing.

... you cannot afford to ignore it.

For further details about exhibiting at the Northern Computer Fair, contact the Advertisement Manager, Your Computer, Room L215, Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS. Telephone: 01-661 3127.

Name: _____

Position in Company: _____

Company: _____

Address: _____

Telephone: _____

PERSONAL COM

LONELY Genie I Microcomputer, early eighties, with large peripheral family but currently unattached, would like to meet interesting, attractively packaged software, Genie or Tandy specification, for programming, problem solving, entertainment and long-lasting friendship. Reply in confidence. Box No RS232.

ANSWERING MACHINES
Office certified

LON
intel
vated

ATT
wish
may
mar

SO
me
(m
tion.
hum

MAI
to
wai
wis



ingenious ...but lonely!

Buying your first Genie I microcomputer is just the start of a long and enthralling adventure, for it won't be long before you will want to expand your system with some of the wide range of peripherals which make up the complete Genie System.



Firstly there is the **Expansion Box**, which immediately expands your Genie's capacity to 32K RAM, and up to 48K RAM if required. It can be connected to 4 disk drives, a printer, RS232 interface or S100 cards.

Then there is the **Printer**,

a compact unit with 80 column, 5 x 7 matrix print-out, which connects to your Genie through the Expander, or via the Parallel Printer Interface.



The **Disk Drive** gives you greater storage capacity and full random access file handling, with the option of double-density through a special adapter. New Dual Disk Drive now available!

Finally, there is Genie's very own

12" Monitor,

a must if you want to let the rest of the family watch their T.V. in peace!

Available in B & W or green tube.



The supreme advantage of the Genie I system is its compatibility with the TRS 80, which means that literally 1000's of pre-recorded programs are already available, just waiting to be plugged into your Genie!

The recent improvements in the Genie system, including Extended Basic, sound unit and machine language monitor, make it the ideal system for the committed hobbyist, and an excellent and easy-to-use educational tool.



**SPECIAL TECHNICAL GENIE
HOT - LINE ON 0629 4995**

for all your technical advice and service back-up on any aspect of the Genie system direct from the experts!

Please send me FREE, 16 page colour brochure on the Genie Computer System. I enclose 25p postage.

Name

Address

Telephone YC-82

**LOWE
electronics**

Chesterfield Road,
Matlock,
Derbyshire DE4 5LE.
Telephone: 0629 4995.
Telex: 377482 Lowlec G.

If the sales hype for the new Dragon 32 is to be believed, it really is magic. Tim Hartnell looks at this new British rival to the Spectrum and rates the real keyboard and 32K RAM as good value for £200, despite flaws in the manual, and in the colour and maths ROMs.



A DRAGON FOR YOUR DUNGEON

METTOY'S NEW plaything may become a strong contender for the title of "most popular micro under £200". British-assembled and designed, around a Tandy Color Computer ROM, the Dragon will sell for slightly less than £200.

If the demand created by advertising can be satisfied Mettoy's High Street distribution should ensure that tens of thousands are sold before Christmas.

Full-size keyboard

For your money you get a fairly large but light-weight unit, with full-size typewriter keyboard. There are sockets for standard joysticks, Centronics parallel printer, ordinary television or a monitor, and a slot for plug-in cartridges. The computer loads and saves on ordinary cassette machines, using a surprisingly reliable interface.

The Dragon, which has 32K of memory, with 26K available to the user, was developed in Cambridge. The memory can be expanded to 64K. Most of the memory is available for the user; it is not consumed supporting the

machine — although each graphic page in the high-resolution modes takes around 1.5K. By contrast, the Vic-20 makes available less than 6K and the BBC model A operating in mode 4 less than 4K.


The Dragon offers an extensive colour Basic, with nine-colour display and high-resolution graphics, 256 by 192 in the highest mode, the same as the ZX Spectrum. There is a trade-off between the degree of resolution and the number of colours available. That is, the higher the resolution, the fewer the colours you can put on the screen at once. The Dragon can be used with a standard TV set or monitor and offers 16 rows of 32 characters display, fewer lines, but the same number of characters across, as the ZX-81 and Spectrum.


Levels of resolution

A range of preset colour chunky graphics is available. There are five levels of resolution, point-by-point drawing, with point-by-point colour, a feature not available on the Spectrum, with commands to obtain lines,

(continued on page 22)

REVIEW

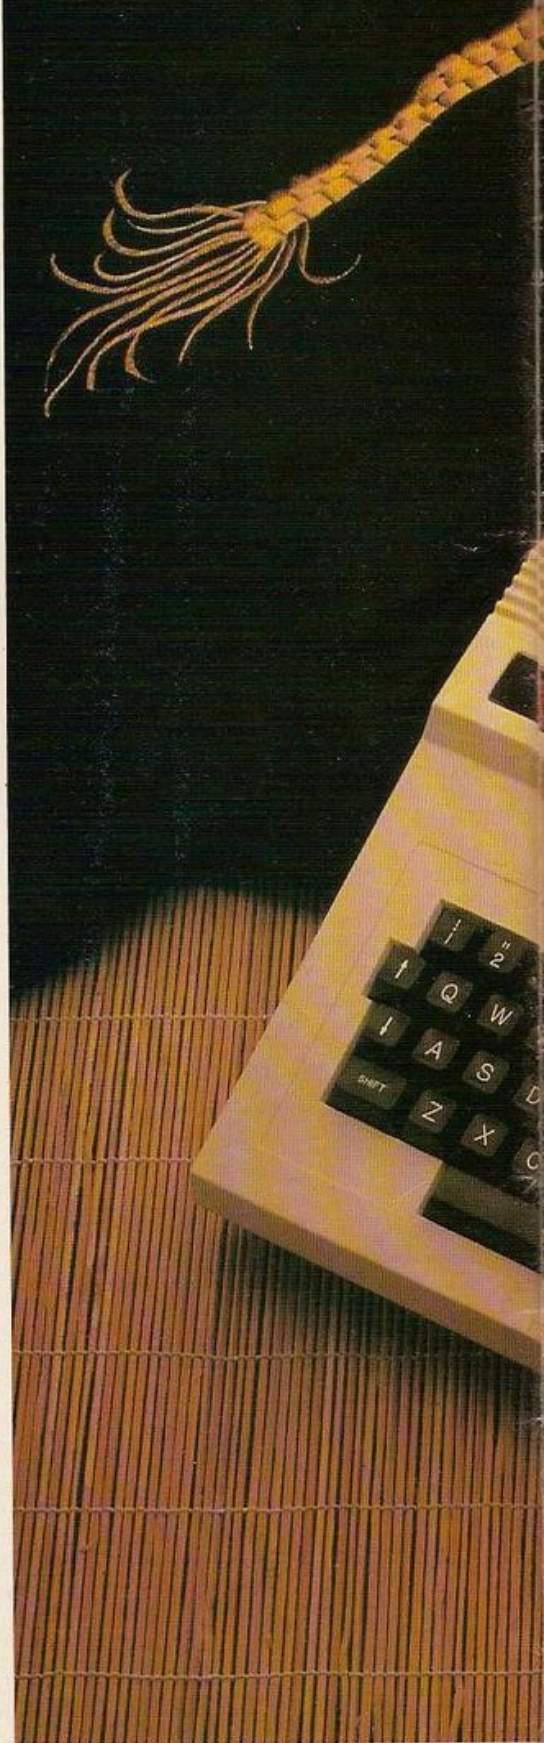

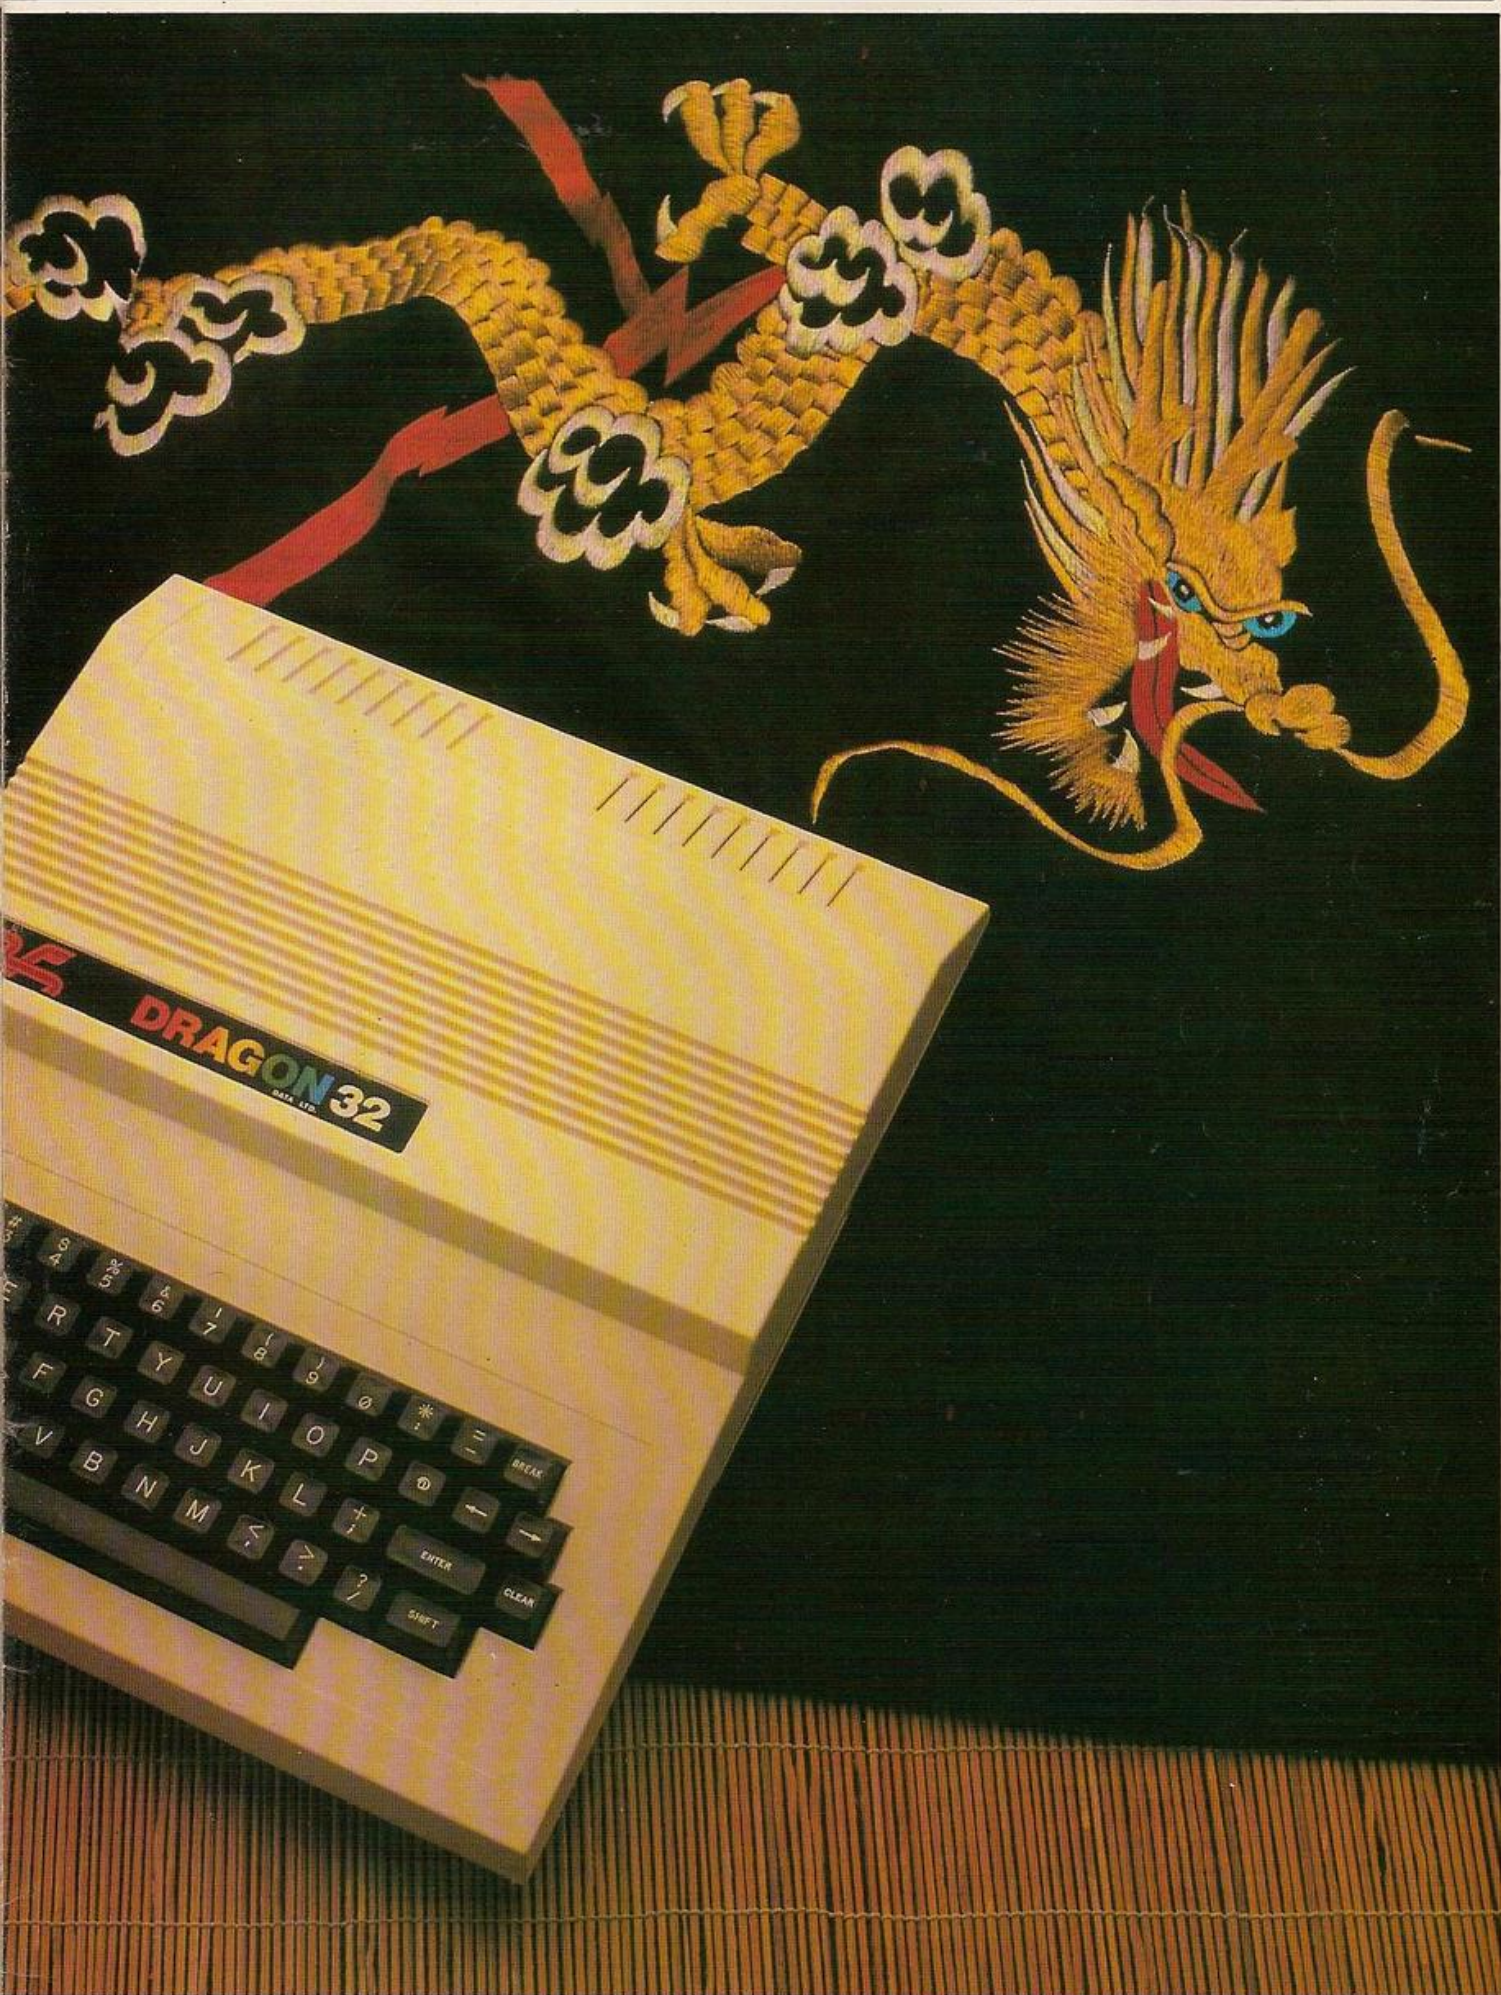

(continued from page 20)

arcs and circles. There is also a fast-operating paint-in command to produce solid areas of colour.

Sound output is through the TV speaker. The manual claims five octaves, 225 tones, 155 tempos and 31 volume levels. The sound is clear, but the single voice limits its potential applications.

You can turn the cassette player off and on from the computer, which opens up the possibility of running a program which turns the cassette off and on at particular points. This has some good educational possibilities, such as having French words spoken from the tape as they are displayed on the screen.

Dragon did not announce the computer until the production lines were running, in the hope of avoiding supply problems. Dragon Data is offering the machine to almost anyone who will stock it, sidestepping the extraordinary control over retail outlets which other companies have exercised.

Will Dragon ensure that stockists know enough about the machine to help potential buyers, and those with after-sales problems?

The company has already produced software on cartridge, including educational and games packages. Cartridge games include Ghost Attack, a Pacman variant and arcade games such as Berserk, Cosmic Invaders and Meteoroids.

All cartridges cost £19.95, except for Ghost Attack which is £24.95. This software is expensive for a £200 computer. Eight programs could cost you as much as the computer.

Learning element

Games packs on cassette cost £8 each. The Dragon Special Selections are written in Basic whereas the cartridges are in machine code and are designed to be Listed on the screen, so you can follow through a program, to work out how it does what it does — adding an element of learning to straightforward games playing. You can learn how to construct a simple database such as a telephone list, operate a do-it-yourself calculator and try out a metric converter.

Unlike many programs available commercially, the Special Selections are totally transparent, so that you can follow every stage of the program and increase your knowledge of programming as you examine the listing.

Dragon also plans to introduce personal finance programs, and a Compuvoice cassette, that will allow you to add phonetic sounds, so you can make your computer speak with a regional accent if you have the patience to program it to do so. Hardware expansion plans include a disc operating system, a serial RS-232 port, and a major operating system.

The computer promises to be one of the first computers which has been properly marketed in the U.K., supported by software, standard hardware and peripherals and adequate distribution and supply. In many ways, it appears to be what the Vic-20 could have been, if Commodore has not been plagued with production problems, limited user memory and fairly coarse graphics.

Richard Wadman's manual takes the first-time user step by step through Dragon Basic

and programming. Unfortunately Wadman launches straight into difficult and boring mathematics.

The moving-graphics section is an improvement on the Spectrum manual. A joystick-controlled, space shoot-out game is listed and explained. However, the manual becomes very difficult to follow when it tries to explain how to use the colour. The trouble stems, in part, from Dragon's Basic. The colour is not particularly easy to use above mode 0, perhaps this is part of the price for buying an old off-the-shelf, ROM.

Dragon may have to rewrite the colour section of the manual to make it clearer.

Some of the graphics routines I tried crashed halfway through. Somehow, I had typed in something which meant the machine refused to enter any mode above mode 2. Dragon Data claimed the routines worked on five other machines. I tried the routines again a few days later, and discovered they ran perfectly.

As I was using a machine with an EPROM, there may have been some subtle error which hopefully will not be present in off-the-shelf Dragons.



CONCLUSIONS

- On a scale of 10, I would give it a seven or eight, with points being earned by the extensive Basic, the real keyboard, standard sockets, and wide availability.
- The Color and Edit commands are a drawback because they are complex and far more fussy than some other machines on the market.
- The manual has too formal an approach to some aspects of computing, and a bewildering method of explaining the colour.
- The maths in the ROM is a little odd, not even holding some powers of two exactly, like 2⁵.
- Software support from the machine's launch suggests an intelligent approach to

marketing, in which satisfying market demand is considered more important than involving the whole of the U.K. in a kind of product debugging exercise.

- The Dragon is more expensive than the Spectrum or Atom but the cost is justified by the keyboard and peripherals.
- The computer offers more memory for the price than any machine on the market other than the ZX Spectrum. The colours, although difficult to use, are good and clear, except for the red which was far from satisfactory.
- The cartridge software is as expensive as the Vic-20's.
- The keyboard, although it feels plasticky, is an enormous improvement over touch-sensitive ones, and at least has a space bar.

You can't get a Home Computer from Texas Instruments under 16 K RAM.

Make the right move into computing with the Home Computer from Texas Instruments. It gives you a large combined RAM/ROM capacity up to 110 K Byte and the ability to expand with a full range of peripherals and software. So as your knowledge of computers increases the TI Home Computer will grow with you.

Just compare the versatility of the TI Home Computer with its price—you'll find it real value for money that will prove to be a good long term investment.

The TI-99/4A is a sophisticated computer designed not only for the beginner with its ease of operation, but also for the professional with its vast computing power through a 16 bit microprocessor. And it simply plugs into an ordinary household TV set.



With its high resolution graphics with 32 characters over 24 lines in 16 colours (256 x 192 dots), 3 tones in five octaves plus noise, and BASIC as standard equipment and options such as other programming languages—UCSD-PASCAL, TI-LOGO and ASSEMBLER—and speech synthesis, you'll find that the TI 99/4A more than compares with the competition. Especially when the starting price is around £200. When you want to solve problems there are over 600 software programs available worldwide—including more than 40 on easy-to-use Solid State Software® Modules.

After all, from the inventors of the microprocessor, integrated circuit and microcomputer, it's only natural to expect high technology at a realistic price.



We'll help you do better.

TEXAS INSTRUMENTS
LIMITED

**UNBEATABLE VALUE
AT AROUND £200**

Don't let its size fool you.

If anything NewBrain is like the Tardis.

It may look small on the outside, but inside there's an awful lot going on.

It's got the kind of features you'd expect from one of the really big business micros, but at a price of under £200 excluding VAT it won't give you any sleepless nights.

However, let the facts speak for themselves.

You get what you don't pay for.

NewBrain comes with 24K ROM and 32K RAM, most competitors expect you to make do with 16K RAM.

What's more you can expand all the way up to 2 Mbytes, a figure that wouldn't look out of place on a machine costing ten times as much.

We've also given you the choice of 256, 320, 512 and 640 x 250 screen resolution, whereas most only offer a maximum of 256 x 192.

Big enough for your business.

Although NewBrain is as easy as ABC to use (and child's-play to learn to use) this doesn't mean it's a toy.

Far from it.

It comes with ENHANCED ANSI BASIC, which should give you plenty to get your teeth into.

And it'll also take CP/M® so it speaks the same language as all the big business micros, and feels perfectly at home with their software.

NO OTHER MICRO HAS THIS MUCH POWER IN THIS MUCH SIZE FOR THIS MUCH MONEY.



So as a business machine it really comes into its own.

The video allows 40 or 80 characters per line with 25 or 30 lines per page, giving a very professional 2000 or 2400 characters display in all on TV and/or monitor. And the keyboard is full-sized so even if you're all fingers and thumbs you'll still be able to get to grips with NewBrain's excellent editing capabilities.

When it comes to business graphics, things couldn't be easier. With software capabilities that can handle graphs, charts and computer drawings you'll soon be up to things that used to be strictly for the big league.

Answers a growing need.

Although NewBrain, with its optional onboard display, is a truly portable micro, that doesn't stop it becoming the basis of a very powerful system.

The Store Expansion Modules come in packages containing 64K, 128K, 256K or 512K of RAM. So, hook up four of the 512K modules to your machine and you've got 2 Mbytes to play with. Another feature that'll come as a surprise are the two onboard V24 interfaces.

With the aid of the multiple V24 module this allows you to run up to 32 machines at once, all on the same peripherals, saving you a fortune on extras.

The range of peripherals on offer include dot matrix and daisy wheel printers, 9", 12" and 24" monitors plus 5¼" floppy disk drives (100 Kbytes and 1 Mbyte) and 5¼" Winchester drive (6-18 Mbytes).

As we said, this isn't a toy.

It doesn't stop here.

Here are a couple of extras that deserve a special mention.

The first, the Battery Module, means you won't be tied to a 13 amp socket. And, even more importantly, it means you don't have to worry about mains fluctuations wreaking havoc with your programs.

The ROM buffer module gives you a freedom of another sort.

Freedom to expand in a big way. It gives you additional ROM slots, for system software upgrades such as the Z80 Assembler and COMAL, 2 additional V24 ports, analogue ports and parallel ports.

From now on the sky's the limit.

Software that's hard to beat.

A lot of features you'd expect to find on software are actually built into NewBrain so you don't need to worry about screen editing, maths, BASIC and graphics.


However, if you're feeling practical you can always tackle household management, statistics and educational packages. And because NewBrain isn't all work and no play, there's the usual range of mind-bending games to while away spare time.

Waste no more time.

To get hold of NewBrain you need go no further than the coupon at the bottom of the page.

With your order we'll include a hefty instruction manual so you'll know where to start, and a list of peripherals, expansion modules, and software so you'll know where to go next.

® CP/M is the registered trademark of Digital Research Inc.

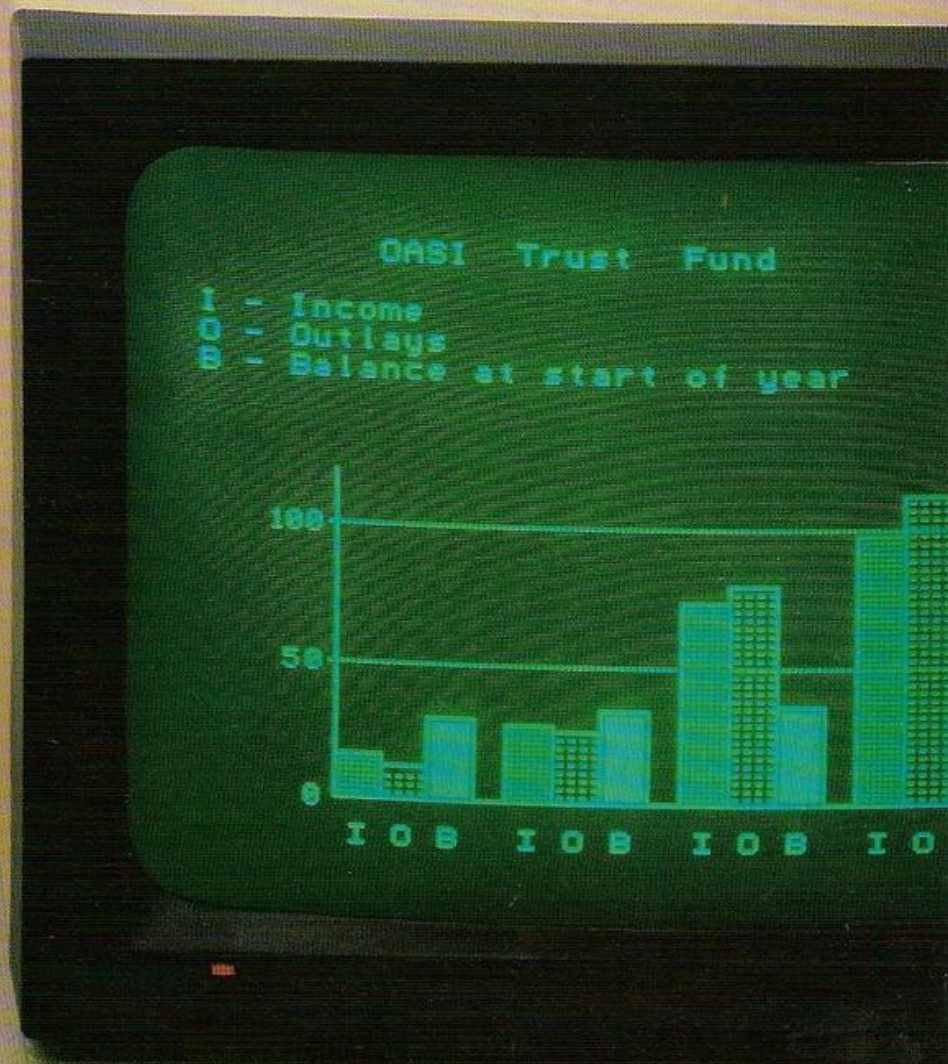

NewBrain, Grundy Business Systems Ltd., Grundy House, Somerset Road, Teddington TW11 8TD.

Each NewBrain order will include a FREE comprehensive user manual, a catalogue of expansion modules and peripherals, and a detailed list of available software.

Please send me the following:-

Quantity	Item	Price per item (Inc. VAT & p&p)	Total
	NewBrain A	£233.00	
	NewBrain AD with onboard single line display	£267.50	
	Printer	£466.00	
	Monitor 12"	£142.50	
	Total £		

I enclose a cheque/Postal Order for £_____ payable to Grundy Business Systems Reader Account.
NewBrain, Grundy Business Systems Ltd., Grundy House, Somerset Road, Teddington TW11 8TD.

Please debit my Access Card No: _____ my Barclaycard No: _____

Signature _____

Name _____

Address _____

Postcode _____

Registered Number 1522978

VAT Number 358661618

Please allow up to 28 days for delivery.

NEWBRAIN VC8

SURVEY VIC EX

Expand that tiny memory and you could take advantage of all the Vic's good features. Boris Allan examines some of the leading manufacturers' memory extension boards and cartridges for the Vic-20.

THE FIRST question we asked when reviewing the Vic-20 memory-expansion units was, "How good is the idea?", and we judged that probably the best ideas were to be found in the Stack products — 3K memory and Storeboard. By their very nature, when cartridges are plugged into a socket, that is the end — nothing can be added. Both the Stack 3K RAM unit and the Storeboard have sockets at the rear to enable the user to add further accessories — in a similar manner to many of the ZX-81 add-ons.



The quality of the conception behind the cartridges from Commodore and that from Arfon was not brilliant, but adequate. The Arfon expansion unit was large and not cleverly conceived. The Beelines Beebox, because of its design, tended to obscure the television if the television and the Beebox were on the same level. Generally, a set of staid products which are far from the forefront of design.

Ideas in practice

One can have a clever idea, and carry it out badly; equally one can have an ordinary idea, and execute it extremely well. The Stack products were clever ideas which suffered in practice. For example, there was not sufficient rigidity in the connection to the cartridge slot. The Stack Storeboard had a further complication, in that, though designed to take an extra 24K which is plugged into the board by the user, we were unable to open the case. Though it must be possible to open the Stack unit, our failure bodes ill for the ordinary user.


The Stack units seemed to be well constructed, and the printed-circuit boards seemed to be well prepared, but — on a personal note — we did not like the black leatherette covering of the Stack units.

The Arfon expansion unit needed little examination to reveal that it was solidly constructed — the case seemed to weigh a ton. It was here troubles started: we had been supplied with a case into which the Vic-20 is eased and the rear cartridge port has to engage with a well-produced printed-circuit board. So far, so good — even if a little tight — and then we realised that the case needed a lid on which the television should sit; an "optional" extra it would appear. Without it we were unsure where to put the TV. A well-made, if incomplete, piece of equipment. The Arfon cartridge

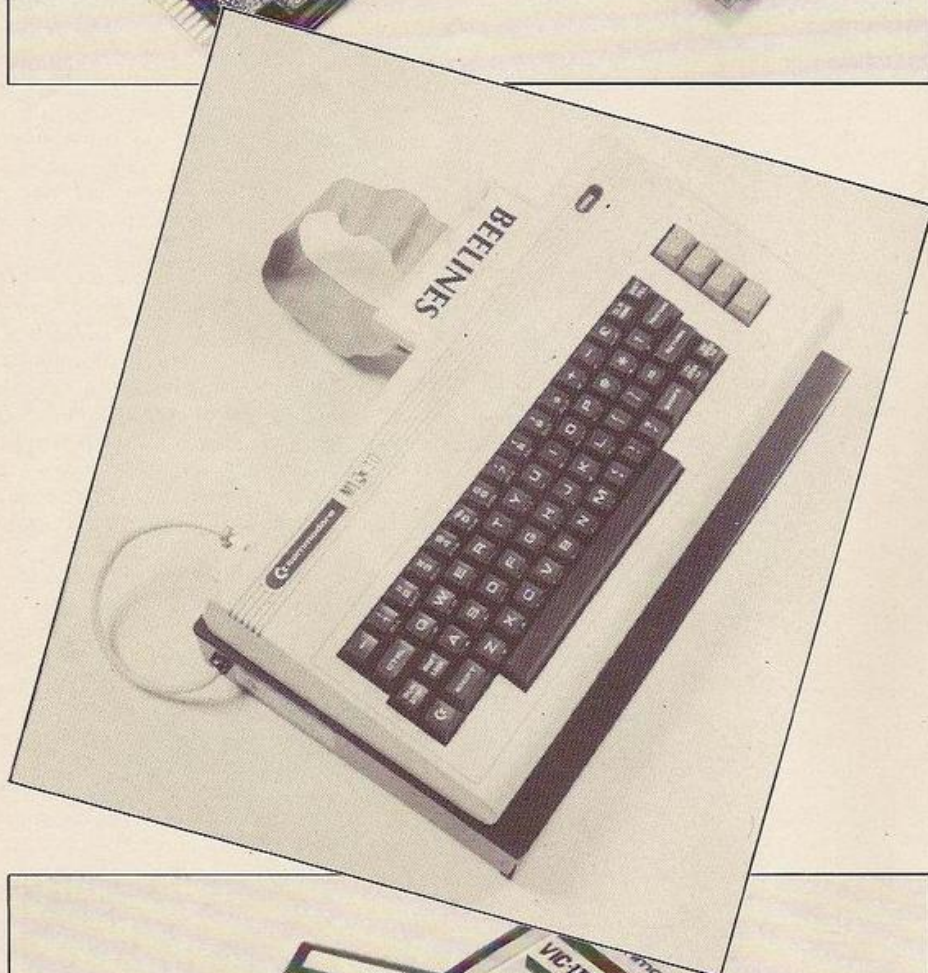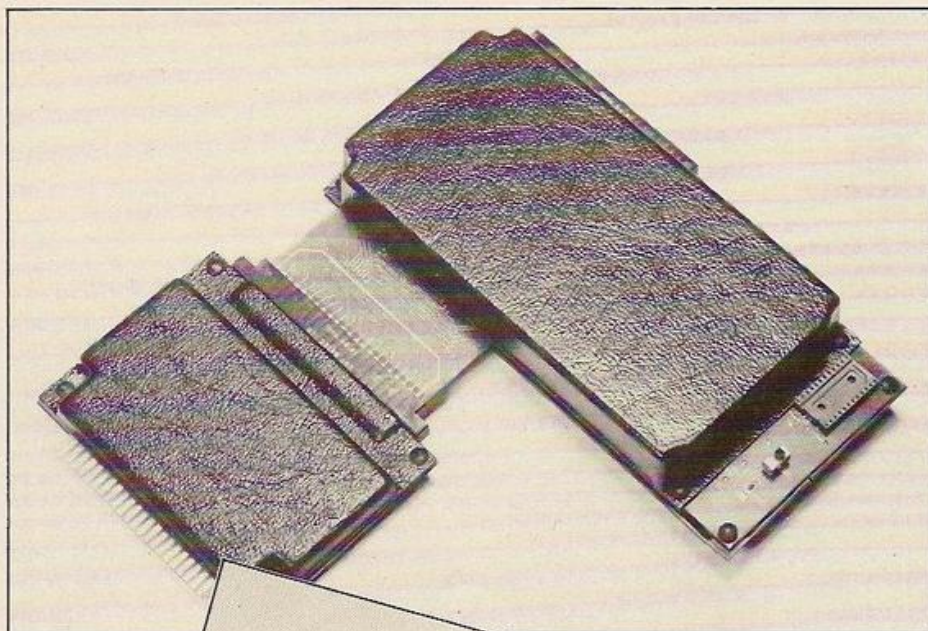

EXPANSION UNITS

Pictured together: Vic-20 in Arfon expansion; Commodore cartridges resting on Beebox; and Stack boards. Below, inside the Beebox. Top left, Stack; middle, Vic on Beebox; bottom, Commodore cartridges.

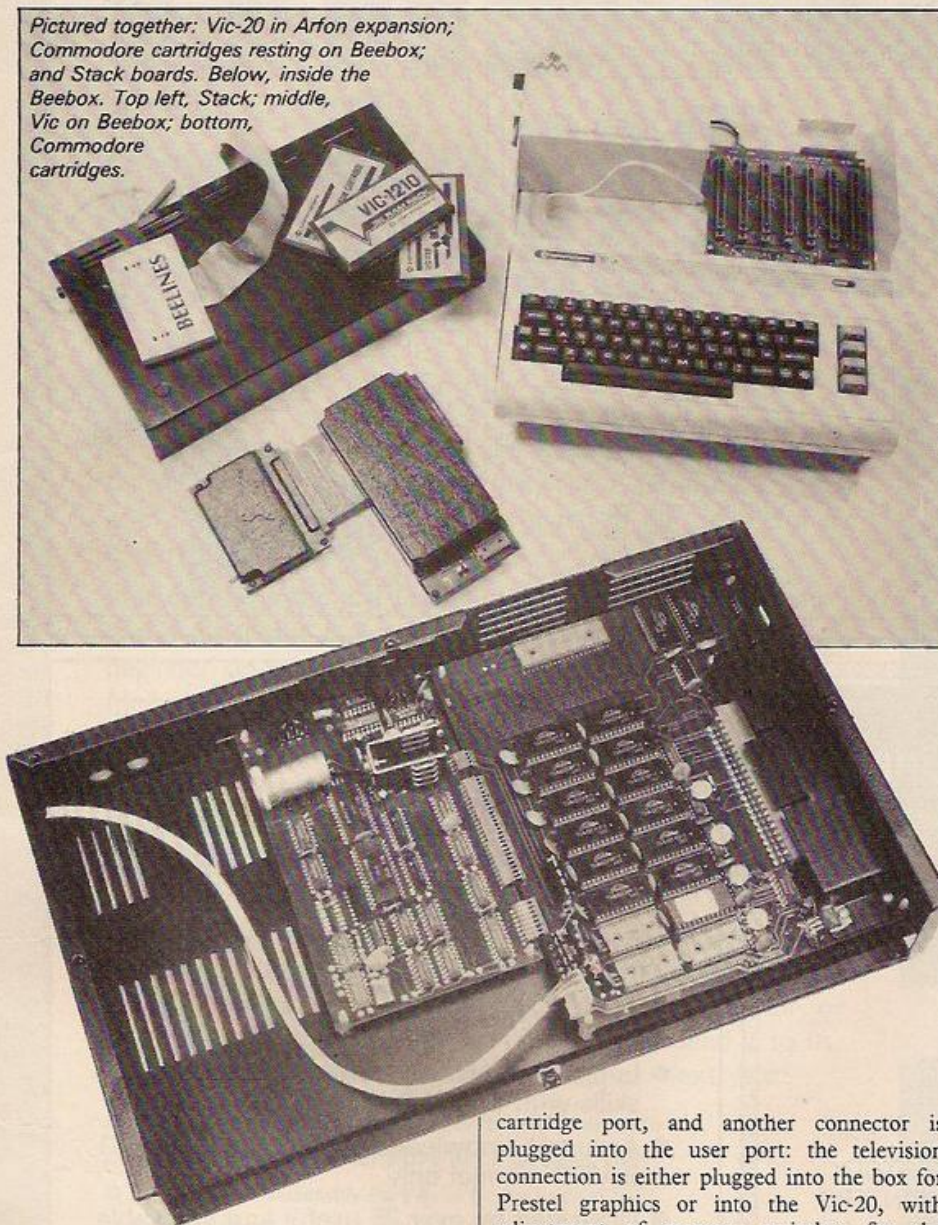

— the expansion unit has seven slots for such cartridges — seemed to be equally well constructed, as did the Commodore cartridges.

The Beeline's Beebox is supposed to do two jobs: it increases the capacity of the Vic-20 and also it provides a 40-column facility with Prestel graphics. The Beebox is a black box slightly wider and deeper than the Vic-20, and about 2in. to 2.5in. high. The Vic-20 is supposed to sit on top of the box. Unfortunately, there is no provision for raising the TV, so the Vic and box obscure the television picture.

A connector is plugged into the Vic

cartridge port, and another connector is plugged into the user port: the television connection is either plugged into the box for Prestel graphics or into the Vic-20, with adjustment of memory switches for the expanded Vic with Vic graphics.

Cartridge connections

The cartridge connector on the Beebox seemed a poor piece of work: there were spaces in the top of the cartridge connector covered by a piece of wide plastic tape, which one could easily break accidentally. The metal teeth did not extend to the edge of the connector.

All the Commodore cartridges worked perfectly well, as did the Arfon cartridge and the Stack 3K memory but, as noted, we could not open the Stack Storeboard.

Our problems with the Arfon expansion unit were to do with inconvenience, which was

unfortunate for a device which is to add to convenience of use. To fit the Vic-20 into the unit was an awkward business as was arranging the cassette lead. To change the cartridge one either had to remove the television and lid, or not use the lid. It is not possible to address the slots by name, which is a pity, especially as it seems part of the design philosophy.

The Beebox worked as an expanded Vic-20, but did not work as a Prestel graphics machine. That is, a machine which uses Prestel graphics, but is not, as yet, connected to the Prestel system. Plugging the TV into the We could obtain nothing but snow on our screen when we tried the other variant.

Prestel graphics

The Prestel system worked fine on Beeline's monitor, but not on the television, even though standard Vic-20 graphics on the Beebox worked perfectly. Programming the new machine was not like programming the Vic-20, because none of the standard Vic characters were available, everything was in lower case, and shortened commands such as Pr had to be typed pR. When in Prestel mode the sound generator was unavailable, and so the Vic-20 was silent.

While trying to make the Beebox work, we went through the documentation carefully, and like much documentation it left a good deal to the imagination. The *Beebox-40 User Manual* has been produced — it appears — by a word processor, and so instead of proper diagrams there are pretend diagrams. A pretend diagram is one which is not drawn, but uses dashes, colons, and stars, to indicate lines. The use of such diagrams means it is more difficult for the reader to understand. We did not find the manual very useful, and would have liked at least one circuit diagram.

The Arfon documentation was better, without being fantastic — at least it had a diagram. The Stack documentation was interesting. It had a demonstration program, and more spelling mistakes than any other but it was still not enough — no circuit diagram, for example. The cartridges had no explanations, except for the one from Arfon — but none was really needed.

Though most people do not want circuit diagrams with the increasing sophistication of the ordinary user, more people soon will.

The final question must be, "Does the product do what is promised? What is promised?" For all cartridges we can say "yes". The Stack low-cost 3K RAM depends on what you consider to be low cost, and we felt that the advertising of the Storeboard

(continued on next page)

(continued from previous page)

might be misleading. In the advertisement it is claimed that you can power up the Vic-20 to a massive 32K, for "only £49", but beneath the price you read in smaller type "(plus VAT) for 3K". So you find you have to add 24K RAM yourself, and pay for it. I do not like such a hard sell of decent equipment.

The Arfon expansion unit is commonly pictured with a TV sitting atop, with the optional lid in use. This is not fair, because it is not the standard unit, and can easily confuse.

Beelines claims that the Beebox makes you "the owner of a pint that thinks it's a quart",

but later the company has a disclaimer which says that "no claim is made concerning the reliability of this product. Beelines... cannot assume liability or responsibility for any loss or damage arising from the use of this product..." The Sale of Goods Act might have something to say about such disclaimers, so do not be fooled — if a product is not reliable, it is not fit for the purpose for which it was sold, and you still have your rights in common law.

CONCLUSIONS

Remember how much each of these goodies costs, and compare its cost to the cost of a Vic-20 when you are


making your decision to buy.

Buy any of the cartridges, but you will not be able to expand without the cartridge possibly becoming redundant. The Stack products though insubstantial, are not too highly priced — note that I did not say "cheap".

The Arfon Expansion Unit is substantial, well-made, but expensive, and it is not as convenient as it might be — especially without the optional lid.

The Beelines' 40 characters are available only in Prestel mode.

Company	Units reviewed	Cost	Address
Arfon Electronics	Vic-20 Expansion Unit 3K RAM Cartridge	£85 plus VAT £26.04 plus VAT	Cibyn Industrial Estate, Caernarfon, Gwynedd. Tel: 0286 5005
Beelines	Beebox-40	£253 including VAT	Beelines Bolton Ltd, 124 Newport Street, Bolton BL3 6AB Tel: 0204 385299
Commodore	3K RAM Cartridge 8K RAM Cartridge 16K RAM Cartridge	£29.95 £44.95 £74.95	Commodore, Baker Street, High Wycombe, Bucks. Tel: Slough 79292
Stack Computing	Low Cost 3K Memory Storeboard	£25.99 £49.	Stack Computing, 290-298 Derby Road, Bootle, Merseyside Tel: 051 933 5511

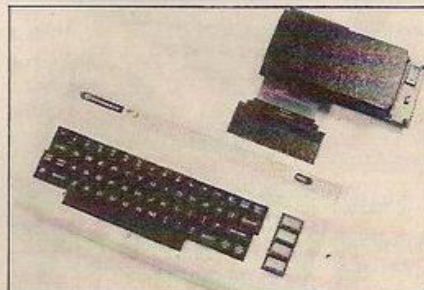

ANIROG Computers

Beginners Bag

ALL FOR **£209**
(£240 INC. VAT)

VIC-20

- + CASSETTE DECK
- + INTRODUCTION TO BASIC (PART 1) WITH 2 CASSETTES
- + LEARN COMPUTER PROGRAMMING
- + 5 EXCITING GAMES ON CASSETTE

FREE DELIVERY. 1 YEAR GUARANTEE
LARGE SELECTION OF SOFTWARE IN STOCK
FULL VIC 20 RANGE, DISC DRIVES, PRINTERS,
JOYSTICKS ETC. STOCKED. FULL STACK AND
ARFON RANGE STOCKED.
CALL OR WRITE FOR FULL LIST OF HARDWARE
AND SOFTWARE. ALL AT DISCOUNT PRICES
EXTRA 5% DISCOUNT FOR
1 YEAR ON ALL PURCHASES
WHEN YOU BUY A BEGINNERS
BAG

COUNTER SERVICE
CO-OP CRAWLEY

MAIL ORDER SERVICE
26 BALCOMBE GARDENS
HORLEY, SURREY
HORLEY 2007/6083

BARCLAYCARD, ACCESS WELCOME
CREDIT FACILITIES AVAILABLE

WRITE EFFICIENT ZX81 BASIC

- Improve your ZX BASIC Programming skills with this new book
- Assumes knowledge of the Sinclair ZX81 BASIC manual only
- Illustrated by over 25 useful and enjoyable programs, demonstrating the rules described, while making the most effective use of 1K
- Many of the principles listed are of more general application, most particularly to ZX SPECTRUM Basic
- Send £3 to:

**Ivor Killerbite,
10, Elson Road,
Formby,
Liverpool L37 2EG.**

Why is this man smiling?

You'd be smiling too if you were Dr. Ian Logan.

Dr. Logan is shown receiving the Rosetta Stone Award for his perceptive insights into the way the ZX81 ROM operates. Melbourne House are proud to be the publishers of Dr. Logan's books.

Melbourne House are Sinclair specialists, publishing books that are winners in every category. Whether you are a beginner or an experienced programmer, you'll need Melbourne House books.

If you've got a Spectrum on order (or better yet, if you've already got your Spectrum), then you'll be glad to know that Dr. Logan is working on **Understanding Your Spectrum**, sure to become the definitive book on the Spectrum.

So if you want to smile like Dr. Logan, you can do one of two things: Order one of our books from your bookseller or fill in the coupon and really understand your Sinclair, or you can write a great book or program and send it to us. Who knows? Your smile may be in this ad. next year!

- Machine Language Made Simple For Your Sinclair, £8.95
- Understanding Your ZX81 ROM, by Dr. Ian Logan, £8.95
- ZX81 ROM Disassembly Part A, by Dr. Ian Logan, £7.00
- ZX81 ROM Disassembly Part B, by Dr. Ian Logan and Dr. Frank O'Hara, £8.00
- Not only 30 Programs for the ZX81: 1K, £6.95
- The Complete Sinclair ZX81 Basic Course, £17.50



Orders to
Melbourne House Publishers,
131 Trafalgar Road,
Greenwich
London SE10

- ☐ Please rush me your new Spectrum/ZX81 catalogue. (Please specify.)
☐ Please send me books as marked above. Note: Please add 80p for post, pack & VAT.

Name

Address Postcode

Correspondence to Glebe Cottage,
Station Road, Cheddington,
Leighton Buzzard,
BEDS LU7 7NA

Last month Tim Hartnell majored on the Spectrum's graphic and colour capabilities. Now Tim Langdell tackles its sound facilities and develops further the colour theme.

LIKE THE ZX-81, the Spectrum was built down to a price and not up to a specification. This meant that Sinclair Research tried to assess how much you and I would be willing to pay for a micro with colour, sound and high-resolution graphics, and designed the Spectrum accordingly. It quickly becomes apparent when you explore your Spectrum's facilities that, to give you reasonable colour and graphics for the money, Sinclair Research seems to have skimped on the sound capabilities. In fact, its sound is poor.

To produce sounds on the Spectrum you use an aptly-named command called Beep. This command is followed by two numbers, the first of which is the duration of the note in seconds, and the second the pitch of the note in semitones above middle-C. Thus,

BEEP 1, 0

sounds middle-C for a second,

BEEP 1, 1

sounds C-sharp for a second, and so on. The note can be from about 0.00125 seconds — any shorter and it is not audible — to around 10 seconds.

To be more accurate, notes from around 60 semitones below middle-C, which is the lowest pitch, to about 50 above can be up to 10 seconds long. From there upwards, the note has to be shorter, until at the maximum pitch of 69 semitones above middle-C the maximum duration is about four seconds.

The problem is, though, that the sound is extremely quiet. Even in a silent room it can be difficult to hear anything much higher or lower than the middle-C. The highest notes are virtually inaudible and perhaps this had led to the criticism that the Spectrum can produce pitches so high that they are only useful for annoying bats.

In fact the top pitch is about 13,300 Hz, or five and three-quarter octaves above middle-C. This is almost two octaves above the range of a piano but still, in theory, well within most people's hearing range. Certainly my bat is not at all bothered by the highest notes.

The very low volume must be considered a design fault and I hope Sinclair Research is already preparing a modification for future Spectrums.

The only way to make the sound louder is to take an output via either the microphone or ear socket at the rear of the Spectrum and feed this signal into the microphone socket of your hi-fi amplifier, or into a similar input of whatever amplifier you might have.

The signal from the ear socket is a little stronger than from the microphone socket. I found that the signal is reasonably strong and easily overloaded the input of my cassette player. Connecting it up to my hi-fi's microphone socket worked better because my Yamaha amplifier comes equipped with a volume control on its microphone input. By doing this I could obtain considerably louder sounds which were much richer in quality

than the sound coming from the Spectrum's own speaker.

The quality of sound varies a great deal, though, across the pitch range. The lowest notes sound like a series of clicks rather than music, and the highest ones tend to warble. Of about 10 octaves available, only about half are really usable for music — but that is not bad for a simple sound device such as this.

My main worry was that it was far from convenient to always position my TV, Spectrum and equipment near my hi-fi. It was also a major nuisance having to plug and unplug the cassette recorder whenever I wanted to load a program, or save one on to tape.

Enough of the criticisms — what can you do with the Beep command? Of course, it is possible to program simple tunes with it. The Spectrum manual suggests that you draw out staves and bar lines for music and having written your tune, you can make a note of the numbers which correspond to each note's pitch and duration. Yet that is not easy and

```

1 REM Composer © Tim Langdell
2 DIM d(50): DIM n(150)
3 LET r=0: LET y=1
4 BORDER 5: PAPER 1: INK 9: C
5
10 PRINT "Enter your music by
  putting the note first and
  then its duration."
15 PRINT "You have two octaves
  starting at middle C... Enter
  C to G for the lower octave,
  c to g for the higher one."
16 PRINT "You put it all in
  one line (eg: c12/121)"
17 REM Duration 1 is one beat,
  2 is two beats, etc.
20 INPUT a$
30 FOR s=1 TO LEN a$ STEP 2
31 IF CODE a$(s) < 97 THEN GO TO
100
32 IF a$(s) = "e" THEN LET r=r+1
33 IF a$(s) = "f" THEN LET r=r+1
34 IF a$(s) = "a" THEN LET r=r+5
35 IF a$(s) = "d" THEN LET r=r+5
36 IF a$(s) = "g" THEN LET r=r+5

```

presumes, perhaps wrongly, that you know something about writing music in notation.

How much better it would be if you could just play the Spectrum like an organ, or type in notes as letters rather than complex Beep commands. The listings in programs 1 and 2 allow you to do these two things. The first program simply uses the Inkey\$ command to read the keyboard. If you press key T it plays middle-C, key Y is a tone up, and so on. I leave you to improve the program's elegance and

SPECTRUM

```

1 REM ORGAN: © Tim Langdell
2 BORDER 1: PAPER 4: INVERSE
3: CLS
4 PRINT "Chose one of three o
  ctaves; type 'a' to have middle
  C on the T key, 'u' for an oct
  ave higher, and 'd' for one lowe
  r."
5 INPUT q$: IF q$="a" THEN LE
  T k=0
6 IF q$="u" THEN LET k=12
7 IF q$="d" THEN LET k=-12
8 CLS
9 INPUT "Want vibrato?" v$
10 IF v$="y" THEN GO TO 11
11 LET x=0.3: GO TO 15
12 LET t=0.85
13 PRINT "PAPER 0: INK 6: AT 3
  4: "0": AT 3.5: "u": AT 3.8: "a": AT
  3.10: "a": AT 3.12: "T": AT 3.14: "Y"
  3.16: "u": AT 3.18: "I": AT 3.20
  3.22: "P": AT 3.24: "The
  keyboard layout: + The
  keyboard Use inv. video to get
  inverse numbers."
17 PRINT AT 2.5: "0": AT 2.7: "0"
  AT 2.9: "0": AT 2.13: "0": AT 2.15:
  2.17: "0": AT 2.19: "0": AT 2.21: "0"
20 IF INKEY$="a" THEN STOP
21 IF INKEY$="t" THEN BEEP x,0
22 IF INKEY$="f" THEN BEEP x,1
23 IF INKEY$="y" THEN BEEP x,2
24 IF INKEY$="u" THEN BEEP x,3
25 IF INKEY$="u" THEN BEEP x,4
26 IF INKEY$="i" THEN BEEP x,5
27 IF INKEY$="9" THEN BEEP x,6
28 IF INKEY$="o" THEN BEEP x,7
29 IF INKEY$="0" THEN BEEP x,8
30 IF INKEY$="p" THEN BEEP x,9
31 IF INKEY$="r" THEN BEEP x,-
32 IF INKEY$="4" THEN BEEP x,-
33 IF INKEY$="e" THEN BEEP x,-
34 IF INKEY$="3" THEN BEEP x,-
35 IF INKEY$="w" THEN BEEP x,-
36 IF INKEY$="2" THEN BEEP x,-
37 IF INKEY$="q" THEN BEEP x,-
38 GO TO 20

```


Program 1.

```

1 REM Frequency envelope
  © Tim Langdell
2 BORDER 3: PAPER 6: CLS
10 INPUT "Start frequency?"; f
11 LET f=f*0.001
20 INPUT "Interval?"; i
21 REM Try i=1
30 INPUT "End frequency?"; fe
31 REM Try fe=3
40 FOR a=f TO fe STEP i
50 DRAW 20*1,10*a: BEEP 0.03,a
60 NEXT a
70 DRAW 20*0,2*fe
80 FOR w=fe TO f STEP -1
90 DRAW 20*1,-10*w: BEEP 0.03,
  w
100 NEXT w

```

Program 3.

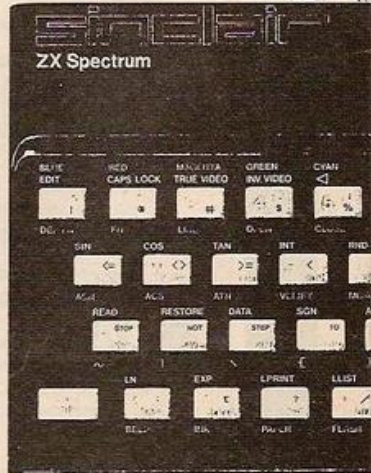


```

40 LET n(y)=(CODE a$(y)-87)*12
41 LET y=y+1
42 IF y=1 THEN
43   LET r=0
44   NEXT x
45   LET y=1
46   FOR x=2 TO LEN a$(y) STEP 2
47     LET d(y)=VAL a$(x)/2
48     LET y=y+1
49   NEXT x
50   GO TO 200
51 STOP
100 IF a$(y)="F" THEN LET r=r+.05
101 IF a$(y)="G" THEN LET r=r+.05
102 IF a$(y)="B" THEN LET r=r+.05
103 IF a$(y)="A" THEN LET r=r+.05
104 LET n(y)=(CODE a$(y)-87-r)*
2
105 LET r=0
106 LET y=u+1
107 GO TO 40
200 FOR t=1 TO LEN a$(y)/2
210 BEEP d(t)/2,n(t)
220 NEXT t

```

Program 2.

find a way to vary the duration of each note. You can store your tune for later play-back. Why not program in two keyboards as on a double manual organ?

The Spectrum allows you to program fractional changes in pitch. You could use this capability to tune your "organ" to another instrument, and you could also create other scales than the so-called even-tempered one obtained by Beeping whole pitch values. You can even create scales for oriental music which

uses more than just eight tones in a scale.

The second program allows you to type the notes as letters and the duration as numbers of beats — alternating notes and durations. This allows you to forget about the Beep command altogether and you no longer have to calculate what number the Spectrum recognises as which pitch. I have made upper-case letters stand for the notes from middle-C to the G above, and lower-case letters are for the next octave. You can, of course, alter this to your taste.

I have also made the basic beat half a second, which you can easily alter, too. Notice that you are entering your whole tune into a single string, so if you want you could save your masterpiece on cassette — remembering to use Goto and Not Run upon reloading or you will clear your string.

Unlike the BBC machine, the Spectrum is not equipped for sound synthesis. So if you have used a ZX-81 with either the Stuart or Quicksilver sound board, you will be very disappointed with the Spectrum's abilities. The

```

1 REM Muscript
2 PAPER 1: INK 5: BORDER 6: C
LS
10 PLOT 0,151: DRAW 255,0
20 PLOT 0,143: DRAW 255,0
30 PLOT 0,135: DRAW 255,0
40 PLOT 0,127: DRAW 255,0
50 PLOT 0,119: DRAW 255,0
60 REM HALF BEAT NOTE
70 LET X=0
80 LET Y=BIN 00000100
85 LET Z=BIN 01111100
90 POKE USA "E",X
100 POKE USA "E",Y,BIN 00000111
110 POKE USA "E",Y,BIN 00000101
120 POKE USA "E",Y,BIN 00000101
130 POKE USA "E",Y,BIN 00000101
140 POKE USA "E",Y,BIN 00000101
150 POKE USA "E",Y,BIN 00000101
160 POKE USA "E",Y,BIN 00000101
170 POKE USA "E",Y,BIN 00000101
180 POKE USA "C",+1,BIN 00111100
190 POKE USA "C",+2,Z
200 POKE USA "C",+3,Z
210 POKE USA "C",+4,Z
220 POKE USA "C",+5,BIN 00111000
230 POKE USA "C",+6,Z
240 POKE USA "C",+7,X
250 PRINT OVER 1,AT 3,3,"E";AT
4
260 REM These are the chrs on
keys E and C
270 BEEP 0.25,12

```

Program 6.

Spectrum can only produce a tone, composed of a series of clicks, and maintain the tone for a specified time.

With a sound board, and with other micros, you can alter the quality of the sound, change how fast the note builds up in frequency, or how fast it dies away — known as the frequency envelope. With the Spectrum you are limited to finding uses for the change in quality of the sound from clicks to warbles and simulating sound envelopes.

Programs 3 and 4 are examples of how you might experiment with frequency and duration envelopes. Such things are made possible by the fact that the Spectrum can accept fractions of a second for duration, and fractions of a semitone for pitches.

By experimenting with a variety of fractional changes in pitch and duration you can use For-Next loops to ramp up to a given tone, and ramp down from it again. Note in the examples in programs 3 and 4 that there are two ways you can speed up the transition from one pitch to the next; either by reducing the duration of the intermediary pitches, or by increasing the value of the Step command in the loop.

The former leads to a rather less musical sound, but the latter gives less smooth ramping. You will have to experiment with the values before arriving at useful sound shapes. Be warned, though, you will not be able to produce sounds in this manner which will match those from a synthesiser.

Program 5 illustrates how you can use the Spectrum to give sound effects for games. I have included a man-climbing-a-ladder routine, a bomb drop, and a phasor sound. None of these is up to arcade game standards, but can give you a useful added dimension to your games. Note that the bomb drop has the pitch descending rapidly from around 60 to 50, with the steps increasing in length as the bomb falls to give the impression that it is speeding up.

Program 6 shows a routine which uses the user-definable graphics facility to make pictures of notes on staves. It would be easy to extend this idea so that notes typed in with the Spectrum acting as an organ or as letters could be displayed as notes graphically. Key signatures and clefs could also be shown.

The next listing, program 7, gives a glimpse of how you might link sound and colour on

(continued on next page)

```

1 REM duration/frequency
2 envelope: 0 Tim Langdell
3 BORDER 1: PAPER 6: CLS
10 LET i=0.05
20 FOR f=0 TO 2 STEP 0.5
30 BEEP i,f: DRAW 300*i,20*f
40 LET i=i-0.005
50 NEXT f
60 DRAW 50,0: BEEP 0.5,2

```

Program 4.

```

1 REM Man Climbs Ladder
2 REM to create man chrs
3 BORDER 1: PAPER 6: CLS
10 POKE USA "P",+1,BIN 00011000
20 POKE USA "P",+1,BIN 00100100
30 POKE USA "P",+2,BIN 10011001
40 POKE USA "P",+3,BIN 01111110
50 POKE USA "P",+4,BIN 00011000
60 POKE USA "P",+5,BIN 01100100
70 POKE USA "P",+6,BIN 10000100
80 POKE USA "P",+7,BIN 00000100
90 REM Second set for
100 POKE USA "U",+1,BIN 00011000
110 POKE USA "U",+1,BIN 00100100
120 POKE USA "U",+2,BIN 10011001
130 POKE USA "U",+3,BIN 01111110
140 POKE USA "U",+4,BIN 00011000
150 POKE USA "U",+5,BIN 01100100
160 POKE USA "U",+6,BIN 10000100
170 POKE USA "U",+7,BIN 00100000
200 REM Draw Ladder
210 LET X=BIN 01000010
220 POKE USA "A",X
230 POKE USA "A",+1,X
240 POKE USA "A",+2,BIN 01111110
250 POKE USA "A",+3,X
260 POKE USA "A",+4,X
270 POKE USA "A",+5,X
280 POKE USA "A",+6,BIN 01111110
290 POKE USA "A",+7,X
300 FOR i=0 TO 21
310 PRINT AT i,10;"A": REM This
is the graphic chrs on key "A"
320 NEXT i
330 LET x=0: LET y=21: LET z=-1
340 FOR n=y TO x STEP z
350 PRINT AT n,10;"P": PAUSE 2-
z: PRINT AT n,10;"U"
360 REM These are graphic chrs
reused by 1
370 PRINT AT n,10;"A"
380 IF ABS z=Z THEN GO TO 500
390 BEEP 0.02,30: BEEP 0.02,40
400 NEXT n
410 LET k=x: LET x=y: LET y=k:
LET z=-z
420 GO TO 340
500 BEEP 0.01,(40-(n/2))
510 NEXT n: GO TO 330


```

```

1 REM Bomb drop@ Tim Langdell
2 REM AN EXTERNAL AMPLIFIER
3 UTIL HELP
10 LET x=0.3
20 FOR N=60 TO 55 STEP -x
30 BEEP 0.05,N
40 LET x=x+0.1
50 NEXT N
60 REM Explosion(?)
70 FOR K=0 TO 20
80 BEEP 0.01,-10: BEEP 0.01,-5
90 NEXT K
1 REM Phasor 2 @ Tim Langdell
10 LET x=0.0125
20 BEEP x,4: BEEP x,6: BEEP x,
8: BEEP x,10: BEEP x,12: BEEP x,
14: BEEP x,16: BEEP x,4: BEEP x,
6: BEEP x,8
30 PAUSE 0: REM Waits for key
press.
40 GO TO 10

```

Program 5.

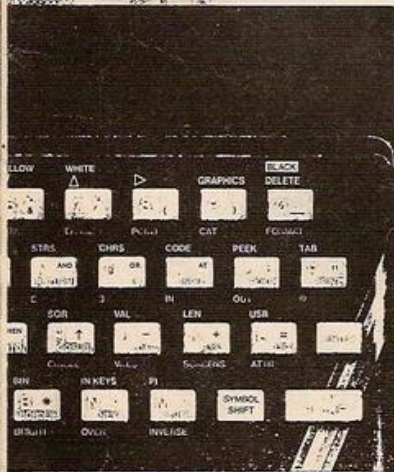

(continued from previous page)

your Spectrum. It plays a random tune, plotting random colours as it does so.

My general conclusion must be that the Spectrum's sound is very limited and poorly designed. The fact that the sound is so very quiet using the internal speaker alone is very annoying. The sound is also used to give auditory feedback that a key has been pressed, although at switch-on the click made cannot really be heard.

You can alter the pitch of the keyboard beep by Poking location 23609, and I suggest that you try a value around 100. This gives a pleasant tone which can just be heard. This facility can be very useful when typing in large amounts of data. But it is a great pity that this keyboard beep is also amplified along with the sound if you add an external amplifier. The effect is very annoying when Inputting data into a program which is using the sound facility.

To avoid these beeps on your stereo, you would need to go through the tiresome routine of unplugging and plugging your jack plugs from the Spectrum. Perhaps Sinclair might consider making the keyboard sounder and the beep facility separate circuits on a later model, but certainly the company must think about making the internal amplifier much more powerful.

The Spectrum's sound is one of its more disappointing aspects, but with perseverance you will be able to put it to good use in games.

Let us now explore some more facets of this machine's colour graphics.

How many colours in a Spectrum? Seven, if you think of a rainbow? Or perhaps eight, if you accept Sinclair's insistence that black and white are colours? How about 64 or even 128 though? Well, it is possible to obtain considerably more than the basic eight colours on a Spectrum. The trick is to use a user-defined graphic which is like a miniature chess board in appearance, or to draw diagonal crosshatch lines across your TV "page" using the draw command.

Program 8 shows how to create the graphic

```
1 REM Interference
2 BORDER 0
3 LET I=INT (5*RND)+1: LET P=INT (5*RND)+1
4 IF I=P THEN GO TO 10
5 INK I: PAPER P: CLS
6 FOR A=0 TO 255 STEP 2
7 PLOT 128,55: DRAW -127+A,-3
8 NEXT A
9 FOR A=0 TO 175 STEP 2
10 PLOT 128,55: DRAW 127,-37+B
11 NEXT B
12 FOR C=0 TO 255 STEP 2
13 PLOT 128,55: DRAW 127-C,37
14 NEXT C
15 FOR D=0 TO 175 STEP 2
16 PLOT 128,55: DRAW -127,37-D
17 NEXT D
18 PAUSE 200: GO TO 10
```

Program 9.

```
10 REM Kaleidos
11 BORDER 0
12 PAPER 7: CLS
13 LET Y=INT (15*RND)
14 LET X=INT (11*RND)
15 LET Z=INT (5*RND)
16 GO SUB 90
17 IF Z=0 OR Z=7 THEN GO TO 15
18 PRINT INK Z: AT 11-X,15+Y: A$
19 PRINT INK Z: AT 11-X,15-Y: A$
20 PRINT INK Z: AT 11+X,15+Y: A$
21 PRINT INK Z: AT 11+X,15-Y: A$
22 RETURN
23 INVERSE 1: AT 11-X,15+Y: A$
24 INVERSE 1: AT 11-X,15-Y: A$
25 INVERSE 1: AT 11+X,15+Y: A$
26 INVERSE 1: AT 11+X,15-Y: A$
27 GO TO 40
```

Program 10.

```
1 REM Musicolage
2 BORDER 1
3 LET NOTE=RND*20
4 LET DUR=RND*0.5
5 I=(RND*5)+1
6 PRINT INK I: AT 20-NOTE,50*0
7 UR: " "
8 BEEP DUR,NOTE
9 GO TO 20
```

Program 7.

```
1 REM 128 colours
2 BORDER 0
3 REM CHECKER PATTERN
4 FOR A=0 TO 5 STEP 2
5 POKER USR "A"+A,0:IN 01010101
6 POKER USR "A"+A+1,0:IN 10101010
7 NEXT A
8 FOR P=0 TO 7
9 FOR I=0 TO 7
10 FOR B=0 TO 1
11 PRINT PAPER P: INK I: BRIGH
12 T B: "A"; P: I: NEXT B
13 NEXT I: NEXT P
14 REM FULL PAGE COLOUR:
15 FOR P=0 TO 7: FOR I=0 TO 7:
16 FOR B=0 TO 1
17 FOR Y=0 TO 31
18 PRINT PAPER P: INK I: BRIGH
19 T B: "A"; P: I: NEXT Y
20 NEXT B
21 POKER 23692,255: REM AUTO
22 SCROLL
23 NEXT B: NEXT I: NEXT P
```

Program 8.

character needed and demonstrates how you can mix the standard eight colours in pairs of adjacent pixels so that more than 100 colours or hues can be obtained. The second part of the program runs through the colours again, but this time each colour fills a video page — which gives a better colour result. You can Print Over these colours as you would the normal eight.

The Spectrum is also capable of some rather fancy pictures which resemble interference patterns in light. Program 9 gives an example of this, and randomly changes the Paper and Ink colours. You might try removing the CLS command so that the new Ink and Paper are written over the previous ones. This also gives a clear demonstration of the fact that you can draw in the 176 by 256 resolution, but colour is set at the 32 by 22 character-space level.

It is very interesting to see in this last program how one of the Spectrum's shortcomings can be an asset. You may have heard some people refer to the rather marked "dot crawl" on the Spectrum. This means that when you draw a few lines of one colour on top of paper of another colour, then the Ink lines seem to shimmer rather than being absolutely steady. In the last example, and in others too, this shimmering effect adds a very interesting dimension to the colour display.

Program 10 is a form of kaleidoscope using the graphics character obtained by pressing Shift 9 followed by Shift 8. The Ink of this is varied at random and the blocks of colour are printed symmetrically in four places around the screen. Lines 90 and 150 onwards rub out some of the pattern to avoid crowding — and make it more interesting.

The next program, number 11, I have called Snowflake. Lines 60 to 180 draw the snowflake and the other lines allow a new feature on the Spectrum to be realised. Usually the only way to change the Paper colour is to type in Paper x, where x is a number between 0 and 7, followed by CLS. This of course wipes off any pattern you had on the screen. By creating a string of spaces sufficient in number to fill the whole screen you can use the Print Over 1 command to change the Paper without destroying the pattern.

In this program the Paper is changed in this way at random. There is an alternative method for changing the Paper while retaining the

graphics by Poking the memory locations between 22528 and 23231 — the next 64 bytes refer to the bottom two lines of screen where the program is entered. These locations contain the attribute codes for the character positions on the screen. So if the position 0,0 is cyan, Paper 5, then Peek 22528 would return (8*5) 40.

You would need to use the Int command to determine the Paper colour already present. For example:

INT((PEEK a)/8) = colour code

where "a" is the address. You would then subtract 8* this value from "Peek a" and add 8* the code of the new colour to "Peek a".

Program 12 demonstrates a rather puzzling feature of the Spectrum. When I was trying to draw lines of the same colour across the television screen I discovered that although I only specified one colour, two were drawn on occasions. This program shows that what colours are drawn when only one has been requested depends on which Paper colour the lines are drawn against.

The first lines are two pixels apart whereas the lower lines are three apart. As you see, the upper ones are usually in the same, requested, colour whereas the lower lines are most frequently different colours. I have Over Printed a block of the Ink colour to show further aspects of the effect.

So that you do not think that this is a property of drawing lines across a single character square, I have included four lines which are first an even number and then an odd number of pixels apart. Whenever the lines are an odd distance apart, two colours occur. Moreover, the earlier demonstration shows clearly that you can draw more than one Ink in a single character square. This is a fault though, and I can see no way of drawing lines of a specified colour and position consistently.

```
1 REM Snowflake
2 BORDER 0
3 LET T=0
4 INK 7: PAPER 3: CLS
5 LET A$=" ": LET B$=" ": REM
6 60 single spaces
7 65 REM Creates screen full of
8 spaces
9 FOR K=0 TO 702: LET B$=B$+A
10 PRINT " ": NEXT K
11 CLS
12 FOR A=0 TO 80 STEP 10
13 LET U=0: LET R=PI
14 LET N=100
15 LET X=(R-0.1)/N
16 FOR J=0 TO R STEP X
17 LET E=A*COS (0.5*J)
18 LET X=E*SIN J
19 LET Y=E*COS J
20 PLOT 128+X,55+Y
21 NEXT J
22 LET T=T+1: IF T=101 THEN GO
23 TO 100
24 GO TO 110
25 LET T=0: NEXT A
26 LET C=INT (15*RND)+1
27 PRINT AT 0,0: PAPER C: OVER
28 B$
29 PAUSE 50: GO TO 100
```

Program 11.

```
1 REM 2 INKS PER CHR$ SQUARE?
2 REM TIM LANGDELL
3 BORDER 1: CLS
4 FOR P=0 TO 7
5 FOR I=0 TO 7
6 IF I=P THEN NEXT I
7 INK I: PAPER P: CLS
8 PLOT 0,100: DRAW 255,0
9 PLOT 0,50: DRAW 255,0
10 PRINT OVER 1: AT 95,0
11 PLOT 0,70: DRAW 255,0
12 PLOT 0,67: DRAW 255,0
13 PRINT OVER 1: AT 10,10: " "
14 PAUSE 100
15 NEXT I
16 NEXT P
17 PAPER 2: INK 5: CLS
18 PLOT 0,110: DRAW 255,0
19 PLOT 0,30: DRAW 255,0
20 PLOT 0,50: DRAW 255,0
21 PLOT 0,15: DRAW 255,0
```

Program 12.

THE BOOK YOU'VE BEEN WAITING FOR!

Examines and explains
every function
on the ZX Spectrum

Just £6.95



Try this program from the book:

```
5 PAPER 0: CLS : BORDER 0
10 FOR X=0 TO 255
20 PLOT X,0
30 DRAW OVER 1;255-X*2,175
40 NEXT X
50 FOR Y=0 TO 175
60 PLOT 0,Y
70 DRAW OVER 1;255,175-Y*2
80 NEXT Y: REM © J. Ruston
```

Takes you through programming your ZX Spectrum from first principles right through to such things as defining your own graphics, MERGE, READ/DATA, SCREEN\$, POINT and DRAW.

Interface,
Dept. YC
44-46 Earls Court Road,
London W8 6EJ.

Please send me the following:


- () Programming Your ZX Spectrum — £6.95
- () A sample issue of INTERFACE, the monthly ZX magazine published by the National ZX Users' Club — £1.00
- () Getting Acquainted with your ZX81 — £5.95
- () 20 Simple Electronic Projects for the ZX81 — £6.45
- () Mastering Machine Code on your ZX81 — £7.50
- () 34 Amazing Games for the 1K ZX81 — £4.95
- () 49 Explosive Games for the 1K ZX81 — £5.95
- () The Gateway Guide to the ZX81 and ZX80 — £6.45

I enclose a total of £_____

Name _____

Address _____

THIS BOOK IS TOTALLY
ORIGINAL. IT IS NOT
BASED ON ANY OTHER
BOOK, & THE PROGRAMS
ARE ALL NEW



User-defined graphics
chapter tells you how
to create your own
DOTMAN game!

New ZX81 Software from Sinclair.

A whole new range of software for the Sinclair ZX81 Personal Computer is now available – direct from Sinclair. Produced by ICL and Psion, these really excellent cassettes cover games, education, and business/household management.

Some of the more elaborate programs can only be run on a ZX81 augmented by the ZX 16K RAM pack. (The description of each cassette makes it clear what hardware is required.) The RAM pack provides 16-times more memory in one complete module, and simply plugs into the rear of a ZX81. And the price has just been dramatically reduced to only £29.95.

The Sinclair ZX Printer offer full alphanumerics and highly-sophisticated graphics. A special feature is COPY which prints out exactly what is on the whole TV screen without the need for further instructions. So now you can print out your results for a permanent record. The ZX Printer plugs into the rear of your ZX81, and you can connect a RAM pack as well.

Games

Cassette G1: Super Programs 1 (ICL)

Hardware required – ZX81.

Price – £4.95.

Programs – Invasion from Jupiter. Skittles. Magic Square. Doodle. Kim. Liquid Capacity.

Description – Five games programs plus easy conversion between pints/gallons and litres.

Cassette G2: Super Programs 2 (ICL)

Hardware required – ZX81.

Price – £4.95.

Programs – Rings around Saturn. Secret Code. Mindboggling. Silhouette. Memory Test. Metric conversion.

Description – Five games plus easy conversion between inches/feet/yards and centimetres/metres.

Cassette G3: Super Programs 3 (ICL)

Hardware required – ZX81.

Price – £4.95.

Programs – Train Race. Challenge. Secret Message. Mind that Meteor. Character Doodle. Currency Conversion.

Description – Five games plus currency conversion at will – for example, dollars to pounds.

Cassette G4: Super Programs 4 (ICL)

Hardware required – ZX81.

Price – £4.95.

Programs – Down Under. Submarines. Doodling with Graphics. The Invisible Invader. Reaction. Petrol.

Description – Five games plus easy conversion between miles per gallon and European fuel consumption figures.

Cassette G5: Super Programs 5 (ICL)

Hardware required – ZX81 + 16K RAM.

Price – £4.95.

Programs – Martian Knock Out. Graffiti. Find the Mate. Labyrinth. Drop a Brick. Continental.

Description – Five games plus easy conversion between English and continental dress sizes.

Cassette G6: Super Programs 6 (ICL)

Hardware required – ZX81 + 16K RAM.

Price – £4.95.

Programs – Galactic Invasion. Journey into Danger. Create. Nine Hole Golf. Solitaire. Daylight Robbery.

Description – Six games making full use of the ZX81's moving graphics capability.

Cassette G7: Super Programs 7 (ICL)

Hardware required – ZX81.

Price – £4.95.

Programs – Racetrack. Chase. NIM. Tower of Hanoi. Docking the Spaceship. Golf.

Description – Six games including the fascinating Tower of Hanoi problem.

Cassette G8: Super Programs 8 (ICL)

Hardware required – ZX81 + 16K RAM.

Price – £4.95.

Programs – Star Trail (plus blank tape on side 2).

Description – Can you, as Captain Church of the UK spaceship Endeavour, rid the galaxy of the Klingon menace?

Cassette G9: Biorhythms (ICL)

Hardware required – ZX81 + 16K RAM.

Price – £6.95.

Programs – What are Biorhythms? Your Biohythms.

Description – When will you be at your peak (and trough) physically, emotionally, and intellectually?

Cassette G10: Backgammon (Psion)

Hardware required – ZX81 + 16K RAM.

Price – £5.95.

Programs – Backgammon. Dice.

Description – A great program, using fast and efficient machine code, with graphics board, rolling dice, and doubling dice. The dice program can be used for any dice game.

Cassette G11: Chess (Psion)

Hardware required – ZX81 + 16K RAM.

Price – £6.95.

Programs – Chess. Chess Clock.

Description – Fast, efficient machine code, a graphic display of the board and pieces, plus six levels of ability, combine to make this one of the best chess programs available. The Chess Clock program can be used at any time.



Cassette G12: Fantasy Games (Psion)

Hardware required – ZX81 (or ZX80 with 8K BASIC ROM) + 16K RAM.

Price – £4.75.

Programs – Perilous Swamp. Sorcerer's Island.

Description – Perilous Swamp: rescue a beautiful princess from the evil wizard. Sorcerer's Island: you're marooned. To escape, you'll probably need the help of the Grand Sorcerer.

Cassette G13: Space Raiders and Bomber (Psion)

Hardware required – ZX81 + 16K RAM.

Price – £3.95.

Programs – Space Raiders. Bomber.

Description – Space Raiders is the ZX81 version of the popular pub game. Bomber: destroy a city before you hit a sky-scraper.

Cassette G14: Flight Simulation (Psion)

Hardware required – ZX81 + 16K RAM.

Price – £5.95.

Program – Flight Simulation (plus blank tape on side 2).

Description – Simulates a highly manoeuvrable light aircraft with full controls, instrumentation, a view through the cockpit window, and navigational aids. Happy landings!

Education

Cassette E1: Fun to Learn series – English Literature 1 (ICL)

Hardware required – ZX81 + 16K RAM.

Price – £6.95.

Programs – Novelists. Authors.

Description – Who wrote 'Robinson Crusoe'? Which novelist do you associate with Father Brown?

Cassette E2: Fun to Learn series – English Literature 2 (ICL)

Hardware required – ZX81 + 16K RAM.

Price – £6.95.

Programs – Poets. Playwrights. Modern Authors.

Description – Who wrote 'Song of the Shirt'? Which playwright also played cricket for England?



Cassette E3: Fun to Learn series - Geography 1 (ICL)

Hardware required - ZX81 + 16K RAM.

Price - £6.95.

Programs - Towns in England and Wales. Countries and Capitals of Europe.
Description - The computer shows you a map and a list of towns. You locate the towns correctly. Or the computer challenges you to name a pinpointed location.

Cassette E4: Fun to Learn series - History 1 (ICL)

Hardware required - ZX81 + 16K RAM.

Price - £6.95.

Programs - Events in British History. British Monarchs.

Description - From 1066 to 1981, find out when important events occurred. Recognise monarchs in an identity parade.

Cassette E5: Fun to Learn series - Mathematics 1 (ICL)

Hardware required - ZX81 + 16K RAM.

Price - £6.95.

Programs - Addition/Subtraction. Multiplication/Division.

Description - Questions and answers on basic mathematics at different levels of difficulty.

Cassette E6: Fun to Learn series - Music 1 (ICL)

Hardware required - ZX81 + 16K RAM.

Price - £6.95.

Programs - Composers. Musicians.

Description - Which instrument does James Galway play? Who composed 'Peter Grimes'?

Cassette E7: Fun to Learn series - Inventions 1 (ICL)

Hardware required - ZX81 + 16K RAM.

Price - £6.95.

Programs - Inventions before 1850.

Inventions since 1850.

Description - Who invented television? What was the 'dangerous Lucifer'?

Cassette E8: Fun to Learn series - Spelling 1 (ICL)

Hardware required - ZX81 + 16K RAM.

Price - £6.95.

Programs - Series A1-A15. Series B1-B15.

Description - Listen to the word spoken on your tape recorder, then spell it out on your ZX81. 300 words in total suitable for 6-11 year olds.

Business/household

Cassette B1: The Collector's Pack (ICL)

Hardware required - ZX81 + 16K RAM.

Price - £9.95.

Program - Collector's Pack, plus blank tape or side 2 for program/data storage.

Description - This comprehensive program should allow collectors (of stamps, coins etc.) to hold up to 400 records of up to 6 different items on one cassette. Keep your records up to date and sorted into order.

Cassette B2: The Club Record Controller (ICL)

Hardware required - ZX81 + 16K RAM.

Price - £9.95.

Program - Club Record Controller plus blank tape on side 2 for program/data storage.

Description - Enables clubs to hold records of up to 100 members on one cassette. Allows for names, addresses, 'phone numbers plus five lots of additional information - eg type of membership.

Cassette B3: VU-CALC (Psion)

Hardware required - ZX81 + 16K RAM.

Price - £7.95.

Program - VU-CALC.

Description - Turns your ZX81 into an immensely powerful analysis chart. VU-CALC constructs, generates and calculates large tables for applications such as financial analysis, budget sheets, and projections. Complete with full instructions.

Cassette B4: VU-FILE (Psion)

Hardware required - ZX81 + 16K RAM.

Price - £7.95.

Programs - VU-FILE. Examples.

Description - A general-purpose information storage and retrieval program with emphasis on user-friendliness and visual display. Use it to catalogue your collection, maintain records or club memberships, keep track of your accounts, or as a telephone directory.

How to order

Simply use the FREEPOST order form below and either enclose a cheque or give us your credit card number. Credit card holders can order by phone - simply call Camberley (0276) 66104 or 21282 during office hours. Either way, please allow up to 28 days for delivery, and there's a 14-day money-back option, of course.

sinclair ZX81 SOFTWARE

Sinclair Research Ltd,
Stanhope Road, Camberley, Surrey,
GU15 3PS.
Tel: Camberley (0276) 66104 & 21282.

To: Sinclair Research, FREEPOST, Camberley, Surrey, GU15 3BR.
Please send me the items I have indicated below.

Qty	Cassette	Code	Item price	Total
	G1: Super Programs 1	30	£4.95	
	G2: Super Programs 2	31	£4.95	
	G3: Super Programs 3	32	£4.95	
	G4: Super Programs 4	33	£4.95	
	G5: Super Programs 5	34	£4.95	
	G6: Super Programs 6	35	£4.95	
	G7: Super Programs 7	36	£4.95	
	G8: Super Programs 8	37	£4.95	
	G9: Biorhythms	38	£6.95	
	G10: Backgammon	39	£5.95	
	G11: Chess	40	£6.95	
	G12: Fantasy Games	41	£4.75	
	G13: Space Raiders & Bomber	42	£3.95	
	G14: Flight Simulation	43	£5.95	
	E1: English Literature 1	44	£6.95	

Qty	Cassette	Code	Item price	Total
	E2: English Literature 2	45	£6.95	
	E3: Geography 1	46	£6.95	
	E4: History 1	47	£6.95	
	E5: Mathematics 1	48	£6.95	
	E6: Music 1	49	£6.95	
	E7: Inventions 1	50	£6.95	
	E8: Spelling 1	51	£6.95	
	B1: Collector's Pack	52	£9.95	
	B2: Club Record Controller	53	£9.95	
	B3: VU-CALC	54	£7.95	
	B4: VU-FILE	55	£7.95	
	ZX 16K RAM pack	18	£29.95	
	ZX Printer	27	£59.95	
	Post & packing - only if ordering hardware		£2.95	

TOTAL £

I enclose a cheque/postal order to Sinclair Research Ltd for £

Please charge my *Access/Barclaycard/Trustcard no.

*Please delete as applicable.

Mr/Mrs/Miss	
Address	

NSA 11

CAN YOU ESCAPE the Demon's Domain? You must find your way through a maze where you are confronted by all sorts of dangers. Unsavoury characters and gruesome tests conspire to ensure that you never gain your freedom.

The program is written with a master program and nine different subroutines. Each subroutine counts as one danger. When Move is displayed in the top right-hand corner of the screen you move around the maze by using the cursor keys, 5 to move left, 6 to move down, 7 to move up, and 8 to move right.

Demon's Domain can be made more fun by adding your own dangers. Here are a few hints if you want to customise the program.

Line 520 indicates the number of danger routines in the program. At the moment the number is 9, one for each subroutine. Therefore, if another routine were added the number would have to be altered to 10.

Each routine goes up in steps of 500. 1000 is the first routine, 1500 the second and so on. Therefore, another routine must start at 500 more than the last one. The last danger routine currently starts at 5000.

The routine at line 50 gives quite a long delay, then clears the screen. This is useful when instructions are printed at the beginning of each routine.

If a player passes the danger, he goes to either line 140 or line 200. Line 140 gives a delay, clears the screen, before going on to line 200. If he fails to negotiate the danger he goes to line 9995. This is the lose routine.

The program structure.

Line	Description
2-40	Initialise
50-80	Delay subroutine
100-140	Print instructions
200-290	Print domain
300-570	Make move
	Check for a win
	Witch Edna routine
	Fall into an abyss routine
1000-1170	The egotistical-gorilla routine
1500-1640	Hail of barbs routine
2000-2190	The mad mathematician
2500-2700	The doors routine
3000-3120	The crusher routine
3500-3690	The gruesome-gambler routine
4000-4200	Baron McDread routine
4500-4670	The maniacal memory-tester routine
5000-5260	Demon-driver routine
9995-9999	Lose routine



```

1 REM DEMONS DOMAIN
2 SLOW
3 RAND
10 LET A=11
20 LET B=0
30 LET C=0
40 GOTO 100
50 FOR E=1 TO 200
60 NEXT E
70 CLS
80 RETURN
100 PRINT "THE DREADED DEMONS D
110 PRINT "THE SHORTEST A
120 PRINT "YOU MAY ONLY M
130 PRINT "ABANDON HOPE A
140 GOSUB 50
200 PRINT "DEMONS DOMAIN"
210 PRINT "
220 FOR E=1 TO 5
230 PRINT "

```

```

240 NEXT E
250 PRINT "EXIT
260 FOR E=1 TO 4
270 PRINT "
280 NEXT E
290 PRINT "
300 PRINT AT A,B;"
310 PRINT AT 0,25;"MOVE"
320 IF INKEY$="" THEN GOTO 320
330 LET A$=INKEY$
340 IF A$="6" OR A$="8" THEN GO
350 PRINT AT 0,25;" ";AT A,B
360 LET A=A+(A$="6")-(A$="7")
370 LET B=B+(A$="8")
380 PRINT AT A,B;
390 LET D=PEEK (PEEK 16398+256*
PEEK 16399)
395 IF D<>136 THEN GOTO 530
400 PRINT "

```


DEMON'S DOMAIN

Once you have taken the first step on your journey through Demon's Domain there is no turning back — and only your wits and game-playing skills will save you from the gaping abyss which awaits all those who fail. The denizens of this subterranean realm will set you fiendish tasks and torment you with the hail of barbs and the crusher. Egotistical gorillas and mad mathematicians are ready and waiting for you. All hope abandon, ye who enter Joseph Nicholson's program for the 16K ZX-81.

```

410 LET E=INT (RND*2)
420 IF E=1 THEN GOTO 500
430 LET C=C+1
440 IF C<>5 THEN GOTO 310
450 CLS
460 PRINT "THE WICKED WITCH EDN
A", "THINKS THAT THE GAME HAS B
EEN", "TOO EASY FOR YOU AND SEN
DS YOU", "BACK TO THE START"
470 LET A=11
480 LET B=0
485 LET C=0
490 GOTO 140
500 LET C=0
510 CLS
520 GOTO (INT (RND*9)*500)+1000
530 CLS
540 IF D=0 THEN PRINT "YOU FELL
INTO AN ABYSS"
550 IF D=42 THEN PRINT "YOU HAV
E ESCAPED FROM", "DEMONS DOMAIN
.BUT NEXT TIME", "YOU MAY NOT B
E SO LUCKY."
560 IF D=0 THEN GOTO 9995
570 STOP
1000 PRINT "THE EGOTISTICAL GORILL
", "TELL HIM HIS NAME", "OR
BE DISMANTLED.", "A FLASH OF L
IGHTNING", "REVEALS IT BRIEFLY."
1010 GOSUB 50
1020 LET E=INT (RND*4)
1030 IF E=0 THEN LET A$="RONALD"
1040 IF E=1 THEN LET A$="WINSTON"
1050 IF E=2 THEN LET A$="STANLEY"
1060 IF E=3 THEN LET A$="SIDNEY"
1070 PRINT AT 10*AND,25*AND,A$
1080 CLS
1090 PRINT "WHAT IS MY NAME ?"
1100 INPUT B$
1110 PRINT "THAT IS ";
1120 FOR E=1 TO 50

```

```

1130 NEXT E
1140 IF A$=B$ THEN PRINT "RIGHT
YOU ARE SAVED"
1150 IF A$=B$ THEN GOTO 140
1160 PRINT "WRONG RIPP...CRACK..."
1170 GOTO 9995
1500 PRINT "HAIL OF BARBS", "KEEP
STILL AND HOPE."
1510 FOR E=1 TO 50
1513 NEXT E
1516 CLS
1520 PRINT AT 15,15;"B"
1530 FOR E=0 TO 21
1540 FOR F=1 TO 3
1550 PRINT AT E,RND*30;"/"
1560 NEXT F
1570 NEXT E
1580 PRINT AT 15,15;
1590 LET E=PEEK (PEEK 16398+256*
PEEK 16399)
1600 IF E=151 THEN PRINT AT 0,0;
"SC-73";TAB 50R 9+50R 9+50R 9
1610 IF E=151 THEN CLS
1620 IF E=151 THEN GOTO 200
1630 PRINT "US"
1640 GOTO 9995
2000 PRINT "THE MAD MATHEMATICIAN
", "YOU HAVE 10 SECONDS TO ANS
WER"
2010 GOSUB 50
2020 LET A$=""
2030 PRINT "QUESTION";AT 10,0;
2040 FOR E=1 TO 8
2050 LET A$=A$+CHR$ (INT (RND*9)
+29)+ "+"
2060 PRINT A$(E*2-1 TO E*2);
2070 NEXT E
2080 LET A$=A$+"0"
2090 PRINT AT 10,15;"=?"
2100 POKE 16436,255
2110 POKE 16437,255
2120 INPUT E

```

(continued on next page)

(continued from previous page)

```
2130 LET D=(65536-(PEEK 16436+(2
56*PEEK 16437))) / 50
2140 PRINT AT 5,0;"THAT TOOK ";D
;" SECONDS"
2150 IF D>10 THEN PRINT "YOU TOO
K TOO LONG"
2160 IF VAL A$=E THEN PRINT AT 0
,14;"CORRECT"
2170 IF VAL A$<>E THEN PRINT AT
0,14;"WHAT IS WRONG"
2180 IF VAL A$<>E OR D>10 THEN G
OTO 9995
2190 GOTO 140
2500 PRINT "THE DOORS",,,, "BEHIN
D ONE IS A STARVING LION"
2510 FOR E=0 TO 2
2520 FOR D=4 TO 11
2530 PRINT AT D,E*7+2;" "
2540 NEXT D
2550 NEXT E
2560 PRINT AT 13,0;"CHOOSE"
2570 IF INKEY$<>" " THEN GOTO 257
0
2580 LET A$=INKEY$
2590 IF A$<"1" OR A$>"3" THEN GO
TO 2580
2600 LET F=INT (RND*3)
2610 FOR E=0 TO 2
2620 FOR D=4 TO 11
2630 PRINT AT D,E*7+2;" "
2640 IF E=F AND D=7 THEN PRINT A
T D,E*7+2;" "
2650 NEXT D
2660 NEXT E
2670 IF F+1<>VAL A$ THEN PRINT A
T 13,0;"FORTUNE HAS SMILED ON YO
U"
2680 IF F+1=VAL A$ THEN PRINT AT
13,0;"WRONG CHOMP...MUNCH..."
2690 IF F+1<>VAL A$ THEN GOTO 14
0
2700 GOTO 9995
3000 PRINT "THE CRUSHER",,,, "ONLY
ONE LETTER WILL STOP HIM";AT 21,
15;" "
3010 LET A$=CHR$ (INT (RND*26)+3
8)
3020 FOR E=2 TO 21
3030 IF INKEY$<>" " THEN GOTO 303
0
3040 LET B$=INKEY$
3050 IF B$<"A" OR B$>"Z" THEN GO
TO 3040
3060 IF B$=A$ THEN GOTO 3110
3070 PRINT AT E,0;" "
3080 NEXT E
3090 PRINT AT 10,3;"YOU ARE CRUS
HED,";A$;" WOULD HAVE STOP
PED HIM"
3100 GOTO 9995
3110 PRINT AT E-1,0;"SAFE
";CHR$ (CODE A$+128); "HAS STOPP
ED HIM"
3120 GOTO 140
3500 PRINT "THE GAUSSIAN GAMBLER
";,,, "HAS THOUGHT OF 2 NUMBERS (1
-99);,,, "YOU HAVE TO SAY IF YOU
THINK THE ",, "SECOND NUMBER IS H
IGHER OR LOWER",, "THAN THE FIRST
ONE."
3510 GOSUB 50
3520 LET D=INT (RND*99)+1
3530 LET E=INT (RND*99)+1
3540 IF E=D THEN GOTO 3530
3550 PRINT "THE FIRST NUMBER IS
";D;,,, "IS THE SECOND NUMBER HIGH
ER (H);,,, "OR LOWER (L) ?"
3560 IF INKEY$<>" " THEN GOTO 356
0
3570 LET A$=INKEY$
3580 IF A$<"H" AND A$>"L" THEN
GOTO 3570
3590 PRINT "YOU THINK IT IS ";
3600 IF A$="H" THEN PRINT "HIGHER
"
3610 IF A$="L" THEN PRINT "LOWER"
3620 FOR F=1 TO 50
3630 NEXT F
3640 PRINT "IT IS ";E
3650 IF E>D AND A$="H" OR E<D AN
D A$="L" THEN GOTO 3680
3660 PRINT "HURRAH YOU WON"
3670 GOTO 9995
```

```
3680 PRINT "CURSES YOU WIN"
3690 GOTO 140
4000 PRINT "BARON MORGAN",,,, "C
HALLENGES YOU TO A DUEL",,,, "TO
STAY ALIVE YOU MUST SHOOT",,,, "HI
M FIRST.PRESS ANY KEY TO SHOOT"
4010 GOSUB 50
4020 PRINT "BARON
YOU"
4030 FOR F=1 TO 7
4040 PRINT AT 4,14-F;" ";TAB F+1
4;" "
4050 IF F=7 THEN GOTO 4100
4060 FOR E=1 TO 10
4070 NEXT E
4080 PRINT AT 4,14-F;" ";TAB F+1
4;" "
4090 NEXT F
4100 IF INKEY$<>" " THEN GOTO 419
0
4110 PRINT AT 0,12;"SHOOT"
4120 FOR F=1 TO 5
4130 IF INKEY$<>" " THEN GOTO 417
0
4140 NEXT F
4150 PRINT AT 4,8;"-----"
4160 GOTO 9995
4170 PRINT AT 4,7;"-----"
4180 GOTO 140
4190 PRINT AT 0,0;"DEATH JUDGE
KILLS YOU"
4200 GOTO 9995
4500 PRINT "THE MANICURAL MEMORY
MASTER",,,, "MEMORIZE THIS TO PACI
FY HIM."
4510 GOSUB 50
4520 LET S=INT (5*RND+5)
4530 LET A$=""
4540 PRINT "I HOPE YOU GET IT WA
ONG"
4550 FOR E=1 TO D
4560 LET A$=A$+CHR$ (38+25*RND)
4570 NEXT E
4580 PRINT AT 10,12;A$
4590 FOR E=1 TO 2*D+0.5*D**2
4600 NEXT E
4610 CLS
4620 PRINT "WHAT WAS IT ?"
4630 INPUT B$
4640 IF A$<>B$ THEN PRINT "WRONG"
4650 PRINT "A$,";A$;"CORRECT"
4660 IF A$=B$ THEN GOTO 140
4670 GOTO 9995
5000 PRINT "DEMON DRIVER",,,, "YO
U HAVE TO DRIVE",,,, "YOUR CAR BET
WEEN THE FIRES OF",,,, "HELL,WITHO
UT BURNING TO",,,, "DEATH BY HITTI
NG THEM.",,,, "TO MOVE LEFT, TO
MOVE RIGHT"
5010 GOSUB 50
5020 FOR D=0 TO 8
5030 PRINT AT D,10;" "
5040 NEXT D
5050 LET E=PEEK 16396+256*PEEK 1
6397+1
5060 LET F=10
5070 LET G=F+2
5080 LET D=0
5090 PRINT AT 9,F;" ";TAB (F+4);
" "
5100 LET F=F+INT (3*RND)-1
5110 IF F<0 THEN LET F=0
5120 IF F+4>31 THEN LET F=27
5130 LET G=G+(INKEY$="S" AND G<3
1)-(INKEY$="5" AND G>0)
5160 SCROLL
5170 PRINT AT 21,31;" "
5180 IF PEEK (E+G)<>0 THEN GOTO
5200
5190 GOTO 5250
5200 PRINT AT 0,0;" "
5210 LET D=D+1
5220 IF D<40 THEN GOTO 5090
5230 PRINT AT 21,10;"SAFE"
5240 GOTO 140
5250 PRINT AT 21,10;"YOU ARE DE
AD"
5260 GOTO 9995
9995 GOSUB 50
9996 PRINT "DEMONS REMAIN",,,,
9997 FOR E=1 TO 20
9998 PRINT "CLAIMS ANOTHER VICTI
M"
9999 NEXT E
```


ZX81 ECONOMIC KEYBOARD £11.95

Individually handmade and thoroughly tested before dispatch, unconventional but practical,

A SINCLAIR USER'S ANSWER
TO A SINCLAIR USER'S PROBLEM

It's reliable, enjoyable and inexpensive; and it comes with a money-back guarantee if you don't agree.

It is NOT a full-sized typewriter keyboard with full-travel keys to be wired up in some way to your computer.

IT IS:

SIMPLICITY ITSELF TO ATTACH fitting directly onto Sinclair's flat keyboard
NEAT AND UNOBTRUSIVE, in no way interesting with any other expansion
SURE IN KEYSTROKE
FAST AND EASY TO OPERATE
ATTRACTIVE TO LOOK AT

IT HAS:

A SLIM BLACK BOARD with
ENLARGED AND RAISED KEYS which are
COLOUR-CODED AND EASY TO READ, and offers
SWIFT LOCATION OF FUNCTIONS etc.

MAKE YOUR ZX81 A REAL PLEASURE TO USE
Send cheque/P.O. for £11.95 to:

DAVID HEARTFORD
91, High Street, Evesham, Worcs,
WR11 4DT

"The Lady Is Not For Turning"

BUT ARE YOU?

You are P.M. and Chancellor of 'Great Britain'. You must select the party you wish to represent and your AIM is to stay in office for as long as possible.

You must control INFLATION and UNEMPLOYMENT, maintain the EXCHANGE RATE, introduce SOCIAL REFORMS and stay POPULAR. The game is split into SECTORS: COUNTRY PROFILE; SHOPPING BASKET; BUDGET DAY (A) & (B); REFORM OPPORTUNITIES; and most important every 5 years ELECTION NIGHT.

A facility exists to SAVE your game to continue later.
The game is called **GREAT BRITAIN LIMITED**.

INHERITANCE: A 2 part game full of excitement. Prove your financial acumen in PART 1 by investing wisely at the stock and metal markets. (If desperate for funds try the CASINO or HORSE RACES). Enter the world of BIG BUSINESS in PART 2. Find the secret formula for PARADISE COLA; manufacture & market the drink and cope with STRIKES, FIRES, and FRAUDS. Your aim is to become a MILLIONAIRE.

AROUND EUROPE IN 80 Hours: Race around Europe collecting SOUVENIRS, avoiding RISKS, exchanging CURRENCIES etc. (incl. 2 player version).

ALL GAMES ARE AVAILABLE IMMEDIATELY ON ZX81 16K RAM.

£4.95 Each; 2 for £8.25; All 3 on quality C60 £10.50 send for details of SPECIAL versions for BBC & SPECTRUM.

SIMON W HESSEL


DEPT. Y,

15 LYTHAM COURT, CARDWELL CRESCENT,
SUNNINGHILL, BERKSHIRE.

TEL. ASCOT 25179

All games are fully guaranteed

Fast service



FLOPPY DISC DRIVES

Single and Dual 40 track for BBC Micro
CALL FOR BEST PRICES!

BBC MICRO

BBC COMPUTER MODEL 'A' £299 + VAT
BBC COMPUTER MODEL 'B' £399 + VAT
BBC COMPUTER WITH DISC £ Phone

MONITORS

High resolution 18 MHZ 12"
Green Phosphor Monitor

£99.00 + VAT

BBC Cable £4.95

OTHER ITEMS AVAILABLE FOR THE BBC MICRO

Books, Cables, Joy Sticks, Cassette Decks, Dust Covers,
Teletext Adaptor.
SEND FOR PRICE LIST

SEIKOSHA GP-100A



- ★ DOT MATRIX PRINTER
- ★ 80 CHARACTERS PER LINE
- ★ 30 CHARS/SEC
- ★ FREE HI-RESOLUTION 'DUMP OUT' LISTING

£195 + VAT. Carr £6 BBC Printer Cable £16 + VAT

BBC MICRO

SPACE WARP. £11.50 BBC MULTIFILE. £25.00
BBC CHESS. £11.50 BBC BACKGAMMON. £ 8.00
BBC GOLF. £ 7.00
MUNCHYMAN £ 5.95
SNAPPER £11.50
DEFENDER. £11.50



BBC MICRO MICRO UPGRADES

RAM KITS: Upgrades the Model 'A' to 32K RAM
Supplied with full fitting instructions. £29.90 + VAT

ANALOGUE KITS: Suitable for adding joysticks,
controllers etc. £15.00 + VAT

PRINTER INTERFACE & I/O PORT: Enables a
Centronic Interface printer to be attached. £16.00 + VAT

MODEL 'A' TO MODEL 'B' UPGRADE
£89.00 + VAT (fitted)

DISC EXPANSION. Phone
DISC DRIVES. Phone

COLOUR MONITORS. £249.00 + VAT
Send for details on other items, cables, cassettes, plugs,
software etc.

WHY NOT SEND YOUR MACHINE TO US FOR
UPGRADING?

PRINTERS

EPSON MX80 F/T3 — The printer recommended for the
BBC Microcomputer.

- ★ Dot Matrix Printer
- ★ 80 Cps
- ★ Hi-Resolution Graphics
- ★ Bi-directional Printing



FREE
HI-RES
'DUMP OUT'
PROGRAM

SPECIAL
PRICE
£349 plus VAT
Printer Cable
£16 + VAT

Q-TEK Systems

Telephone STD (0438) 65385
2 Daltry Close, Old Town, Stevenage.

BBC
Service &
Information Centre.

INTERVIEW

THE BUSINESS OF M

A new recording star has emerged from the mists of the Mersey — Bug-Byte software has sold 500,000 cassette games already and doubles its sales every three months. Meirion Jones headed north to ask Tony Baden how he and Tony Milner turned a pastime into profit.

NO WONDER Tony Baden looks smug — if you had turned a student hobby into a million-pound business in just over a year so would you.

Two years ago he was studying Chemistry at Oxford when Tony Milner, a student in the next room, bought a ZX-80. They played with the machine and wrote a few programs before noticing that no-one seemed to be selling ZX-80 software.

A £3 classified advertisement paid dividends. To their surprise, the 40 cassettes they had recorded were all sold in two weeks so one night in the pub they thought up a company name, sent off the £1 fee, and Bug-Byte was born.


Tony Baden freely admits they made mistakes early on. "We had

'We had doubled our advertising and halved our sales'

some problems but people seemed to be more tolerant in those days". The company developed into a relatively profitable sideline while they continued their studies, but they did not think a student accommodation address would sound very confidence-inspiring, so they used an address in Coventry where Tony Milner hailed from.

As soon as they could acquire an Atom, the pair set about writing Acorn games. From the outside the operation was beginning to look professional. "At first we pretended we were bigger than we were". Just before Christmas 1980 Bug-Byte's sales reach £150 in one week and the potential of the business became clear to them.

Early in 1981, just months from the end of their college careers, the

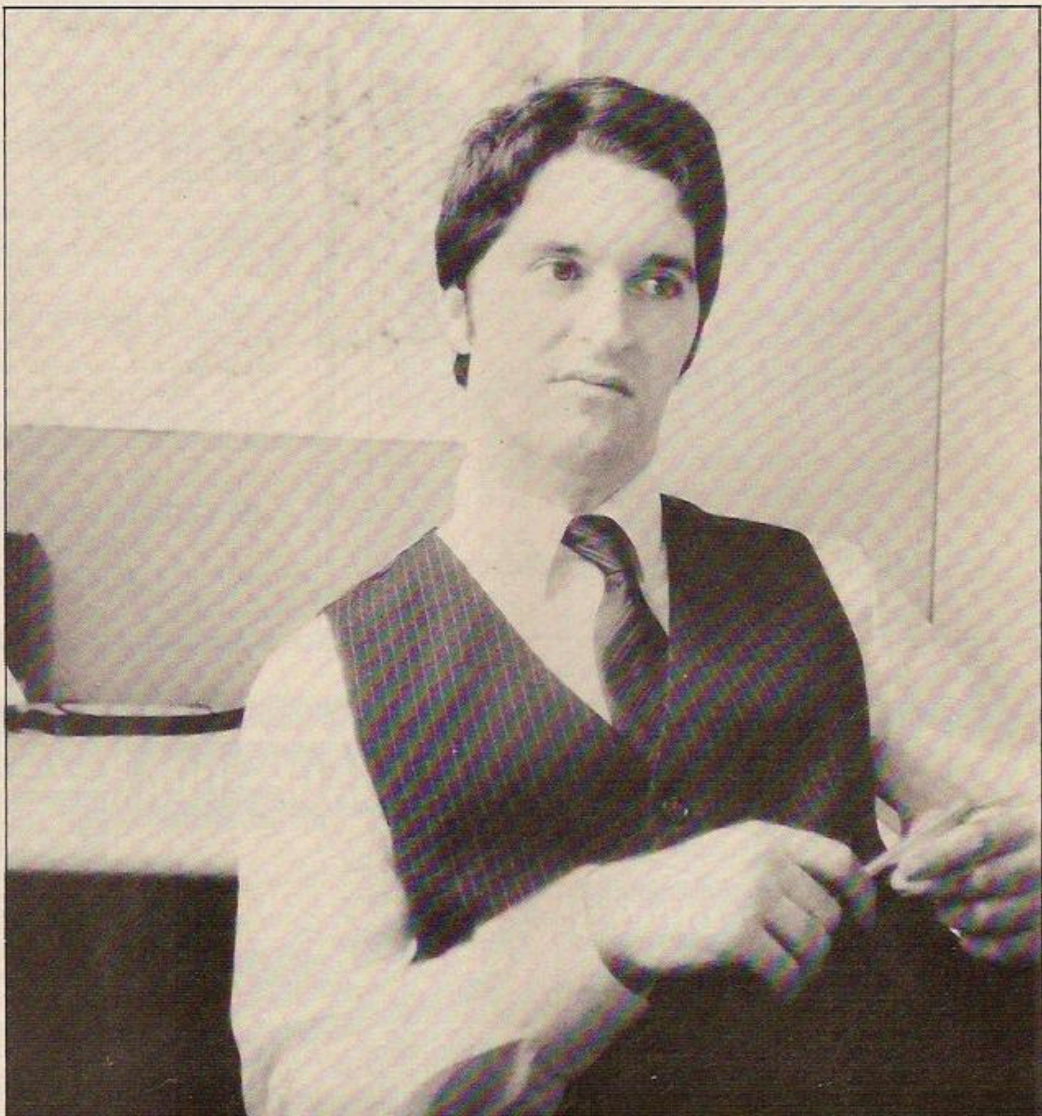

two Tonys gambled on placing a full page advertisement for the ZX-80 tapes. Unfortunately Clive Sinclair chose the same month to launch his new ZX-81: "We had doubled our advertising and halved our sales", admits Baden.

The time had arrived for decisions. Undeterred by the advertising fiasco, they decided to become full-time partners in Bug-Byte when they left Oxford rather than pursue safe careers such as computer programming. "I'm glad I didn't", says Tony Baden. A third friend from Oxford was supposed to join them but "he never turned up".

'I wrote eight cassette games in one day once'

Tony Baden wanted to set up shop in his home town, so they moved into the Albany, Old Hall Street, Liverpool in July 1981. They quickly developed games software for the ZX-81. At first they produced all the programs themselves: "I wrote eight in one day once", but

gradually built up a team of outside programmers they could trust, who earned 20 percent royalties on sales of their games.

Tony Baden has abandoned programming to concentrate on running the business, leaving Tony Milner to the joys of machine-code. The best-selling programs are still originated inside the company, which now employs 12 people with an average age of 19 — including a programmer who is just 16. Games are developed on Apples and then translated to fit particular machines.

Bug-Byte still contracts out for particular programs which it needs — say, an invader program for a new computer — and is interested in buying up innovative software ideas, for cash now rather than the royal-

AKING A MILLION

ties Bug-Byte used to offer. At the moment Bug-Byte buys games from about 20 regulars but "we always need more programmers".

At first Bug-Byte had to laboriously duplicate tapes but now after production of the originals manufacture is subcontracted under strict control. "We are so confident of the quality that we can guarantee our cassettes for a year — we don't get many returned", says Baden.

Bug-Byte is now selling 10 times as much as it was a year ago. "Our sales double every three months". He claims that the company has already sold 500,000 cassette games.

He does not have a very high opinion of the hardware manufacturers. "They've never really been helpful. We've had several problems with Acorn — we're not too happy with the BBC Micro". Bug-Byte's BBC was full of bugs when it finally arrived. As for the Spectrum: "We've had four of them — three don't work".

"We ignored the Vic for a while", Tony Baden admits. He feared that Commodore with its experience gained on the Pet would swamp the

that they look attractive enough to stand out on a shelf in a store. Software is moving out of the small advertisements and into your local shops. He compares his business with the record industry — it is no coincidence that Bug-Byte cassettes have acquired album-style covers. Tony Baden extols the virtues of "better advertising, better presentation". He expects home computers to be sold in different shops from what you play in them — just as most record shops do not sell record players. Of course, chain stores will soon be selling both.

The home-computer software business is losing its innocence. Bug-Byte now employs an advertising agency and is considering racy television and radio commercials.

Baden has already signed up 100 dealers and hopes to have 500 within two years. He claims that Bug-Byte "provides the best service and back-up dealers can find". Negotiations with High Street chainstores to sell software over the counter are going well. Last Christmas despite a rogue batch of "2,000 rotten tapes" Bug-Byte did well. A major winter offensive is already planned.

"This year with six months preparation, sales could be phenomenal", says Baden. The hype, at least, is reminiscent of the record

industry. With manufacturers launching a new home computer every month for the foreseeable future, perhaps Tony Baden is not so rash in predicting that "every home will have one by the end of next year". The new Commodores and the Acorn Electron seem set to open up the market established by the ZX-80/81, the Atom, the Spectrum and now the Dragon. Nevertheless he believes that buyers will need to spend less to obtain the kind of machine they want. He cites the £50, 16K Bina-tone which will offer colour and sound.

Tony Baden expects people to spend "more on software than on hardware — at least the cost of the machine every year. In the same way that you have a record collection which costs more than your record player". He does not think the computer manufacturers will satisfy the demand. "They're very distant, so wrapped up in their hardware that they don't realise software is where it's at".

The recent Atari advertising blitz on television seems to show that some manufacturers have become aware that "software sells hardware".

So far Bug-Byte has grown almost unnoticed into a major supplier of games software, without having to

rely on loans or government grants. "Just the occasional overdraft". Now Bug-Byte is having to cope with the problems that success brings in its wake.

Baden hopes it will not be necessary to move too far from the Mersey: "I'd like to stay up here — I

'Every home will have a computer by the end of next year'

like Liverpool — but we may open a London office". He does not see why companies who make anything to do with computers should have to be based around Cambridge or just off the M4 to be taken seriously: "We should be judged on our products".

One group that are taking Bug-Byte seriously are software pirates. Imitation may be the sincerest form of flattery but it is not one that software publishers enjoy. Baden sees unauthorised copying of programs as a threat. Software libraries are now trying to exploit loopholes in the law to operate a lending service with cassettes.

Could you be trusted not to make a duplicate of a good game you had borrowed? Making it difficult to unlock the program does not help if a direct copy can be made on tape. Considering Tony Baden's regard for the record industry it should come as no surprise to hear that Bug-Byte is experimenting with techniques to make rerecording its own cassettes impossible.

"Software sales will be worth billions over the next few years and we intend to be undisputed market leaders", says Baden. So far Bug-Byte has avoided serious software but games alone should allow them plenty of scope in the immediate future.

The company must be a juicy target for a large group to take over. "I'm open to offers", quips Baden, "but have they got the expertise? — I don't think so".

Complete with natty waistcoat and an Osborne lying casually on a desk Tony Baden looks every inch a 1980s' boy wonder, but has it been at the cost of the 24-hour grind described by some refugees from the micro industry? "No — I've enjoyed it, I don't work all night". ■

'We've had four Spectrums — three don't work'

market with high-quality converted software. Commodore was surprisingly slow to produce an extensive range of software and when it materialised the prices were high enough to allow independent software houses to easily undercut them. Tony Baden is disappointed with the machine: "The Vic has not made the impression we expected", but he is looking forward to its successors, the Vic-10 and Vic-40/64.

Bug-Byte found it difficult to win Acorn approval for its software, and spent three months in fruitless negotiations with Sinclair to provide programs for the Spectrum. Now Sinclair plans to unleash a flood of 500 programs on to the market starting with a *Welcome* package which will be despatched with all new Spectrums from next week. Predictably Tony Baden is critical: "They are doing it the wrong way".

Baden believes that confidence must be created by building up a wide range of proven programs and then improving the packaging so



Your marksmanship will decide whether the duck has any more than just a sporting chance in David Prosser's shooting game for the unexpanded Vic.

DUCK SHOOT is a semi-serious game for the unexpanded Vic-20. The player enters an angle through which a gun is turned and then fired. The higher the angle entered, the less distance the shell will cover from the gun. The shell can be made to cover different distances by varying the angle.

This can be an educational and recreational game. Young players become aware of the use of angles even though it is just a game to them. The program makes full use of colour graphics and accompanying sound effects. The behaviour of the shells is not as straightforward as at first it may seem.

When run, the program displays the title page while waiting for the user to press the f1 key. The computer, after producing a bleeping sound 10 times, will play a tune until the f1 key is pressed at the appropriate time.

After the f1 key has been pressed, a picture appears of a duck and moon on the right-hand side of the screen. Each time the game is played the moon and duck appear in different positions. Occasionally the duck will be well over to the right and the moon well over to the left, thus with three shots it is quite easy. On other occasions the user will have to shoot very accurately for the moon may block the path of the shell to the duck.

To score a point, the shell must hit the duck on the back. If the shell hits the duck anywhere else, an appropriate sound is output followed by a comment at the top of the screen. The duck moves a random quantity of spaces.

There are three shots to each game and five games are provided for. These can be changed easily by changing the lines indicated in the accompanying program documentation. If the shell hits the moon, the program automatically moves on to the next game, after producing some sound and graphics effects.


Possible improvements to the program could be made by defining your own graphics, with additional memory, to improve the detail. Instead of the present score system, you could amend it to take into account the quantity of shots which the player takes to hit the duck. Extra foul points could be implemented in case you shoot the moon. Those who feel the game is a little cruel, could change the duck into a battleship or something else. Sound effects and comments would have to be changed, but the bulk of the program would need no alterations.

Lastly, sound effects could be changed including different tunes at the beginning and throughout.

Line 300 has 89 characters in it, even though the Vic manual states only 88 are allowed per program line. This is achieved by replacing Print with its abbreviated form ?. This leaves four extra spaces at the end of the line, one of which is used for the extra character. If the line is now listed, the question mark is replaced by Print and the line uses up to 89 characters. By abbreviating in this way, much longer command lines can be created.

Line	Description
006	This sets the original screen colour to red with a red border.
007	This line sets up all the sound variable locations which are — V for the volume, S2 for the sound-box location, S3 being another sound-box location and finally NO which is the white-noise generator location.
010	The purpose of this line is to Poke coloured blocks both at the top and the bottom of the screen using logic Ands to do so.
011 to 016	These lines are used to output the title page.
021	Here, any key pressed while the music is playing is reset and a count is set up which governs how many times f1 flashes.
022 to 023	These two lines flash f1 while producing an accompanying

GAMES DUCK S

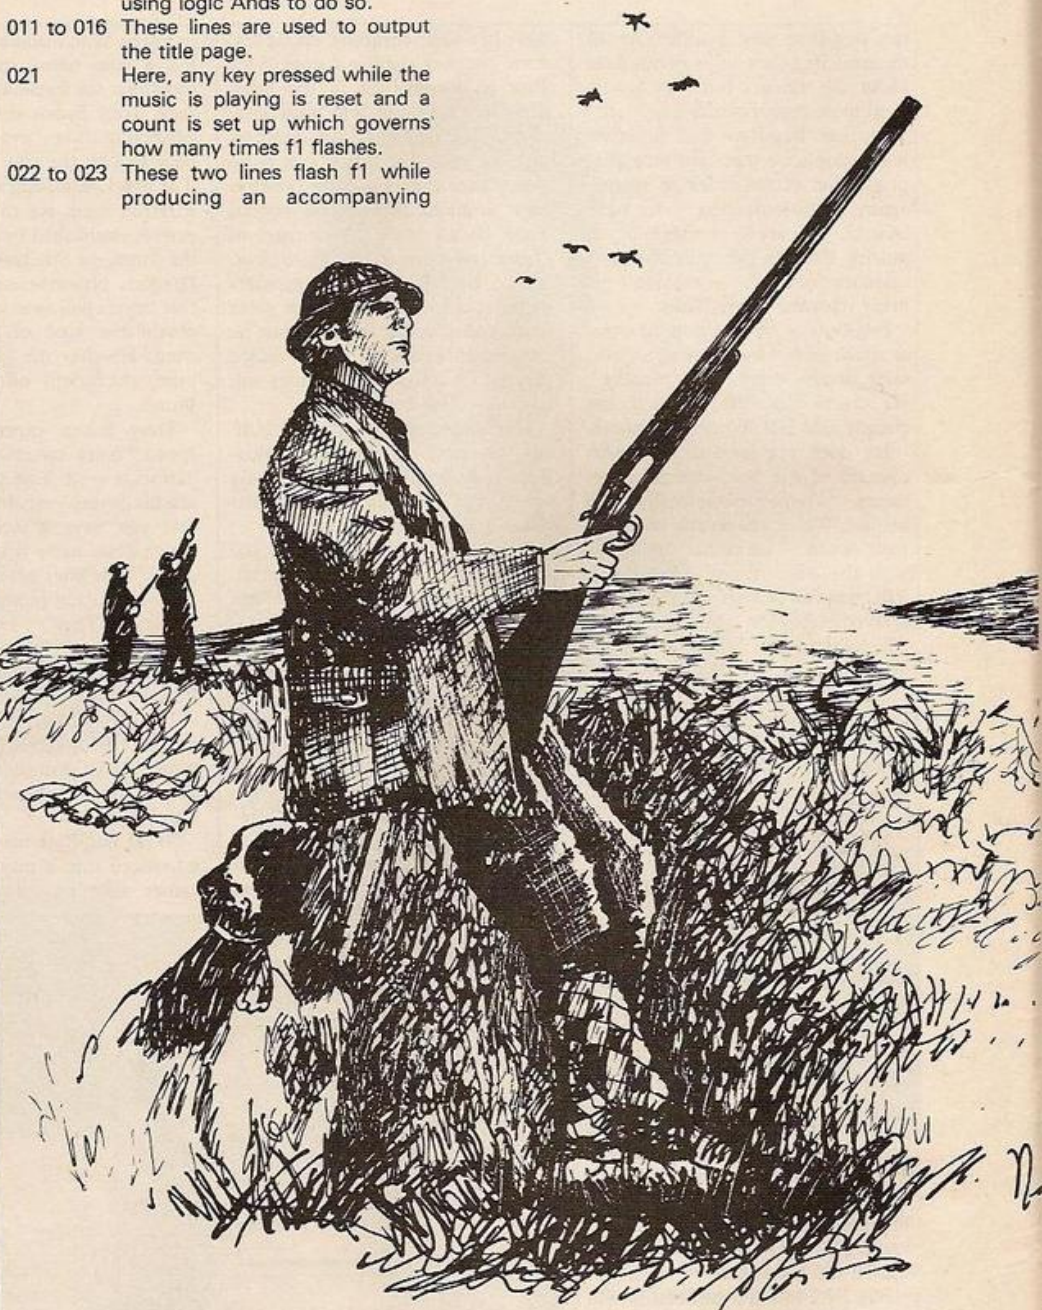


```

0 REM DAVID PROSSER
1 REM TU-4-5-82.
2 REM
3 REM
4 REM SHELDON HEATH.
5 REM
6 PRINT "DUCK SHOOT" : POKE36879,42
7 V=36878:S2=V-3:S3=V-2:NO=V-1
10 FORX=0TO21:POKE38400+X,(XAND7):POKE7680+X,160:POKE38884+X,(XAND7):POKE8164+X
160:NEXT
11 PRINT "DUCK SHOOT"
12 PRINT "FOR"
13 PRINT "VIC-20"
14 PRINT "BY DAVID PROSSER"
15 PRINT "SHELDON HEATH"

```


HOOT



bleeping sound to attract the user's attention.

224 Line 24 scans the keyboard and tests if the f1 key has been pressed.

226 The data pointer is reset so that the tune can be played again.

230 The quantity of games to be played is set by this line.

235 In this line the screen and border colours are changed to those used in the game, which is a green border and a purple screen.

240 The shape of the moon and of the duck.

245 to 260 Produces the rest of the picture.

270 This line controls how many attempts the user has to shoot the duck.

280 SP controls the intensity of the plot. The higher the intensity, the slower the plot is.

285 The angle at which the shell is fired is calculated here.

290 This line is used to plot each shell in a different colour.

295 TE is used as a logic variable so that if TE equals -1 the rest of the If Then statement is obeyed. If TE equals 0 then it is not.

300 This line works out the user's score in the form of a percentage so that the user can control and alter the amount of games.

210 to 215 These line flash the Y and the N on and off while also outputting a bleeping sound.

350 The colour of the duck's tail is changed three times, after the shell has hit it.

415 If the shell hits the duck on the nose or on the chest, the output is the same, the beak flashes on and off. If the shell hits the duck in the chest, then PO, the position, needs to have 22 subtracted to set PO to the position directly below the beak.

420 This line causes the duck's beak to flash.

500 This subroutine plays a tune.

600 Subroutine to move the duck.

615 Another line using logic. If T2 equals -1 then the line is obeyed otherwise the rest of the line is ignored.

700 This line makes the screen shake.

```

16 PRINT "PRESS <F1> TO BEGIN."
20 POKEV,15
21 POKE198,0:FORQ=1TO10
22 PRINT "*****<F1>*****":POKE83,225:FORDE=1TO150:NEXT:PRINT "*****<F1>*****"
23 POKE83,0:FORDE=1TO150:NEXT
24 GETA$:IFA$=CHR$(133)THEN27
25 NEXTQ
26 GOSUB500:GOTO21
27 CD$="*****":CR$="*****"
28 FORGAME=1TO5
35 PRINT "POKE36879,77
40 M$="*****":DU$="*****":P%=RND(1)*11+9:P2%=RND(1)*8+11
45 PRINTLEFT$(CD$,19),"*****"*****"*****":PRINT "*****";
50 PRINT "*****";
55 PRINT "LEFT$(CR$,P2%)DU$
60 PRINT "*****LEFT$(CR$,P2%)M$
65 POKEV,15
70 FORATTEMPT=1TO3
75 PRINT "*****"
80 INPUT "*****<20-90>";AN
85 IFAN<20ORAN>90THEN75
90 POKENO,130:FORDE=1TO200:NEXT:POKENO,0
95 IFAN>86THEENTE=-1
100 AG=91-AN:SP=AG/100
105 AN=AG/6.42598497
110 FORX=0TO22STEPSP
111 Y=20*SIN(X/AN)
112 POKE83,231+Y:POKEV,15-.65*Y
113 Y=22-Y
114 IFY>22THEN170
115 Y=INT(Y):Y=22*Y
120 PO=7680+X+Y:C=30720+PO
125 IFPEEK(PO)=320RPEEK(PO)=46THEN160
130 POKE83,0:IFX<11ANDY>330THEN170
135 IFY<330THEN250
140 IFPEEK(PO)=254ORPEEK(PO)=225THEN400
145 IFPEEK(PO)=123THEN335
150 IFPEEK(PO)=160THEN231
155 GOTO180
160 POKEC,ATTEMPT:POKEPO,46
165 NEXT
170 POKE83,0
175 IFTETHENPRINT "YOU SHOT YOURSELF !!":TE=0:GOTO700
180 NEXTATTEMPT
190 NEXTGAME
195 FORDE=1TO1000:NEXT:PRINT "POKE36879,42:PRINT "*****SCORE:*****"
197 PERCENT=NU/(GAME-1)*100
200 PRINT "YOU HAVE SCORED:"PRINT "*****PERCENT%"
210 POKEV,15:FORQ=1TO5:PRINTLEFT$(CD$,15)"*****ANOTHER GO(*****)?":POKE83,225
212 FORDE=1TO150:NEXT:POKE83,0:PRINT "*****N"
215 FORDE=1TO150:NEXTDE,0:POKE198,0
216 GETA$:IFA$=""THEN216
217 IFA$="Y"THENRND
218 IFA$<"N"THEN210
219 END
221 PRINT "*****DEAD!!"
225 PRINTLEFT$(CD$,14)"*****I.P.*****"
240 GOSUB500:NU=NU+1
245 GOTO190
250 POKEV,15
255 IFP%-P2%>2ANDP%-P2%<3THENPRINT "*****IT'S GONNA HIT ME !!":FORDE=1TO150:NEXT:TE=-1:GOSUB600
300 FORX=5TO16:PRINTLEFT$(CD$,X)LEFT$(CR$,P2%)*****"LEFT$(CD$,X+1)LEFT$(CR$,P2%)M$
305 POKE83,X+237:FORDE=1TO20:NEXTDE
310 NEXT
315 POKE83,0
316 PRINT "*****MISSED!!"
320 POKENO,180:FORL=1TO1:FORN=9TO0STEP-1:POKEV,N:FORN=1TO75:NEXTN
325 NEXTM,L:POKENO,0:POKE83,0
330 GOTO190
335 PRINT "*****CHECKY!!"
340 POKEV,15:FORL=148TO220STEP.7:POKE82,L:NEXTL:FORL=128TO200:POKE82,L:NEXTL
345 FORL=200TO128STEP-1:POKE82,L:NEXTL:POKE82,0
350 FORI=0TO2:POKEC,I:FORDELAY=1TO500:NEXTDELAY:NEXT
355 GOSUB600:GOTO170
400 PRINT "*****OUCH!!"
405 POKEV,15:POKE82,148:FORDE=1TO200:NEXTDE:POKE82,0:FORDE=1TO60:NEXTDE
410 POKE82,128:FORDE=1TO450:NEXTDE:POKE82,0
415 IFPEEK(PO)=225THENPO=PO-22
420 FORI=1TO3:POKEPO,225:FORDELAY=1TO500:NEXT:POKEPO,254:FORDELAY=1TO500:NEXTDE
LAY:NEXT
425 GOSUB600:GOTO170
500 RESTORE
501 POKEV,15
505 FORW=1TO26+EX:READN,D
515 POKE82,N:POKE83,N
520 FORDE=1TOD*65:NEXTDE
525 POKE82,0:POKE83,0:FORDE=1TO5*D:NEXTDE
530 NEXTW:RETURN
535 DATA187,4,187,4,201,2,201,4,201,2,195,2,195,2,183,2,163,2,175,6,163,1,175,1,183,2
540 DATA195,2,195,2,201,2,195,2,183,2,163,3,175,1,183,2,183,2,175,2,175,2,163,6,0,12
600 PRINTLEFT$(CD$,21)LEFT$(CR$,P2%)*****"
605 DI=1
610 IFP2%>15THENDI=-1
615 IFT2THENT2=0:P2%=P2%+DI*4:GOTO625
620 P2%=P2%+DI*RND(1)*4
625 PRINTLEFT$(CR$,P2%)DU$:RETURN
700 POKEV,15:FORX=15TO0STEP-.3:POKE36880,RND(1)*3+11:POKE36881,RND(1)*2+37:POKE83,160+X
701 FORDE=1TO10:NEXTDE,X:POKENO,0:GOTO190

```


Complete Sinclair ZX81 BASIC Course

At last, a comprehensive text for your Sinclair ZX81! The complete BASIC Course is a manual which will immediately become an indispensable work of reference for all your ZX81 programming.

Whether you have never done any programming or whether you are an experienced microcomputer user, the Complete BASIC Course will provide an invaluable aid.

Not Only 30 Programs for the Sinclair ZX81: 1K —

Not only over 30 programs, from arcade games to the final challenging Draughts playing program, which all fit into the unexpanded 1K Sinclair ZX81 but also notes on how these programs were written and special tips! Great value!

Machine Language Programming Made Simple for the Sinclair —

A complete beginner's guide to the computer's own language — Z80 machine language. Machine language programs enable you to save on memory and typically give you programs that run 10-30 times faster than BASIC programs.

ZX81 ROM Disassembly Part A

This book is for the programmer that needs complete answers about the ZX81. Dr. Logan has examined all routines in the ROM and here he comments on each one. It covers all ROM locations from 0000H to 0F54H, and includes all functions except for the routines used in the floating point calculator.

Understanding Your ZX81 ROM

A brilliant guide for more experienced programmers by Dr. Ian Logan, this book illustrates the Sinclair's own operating system and how you can use it.

SPECIAL OFFER!
FREE BLANK CASSETTE
WITH EVERY BOOK

The Essential Software Company

We are pleased to announce the opening of our new shop at the **TECHNICAL LEISURE CENTRE**, 1, GRANGWAY, KILBURN, LONDON, NW6.

NEWS



Come and see our exciting range for ZX81, TRS80 VIDEO GENIE

OUR GREAT NEW CATALOGUE IS NOW AVAILABLE

SEND S.A.E.

Order Form:

Orders to
The Essential Software Company, Dept BT
(Visconti Ltd.)
47 Brunswick Centre, London WC1N 1AF

NAME:

ADDRESS:

Postcode

The Complete Sinclair ZX 81 BASIC Course	£17.50	<input type="checkbox"/>
Basic Course		
Programs on Cassette	£ 2.50	<input type="checkbox"/>
Sinclair ZX 81 ROM Disassembly		
Part A - 0000H-0F54H	£ 7.00	<input type="checkbox"/>
Not Only 30 Programs/Sinclair ZX 81:1K	£ 6.95	<input type="checkbox"/>
Machine Language		
Programming Made Simple	£ 8.95	<input type="checkbox"/>
Understanding Your ZX 81 ROM	£ 8.95	<input type="checkbox"/>
Postage and Packing	£ 0.70	
Remittance enclosed		<input type="checkbox"/>



Labyrinth places you in a maze of gigantic proportions. But you are not alone! A minotaur searches for you, seeking a grisly meal. You must find weapons, spells, and treasures. You must deal with ghosts and cave gnomes. You must avoid the minotaur until the moment is right for the final battle. **TAPE £10⁹⁵**

3D-Adventures

TRS80 VIDEO GENIE

3-D means that as you wander through the mazes and buildings, a full screen graphic display constantly shows your position in a perspective format as though you were actually there! This "rat's eye" view adds an entirely new dimension to adventure.

English language commands can be entered at any time to manipulate your environment. The command sets are extensive and sophisticated.

Deathmaze 5000 and Labyrinth allow the traditional one and two word commands. Asylum incorporates our Advanced Language Interpreter (ALI), which allows full sentence input. Deathmaze and Labyrinth consist of over 550 locations! Asylum tops 1200 locations!

Deathmaze 5000 places you on the top floor of a five storey building. Each floor is a maze of twisting passageways. Floors are connected by elevators and open pits. You have but one goal.

ESCAPE ALIVE! Where is the only door out of this nightmare?

Monsters, bats, mad dogs, hunger, and many more horrors plague your every step as you struggle to escape. **TAPE £10⁹⁵**

Asylum places you on a cot in a small room. Periodically, a janitor lobbs a hand-grenade through the window of your locked door. What you do next could mean survival and escape! It could also mean permanent residence in the home for Deathmaze survivors! To leave, you will have to deal with guards, fellow survivors, doctors, the infamous Crazy Carpenter, and much, much more. Don't expect to get out any time soon! **TAPE £12**

THE ESSENTIAL SOFTWARE COMPANY
(Visconti Ltd.)

47 Brunswick Centre, London WC1N 1AF

I have a _____ microcomputer

Please send me your software catalogue I enclose a stamped self addressed envelope.

Please send me _____

I enclose a cheque / postal order for £ _____ (plus 70p post & packing)

Signature _____

Name _____

Address _____

Postcode _____

My ACCESS No is _____



TAURUS COMPUTER DESIGN

Our SPECTRUM games are now available (Mastermind, Atoms, L-Game, etc.)

SPECTRUM utilities available soon. Write for details.

Our product range for the ZX81 is as follows:

TAURUS 8K PROMCARD

- Fills memory space 8K-16K
- Housed within ZX81 case—easy installation
- Link selectable: 7K PROM+1K RAM or 8K PROM (2x2732)
- Ideal home for TAURUS SOLID SOFTWARE®

TAURUS 16K RAMPACK

- User switchable: Model A 16K RAM or 14K RAM+2K PROM (2716)
- Model B 16K RAM or 12K RAM+4K PROM (2732)
- Flexible connection to ZX81—eliminates memory wipeout
- Rugged construction—proven high quality design
- Ideal home for TAURUS SOLID SOFTWARE®

TAURUS MACHINE-CODE MONITOR

Version 1:

- 16 user utility commands
- Optimised for developing and testing machine code
- Available as TAURUS SOLID SOFTWARE® on all TAURUS hardware products
- Also available on cassette

Version 2:

- As Version 1+MACHINE CODE DISASSEMBLER
- Displays address, hex instruction bytes, source code
- Standard X-80® mnemonics
- Relative jumps shown with absolute addresses
- Also available on cassette

GRAPHICS EDITOR

- Make your own character shapes—whatever you want!
- Includes routine for switching character sets
- Two new character sets provided (including lower case)
- Available as TAURUS SOLID SOFTWARE®

MACHINE-CODE ASSEMBLER

- Standard Z-80® mnemonics
- Optimised for ZX81 keyboard layout
- Up to 256 user-definable labels
- Available as TAURUS SOLID SOFTWARE®
- Also available on cassette

PRODUCT SUMMARY

	16K RAMPACK	8K PROMCARD	Cassette
	Model A	Model B	
(Hardware only)	£36.00	£38.00	£25
MONITOR Version 1	£45.00	—	£8 per EPROM
MONITOR Version 2	—	£49.00	£8.50
ASSEMBLER	—	—	£12 per EPROM
GRAPHICS EDITOR	—	—	£6.50

Send for details or cheque with order to:

TAURUS COMPUTER DESIGN
47 High Street, Baldock,
Hertfordshire SG7 6BG
Telephone Baldock (0462) 893900

16K

ZX81

NOW A GOBBLER FOR THE ZX81

X-MEN GOBBLE YOUR WAY AROUND THE MAZE WHILE THE 4 X-MEN LEAVE THEIR DEN AND TRY TO CATCH YOU. GOBBLE UP A STAR AND IT'S YOUR TURN TO CATCH THEM.
CONTINUOUS SCORING, HIGH SCORE, BONUS OFFERED, 3 LIVES.

TRAP SURROUND YOUR OPPONENT (COMPUTER OR HUMAN) BEFORE HE SURROUNDS YOU.
12 VARIATIONS.

HUNT A MAZE GAME FOR ONE OR TWO PLAYERS WITH 48 VARIATIONS AND 30 FULL SCREEN MAZES IN ONLY 5K.

UFO PLENTY OF ACTION IN THIS HIGHLY ADDICTIVE SHOOTING GAME.

£4.95 PER GAME
ON CASSETTE

ALL GAMES IN
MACHINE CODE

AMBA
SOFTWARE

13 CHERRY BOUNDS RD
GIRTON
CAMBRIDGE CB3 0JT
TELEPHONE
CAMBRIDGE 277364
EVENINGS & WEEKENDS

ZX Spectrum 20 Programs £6.95

The ZX Spectrum has brought advanced computing power into your home. The Cambridge Colour Collection, a book of 20 programs, is all you need to make it come alive.

No experience required. Simply enter the programs from the book or load them from tape (£2.95 extra) and run.

Amazing effects. All programs are fully animated using hi-res graphics, colour and sound wherever possible.

Entirely original. None of these programs has ever been published before.

Proven Quality. The author already has 30,000 satisfied purchasers of his book of ZX81 programs.

Hours of entertainment

● **Lunar Landing.** Control the angle of descent and jet thrust to steer the lunar module to a safe landing on the moon's surface.

● **Maze.** Find your way out from the centre of a random maze.

● **Android Nim.** Play the Spectrum at the ancient game of Nim using creatures from outer-space.

● **Biorhythms.** Plot the cycles of your Emotional, Intellectual and Physical activity. Some would say this is not a game at all.

Improve your mind

● **Morse.** A complete morse-code training kit. This program will take a complete beginner to R.A.E. proficiency.

● **Maths.** Adjustable to various levels, this program is an invaluable aid to anyone trying to improve their arithmetic.

Run your life more efficiently

● **Home Accounts.** Keeping track of your finances with this easy-to-use program will enable you to see at a glance where the money goes and plan your spending more effectively.

● **Telephone Address Pad.** Instant access to many pages of information.

● **Calendar.** Displays a 3 month calendar past or future, ideal for planning or tracing past events.

ORDER FORM:

Send Cheque or P.O. with order to:-

Dept. C., Richard Francis Altwasser, 22 Foxhollow, Bar Hill, Cambridge CB3 8EP

Please send me

- ☐ Copies Cambridge Colour Collection Book only £6.95 each.
☐ Copies Cambridge Colour Collection Book & Cassette £9.90 each

Name: _____

Address: _____

William Masefield's ZX-81 program effectively simulates the spread of disease and the predator-prey relationship.

A NUMBER of programs have been published, based on Life, in which a colony of cells is made to proliferate and ultimately die off. None that I have seen does much more than this. Yet with a little extra programming, it is possible to use the basic concept of Life to create a series of ecological and epidemiological models which, while not being perfect, can be used in a classroom to illustrate some of the elementary concepts in ecology.

The first model deals with the spread of a disease in, say, a woodland plantation, and the second models the predator-prey relationship, with spiders and flies as the protagonists.

Taking the first model, the program asks for the initial number of normal, healthy trees in the plantation — a maximum of 100 — then the number of trees that may be immune to the disease — a maximum of 100 less the number of healthy normal trees — and finally the number of diseased trees — 100 less the sum of the other trees.

The program then plants these trees randomly in a 10-by-10 matrix, using a different symbol for each kind of individual. The matrix is then displayed within a black border and the numbers of each kind printed alongside, together with the cycle number, which will be zero at the start — see figure 1.

On keying Newline, the first cycle is initiated. What the program does now is to interrogate each cell of the matrix in turn to find out what kind of tree, if any, occupies it, and what its neighbours are on the north, south, east and west sides.

For our purposes, the diagonal neighbours are not considered near enough to have any influence.

This is where the ideas borrowed from Life play a role: if the number of neighbours of a normal or immune tree are three or four, then the tree is overcrowded and dies; its matrix cell is reset to zero; if the number of neighbours is less than two, then the normal and immune trees reproduce — that is, a new tree of the same kind is placed at random in an empty cell of the matrix.

However, if the cell being interrogated is occupied by a diseased tree, the disease is

spread to a random matrix cell. Should that cell be empty or occupied by an immune tree, nothing happens, but if the cell has a normal tree, then that tree becomes diseased. Finally, diseased trees have a limited life-span, dying off after four cycles, whether overcrowded or not.

After interrogation of all the cells of the field, the new state of affairs is displayed, together with the counts of normal, immune and diseased trees in the field. These numbers are also stored for later display in histogram and tabular forms. The cycle is now repeated as many times as necessary until the disease dies out — which it will not do if there are no immune trees to start with, in which case the disease becomes endemic.

Figures 2 and 3 show the position after 10 and 20 cycles and figure 4 the final field for a run which started with 50 normal, 10 immune and five diseased trees. Obviously, the number of cycles will depend on the starting conditions, and on the randomness of the propagation process, but the general trend is always the same.

After cycling for the required time, the results of the experiment can be displayed as a

ECOLOGICAL MODELLING

```

5 REM ECOLOGICAL EXPERIMENTS.
6 REM COPYRIGHT W.R.MASEFIELD
1982
10 CLEAR
15 CLS
20 PRINT TAB 5;"ECOLOGICAL EXP
ERIMENTS"
30 PRINT
40 PRINT TAB 9;"PROGRAM"
50 PRINT
60 PRINT "SPREAD OF DISEASE IN
A"
70 PRINT "WOODLAND PLANTATIO
N"
80 PRINT
90 PRINT "SPIDERS AND FLIES"
100 PRINT "PREDATOR AND PREY
)"
110 PRINT
120 INPUT A$
130 DIM A(120)
140 CLS
150 LET N$="PRESS NEWLINE TO CO
NTINUE"
160 IF A$="A" THEN GOTO 1000
170 IF A$="B" THEN GOTO 3000
180 STOP
190 REM "SPREAD OF DISEASE"
200 PRINT AT 3,2;"AT 3,13;"
210 AT 3,15;"CYCLE NO.:"AT 14,2;"
220 AT 14,13;"
230 PRINT AT 15,0;N$;"H FOR HI
STOGRAM, T FOR TABULATED RES-
ULTS E FOR NEW EXPERIMENT, I
FOR PROGRAM INDEX"
240 FOR I=3 TO 12
250 PRINT AT 3,I;"":AT 14,I;"
260 NEXT I
270 FOR I=4 TO 13
280 PRINT AT I,2;"":AT I,13;"
290 NEXT I
300 PRINT AT 0,0;B$
310 RETURN
320 REM "SPREAD OF DISEASE"
330 FOR I=1 TO 10
340 LET A(I)=0
350 LET A(I+110)=0
360 NEXT I
370 RETURN
380 REM "SPREAD OF DISEASE"
390 CLS
400 LET B$="SPREAD OF DISEASE I
N A WOODLAND"
410 PRINT B$
420 PRINT
430 PRINT "ENTER NO. OF NORMAL
TREES (MAX. 100)";
440 INPUT N
450 PRINT N
460 PRINT
470 PRINT "NO. OF IMMUNE TREES
(MAX. 100-N)";
480 INPUT M
490 PRINT M
500 PRINT
510 PRINT "NO. OF DISEASED TREE
S (MAX. 100-N-M)";
520 INPUT D

```

```

1120 PRINT D
1130 PRINT
1140 INPUT A$
1150 IF A$=" " THEN STOP
1160 REM "SPREAD OF DISEASE"
1170 CLS
1180 GOSUB 200
1190 DIM N(200)
1200 DIM M(200)
1210 DIM D(200)
1220 FOR J=1 TO N
1230 LET R=INT (RND*100+1)+10
1240 IF A(R)<>0 THEN GOTO 1270
1250 LET A(R)=11
1260 NEXT J
1270 FOR J=1 TO M
1280 LET R=INT (RND*100+1)+10
1290 IF A(R)<>0 THEN GOTO 1330
1300 LET A(R)=12
1310 NEXT J
1320 FOR J=1 TO D
1330 LET R=INT (RND*100+1)+10
1340 IF A(R)<>0 THEN GOTO 1330
1350 LET A(R)=13
1360 NEXT J
1370 IF D=0 THEN GOTO 1430
1380 FOR J=1 TO D
1390 LET R=INT (RND*100+1)+10
1400 IF A(R)<>0 THEN GOTO 1390
1410 LET A(R)=13
1420 NEXT J
1430 CLS
1440 GOSUB 1435
1450 GOTO 1520
1460 LET I=11
1470 LET N=0
1480 LET M=0
1490 LET D=0
1500 FOR J=4 TO 13
1510 FOR K=3 TO 12
1520 IF A(I)=11 THEN PRINT AT J,
K;"O";
1530 IF A(I)=12 THEN PRINT AT J,
K;"I";
1540 IF A(I)=13 THEN PRINT AT J,
K;"D";
1550 IF A(I)=0 THEN PRINT AT J,K
;" ";
1560 IF A(I)=11 THEN LET N=N+1
1570 IF A(I)=12 THEN LET M=M+1
1580 IF A(I)=13 THEN LET D=D+1
1590 LET N(C)=N
1600 LET M(C)=M
1610 LET D(C)=D
1620 LET I=I+1
1630 NEXT K
1640 NEXT J
1650 RETURN
1660 PRINT AT 3,24;C-1;AT 5,15;"
O NORMAL "AT 6,15;"I IMMUNE
"AT 7,15;"D DISEASED "
1670 INPUT A$
1680 IF A$="H" THEN GOTO 1600
1690 IF A$="T" THEN GOTO 2200
1700 IF A$="E" THEN GOTO 1000
1710 IF A$="I" THEN GOTO 1000
1720 STOP
1730 PRINT AT J+1,0;"END"
1740 GOTO 2100
1750 PRINT AT J+1,15;"END"
1760 GOTO 2100
1770 REM "HISTOGRAM"
1780 CLS
1790 LET N=0
1800 LET M=0







```

```

1810 LET D=0
1820 PRINT AT 5,26;"":AT 6,26;"
":AT 7,26;"
1830 FOR I=11 TO 110
1840 IF A(I)=0 THEN GOTO 1790
1850 LET Y=INT (A(I-10)/10)+INT
(A(I+10)/10)+INT (A(I-1)/10)+INT
(A(I+1)/10)
1860 IF A(I)=11 OR A(I)=12 AND
Y>2 THEN LET A(I)=0
1870 IF A(I)=0 THEN GOTO 1790
1880 IF Y<2 THEN LET R=INT (RND*
100+1)+10
1890 IF A(I)=11 AND A(R)=0 THEN
LET A(R)=11
1900 IF A(I)=12 AND A(R)=0 THEN
LET A(R)=12
1910 IF A(I)=13 AND A(R)=11 THEN
LET A(R)=13
1920 IF A(I)=13 THEN LET A(I)=A
(I)+1
1930 IF A(I)=16 THEN LET A(I)=0
1940 NEXT I
1950 LET C=C+1
1960 LET Q=C
1970 GOSUB 1435
1980 PRINT AT 3,24;C-1;AT 5,26;N
;AT 6,26;M;AT 7,26;D
1990 GOSUB 300
2000 GOTO 1530
2010 REM "HISTOGRAM"
2020 CLS
2030 PRINT AT 0,0;B$
2040 PRINT AT 1,0;"C N I D
"
2050 PRINT AT 15,0;N$
2060 PRINT AT 19,6;"H FOR HISTOG
RAM";AT 20,6;"E FOR NEW EXPERI
MENT"
2070 PRINT AT 21,6;"I FOR INDEX"
2080 FOR J=1 TO 16
2090 PRINT AT J,15;" ";
2100 NEXT J
2110 LET C=2
2120 FOR J=2 TO 16
2130 PRINT AT J,0;C-1;AT J,4;N(C
);AT J,8;M(C);AT J,12;D(C)
2140 LET C=C+1
2150 IF C>0 THEN GOTO 2160
2160 NEXT J
2170 FOR J=2 TO 16
2180 PRINT AT J,17;C-1;AT J,21;N
(C);AT J,25;M(C);AT J,29;D(C)
2190 LET C=C+1
2200 IF C>0 THEN GOTO 2180
2210 NEXT J
2220 INPUT A$
2230 IF A$="H" THEN GOTO 2000
2240 IF A$="T" THEN GOTO 2200
2250 IF A$="E" THEN GOTO 1000
2260 IF A$="I" THEN GOTO 1000
2270 STOP
2280 PRINT AT J+1,0;"END"
2290 GOTO 2100
2300 PRINT AT J+1,15;"END"
2310 GOTO 2100
2320 REM "HISTOGRAM"
2330 CLS

```

(listing continued on page 48)

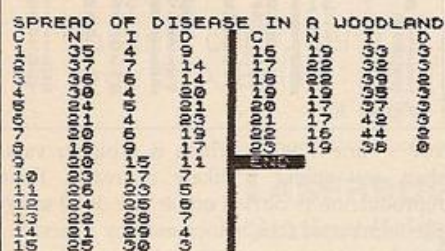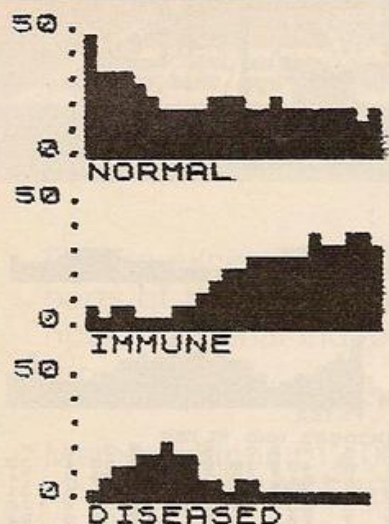

histogram — figure 5 — or as a table of counts for pupils to make their own graphs — figure 6.

It is possible to elaborate this program so that the disease is spread only to immediate neighbours, for instance, or to prolong the life-span of diseased trees, and so on.

The second model concerns spiders and flies, and the prey and predator relationship. The basic idea is the same: the program asks for the initial number of flies — a maximum of 50 — and spiders — a maximum of 20 — and these are scattered at random in the 10-by-10 field. This initial field and the counts are displayed — figure 7.


The same kind of interrogation of each cell is then carried out, but the manipulation is different: if a fly is unfortunate enough to be adjacent to a spider — north, south, east or west but not diagonally — then it is eaten. Otherwise, it is moved to another empty cell at random. A fly not adjacent to a spider is allowed to reproduce.

A constraint limits the number of new flies in each generation to half the number of parent flies, that is, a reproduction factor of 1.5, so that if there are 30 flies in one field, there will be 45 in the next.

Another limit ensures that there are not more flies than there are spaces in the matrix for them. All the flies are redistributed randomly, as they would be in life were they flying about.

The spiders, on the other hand, do not move, as they are supposed to be sitting in

(continued on next page)

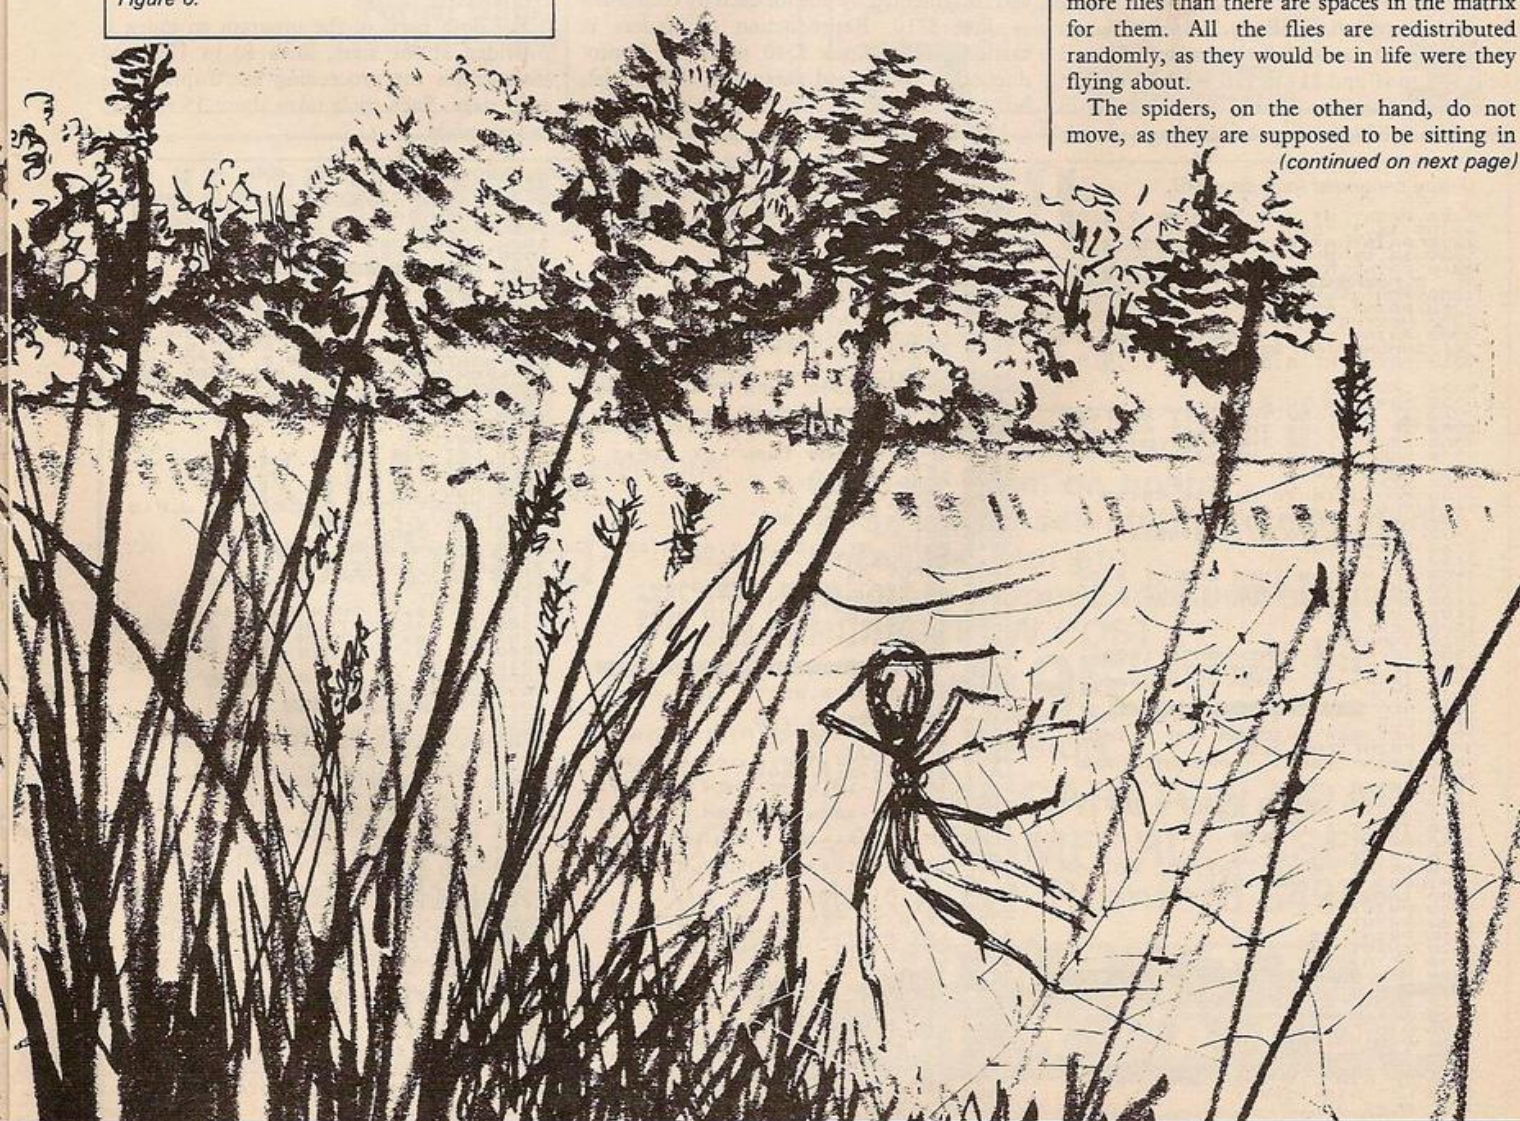

(continued from previous page)

their webs. Each spider, at the start of its life, is given a store of food, valued at three units, but this is depleted by one unit per cycle, and a spider with zero units dies. However, each fly it consumes increments its food store by one unit.

If a spider reaches a value greater than six, it reproduces, the offspring being set at random in the field, and both it and its parent are given the starting value of three units.

At the end of each cycle the field and counts are displayed, and the process repeated for as many cycles as required. Figures 8 and 9 show the 10th field and the 50th, and figure 9 shows the histograms. In this particular run, starting with 50 flies and five spiders, there has been a cyclic fluctuation in the populations and the peaks are staggered as they would be in nature.

Other starting figures will give different degrees of fluctuation and if there are too few flies or too many spiders at the start, the spiders can actually die out. It is assumed that the flies' food source is inexhaustible.

Although the displayed field is a 10-by-10 matrix, the actual field is 10-by-12. The reason for this is as follows: in the interrogation of, say, the j th cell, we have to look at the adjacent cells, $j-10$, $j+10$, $j-1$ and $j+1$ — the diagonal cells are not considered.

Now, if we wanted to interrogate cell 4, say, of a 10-by-10 matrix, we should have to look at cell 4-10, which does not exist and would crash the program. Similarly, cell 93+10, say, does not exist; so we have two rows of guard cells — 1 to 10 and 111 to 120 — which are not interrogated and are cleared on each cycle in lines 300 to 350, leaving the interrogated cells




Figure 7.

SPIDERS AND FLIES




Figure 8.

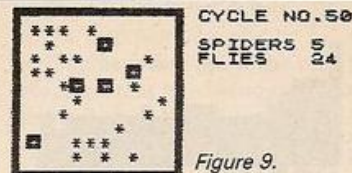


Figure 9.

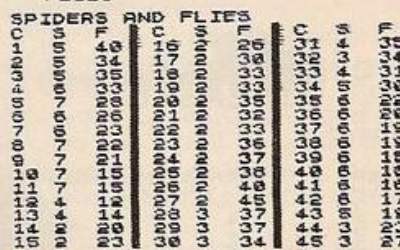
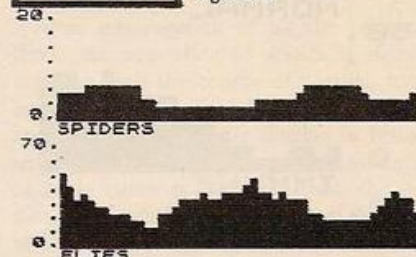


Figure 10.

as 11 to 110. Note that the left and right sides of the field are, in effect, contiguous, so that the field is really cylindrical. This does not invalidate the models in any way.

In the woodland program, normal, immune and diseased trees are distinguished by giving the cells values 11, 12 and 13 respectively — lines 1260 to 1420 — and the number of neighbours is determined by the sum of the tens digits in the adjacent cells — line 1760. The various operations on the cells are carried out in lines 1680 to 1790.

In the spiders and flies program, spiders are given an initial value of three — line 3350 — and this is decremented on each cycle by one, and incremented by one for each fly consumed — line 3710. Reproduction of spiders is carried out in lines 3740 to 3760. Reproduction is considered asexual in this model, but a sexual method could be incorporated.

Matrix cells with flies are given a value of

100 — line 3290 — which is a higher value than any spider is likely to reach. Flies' reproduction is carried out at line 3610 where the number of flies is increased by a factor of 1.5. It is interesting to experiment with other reproductive factors.

For both parts of the program an index is provided at the start, lines 40 to 170, and instructions for proceeding are displayed at each stage. Each cycle takes about 15 seconds in fast mode.

(listing continued from page 46)

```

3220 PRINT AT 0,1;"50";AT 7,1;"5
0";AT 14,1;"50"
3230 PRINT AT 5,2;"0";AT 12,2;"0
";AT 19,2;"0"
3240 PRINT AT 21,0;"E FOR NEW EX
PT. I FOR INDEX"
3250 FOR I=1 TO 19
3260 PRINT AT I,3;".";
3270 NEXT I
3280 PRINT AT 6,4;"NORMAL";AT 13
,4;"IMMUNE";AT 20,4;"DISEASED"
3310 PRINT AT 6,3;" ";AT 13,3;"
"
3320 LET X=5
3330 FOR I=1 TO 0
3340 IF N(I)>50 THEN LET N(I)=50
3350 IF M(I)>50 THEN LET M(I)=50
3360 IF D(I)>50 THEN LET D(I)=50
3370 FOR J=32 TO N(I)*9/50+32
3380 PLOT X,J
3390 NEXT J
3400 FOR J=15 TO M(I)*9/50+18
3410 PLOT X,J
3420 NEXT J
3430 FOR J=4 TO D(I)*9/50+4
3440 PLOT X,J
3450 NEXT J
3460 IF N(I)=0 THEN UNPLOT X,32
3470 IF M(I)=0 THEN UNPLOT X,18
3480 IF D(I)=0 THEN UNPLOT X,4
3490 LET X=X+1
3500 NEXT I
3510 INPUT A$
3520 IF A$="E" THEN GOTO 1000
3530 IF A$="I" THEN GOTO 10
3540 IF A$="T" THEN GOTO 1900
3550 STOP
3600 REM SPIDERS AND FLIES
3605 CLS
3610 LET B$="SPIDERS AND FLIES"
3620 PRINT TAB 7;B$
3630 PRINT TAB 7;"(PREDATOR AND
PREY)"
3635 PRINT
3640 PRINT "ENTER INITIAL NO. OF
FLIES (MAX. 50)";
3650 INPUT F
3660 PRINT F
3665 PRINT
3670 PRINT "ENTER INITIAL NO. OF
SPIDERS (MAX. 20)";
3680 INPUT S
3690 PRINT S
3700 PRINT
3710 PRINT N$
3720 INPUT A$
3730 IF A$="" THEN STOP
3740 REM SPIDERS AND FLIES
3745 CLS
3750 GOSUB 200
3760 DIM F(200)
3770 DIM S(400)
3780 FOR J=1 TO F
3790 LET R=INT (RND*100+1)+10
3800 IF A(R)<>0 THEN GOTO 3270
3810 LET A(R)=100
3820 NEXT J

```

```

3320 FOR J=1 TO 5
3330 LET R=INT (RND*100+1)+10
3340 IF A(R)<>0 THEN GOTO 3330
3350 LET A(R)=3
3360 NEXT J
3370 LET C=1
3380 GOSUB 3400
3390 GOTO 3540
3400 LET I=1
3410 LET F=0
3420 LET F=0
3430 FOR J=4 TO 13
3440 FOR K=3 TO 12
3450 IF A(I)=0 THEN PRINT AT J,K
" "
3455 IF A(I)=0 THEN GOTO 3492
3460 IF A(I)<100 THEN PRINT AT J
,K;" "
3470 IF A(I)<100 THEN LET S=S+1
3480 IF A(I)=100 THEN PRINT AT J
,K;" "
3490 IF A(I)=100 THEN LET F=F+1
3492 LET I=I+1
3494 NEXT K
3500 NEXT J
3510 LET F(C)=F
3520 LET S(C)=S
3530 RETURN
3540 PRINT AT 3,24;C-1;AT 5,15;"
SPIDERS ";S;AT 6,15;"FLIES ";F
3550 INPUT A$
3560 IF A$="E" THEN GOTO 3600
3570 IF A$="H" THEN GOTO 4300
3580 IF A$="T" THEN GOTO 3000
3590 IF A$="I" THEN GOTO 4000
3595 STOP
3600 REM SPIDERS AND FLIES
3605 CLS
3610 PRINT AT 5,23;" ";AT 6,23;"
"
3640 FOR I=11 TO 110
3650 IF A(I)=100 OR A(I)=0 THEN
GOTO 3770
3660 LET X=INT ((A(I-10)+A(I+10)
+A(I-1)+A(I+1))/100)
3670 IF A(I-10)=100 THEN LET A(I
-10)=0
3680 IF A(I+10)=100 THEN LET A(I
+10)=0
3690 IF A(I-1)=100 THEN LET A(I
-1)=0
3700 IF A(I+1)=100 THEN LET A(I
+1)=0
3710 LET A(I)=A(I)+X-1
3720 LET F=F-X
3730 IF A(I)/6 THEN GOTO 3770
3740 LET A(I)=3
3750 LET R=INT (RND*100+1)+10
3760 LET A(R)=3
3770 NEXT I
3780 FOR I=11 TO 110
3790 IF A(I)=100 THEN LET A(I)=0
3800 NEXT I
3810 LET F=F+INT (F/2)
3820 IF F=0 THEN GOTO 3880
3830 IF F/100<5 THEN LET F=100-S
3840 FOR J=1 TO F
3850 LET R=INT (RND*100+1)+10
3860 IF A(R)=0 THEN LET A(R)=100
3870 NEXT J

```

```

3880 LET C=C+1
3890 LET 0=C
3900 GOSUB 3400
3910 PRINT AT 3,24;C-1;AT 5,23;S
;AT 6,23;F
3920 GOSUB 300
3930 GOTO 3550
4000 REM SPIDERS AND FLIES
4005 CLS
4010 PRINT B$
4020 PRINT "C S F C S F
C S F"
4030 PRINT AT 18,0;"PRESS NEWLIN
E IF TABLE NOT FULL";AT 19,6;"H
FOR HISTOGRAM";AT 20,6;"E FOR NE
W EXPERIMENT";AT 21,6;"I FOR IND
EX"
4040 FOR I=1 TO 16
4050 PRINT AT I,0;" ";AT I,18;" "
4060 NEXT I
4070 LET C=2
4075 LET P=0
4080 FOR K=1 TO 3
4090 FOR J=2 TO 16
4100 PRINT AT J,P+9;C-1;AT J,P+3
;S(C);AT J,P+5;F(C)
4110 LET C=C+1
4120 IF C>0 THEN GOTO 4220
4130 NEXT J
4140 LET P=P+10
4150 NEXT K
4160 INPUT A$
4170 IF A$="E" THEN GOTO 4075
4180 IF A$="H" THEN GOTO 4300
4190 IF A$="T" THEN GOTO 3000
4200 IF A$="I" THEN GOTO 10
4210 STOP
4220 PRINT AT J+1,P;" ";
4230 GOTO 4160
4300 REM SPIDERS AND FLIES
4310 CLS
4320 PRINT AT 0,0;20;AT 7,1;0;AT
10,0;70;AT 17,1;0;AT 8,3;"SPIDE
RS";AT 18,3;"FLIES"
4330 PRINT AT 20,0;"PRESS T FOR
TABLE E FOR NEW EXPT";AT 21,6;"I
FOR INDEX"
4340 FOR J=0 TO 17
4350 PRINT AT J,2;".";
4360 NEXT J
4400 PRINT AT 9,2;" ";AT 8,2;" "
4410 LET X=5
4420 FOR I=1 TO 0
4430 IF F(I)/70 THEN LET F(I)=70
4440 IF S(I)/20 THEN LET S(I)=20
4450 FOR J=26 TO S(I)*14/20+28
4460 PLOT X,J
4470 NEXT J
4480 FOR J=3 TO F(I)*14/70+8
4490 PLOT X,J
4500 NEXT J
4510 IF S(I)=0 THEN UNPLOT X,28
4520 IF F(I)=0 THEN UNPLOT X,8
4530 LET X=X+1
4540 NEXT I
4550 INPUT A$
4560 IF A$="E" THEN GOTO 3000
4570 IF A$="T" THEN GOTO 4000
4580 IF A$="I" THEN GOTO 10
4590 STOP

```




Due to excessive enquiries from all parts of the U.K., LASERBUG is now a national independent user group.

Membership is £12.00 per year for 12 issues of LASERBUG newsletter.

For trial copy, send £1.00 plus large S.A.E. (12" x 9") to:

LASERBUG
4 Station Bridge,
Woodgrange Road,
Forest Gate,
London E7 0NF.

A.S.P. Microsystems

PRICES INCLUDING VAT

ACORN ATOM

8K Rom + 2K Ram Assembled	£174.50
12K Rom + 12K Ram Assembled	£289.50
Mains Power supply unit	£9.20
Games Packs	£11.50
Acorn C15 Blank Cassettes	£0.70
Word Pack + Rom Text Editor, Word-Processor	£30.00
Introductory Package, 4 cassettes with booklet:	

(1) Interactive teaching	
(2) Financial Planning	
(3) Household	
(4) Games	£23.00

"Atomic Theory & Practice" Manual £8.60

"Atom Business Book" £7.55

"Practical Programs for the BBC Computer and the Acorn Atom" £7.55

D.J. Davies-Dee 1981 £287.50

BBC Basic Model 14" Monitor (Colour) £23.95

Ferguson 3T07 Cassette Recorder £1.55

3 pin to 3 pin DIN lead Free of Charge

Every Atom supplied with "Atomic Theory and Practice" Manual - Free of Charge

COMMODORE VIC 20

VIC-20 computer £189.00

VIC dot matrix 1515 Printer £229.95

VIC Cassette Deck £43.95

VIC Floppy Disk Unit £396.00

VIC Paddles £11.74

VIC Joysticks £7.50

VIC 3K Ram Cartridge £29.95

VIC 8K Ram Cartridge £44.95

VIC 16K Ram Cartridge £74.95

Programmers Aid Cartridge £34.95

Machine Code Monitor Cartridge £19.95

VIC Games Rom Cartridges each £14.95

Intro to Basic Part I £24.95

New VIC Games Rom Cartridges £19.95

"Mole Attack" Rom Cartridge £10.00

"VIC Revealed" Book £1.95

"Learn Computer Programming with the Commodore VIC" Book P.O.A.

Business/Utilities

BBC COMPUTERS

Model A (one only) £299.00

Model B £399.00

Mail Order Postage & Packing:

Orders below £7.00 add 75p. Between £7.01 & £15 add £1.00. Between £15.01 & £50 add

£1.75. Above £50.01 add £5.00.

QUALITY SOFTWARE FOR VIC-20 WANTED.

If you write programmes for the VIC-20 send your programmes on cassette to the

address below.

WE OFFER 15% Royalties.

Nearest Underground is Highbury & Islington, Victoria Line. Always telephone before



calling to check stock position.

185, Upper Street, Islington, London, N1 1RQ

(Opposite Town Hall)

Telephone: 01-359 9095

H.P. Facilities. Closed All Day, Thursday.

HIGH RESOLUTION!!

* Video Genie

* TRS80



* UK101

MAIL AND TELEPHONE
ORDERS ARE
WELCOME

* Superboard

At last a true HI RES system for your micro. Upgrade to the latest display formats, with colour option!

Available now, these units give you true HI RES at a realistic price. Acorn Atom compatible for the best graphics options, Graphs, 3D, Diagrams, Drawing etc. . . .

* Genie Version includes case and cable, just plug in and go!



OUR LAST ADVERTISEMENT — A CORRECTION

An error in our last advert showed this superb board as just 156 x 192 points. It is of course a full 256 x 192 plotable points!

- 256 x 192 Plotable points
- 6K User Ram, on board
- 11 Software selectable screen modes
- Software, plot etc
- Memory mapped low power Ram
- HI RES, LOW COST

£54.95 INC VAT

UK101 VERSION

**14 CARLTON ROAD
ROMFORD, ESSEX
Tel: Romford 64954**

**COMPUTER
USER AIDS**

USER-DEFINED

Mike Berry shows you how to prime those user-defined keys to eliminate some of programming's more laborious tasks.

COMPUTER TERMINALS used by professionals frequently have keys which can be set up by the programmer to generate functions which are used repeatedly. As a professional programmer, I was impressed to find that the BBC Micro provides such a facility.

User-defined keys are the red ones along the top of the keyboard labelled f0 to f9. Program 1's sole purpose in life is to set up the keys to perform useful tasks, leaving you to get on with more interesting problems. Keys are programmed by entering a command of the form

***KEYn**

followed by whatever you want the key to produce when you use it, the "n" is the number of the user-defined key. If you want to attach a Return to the end, you simply add the symbol "**|**", followed by the letter "M".

*Key0 Auto simply puts the keyword "Auto" on to the next line, where it waits for you to enter the starting line number and/or the increment. Although the default values for these are normally satisfactory, typing errors during program entry make it necessary to Escape from Auto so often that it is best to avoid including the line number and the "**|**M" on this key.

Just one touch of *Key1, Run|M starts your program.

The *Key2 Renumber|M command allocates new line numbers throughout your program, the defaults being 10 for the first line, and increments of 10 for subsequent lines. Statement numbers appearing in Goto and Gosub branches are cleverly adjusted for you. This facility is very useful as your program develops, and you keep cramming in extra code. It is also spectacularly fast.

Keywords preceded by an asterisk are, technically, commands. The command *Ca't on key 3 starts the cassette recorder. Your BBC computer will then read through the tape until you tell it to stop, by pressing Escape. While it does this, it checks the accuracy of what it is reading, and puts out messages similar to those you see while a program is being loaded. Thus, you can check that you have saved a program securely, before you lose it from the machine's memory.

*Key4 List|M is useful for program development. If you like to see your For-Next and Repeat-Until loops indented in the program listing, you could achieve this by altering this statement to

"*KEY4 LIST0 7|M LIST|M"

Left untouched, the machine will, in response to a List command, scroll at impressive speed through the whole program listing. The normal way of combatting this is to press the N key simultaneously with the Ctrl key.

Thereafter, the machine will be in Page Mode, so only one screen full of program listing will be displayed at one time. To move on to the next page, you hit Shift. The VDU 14 instruction in *Key5 VDU14|M has exactly the same effect as Ctrl-N. Incidentally, VDU 15 turns the Page Mode off. This user-defined key is particularly handy because Page Mode is turned off every time you press Break or run your program.

Since you can load a program without specifying its name, and it is good practice to keep only one program per side of each cassette, inherent laziness suggests abandoning

names and making use of *Key6 Load ""|M.

When developing graphics programs, you probably find yourself constantly moving from a graphics mode to a program listing. This means that you either get whopping great print, or other unreadable text. So, *Key7 Mode 7|M puts you straight back into Mode 7, which is the teletext mode you started in, with good clear text.

The FX in *Key 8*FX137, 1|M or effects command is a direct instruction to the operating system. This particular one starts up the cassette recorder. This overcomes an irritating little habit of the BBC Micro to be always



KEYS

Figure 1.

```

10 REM Initialisation Program
   © Mike Berry 1982
20 *KEY0 AUTO
30 *KEY1 RUN|M
40 *KEY2 RENUMBER|M
50 *KEY3 *CAT|M
60 *KEY4 LIST|M
70 *KEY5 VDU14|M
80 *KEY6 LOAD""|M
90 *KEY7 MODE7|M
100 *KEY8 *FX 137,1|M
110 *KEY9 *FX 137,0|M
120 *KEY10 OLD|M
130 PRINT "Initialisation complete"
140 END

```

telling the cassette recorder to be off when you want it to be on, for example, when you want to rewind the tape after loading or saving a program.

*Key9, *FX 137,0|M turns the cassette motor off. Use it after you have rewound your tape.

*Key10 Old|M is the break key. After you use the break key to escape from nasty program error situations, you find that you have to re-activate your program by typing in Old. After your user-defined keys have been initialised as I suggest, the break key will produce the effect of Old as well as its usual function.

The BBC Micro has a very useful plastic strip above the keys, under which you can slide a strip of paper to label the user-defined keys. You can prepare the machine for a programming session with CH."" and Return. The initialisation program then loads and automatically runs. This only takes a few seconds, after which time the machine is set up in a thoroughly professional manner for the real business of programming.

You may have blocks of program code which crop up repeatedly in your program. It is a simple matter to attach all the common code to a user-defined key.

Another possible use is to store under each

key one of your favourite Sound routines. The sound facilities of the BBC Micro are very sophisticated, but making the best use of them does entail difficult coding of Envelope and Sound statements. It makes sense to keep these carefully contrived statements for your best sound effects, to be used in successive programs. Unfortunately, it is difficult to remember what they sound like. By storing them in a program similar to the one in program 1, you can put your routines on to the user-defined keys, and they try them until you find the most suitable for your purpose.

You could also use the user-defined keys for input during execution of your program. This could even out wear on the popular keys used for controlling movements during games, and could make it possible to input lengthy replies with minimum effort, for example in Adventure games.

What you store under a user-defined key does not have to be just one command or statement. You can store a multi-statement line, with semicolons, or string together a series of commands, each of which ends with a "|M". You can even program one user-defined key to define another user-defined key. If you reach the limit of how much you can store under one key, the machine will complain noisily. ■

TELETEXT MODE

The BBC Micro's teletext mode — a standard feature on every machine — presents many useful features if only the beginner can fathom its inner workings. John Thomas offers the key.

SOME VERY UNUSUAL effects can be obtained with the BBC's teletext character set. The set consists of control codes, 0-31, as in the other display modes — followed by an ASCII character set with lower case, a set of screen control codes, and a repeat of the ASCII set.

A list of the interesting screen control codes and their functions appears in table 1.

Eight colours including black or white text or block graphics as well as flashing and double-height characters are possible by prefixing any characters printed, with one of the special codes. The codes act for one line only

— until the next new line occurs — and are printed as spaces. To print characters of a specified colour, say, red, you must

```
PRINT CHR$ 129; X$
```

where X\$ represents any string. Anything printed in this line will appear in red but the effect does not continue on to the next line.

The block-graphics codes produce the standard teletext symbols found on the RML 380-Z and other computers. A list of the graphics, their codes and the characters they normally correspond to follow in table 2.

(continued on next page)

Table 2. Test program.

```

10 REM" Press space bar to continue
20 ONERRORGOTO360
30 MODE 7
40 PROCPOKE
50 PROCTELE
60 VDUL4:END
70 DEF PROCTELE
80 C=32
90 REPEAT
100 IF(C-32)MOD24=0 PRINT"Graphic",
   "ASCII code", "Character"
110 CL=(C-32)MOD6
120 VDU(129+CL),157,154,151,156,C,
   (129+CL),157,135:PRINTC;SPC(10);
   CHR$C
130 REM" Test for space bar.
140 REPEAT UNTIL INKEY$=" "
150 C=C+1
160 UNTIL C=255
170 ENDPROC
180 REM" Colour REMs
190 DEPROCPEEK
200 P+PAGE
210 T=TOP
220 FORA=P TO T

```

```

230 PRINTA-PAGE,?A,CHR$(ABS((?A
   31AND A)127/("A))
240 REPEAT UNTIL INKEY$=" "
250 NEXT
260 ENDPROC
270 DEFPROCPOKE
280 FORN=1 TO 3
290 READA
300 A=A+PAGE
310 ?A=129:?(A+1)=157:?(A+2)=131
320 NEXT
330 DATA6,240,304
340 ENDPROC
350 REPORT:PRINT" at line":ERL:VDU14:
   END

```

This program lists all printable characters and their equivalent graphics. It is listed in List07 so do not insert spaces except where the "" symbol occurs. As the program uses the BBC Poke it must be entered very carefully. ProcPoke was used in development and lists the contents of the memory which the program occupies with its address relative to Page. ProcPoke demonstrates coloured Rems. ProcPoke and ProcPoke may be left out altogether — the program will still run on.

(continued from previous page)

Flashing characters are a relatively simple matter. Chr\$ 136; is printed before the character required to flash. This code will make anything printed after it on the same line flash, behaving similarly to the other codes, and does not affect the following line. However, another ASCII code, Chr\$ 137 will cancel the flash.

Double-height characters are caused by code 141 and may be cancelled by code 140. In order to produce a full word in double-heights, it must be printed twice. For example, to print "Hello" in double-height-
PRINT CHR\$ 141; "Hello"; CHR\$ 141; "Hello"
must be used.

Code 154 only acts on block graphics and it produces distinct pixels instead of the normal contiguous pixels.

Chr\$ 158 has even more esoteric effects. This screen control code does not appear on the screen but causes the last graphics symbol printed to be repeated in the same character cell as Chr\$ 158.

Either VDU or Chr\$ may be used to produce the teletext effects and there is no real difference in memory terms between the two except when multiple effects are required. For example

```
PRINT CHR$ 130; CHR$ 136; CHR$ 141;
"Colour"; CHR$ 136; CHR$ 136; CHR$
141; "Colour"
```

will produce the word "Colour" in double-height, flashing green. The following routine uses four bytes less — VDU and Chr\$ are tokenised and use only one byte each — and is more concise, involving less typing.

```
VDU 130, 136, 141; PRINT "Colour";
VDU 130, 136, 141; PRINT "Colour"
```

Different background and foreground colours are also possible.

Printing a colour code followed by Chr\$ 157

followed by another colour code will produce a line with the first colour as the background and any characters in the foreground colour

VDU 129, 157, 131

will turn anything in a following Print statement into yellow on a red background.

A further property of the teletext mode is that, since any character on the screen may be copied to the lowest line by the editing cursor, all the features of the graphics may act actually within listings.

Suppose you wanted a Remark with red, double-height, flashing characters on a light-blue background. By using

VDU 134, 157, 129, 141, 136

as a direct command, five characters are printed on the screen below the VDU command and above the next > symbol. These characters cannot be seen but can be copied into the Rem statement by moving the editing cursor to the line below VDU and using the copy key. Note that the open quote must be used since some of the special characters are recognised by the Basic as tokens and will be converted into full keywords unless the quote is used. No closing quote is required except in Print statements where this technique may be used to show in the listing what will actually appear on the screen instead of showing a list of meaningless numbers and characters.

Teletext mode uses only 1K of memory and has a resolution of 80 by 75.

VDU 129, 157, 131

will turn anything in a following Print statement into yellow on a red background, and all eight colours can be produced, flashing and in double-height. On the model A with only 3K of user memory in the higher graphics modes — 10K for the screen and 3.5K for the machine operating system — this is especially significant.

Table 3. Demonstration program.

```
1 REM (C) John Thomas 1982. Teletext
display demonstration
10 *FX4,1
11 REM cursor and COPY keys produce
ASCII codes
20 *FX11,1
21 REM Turn off auto repeat
25 *KEY100LD:M
26 REM Programs BREAK key
30 MODE 7
40 ON ERROR GOTO 60
50 Y = 12:SP = 11
60 PROCCL
70 INPUTLINE "Enter message: "MS$
80 IFMS$="" MS$="" Moving display
teletext demonstration. Copyright J T
1982.
```

Cursor keys may be used to change the speed of motion and to alter the display's altitude. Press "C" to alter colours.

```
90 PROCLINE
100 MS$=STRING$(35,"") + MS$
+ STRING$(35,"")
110 DS$=MS$
120 REPEAT
130 PRINTTAB(3,Y);CHR$141;LEFT$
(DS$,35)
140 PRINTTAB(3,Y+1);CHR$141;LEFT$
(DS$,35)
150 DS$=MID$(DS$,2)
160 IS=INKEY$SP
170 IFIS="C" PROCCL:PROCLINE
180 IFIS=CHR$139ORIS=CHR$138
PROCHEIGHT
190 IFIS=CHR$136ORIS=CHR$137
PROCSPEED
200 PROCSTATUS
210 UNTILEND$=1
220 GOTO 110
230 DEFPROCCL
240 *FX11,50
250 CLS
260 PRINT"Colours available are:"
270 PRINTTAB(10);"(1) Red"
280 PRINTTAB(10);"(2) Green"
290 PRINTTAB(10);"(3) Yellow"
300 PRINTTAB(10);"(4) Blue"
310 PRINTTAB(10);"(5) Magenta"
320 PRINTTAB(10);"(6) Cyan"
330 PRINTTAB(10);"(7) White"
335 PRINTTAB(10);"(8) Flashing fore-
ground"
340 PRINT"Press foreground colour . . .";
FC=VALGET$+128:IFFC<129ORFC>
135 GOTO340 ELSE PRINT FC-128
350 PRINT"Press background colour . . .";
BC=VALGET$+128:IFBC<129ORBC>
136 GOTO350 ELSE PRINT BC-128
360 *FX11,0
370 ENDPROC
380 DEFPROCCLINE
390 CLS
400 PRINTTAB(0,Y);VDUBC,157,FC
410 PRINTTAB(0,Y+1);VDUBC,157,FC
420 ENDPROC
430 DEFPROCHEIGHT
440 Y=Y+ABS(IS=CHR$139)*VPOS 2)+
(IS=CHR$138)*(VPOS 23)
450 PROCLINE
460 ENDPROC
470 DEFPROCSPEED
480 SP=(SP-1)*ABS(SP 0)*ABS(IS=
CHR$136)+ABS(IS=CHR$137)*
(SP+1)
500 ENDPROC
510 DEFPROCSTATUS
520 PRINTTAB(0,Y+2);"Y="";Y;SPC(5);
"Delay="";SP;SPC(5)
530 ENDPROC
```

Table 1. Useful teletext codes.

Code Effect

127	Delete	
128	space	
129	red	text
130	green	text
131	yellow	text
132	blue	text
133	magenta	text
134	light-blue	text
135	white	text (Copy)
136	turns flash on	(left cursor key)
137	Cancels flash	(right cursor key)
138		(down cursor key)
139		(up cursor key)
140	Cancels double-height	
141	Turns on double-height	
142		
143		
144		
145	red	graphics
146	green	graphics
147	yellow	graphics
148	blue	graphics
149	magenta	graphics
150	light-blue	graphics
151	white	graphics
152	Rubs out following text on one line	
153	Cancels pixel graphics	
154	Turns on pixel graphics	
155		
156	Removes background — opposite of Chr\$ 157	
157	Fills line white/colour	
158	Repeats graphics when spaces/screen commands occur	
159		

Change colour — effective for one line only — if used before Chr\$157 will affect background otherwise will affect foreground

Codes produced by cursor keys and Copy key after *FX4,1

ZX81

Simple to use — plug in and go.
Powered automatically from your
ZX81. No extra connections.

16K Ram

Proven Design, Boxed, Tested,
Guaranteed.

£25.00

All inclusive, post paid

Send today. AFDEC Electronics Ltd.

To AFDEC ELECTRONICS LTD., 318 KEMPSHOTT
LANE, BASINGSTOKE, HANTS RG32 5LT.

Please supply.....16K Rampacks at £25.00 each.

NAME

ADDRESS

I enclose cheque/P.O./money order

Allow up to 21 days for delivery.

Coming soon a professional keyboard at an affordable price.

30 + PROGRAMS FOR THE BBC MICRO

This Book contains program listings, with explanations and tips
on using the BBC Micro

GAMES UTILITIES GRAPHICS & MUSIC
'ASTRO RUN' 'SCREEN PLAY' '3D GRAPHICS' ...

Most programs will run on Models A & B
Edited by C.J. Evans, various Authors. April 82
£5.00 inclusive of p&p

CASSETTE LEADS FOR THE BBC MICRO

The BBC Micro comes with an incomplete lead
7Pin Din to 7Pin Din
7Pin Din to 5Pin Din & 2.5mm minijack
7Pin Din to 2 x 3.5mm & 1 x 2.5mm minijacks
7Pin Din PLUGS
PRINTER CABLE (Centronics type)

£4.65 p&p 35p
£4.65 p&p 35p
£4.66 p&p 35p
£0.65 p&p 35p
£17.00 p&p 50p

RAM CHIPS

4816 As used in the BBC Micro 8 Chips gives 16k £4.00 each
2114 As used in the Acorn Atom 20 Chips gives 10k £1.20 each
6116 As can be used to replace the Ram chip
inside the ZX81 to give 2k internal Ram £7.50 each
p&p Ram chips 50p per order

Programs & Hardware designs for the BBC Micro wanted.
VAT INCLUDED WHERE APPLICABLE
Send SAE for full Price List

C.J.E.

MICROCOMPUTERS

25 HENRY AVENUE, RUSTINGTON,
W. SUSSEX BN16 2PA (09062) 74998

MICROPOWER

Some Great New Deals from Acorn's Great New Dealer...

MICROPOWER



SPECIAL OFFERS — See below



ONLY £299 plus VAT



ONLY £189 plus VAT

ACORN ATOM
BASIC ATOM (8K Rom + 2K Ram) £149
N.B. Special Offer — Free 4K of additional Ram chips. Worth more than £10!!
FULL MEMORY ATOM (8K Rom + 12K Ram) £169
N.B. Special Offer — £20 off any ATOM software from Program Power
COLOUR ATOM (8K Rom + 5K Ram + New Colour Encoder) £174
N.B. Special Offer — FREE Power Supply and FREE Acornsoft 'Introductory Pack'. Worth over £30!!

BOOKS
NEC '30 HOUR BASIC' £5.50
BASIC Programming on the BBC Microcomputer £5.95
Practical Programs for the BBC Computer and the Acorn Atom £5.95
Getting Acquainted with your Acorn Atom £7.95
Atom Magic Book £5.50

Banish Saving and Loading Time with the **NEW ATOM DISK SYSTEM**
NOW you can spend your time actually programming!!
(5K programs load in approx. 2 seconds)
— 40 track single sided 5.25 inch disk drive
— integral power supply for Disk and Atom
— disk controller card with 4K DOS ROM
— 64 way Euro-connector plug and cable
— manual containing full operating instructions

SOFTWARE
We stock the full range of ATOM and BBC Micro programs from ACORN SOFTWARE and PROGRAM POWER, including Word Processor ROM £26
Atom Calc ROM £34
Atom FORTH — Tape £10 Book £6
Programmer's Toolbox ROM £24.50
(ROM Selector Board) £19.50
BBC basic ROMS (phone for availability)

GP/80 PRINTER £189
GP/100 PRINTER £199
— 80 column print line
— speed 30 characters per second
— single and double width characters
— parallel interface

Visit our new SHOWROOM for a free demonstration or use our prompt mail order service.

MICRO POWER Ltd.
8/8A Regent Street
Leeds LS7 4PE
Tel. (0532) 683186

Please add 15% VAT to all items except books.
Post & Packing 55p/order
Large Hardware Items £3.00

MICROPOWER

MICROPOWER

MICROPOWER

Table 1.

Code	Mnemonic	Basic equivalent
6	LD B N	LET B = N
14	LD C N	LET C = N
22	LD D N	LET D = N
30	LD E N	LET E = N
38	LD H N	LET H = N
46	LD L N	LET L = N
1	LD BC NN	LET BC = NN
17	LD DE NN	LET DE = NN
33	LD HL NN	LET HL = NN
4	INC B	LET B = B+1*
12	INC C	LET C = C+1*
20	INC D	LET D = D+1*
28	INC E	LET E = E+1*
36	INC H	LET H = H+1*
44	INC L	LET L = L+1*
3	INC BC	LET BC = BC+1
19	INC DE	LET DE = DE+1
35	INC HL	LET HL = HL+1
5	DEC B	LET B = B-1*
13	DEC C	LET C = C-1*
21	DEC D	LET D = D-1*
29	DEC E	LET E = E-1*
37	DEC H	LET H = H-1*
45	DEC L	LET L = L-1*
11	DEC BC	LET BC = BC-1
27	DEC DE	LET DE = DE-1
43	DEC HL	LET HL = HL-1
9	ADD HL BC	LET HL = HL+BC
25	ADD HL DE	LET HL = HL+DE
128	ADD A B	LET A = A+B*
129	ADD A C	LET A = A+C*
130	ADD A D	LET A = A+D*
131	ADD A E	LET A = A+E*
132	ADD A H	LET A = A+H*
133	ADD A L	LET A = A+L*
144	SUB A B	LET A = A-B*
145	SUB A C	LET A = A-C*
146	SUB A D	LET A = A-D*
147	SUB A E	LET A = A-E*
148	SUB A H	LET A = A-H*
149	SUB A L	LET A = A-L*
120	LD A B	LET A = B
121	LD A C	LET A = C
122	LD A D	LET A = D
123	LD A E	LET A = E
124	LD A H	LET A = H
125	LD A L	LET A = L
71	LD B A	LET B = A
79	LD C A	LET C = A
87	LD D A	LET D = A
95	LD E A	LET E = A
103	LD H A	LET H = A
111	LD L A	LET L = A
62	LD A N	LET A = N
60	INC A	LET A = A+1*
61	DEC A	LET A = A-1*
112	LD (HL) B	POKE HL, B
113	LD (HL) C	POKE HL, C
114	LD (HL) D	POKE HL, D
115	LD (HL) E	POKE HL, E
116	LD (HL) H	POKE HL, H
117	LD (HL) L	POKE HL, L
119	LD (HL) A	POKE HL, A
54	LD (HL) N	POKE HL, N
70	LD B (HL)	PEEK HL, B
78	LD C (HL)	PEEK HL, C
86	LD D (HL)	PEEK HL, D
94	LD E (HL)	PEEK HL, E
102	LD H (HL)	PEEK HL, H
110	LD L (HL)	PEEK HL, L
126	LD A (HL)	PEEK HL, A
194	JP NZ NN	
195	JP NN	
202	JP Z NN	
201	RETURN	

Loathe to leave the safety and comfort of Sinclair Basic, the ZX-81 user all too often misses out on the simplicity, speed and economy of machine-code programming. With the first part of this new series, Kathleen Peel aims to coax the timorous ZX owner out of his Basic refuge by demonstrating just how uncomplicated machine-code can be. She clears up the normal confusions by giving the Basic equivalent of every piece of code she discusses.

As YOU ACQUIRE programming skills, you become aware of the limited speed and profligate use of memory in Basic. Real progress can be achieved by the use of machine code.

The sub-set of 14 commands which I define in this article will enable you to write small machine-code routines. Subsequent articles will expand the sub-set, gradually presenting a more exact picture of the Z-80 processor. Table 1 gives the mnemonics and Basic equivalent.

You can buy a piece of software called an assembler which takes the mnemonic instructions, which you can understand, and creates the machine code, which initially you will not understand. So effectively, it is a middle language between what the machine recognises and what the human recognises.

Start from the premise that the Z-80 processor has six variables and they are called B, C, D, E, H and L. These variables can only hold a number and that number has to be within the range 0 to 255, codes 6, 14, 22, 30, 38, 46. The variables can be grouped as pairs BC, DE and HL thus enabling them to hold a larger number, 0 to 65,535, codes 1, 17, 33. The variables and pairs of variables can be increased, codes 4, 12, 20, 28, 36, 44, 3, 19, 35, and decreased, codes 5, 13, 21, 29, 37, 45, 11, 27, 43, by one. You can also add to HL either BC, code 9, or DE, code 25.

If you wish to load a number into variable B, the number that follows the code 6, ld B N, is the number to be loaded into B. Similarly with code 17, ld DE NN, the two numbers following code 17 are the numbers to be loaded into the variable DE. N represents a single number; NN two numbers. If either value is zero it must still be included. If the processor expects two numbers, that is what you must give it. For example:

Basic Mnemonic Machine code

LET DE=16514 LD DE NN 17 130 64
LET BC=17152 LD BC NN 1 0 67

Notice that I have equated

16514 = 130 64
and 17152 = 0 67

In NN code the second number is always multiplied by 256 to get its value.

16514 = 130 + 64*256

17152 = 0 + 67*256

Somewhere inside the processor is another

Table 2.

Mnemonic	Machine code	Address	
JP NN	195	130 64	The examples all
JP Z NN	202	130 64	jump to Address 16514
JP NZ NN	194	130 64	(130 + 64*256 - remember?)



SPEED A

variable, A for accumulator. It is the only variable which can be added to, codes 128 to 133, or subtracted from, codes 144 to 149, one of the other variables. We can also put the contents of any one of the variables into A, codes 120 to 125, or put the contents of A into another variable, codes 71, 79, 87, 95, 103, 111. A can be made to equal any number between 0 and 255, code 62, and lastly A can be increased, code 60, or decreased, code 61, by one.

The last variable F, flag, will be defined by the following relationship. I hope you have noticed an asterisk by some of the codes. This indicates that after this operation a test is performed to see if 0 has occurred as a result of the operation.

Basic Mnemonic Machine code

LET B=B-1 DEC B 5

Variable F is adjusted on completion of this operation as follows:

SHARP MZ-80K/MZ-80A/MZ-80B

Functional cassette software by Dale Hubbard

Buy 2 at £19.95 - take 1 at £5.95 FREE!!!

All programs in Standard Sharp Basic for 48k RAM upwards.
All programs supplied with exhaustive and attractively bound documentation.

DATABASE

The program that everyone needs. Facilities include sort, search, list, delete, change, totals, save file, line print if required, etc. etc. Can be used in place of any card index application.

£19.95

STOCK CONTROL

All the necessary for keeping a control of stock. Routines include stock set up, user reference no., minimum stock level, financial summary, line print records, quick stock summary, add stock, delete/change record, and more.

£19.95

MAILING LIST

A superb dedicated database to allow for manipulation of names & addresses & other data, with selective printing to line printer. Features include the facility to find a name or detail when only part of that detail is known. Will print labels in a variety of user-specified formats.

£19.95

DECISION MAKER

A serious program that enables the computer to make a sound decision for you based on various criteria.

If you want to buy a car, hi-fi, house, etc., or you don't know which woman to marry then you need this one.

£5.95

INVOICES AND STATEMENTS

Ideal for the small business. A complete suite of programs together with generated customer file for producing crisp and efficient business invoices and monthly statements on your line printer. All calculations including VAT automatic and provision for your own messages on the form produced.

£19.95

RUBIK SOLVER

It's not our policy to offer games but we make an exception here for a program to solve the cube from ANY position. Shorthand notation makes learning the solution by heart possible for most active brains.

£12.95

THE CATALOGUER

This dedicated database is ideal for use in any situation where a catalogue could be utilised. E.g. stamp collection, coins, photos, slides, books, records etc.

£19.95

COMMERCIAL ACCOUNTS

A gem of a program, all for cassette, with the following features:-

Daily Journal	Sales Ledger
Credit Sales	Purchase Ledger
Cash Sales	Bank Account
Credit Purchases	Year to Date Summary
Purchases - other	

A fully interactive program suitable for all businesses. Files can be saved and loaded and totals from one file carried forward to another on cassette. Particularly useful from a cash flow point of view, with an immediate accessibility to totals for debtors and creditors. Bank totally supported with entries for cheque numbers, credits and, of course, running balance.

£19.95

HOME ACCOUNTS

£19.95

Runs a complete home finance package for you with every facility necessary for keeping a track of regular and other expenses, bank account, mortgage, H.P. etc etc etc!! You'll wonder how you ever managed without it.

CHOPIN - LES ETUDES

Six beautiful studies from Opus 10 and 25 performed for you live by Mr. Sharp - Spellbinding!!!

£5.95

MOTOR ACCOUNTANT

Find out exactly what that car is costing you and keep a data file with all your expenses therein!

£5.95

RECIPE FILE

Let all those computer widows have a bash! The wives will really enjoy the fun of this program designed to keep all her recipes. Will even suggest a menu for a day/week! Excellent value.

£19.95



Access Welcome

Send cheque or P.O. or Cash (registered) or Credit Card no. to:

Gemini Marketing Ltd

Dept YC7 Quay House Quay Road Newton Abbot Devon TQ12 2BU
Or telephone us with your credit card order on (0626) 62869

All orders despatched by return - no waiting.

All prices include VAT and post & packing except Hardware. Full range of Sharp peripherals available - please phone for quotations.

Please state machine type (A.K. or B) when ordering software.

SPECIAL
HARDWARE OFFER!!
MAIL ORDER ONLY
MZ-80A PLUS ANY 3
PROGRAMS
£477 + VAT
LIMITED STOCKS -
HURRY!!!

IT IS USUALLY possible to program efficiently without recourse to logical arithmetic and many programmers are happy to leave it that way. Unfortunately, if you are in the translation business and the original programmer has used logical arithmetic you are obliged to follow suit. This may leave you in an area of your Basic with which you are not familiar and with a machine that insists on being illogical. So let us look at some possible problems.

The logic of the Pet, TRS-80 and Genie is standard with the logical values being integers of -1 for true and 0 for false, but the Apple uses 1 for true and 0 for false. This would seem to be no more than an inconvenience but unfortunately there is a more subtle difference in the way machines deal with individual bits. The line

10 IF (X<7) AND (Z<>7) THEN 100
will work on most machines and is in fact a very powerful programming tool. Yet if that works, what about the following line?

20 IF PEEK (59410) AND 4 THEN 2000
It works on a Pet — to see if the space bar has been pressed — but an equivalent line
30 A = PEEK (49152) AND 128 THEN 2000
on an Apple will not extract a bit from an I/O

```
10 PRINT "'AND' BINARY LOGIC TEST"
20 PRINT "ENTER VALUE OF X"
30 INPUT X
40 PRINT "ENTER VALUE OF Y"
50 INPUT Y
60 A=X AND Y
70 PRINT "THE LOGICAL 'AND' VALUE
   OF";X; "AND";Y; "IS";A
80 GO TO 10
```

Program 1. Binary logic test.

port. This is because on the TRS-80, Genie and Pet the logical operators And, Or, and Not operate on individual bits, but on the Apple they do not. Consequently line 30 always returns a value of A=1 regardless of the actual value in location 49152. On the Apple

A=X AND Y

is interpreted as

A=(X<>0) AND (Y<>0)

Confused? Program 1 is a test program to use on your computer to see how it handles logical arithmetic. Use this program to see how your machine reacts using various line 60s.

The logical operators on Sinclair machines are different again. On the ZX-80 true is -1 and false is 0, but on the ZX-81 true is 1 and false is 0. The rules for logical arithmetic on these machines are quite different and you are referred to table 1.

Sinclair owners will know that their version of logical arithmetic lacks a Not function. They cannot use the line

10 IF NOT X=10 THEN GO TO 100

but it can easily be mimicked with

10 IF X-10 THEN GO TO 100

which, on a Sinclair, does the job required.

Most games include an element of chance and this is provided by the computer's random-number generator. The first sign of such use often appears at the start of a program when the seed of the generator is reset to ensure a new series of random numbers. The statement used will be

Randomise, Random, Rand or Ran. The Pet and Apple set the seed with RND(-X). Your instruction book will tell you how to reset the seed value on your machine.

Having set this, the computer will call for a random number, when it needs one, with RND. RND is almost universal, but the results returned are not and could cause some


difficulty in translation. When a program requires a random number, there is a range into which it must fall and different machines handle these ranges differently. For a translation key, see table 2.

If your machine does not have a random function, you must create one and use it as a subroutine. There are a number of complex random-number algorithms but usually a simple one is adequate for games programs. My suggestion is program 2, which returns a pseudo-random number between 0 and 1 as R.

Cursor-control characters are the bane of a translator's life. They sit in other people's

BASIC TRANSLATION AND THE FINAL HURDLES

This month Tony Edwards offers a miscellany of ideas to help you past the pitfalls which lurk in even the simplest-looking Basic translation.

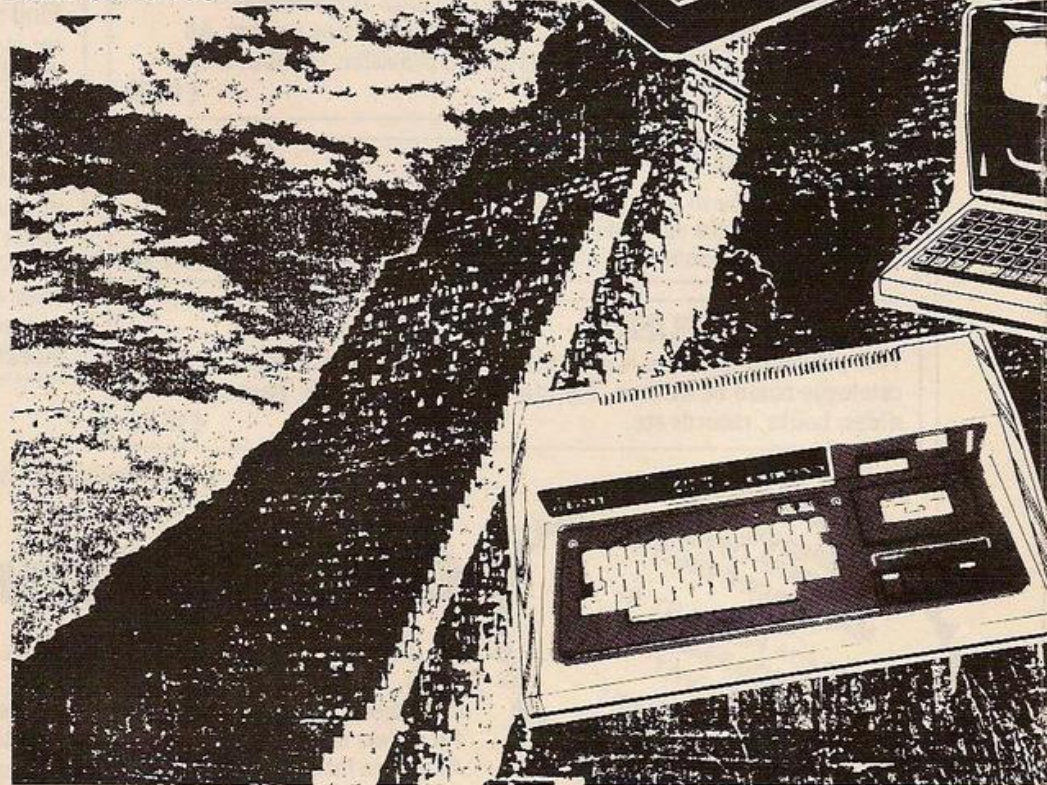

Random number	Pet	Apple	TRS-80 or Genie	ZX-81
$0 < x < 1$	RND(1)	RND(1)	RND(0)	RND
$0 < x < N$	N*RND(1)	N*RND(1)	RND(N)	N*RND
$A < x < B$	$A + (B-A)*RND(1)$	$A + (B-A)*RND(1)$	$A + RND(B-A)$	$A + (B-A)*RND$

Table 2.

programs, Chr\$, and are completely opaque. They cause the computer to do strange things depending on the code in parenthesis behind them — but to the uninitiated there is no way of breaking the code. Codes 32 to 126, except on Sinclair machines, are usually standard ASCII codes which were dealt with last month and codes above 126 are usually graphics symbols — also dealt with last month.

The exceptions are the Genie and TRS-80 where codes above 191 are space-compression codes which cause a number of spaces to be printed, the number of spaces being found by the formula

$$\text{number} = \text{code} - 192$$

These are useful in formatting or in erasing characters no longer wanted on the screen.

The codes which cause most trouble are those which move the cursor about and clear parts of the screen. These are covered by the translation key in table 3. An exception is the TRS80's Chr\$(23) which causes characters printed to become double-sized. The Apple cursor controls are seldom used in programs as they must be preceded by the escape character, Chr\$(27).

Both games and business programs use extensive screen-formatting controls to pro-

X AND Y has value X if $Y < > 0$
X AND Y has value 0 if $Y = 0$
X OR Y has value 1 if $Y < > 0$
X OR Y has value X if $Y = 0$
NOT X has value 0 if $X < > 0$
NOT X has value 1 if $X = 0$

Table 1.

duce a neat appearance. The Chr\$(X) controls and space-compression characters mentioned are part of this formatting but another essential part is the Print At, or Print @ statement. These and similar statements cause a character or string of characters to be printed at a particular position on the screen.

Sinclair machines identify the screen position with two co-ordinates so that

PRINT AT 3, 7, "#"

prints a hash at row 3 of column 7. The TRS-80 and Genie identify 1,024 screen positions so, as the screen is 64 characters wide, the same effect is produced by

PRINT @ 3*64 + 7, "#"

Apple owners do not have this facility but do not need it as they can use

VTAB3:HTAB7:PRINT "#"

to produce the same effect. VTab tabulates vertically and HTab tabulates horizontally.

At this stage readers who own Pets will be wondering what they can do as their machines do not have this feature. They can use a mixture of cursor controls and spaces to produce the same effect. For example, PRINT CHR\$(19), CHR\$(17), CHR\$(17),

CHR\$(17), "#"

but this is not very elegant so I offer program 3 which provides Pet owners with a Print @ facility.

This is a Basic program which Pokes a machine-code program into the second cassette buffer. It should be safe enough there but if you want it somewhere else, it is relocatable without change. It is written for new-ROM

```
10 PRINT "INPUT RANDOM NUMBER
SEED"
11 INPUT S
```

```
1000 REM PSEUDO-RANDOM NUMBER
GENERATOR
1010 T = S/3001
1020 I = INT(T)
1030 R = T-I
1040 S = S+17
1050 RETURN
```

Program 2. Pseudo-random number generator.

```
100 DATA 32,154,208,169,19,32,210,255,
230,97
110 DATA 164,97,169,29,166,98,240,8,202,
32
120 DATA 210,255,224,0,208,248,136,208,
245,96
130 FOR X = 826 TO 855
140 READ Y
150 POKE X,Y
160 NEXT
```

Program 3. Pet Print @ routine.

Pets so users of old-ROM machines should make the following changes:

- Line 100, change 154 to 167
- Line 100, change 97 to 179
- Line 110, change 97 to 179
- Line 110, change 98 to 180

The line

POKE 1, 58:POKE 2,3

is used to initialise the program and then it is used with the statement

X = USR(A):PRINT A\$

where A is the screen position and A\$ is the string to be printed.

This article started with logical arithmetic and in case you thought you had seen the last of it I am going to finish with it. A number of computers, including the Apple and the Pet, have a Wait statement which is useful. This causes the program execution to halt until some preset condition is achieved. The statement has the form

WAIT X,Y,Z

and the computer will wait until the contents of location X — usually a port — And Y Exclusive Or Z gives a non-zero result. It does not matter that this is such a mess because if your machine has no such function you do not need to understand it — just translate it. If you have an INP function you can mimic

10 WAIT X,Y,Z

with

10 IF INP(X) = 2 THEN 20:GO TO 10

This function is usually used to halt Basic until some action is taken with hardware so it can be mimicked with Inkey\$ if you have one using the loop:

100 A\$ = INKEY\$:IF A\$ = "" THEN 100

which causes the machine to halt until a key is pressed or if you do not have Inkey\$ a normal Input will stop Basic until you enter some dummy value.

Next month, in the final part of this series, I shall deal with the methods used to translate from one dialect to another when the dialects are so different as to make direct translation impossible. The method presented is capable of translating from one language to another and an example of such a translation will be given.

Action	Pet	TRS-80 II and Genie	TRS-80 III	ZX-81
Clear screen	(147)	—	(27)	—
Clear to end of line	(22)	(30)	(23)	—
Clear to start of line	(150)	(29)	—	—
Clear to end of screen	—	(31)	—	—
Cursor up	(145)	(27)	(254)	(112)
Cursor down	(17)	(26)	(255)	(113)
Cursor left	(157)	(24)	(252)	(114)
Cursor right	(29)	(25)	(253)	(115)
Cursor home	(19)	(28)	—	—

Table 3. Chr\$ codes.

MICHAEL ORWIN'S ZX81 CASSETTES

The best software (by various authors) at low prices.

QUOTES

"Michael Orwin's £5 Cassette Two is very good value. It contains 10 stolid well designed games which work, offer plenty of variety and choice, and are fun."

from the ZX Software review in
Your Computer, May '82 issue.

"I had your Invaders/React cassette ... I was delighted with this first cassette."

P. Rubythor, London NW10

"I have been intending to write to you for some days to say how much I enjoy the games on 'Cassette One' which you supplied me with earlier this month."

E. H., London SW4

"I previously bought your Cassette One and consider it to be good value for money!"

Richard Ross-Langley
Managing Director
Mine of Information Ltd.

CASSETTE 1

(eleven 1K programs)

machine code:

React, Invaders, Phantom aliens, Maze of death, Planet lander, Bouncing letters, Bug splat.

Basic:

I Ching, Mastermind, Robots, Basic Hangman. PLUS Large screen versions of Invaders and Maze of Death, ready for when you get 16K.

Cassette One costs £3.80.

CASSETTE 2

Ten games in Basic for 16K ZX81

Cassette Two contains Reversi, Awari, Laser Bases, Word Mastermind, Rectangles, Crash, Roulette, Pontoon, Penny Shoot and Gun Command.

Cassette Two costs £5.

CASSETTE 3

8 programs for 16K ZX81

STARSHIP TROJAN



Repair your Starship before disaster strikes. Hazards include asphyxiation, radiation, escaped biological specimens and plunging into a Supernova.

STARTREK This version of the well known space adventure game features variable Klingon mobility, and graphic photon torpedo tracking.

PRINCESS OF KRAAL An adventure game.

BATTLE Strategy game for 1 to 4 players.

KALABRIASZ World's silliest card game, full of pointless complicated rules.

CUBE Rubik Cube simulator, with lots of functions including 'Backstep'

SECRET MESSAGES This message coding program is very tlp qexi jf.

MARTIAN CRICKET A simple but addictive game (totally unlike Earth cricket) in machine code. The speed is variable, and its top speed is very fast.

Cassette 3 costs £5.

CASSETTE 4

8 games for 16K ZX81

ZX-SCRAMBLE (machine code)



Bomb and shoot your way through the fortified caves.

GUNFIGHT (machine code)



INVADERS (machine code)



FUNGALOID (machine code)

GALAXY INVADERS (machine code)

Fleets of swooping and diving alien craft to fight.

SNAKEBITE (machine code)

Eat the snake before it eats you. Variable speed (very fast at top speed)

LIFE (machine code)

A ZX81 version of the well known game.

3D TIC-TAC-ONE (Basic)

Played on a 4x4x4 board, this is a game for the brain. It is very hard to beat the computer at it.

7 of the 8 games are in machine code, because this is much faster than Basic. (Some of these games were previously available from J. Steadman).

Cassette 4 costs £5.

Recorded on quality cassettes, sent by first class post, from:

Michael Orwin, 26 Brownlow Rd. Willesden, London NW10 9QL (mail order only please)

SILVERSOFT

personal computer software

ZX81/ 16K SOFTWARE



"STARTREK"

£4.95

16K STARTREK: Exciting space adventure game including klingons starbases, phasers, 8x8 galaxy, 4-levels of play, long and short range scanners, etc.



"SUPER-WUMPUS"

£4.95

16K SUPER-WUMPUS: Can you hunt and catch the mysterious wumpus in his underground labyrinth? Intriguing underground adventure.



"GRAPHIC GOLF"

£4.95

16K GRAPHIC GOLF: Test your golfing skills on the computer's 18-hole golf course, each hole is different and is graphically displayed on screen, many hazards including lakes, streams, rough etc.



"GAMES PACK 1"

£4.95

16K GAMES PACK 1: Fantastic value for money, nearly 50K of programs on one cassette. Five games including "Real Time Graphic" Lunar Lander, Starwars, Hammurabi, Minefield, Mastermind.

ZX-ARCADE ACTION!!

NEW!!



"MUNCHER!!"

£5.95

At last! Pacman for your ZX-81 full feature arcade game including 4-types of monsters, high-score, 10-skill levels etc., all entirely in m/c code.



"SPACE-INVADERS"

£4.95

This version is simply the best yet, features include 3-lazer bases, high scorer, bonus points, alien motherships, authentic space invader movement and ever increasing speed, 10-skill levels.



"ASTEROIDS"

£5.95

Authentic representation of the arcade game with left, right, thrust & fire controls, 5-levels of play & alien spaceships. FASTEST! version available.



"ALIEN-DROPOUT"

£5.95

Can you stop the aliens from building up in their launch chutes before they drop down & destroy you. Exciting NEW arcade game.

Cheques/POs payable to "SILVERSOFT"
TICK BOXES REQUIRED

Two or more deduct £1.00
S.A.E. FOR CATALOGUE


I enclose a cheque/PO for £.....
ZX81, VIC-20, SPECTRUM & BBC SOFTWARE WANTED
EXCELLENT ROYALTIES (Probably the best around)

Name

Address


YC/82

SILVERSOFT (Dept. YC)
35 Bader Park, Bowerhill,
Melksham, Wiltshire.



KAYDE Electronic Systems ZX80/1 ZX KEYBOARD WITH REPEAT KEY

£37.95
inc VAT

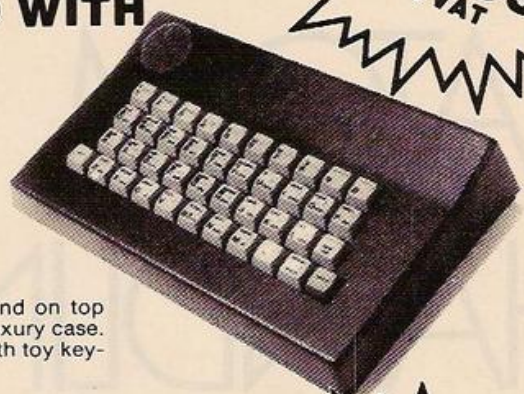

Fully cased keyboard £37.95
Uncased keyboard £27.95
Keyboard Case £10.95

This is a highly professional keyboard using executive buttons as found on top quality computers. It has a repeat key and comes complete in its own luxury case. This is a genuine professional keyboard and should not be confused with toy keyboards currently available on the market.

KAYDE 16K RAM PACKS

The 16K RAMPACK simply plugs straight into the user port at the rear of your computer. It is fully compatible with all accessories and needs no extra power and therefore it will run quite happily on your Sinclair power supply. It does not over-heat and will not lose memory at all. As you may know some makes go down to 11K after being on for a while.

£29.95
inc VAT

This 16K RAMPACK is very stable and will not wobble or cause you to lose your programme. It comes fully built and tested with a complete money back Guarantee.

KAYDE FLEXIBLE RIBBON CONNECTOR

**Stops movement of RAM PACK and other accessories
(Not needed with a KAYDE RAMPACK)**

£12.95
inc VAT

KAYDE 4K GRAPHICS BOARD

The KAYDE Graphics Board is probably our best accessory yet. It fits nearly inside your ZX81. It comes complete with a pre-programmed 2K Graphics ROM. This will give nearly 450 extra graphics and with there inverse makes a total of over nine hundred.

£29.95
inc VAT

The KAYDE Graphics Board has facilities for either 4K of RAM (for user definable graphics) 4K of ROM or our 4K Tool Kit Chips that will be available shortly. All the graphics are completely software controlled therefore they can be written into your programmes. Here are a few examples:
A full set of space invaders — Puckman — Bullets, Bombs — Tanks — Laser Bases and Alien Ships

NO EXTRA POWER NEEDED

KAYDE 16K GRAPHICS BOARD SOFTWARE

Peckman: The only true ZX version of the popular arcade game.

Centipede: "In all I think this is the best presented moving graphic program I've yet seen"

Phil Garratt, Interface.

Space Invaders: The best version available anywhere. Graphic software can only be used with a graphics board.

KAYDE 16K 81 SOFTWARE

Centipede "In all I think this is the best presented moving graphics program I've yet seen" Phil Garratt Interface

3D/3D Labyrinth. A Cubit Maze that has corridors which may go left, right, up, down.

Peckmen (the latest addition in 81 games)

**WHY WAIT TO PAY MORE
FAST IMMEDIATE DELIVERY**

Post to:

Dept YC7

Kayde Electronic Systems Ltd

The Conge

Great Yarmouth

Norfolk NR30 1PJ

Tel: 0493 57867 (DEPT YC)

**DON'T FORGET YOU CAN ALWAYS ORDER
ON THE TELEPHONE WITH YOUR CREDIT CARD**

All products include VAT are fully built and tested and come with a **COMPLETE MONEY BACK GUARANTEE**



I enclose £.....

Name

Address

Please add £1.50 p/p for all hardware and 50p for all software.
Please make cheques payable to Kayde Electronic Systems Ltd.

SOFTWARE ATOM FILE HANDLING

DATABASES are collections of information designed to allow you quick and easy access to the necessary data. A simple database sits in the corner of every office in the country, in the guise of a filing cabinet.

The more powerful the management system of the database is, the more choice you have of ways of interrogating the information base. Typical databases would be personnel records, payroll, scientific results, sales figures and mailing lists organised into files. A sophisticated database consists of a suite of programs accessing and working on many different files to provide the user with information.

Files are the nuts and bolts, and they can be classified as sequential, indexed or random access. Sequential file structures, sometimes known as serial files, have their information stored as records in memory, one after the other, head to tail. One important advantage of this style is the simple structure which makes program writing easier and less time-consuming.

Once you have created the file you must make it easy to use. File management is carried out by a trio of assembler routines euphemistically known as SID. These three routines perform the search, insert and delete functions that are necessary. The search routine is a simple linear search, that is to say it starts at the beginning of the file and works its way through each record, searching on the first three characters of each record.

If the search is successful the record will be printed out, if not the search flag will be conditioned and an appropriate message displayed on screen. Remember this search is conducted on a particular record's label, so as long as the key is unique you do not have to worry whether the rest of the record is similar to others. For example, you could use the last three digits of an invoice number as a label and the goods, price and date as the rest of the record. If the key cannot be guaranteed, just prefix each record with a three digit number from, say, 000 to 999 giving 1,000 unique labels but at the cost of a three-byte overhead for each record.

This search routine is also utilised by the insert and delete routines — not surprisingly since in order to delete a record you first need to find its position in the file. The search flag

George Byrns' trio of assembler routines provides the search, insert and delete functions that you need to handle the files which make up your Acorn Atom database.


is again used to flag messages to the user in the event of unsuccessful searches when deleting or trying to insert a record that already exists.

The file is created or loaded back into the upper text space with the pointers to the file base set at #8205 thus allowing space for the file parameters Filelen and Recordlen to be saved with the file. With only 6K of storage you need to be fairly concise. Naturally, with a disc drive, the program could be developed into a really powerful tool, as this would load the files in a matter of seconds, giving the capability to search through vast amounts of information in a minute or so.

The program is menu-driven and upon selection of a function a jump to the appropriate subroutine is performed along with error checking. To end a function and return to the menu the colon is recognised as end of function.

Suppose an estate agent had set up a file of all the properties on the market. Details listed could include the area of the city, detached or semi-detached, number of bedrooms, central heating and price. A prospective buyer might come into the office and ask for all properties in a particular area of the city, or request details of four-bedroom detached properties, in a specific area and with central heating. Here the multi-search comes into play.

This routine performs a global search on up to three target strings simultaneously and returns all the records that satisfy the search parameters. The target strings can be any

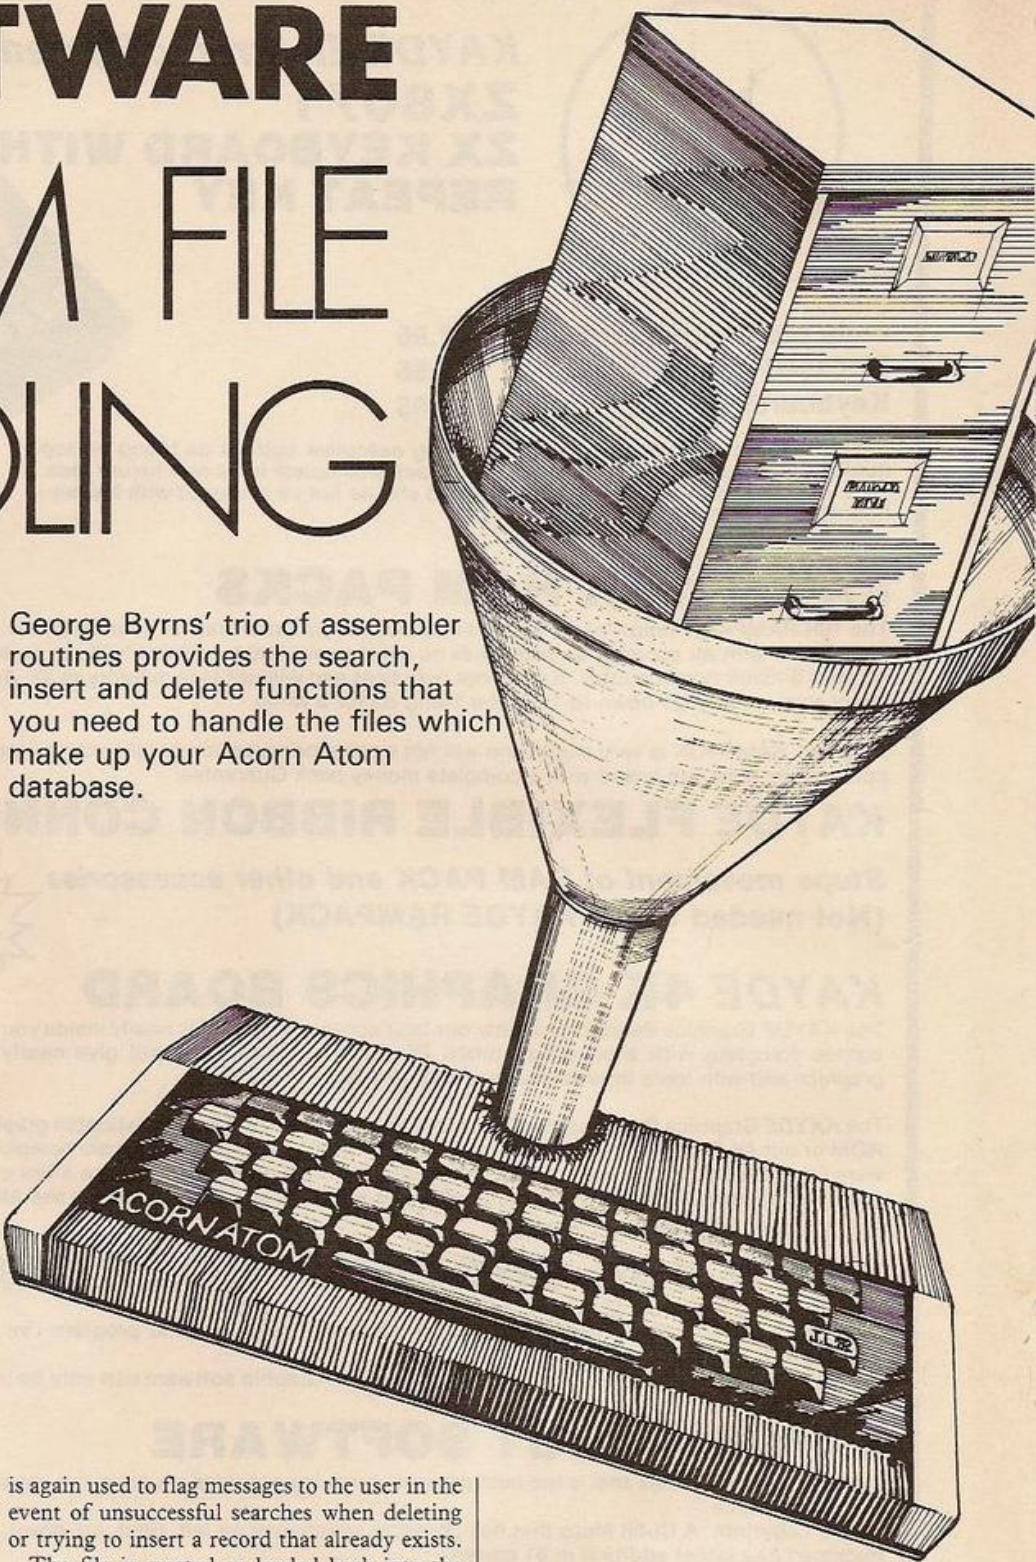



1

11

(continued from previous page)

LL12	Done	STA 83	Point + 1
LL13	Out	JMP LL18	Jump to Add Rec Len
		LDA 8FF	
		RTS	
LL14	Initialise	Multi Search	
		LDA 84	File Len
		BEQ LL13	Out check for zero file
		STA 93	Temp-file len
		LDA 324	Low byte of C
		STA 92	Success Count
		LDA 80	Filebase
		STA 82	Point
		LDA 81	Filebase + 1
		STA 83	Point + 1
LL15	Start Over	LDA 80	
		LDA 97,X	Fetch first object
		STA 85	Object
		INX	
		LDA 97,X	Object + 1
		STA 86	
		INX	
		LDA 97,X	
		STA 90	String Len
		STX 91	Temp X store
LL16	Begin	LDA 82	Point
		STA 88	Temp-point
		LDA 83	Point + 1
		STA 89	Temp-point + 1
LL17	Look	LDA 88	Temp-point
LL18	Again	LDA 89	Temp-point + 1
		STA 89	
		JMP LL17	Look

LL19	Next Char	INX	
		CPY 90	String Len
		BNE LL18	Again
LL20	Found	DEC 92	Success Count
		BEQ LL22	Print Record
		LDA 91	Temp X store
		TAX	
		INX	
		LDA 97,X	Fetch next object
		STA 85	
		INX	
		LDA 97,X	
		STA 86	
		INX	
		LDA 97,X	
		STA 90	Object length
		STX 91	Temp X store
LL21	Next Record	JMP LL16	Begin
		DEC 93	Temp-file len
		BEQ LL25	Out
		LDA 324	
		STA 92	Success count
		CLC	
		LDA 82	Point
		ADC 87	Rec Len
		STA 82	
		LDA 80	Point + 1
		ADC 80	
		STA 83	
		JMP LL15	Start Over
LL22	Print Record	LDA 80	
LL23	Cont.	LDA 82	Point
		CPY 82	Carriage return ?
		BEQ LL24	Done
		JSR FFF4	Print char to screen
		INX	
		BNE LL23	Cont.
LL24	Done	LDA 324	
		STA 92	Restore success count
		JSR FFFD	CR/LF
		JMP LL21	Next Record
LL25	Out	RTS	

The zero-page locations.

Filebase	30	Record Len	87
Filebase + 1	81	Temp-pointer	88
Pointer	82	Temp-pointer + 1	89
Pointer + 1	83	String Len	90
File Len	84	Temp X store	91
Object	85	Success count	92
Object + 1	86	Temp file len	93

Figure 1. The linear search.


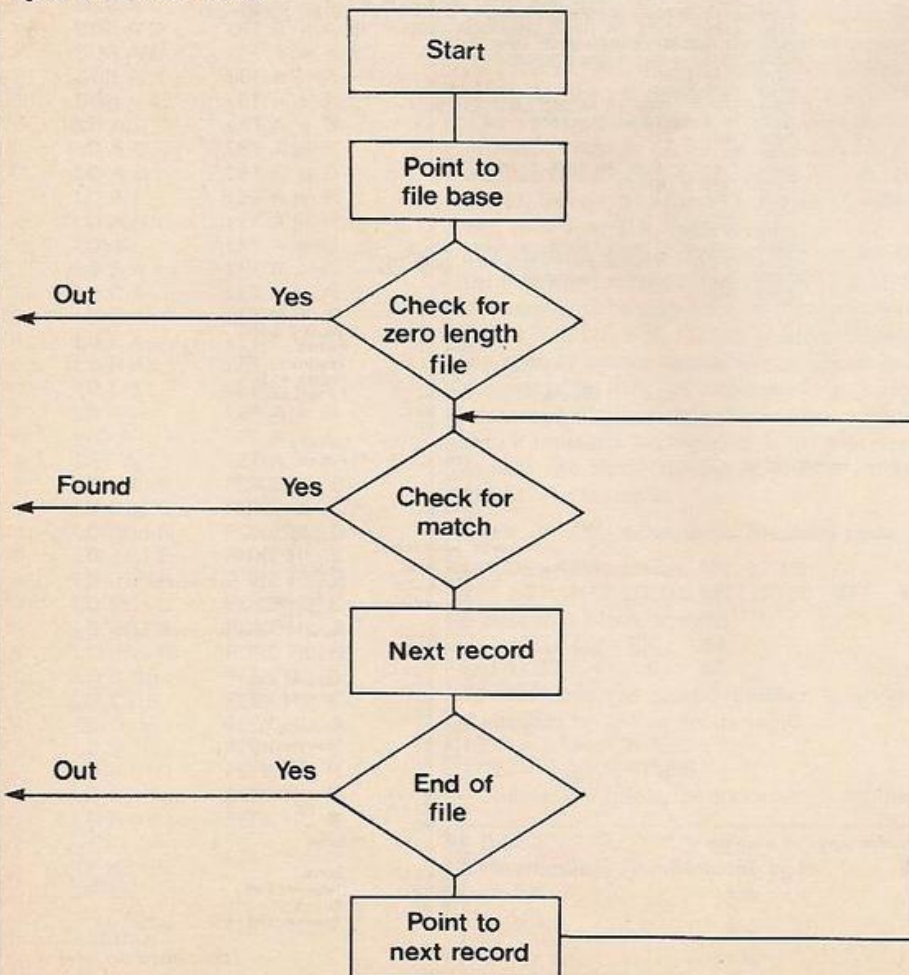



Figure 2. The multi-search.

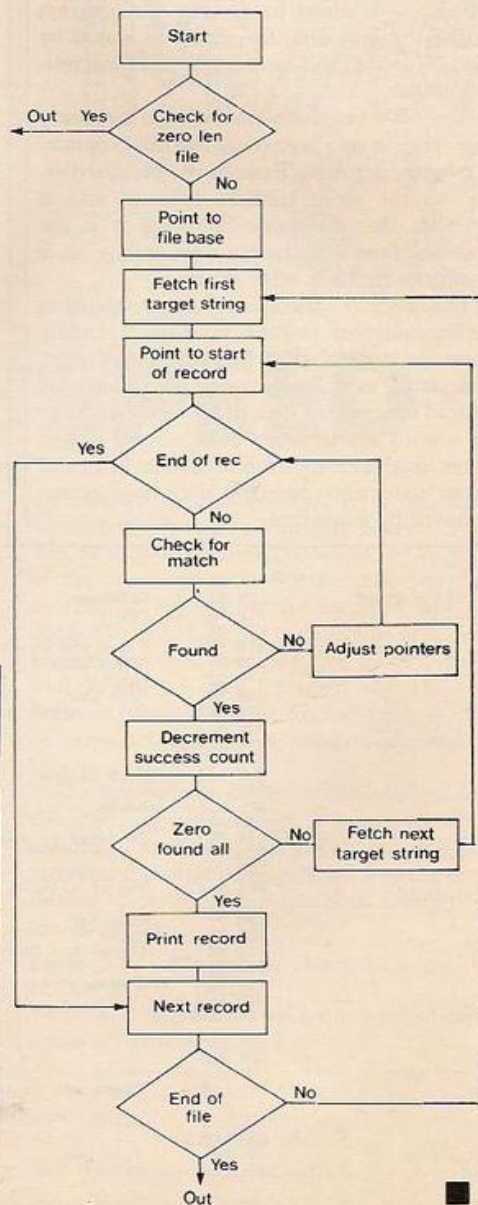

MEMOTECH Explores the Excellence of your ZX81

THIS MONTH -
**2 NEW
PAKS!**

MEMOPAK
CENTRONICS I/F

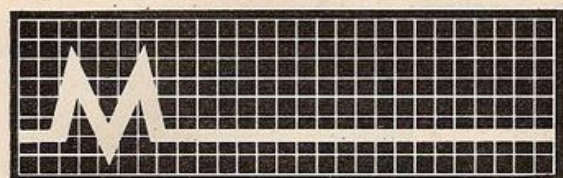

MEMOPAK 16K

MEMOPAK 64K

MEMOPAK HRG



**MEMOPAK
32K RAM**
Operates in tandem
with Sinclair 16K Ram
to give a full 48K!

Memotech's Memopak Range

All five of the currently available Memopaks are housed in elegant black anodised aluminium cases, and are styled to fit wobble-free onto the back of the ZX81, allowing more add-ons (from Memotech or Sinclair) to be connected.

£68⁷⁰

plus VAT

MEMOPAK 64K MEMORY EXTENSION

The 64K Memopak extends the memory of the ZX81 by 56K, and with the ZX81 gives 64K, which is neither switched nor paged and is directly addressable. The unit is user transparent and accepts commands such as 10 DIM A(9000).

Breakdown of memory areas...0-8K-Sinclair ROM. 8-16K-This area can be used to hold machine code for communication between programmes or peripherals. 16-64K-A straight 48K for normal Basic use.

£43⁴³ / £26⁰⁰

plus VAT

MEMOPAK 32K and 16K MEMORY EXTENSIONS

These two packs extend and complete the Memotech RAM range (for the time being!) A notable feature of the 32K pack is that it will run in tandem with the Sinclair 16K memory extension to give 48K RAM total.

£52⁰⁰

plus VAT

MEMOPAK HIGH RES GRAPHICS PACK

HRG Main Features — • Fully programmable Hi-Res (192 x 248 pixels) • Video page is both memory and bit mapped and can be located anywhere in RAM. • Number of Video pages is limited only by RAM size (each takes about 6.5K RAM) • Instant inverse video on/off gives flashing characters • Video pages can be superimposed • Video page access is similar to Basic plot/unplot commands • Contains 2K EPROM monitor with full range of graphics subroutines controlled by machine code or USR function

£34⁷⁰

plus VAT

MEMOPAK CENTRONICS TYPE PARALLEL PRINTER INTERFACE

Main Features — • Interfaces ZX81 and parallel printers of the Centronics type • Enables use of a range of dot matrix and daisy wheel printers with ZX81 • Compatible with ZX81 Basic, prints from LLIST, LPRINT and COPY • Contains firmware to convert ZX81 characters to ASCII code • Gives lower-case characters from ZX81 inverse character set

Coming Soon...

**MEMOPAK RAM
HI-RES GRAPHICS
CENTRONICS I/F**

ZX81

A complete range of ZX81 plug-in peripherals

Digitising Tablet

RS232 Interface

We regret we are as yet unable to accept orders or enquiries concerning the above products, but we'll let you know as soon as they become available.

Please make cheques payable to MEMOTECH Ltd.

Please Debit my Access/Barclaycard account number

*Please delete whichever does not apply

Please send me

64K RAM £68.70 + £10.30 VAT
32K RAM £43.43 + £6.52 VAT
16K RAM £26.00 + £3.90 VAT
HRG £52.00 + £7.80 VAT
CENTRONICS I/F £34.70 + £5.20 VAT
Packaging & Postage £2.00 per unit

Price No Total

£79.00
£49.95
£29.90
£59.80
£39.90

TOTAL ENC

SIGNATURE

DATE

NAME

ADDRESS

TELEPHONE

Access/Barclaycard Holders
please Tel: Oxford
(0865) 722102
(24 hrs)

© R. Branton & G.A.C. Boyd 1982

We want to be sure you are satisfied with your Memopak — so we offer a 14-day money back Guarantee on all our products. Memotech Limited, 3 Collins Street, Oxford OX4 1XL, England Tel: Oxford (0865) 722102 Telex: 837220 Orchid G

PROJECT ASIMOV AS A DATABASE

A VAST AMOUNT of work has been done on mainframe computers to find efficient ways of accessing parts of a collection of data in order to produce lists or reports that are useful to organisations or individuals. Data in this sense is a resource that is stored, manipulated and output from the computer for a multitude of tasks.

Extending programs

Word processors originally grew out of the need to write and edit source code for big mainframe computers. In the same way a microcomputer word-processing program can be used for other purposes than simply writing and printing text. Word processors like Asimov can be extended into database systems by adding commands.

Asimov will not be a true database management language. A database language should allow you to interrogate a collection of information in any way that you determine, rather than by one of a few limited routes built into a program.

Information held in a computer may take many forms. Data is conceptualised as letters or numbers, truth values, references or program instructions; but it is in fact only a stored value. A program instruction may have exactly the same binary value as a relative address or the letter 'k'. The description given to the stored value is an attribute of the data. A data attribute identifies an area of RAM and provides information as to how the contents of that RAM should be treated.

Implicit attributes

Attributes may be implicit; for example, the second byte of a machine-code instruction is an address rather than the instruction to the Central Processor Unit. Alternatively, the data attributes may be explicit and very high level, the information listed in figure 2 is grouped in

John Dawson's Asimov word processor can offer some of the facilities of a database. Here he shows how these techniques could be used to classify a cellar of wine.

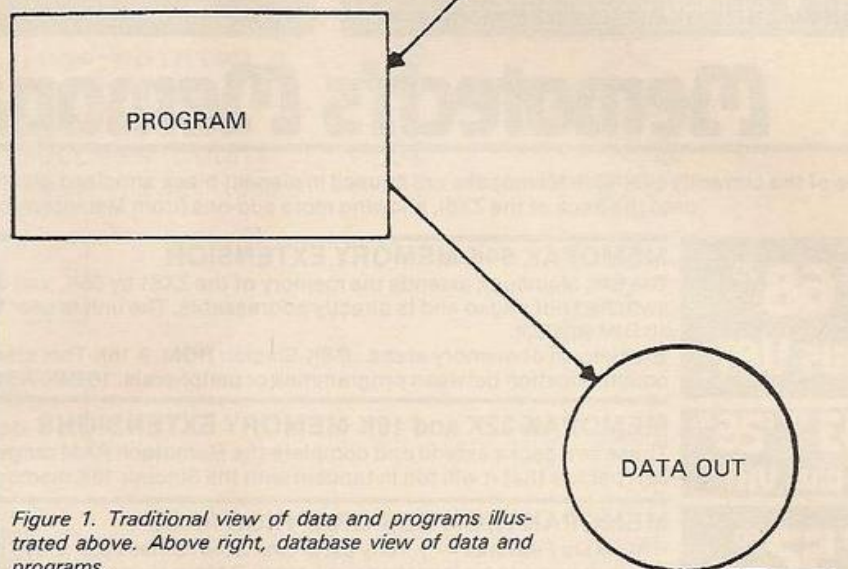


Figure 1. Traditional view of data and programs illustrated above. Above right, database view of data and programs.

a structured form and each record starts with a control line:

[.....]
which contains a number of attributes of the data which follows.

The control line may contain 15 characters and the instructions in the extended version of Asimov will allow a user to search through a file of records, selecting those in which the control line matches a selection of attributes.

This pseudo-database approach means that sorting through the records can be done only by examining that line and not by looking at names or other pieces of information within the record.

Fine French wine

Fr in the control means that the wine comes from France; but suppose I want to know whether the collection contains any Cotes du

Definitions.

File — A file is a collection of records and will normally be a text in its own right. A file will be kept up to date by editing the text using Asimov. A combined text and record file is formed by retrieving the records first and then writing or appending the text.

Record — A record is a number of fields. The start of each field is identified uniquely within the record and the fields are linked or related to each other. For example, Rhone wine is manufactured in France and


these two pieces of information will be linked in a record of a Rhone wine. Note however, that Rhone wine must be French; not all French wines are made in the Rhone area.

Field — The most basic part of the whole collection of information. Each field is terminated by a carriage return character to speed data input for name and address lists. Consequently each field is one paragraph long.

Figure 2.

```

[DUMMY.....
^1 Name
^2 Year
^3 Country of Origin
^4 Grape
^5 Shipper
^6 Date bought
^7 Bottles left
^8 Tasting notes]
  
```

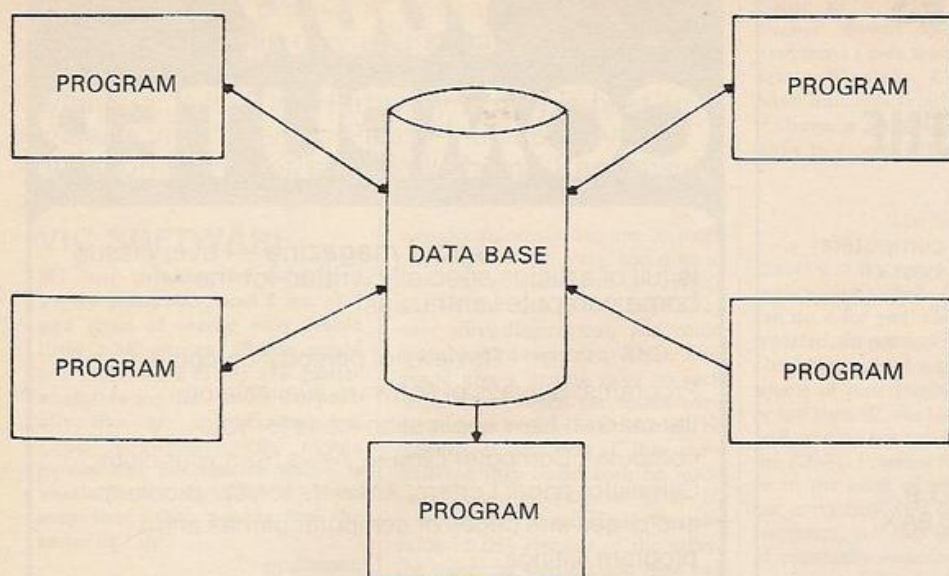HANDICAPPED COMPETITION

In Information Technology Year, *Your Computer* is sponsoring a competition to aid the handicapped. The competition, which is divided into two sections, is to design a device which helps disabled people to use a microcomputer to overcome their handicaps. All entrants to the competition must write up to 2,000 words describing such a device. In addition, entrants over the age of 18 will be expected to show a prototype device in action. More information about the competition and its rules will be found in *Your Computer*, April edition. The competition closes on August 31.

Luberon, the only way to find out is to print all the French wines. It is possible to find the words Cotes du Luberon with the Find command in Asimov and then print the record from there, but that is still not a real database.

The commands are nevertheless a useful and powerful way of storing, manipulating and retrieving information.

Some word processors allow you to write an address list and then generate standard letters with personal names incorporated into the letter. Asimov does not include this facility because it was designed to help write articles and books. The quality of the typeface produced by dot-matrix printers is legible and acceptable for draft articles or, for clubs and campaigns where the primary need is to distribute information.

Mailmerge facility

In adding a mailmerge facility to Asimov it proved possible to provide extended instructions that could be embedded into a text and edited with the normal word processor commands. This provided a more flexible system for people to use. Writers about wine could use extended Asimov to store information such as

Name
Country of origin (CoO)
Region within the CoO
Type of grape

Red or White
Wine shipper's name or where bought
Date bought
Cost

How many bottles left

Tasting notes (free format comments)

There are a number of uses for this information. The writers may wish to access the tasting notes for a single wine or a class of wines in the course of preparing an article or may wish to write to a shipper enquiring whether such and such a wine is still available.

They may wish to produce a catalogue of their stock, listing the wines according to various features — White Burgundy, or all the wines from California.

Each of these uses requires the data contained within the collection to be accessed and printed by the computer in different ways.

In addition to the instructions in figure 3 a couple of others are necessary to separate the text from the record file but these are trivial.

Missing instructions

Many instructions are missing that would be considered essential in a true database language. Boolean operators should allow you to carry out NOT and OR comparisons on the data to achieve selections such as:

Print all the Red OR White Spanish wines

The present control line is a permanent And function for example Print those records that are French And Red would look like

[FR.R.....]

A proper database language would allow you to add columns of figures extracted from the file of records, to select records that fell within a range of criteria — all the wines bought between 1975 and 1980 — or to answer questions such as — How many wines did we buy in 1976?

Nevertheless, the power of simple commands should not be disregarded and one crucial element in the design of any collection of information is safe — the data is in a form suitable for further analysis by more sophisticated procedures. Sorting a selection of records in a file into a particular order according to some attribute, the name of the wine, for example, should be comparatively straightforward.

Figure 3.

This list of instructions will provide easy, flexible and powerful ways of intermixing and listing data and text. The characters at the head of each descriptive paragraph are arbitrary and specific to Asimov — another program could use entirely different codes. The codes should be easy to remember and not intrude into your normal writing.

>

Search through the files and find the next record that matches the current control line.

\$n

Repeat instruction which forms part of a Repeat While loop. The instruction has no effect in its own right except to mark a position in the text. The \$n instruction must be matched with a <n instruction. This pair of instructions causes the computer to jump to the character following the \$n instruction while the End of File (EoF) flag is False. The EoF flag is set false at the start of the merge print function. The Repeat While pair can be used to print all the records in the file that match the current control line if a > instruction is included in the loop. Repeat While pairs may be nested.

?

Set of EoF flag to false. This instruction allows you to make more than one search through a file of records in the course of printing a document. For example, if you want to produce a list of all the Italian red wines in the collection the text could look like this:

List of Italian Reds and French White wines at 18 August 1982.

ITALIAN REDS

[IT.R.....]

\$1 > ^1^2^7

<1

FRENCH WHITE

[FR.W.....]

\$2 > 1 2 7

<2

End of list

When the program has completed printing the first selection of Italian red wines it will continue to print the heading for the next section and will then restart its search through the file for all the French white wines.

^ x

Print the field in the current record that corresponds to x. Each field may be of unlimited length and is terminated by a <Return> character. A record may have up to 62 fields — the identifier following the field marker is supplied automatically by ASIMOV when a record is typed. You may have only one record in the computer, comprising a number of standard paragraphs for flat leasing, for example, which are called up as necessary.

[.....]

Sets the control line to the characters inside the square brackets. A full stop is a "wildcard" and will match with any character so that an "empty" control line of 15 full stops will print all the records.

?

Print the current serial number. A variable is set to zero at the start of a print merge operation and this variable is incremented and printed at the present position of the printer. This instruction is useful for numbering items in a catalogue or list.

THE BEEB PRODUCES THE BEST TV PROGRAMMES IN THE WORLD . . .

Uncle Clive produces the World's best computers
and Jack Gibbons A.I.B. produces the best
Banking Programs in the World . . . *Anon.*

THE PERSONAL BANKING SYSTEM

is available direct from J.P. Gibbons A.I.B.
14 Avalon Road, Orpington, Kent, BR6 9AX.
Price £9.95 inclusive.
For Cassette and Users Manual
(Requires 16 to 48K Ram).
Specify whether ZX81 or Spectrum.
Bank reconciliation module.
Available soon £6.50.

* * * *

Also stocked at the **Buffer Micro Shop,**
Streatham — Microware Shop,
Leicester — John Derby, Bournemouth
— and branches of the **Computer**
Bookshop Group.

Full after sale maintenance available.

YOUR COMPUTER

is your magazine — every issue
is full of articles specially written for the
home computer enthusiast.

Reviews of personal computers;
Programs; Surveys of software available on
the market; New application ideas for your
computer; Computer Club — news from your clubs;
Calculator page; Letters; Answers to your problems
and pages and pages of computer games and
program listings.

All for only 60p
Ensure your copy
each month, take
out a subscription
NOW!

SEE THE
SUBSCRIPTION
ORDER FORM BETWEEN
PAGES 98 & 99
IN THIS ISSUE

ZX SPECTRUM OWNERS

UPGRADE YOUR 16K SPECTRUM
TO A FULL 48K WITH OUR
FULLY ASSEMBLED AND GUARANTEED

**MASSIVE
32K RAM**

MEMORY EXPANSION
SIMPLE TO FIT. SUPPLIED WITH FULL
INSTRUCTIONS

FULLY INCLUSIVE PRICE

£39.95 Allow 28 days delivery



Stonechip Electronics

Send now to:

**STONECHIP ELECTRONICS,
UNIT 4, HOSKINS PLACE
WATCHETTS RD, CAMBERLEY,
SURREY. TEL: (0276) 681131**

MAKE CHEQUES OR P.O.'s PAYABLE TO:
STONECHIP LTD.

VIC-20 OWNERS

Fully Assembled, Cased and Guaranteed

**MASSIVE
16K RAM**

MEMORY EXPANSION
PLUGS DIRECTLY INTO YOUR VIC-20
OR MOTHERBOARD

FULLY INCLUSIVE PRICE

£39.95 Allow 10 days delivery

PLEASE SEND ME:

Insert No.

- ☐ 16K RAM FOR VIC-20 at £39.95 each.
☐ 32K RAM FOR ZX SPECTRUM at £39.95 each.

I enclose £.....

NAME

ADDRESS

YC/8

RESPONSE FRAME

Do you have a problem? Your manual is incomprehensible or you just cannot get the hang of that programming trick you tried — whatever it is, Tim Hartnell will do his best to answer your queries. Please include only one question per letter and mark them "Response Frame".

VIC SOFTWARE

I am thinking of buying a Vic-20 computer, and I am sick and tired of seeing only feeble little 3.5K games. Please could you inform me of any 16K games available for the Vic-20. I especially like the complicated but good Adventure and space games like Starfighter which is available for the TRS-80. I am sure that other people feel the same as I do.

Gregg Barnett,
Adbaston, Stafford.

IF AVAILABILITY of software is one of the main factors influencing your choice of computer, I suggest you look at the software first, and pick up the computer from that. The Vic-20, the TI 99/4A and the Atari 400 are now very close in price, and all offer computer power with plug-in cartridges. Atari's Star Raider is possibly the most impressive game on the market, but reviews of the same company's answer to Pacman have been far from favourable. Whichever machine you buy, you will have to accept some compromise — price against facilities, available software against ease of programming. The new Dragon 32 has at least five cartridges already available, and this may well be worth considering. Software for the Spectrum is already available, and the quality of the first programs I have seen suggests that you may be able to satisfy your game-playing needs with a Spectrum. To repeat my first suggestion, rather than criticise a particular machine for not having the programs you want, look for the games you want, and then see which machine supports them best.

FA CUP DRAW

An idea came to me when the FA Cup Draw was made. I could do my own computerised FA Cup draw. I immediately set about this, thinking of different ways to accomplish it. I have an idea on how to select a random football team, but the more I think about this, the longer the program seems to become. Also, after two teams have been drawn together, how do you ensure that the same two teams do not reappear again?

John A Stonier,
Welwyn Garden City, Hertfordshire.

IT IS DIFFICULT to give you specific advice, as I do not know how you have set the program up. However, if you base it on arrays, and the draw is held within an array, you could

consider dimensioning one or more extra depth in the array, and store in this extra dimension a unique number for each team. If the array were three-dimensional, you could allot the third element to RND. This would give a unique value to each team. Then, when the teams were drawn together these values could be checked. If, and only if, they were different they could both be made equal to a third value of RND. If, however, they already held the same value in this element of the array, the computer would know they had already been drawn together.

INTRODUCTORY BOOKS

I recently purchased a ZX-81 to help my daughters who are 11 and nine to acquire skills in using and understanding computers. It was not as easy as I had thought and now the computer is seldom used. I find the instruction book rather hard work. I have my first copy of Your Computer with so many advertisements for books for novices such as myself, I am wondering if you can advise me at all. The choice is bewildering.

Sue Bougard,
Harestock, Winchester.

THIS IS almost as difficult a question to answer as "Which is the best computer?", and made more difficult for me as I have written a few of the books which are among the bewildering number available. I will try to be impartial, which is difficult in the circumstances. In my opinion the books which you should consider as first-timers' books include, but are not necessarily limited to ZX-81 Basic Book by R Norman, The ZX-81 Pocket-Book by Trevor Toms, and Getting acquainted with your ZX-81 by Tim Hartnell. When you've covered the material in these books, you could look at The Explorer's Guide to the ZX-81 by Mike Lord, and Byteing Deeper into your ZX-81 by Mark Harrison.

LOOSE ADAPTOR

When my Sinclair ZX-81 arrived it worked perfectly for about two months and then the 9V DC input plug from the adaptor to the computer became loose, and the slightest jog cleared the screen. I took it back, and received a replacement. Since then it has become loose a further three times. The problem is that the only thing that holds the adaptor plug in place is a strip of metal with a

bump in it. This is gradually pushed down, and causes the problem. I was wondering if any other Sinclair ZX-81 owners have had this trouble, and if so, if there is anything that can be done to stop this happening?

P Bradbury,
Westkingsdown,
Near Sevenoaks, Kent.

FIRSTLY, IT is a very simple matter to replace the socket. Any electrician can do it for you. Once you have it replaced, do not continue to pull the plug in and out. I suggest that is the source of your trouble. Disconnect, or just turn off, the power unit at the wall, and do not touch the socket on the ZX-81. It seems to me you must be in the habit of pulling the plug out every time you finish using the computer, and this is a certain way of eventually ensuring it will work itself loose. So, in brief, find an electrician to replace it with the best socket he has, and then once you have the unit working, do not pull the plug out again.

ATARI OWNER

Is there no-one out there in microland who has an Atari? As it is totally Your Computer's fault that I am now a pauper, I think you should help me. I knew nothing about computers until I foolishly bought a copy of your magazine. Then I was hooked. One question: can I use a cassette recorder with my micro other than the Atari one, or is it dedicated to the output, like the Vic-20 one?

Howard G Angel,
Harrogate, North Yorkshire.

YOU ARE NOT the only Atari owner. I have one, and so do tens of thousands of other people in the country. And now that the price of the 400 has dropped, there are certain to be more and more owners as time goes on. Yes, you do need to use the Atari cassette recorder, which is designed specifically and solely for the Atari computer. Although this is a disadvantage in terms of the cost, it is considered worthwhile by many because the load/save reliability of dedicated cassette machines tends to be higher than those which accept just any standard domestic recorder. My Atari recorder, for example, is considerably more reliable than my ZX-81/domestic recorder hook-up.

RANDOM MOVE

I own a 16K ZX-81 and I am writing two programs that involve the random movement of two characters around a maze. What I cannot work out is how to change the direction of the character at random when it comes to either a three- or four-node junction. I was wondering whether you could help me?

Nick Flint,
Salisbury, Wiltshire.

ASSUMING YOUR moving object is at locations Y,X. To move up, as you know, you subtract one from Y; adding one to Y to move down. Subtract one from the X value, and the object moves to the left, add one and it moves to the right. There are, in effect, four choices, and a few lines of code can be written to choose one of the four, and then make the necessary alterations in the value of Y and X. Try this routine, and then see if you can adapt it for your own program. The vital lines are 40, 50 and 60. It can easily be adapted for three directions.

```
5 REM MAZE DECISIONS
10 LET X=10
20 LET Y=10
25 LET A=X
26 LET B=Y
30 PRINT AT Y,X;"■"
40 LET K=INT (RND÷4)
50 LET Y=Y-(K=0) + (K=1)
60 LET X=X-(K=2) + (K=3)
70 PRINT AT B,A;"..."
80 GOTO 25
```

ALIEN EXPLODES

I have a ZX Spectrum on which I am expanding my programming knowledge. My problem is trying to fire a missile from a base, and if it hits an alien, making that alien explode. I have heard this is something to do with graph co-ordinates, but on trying to apply this to a program, I have had no success.

Jason Hodges,
Brentwood, Essex.

YOU HAVE NOT said exactly what your problem is, but I guess you want to know how the missile knows it has hit an alien. You can use the ATTR function which can tell when the missile is just about to run into a character cell which contains an alien. ATTR, which is used in the form ATTR(Y,X), where the Y is the co-ordinate down the screen, and the X is the co-ordinate across it. You are printing the missile with Y and X as

PRINT AT Y,X;"**"

You need to write a few lines to check the attributes of the square Y,X before the missile is printed there. The number actually produced by ATTR depends on whether the character is flashing or not, whether it is bright or not, and the colours of the Ink and Paper at that position. Because ATTR seems to me to be a little unpredictable in practice, it seems best to set up a routine to print out the results of ATTR before you finally decide what value you wish to test for. The absence of a value produced when the missile moves over a blank background is not recommended. Instead of this, test for the presence of a particular value. You can do this when writing a program by including a temporary line of the type

PRINT AT 0,0;ATTR(Y,X)

then watching what happens to this value when the missile is just about to move into a cell occupied by an alien. ■



A BYG BYTE

FROM THE PRICE OF A
16 K RAM PACK

NOW ONLY

£25.50

*inc. V.A.T., postage and packing
Dispatch guaranteed within 24 hrs*

Please rush me my BYG BYTE 16 k Ram Pack

NAME _____
ADDRESS _____ YC8

PLEASE MAKE ALL CHEQUES PAYABLE TO

Phoenix Marketing Services

Oaklands House, Solartron Road, Farnborough, Hants. GU14 9QL.

Tel: (0252) 514990.



FINGERTIPS

Fingertips is our regular calculator column covering calculator news, programming hints and examples of unusual applications. The column is written and compiled by calculator enthusiast David Pringle who is glad to hear of any of your ideas. *Your Computer* pays £6 for each of your contributions published.

THIS MONTH I am going to stand down and hand the column over to four contributors, two of whom are from a growing band of overseas correspondents. You may note three of the programs are written for the Casio calculators. This reflects the majority of the Fingertips mail-bag — so Texas Instruments, Hewlett-Packard and Sharp users should wake up, and start submitting some of their more inspirational material.

The program will give the distance from your town to any location in the world in miles, or kilometres if required, writes Andrew Shelbourne of Chesterfield, Derbyshire. I am a radio enthusiast and it is often useful to know how far a broadcasting station is from my location. It is written to run on the FX-180p.

You could also work out approximately how long a journey is or just use it out of interest. It proves to be much more accurate than the scales given on maps and atlases. The program must be used in conjunction with the index of an atlas to find the exact longitudes and latitudes.

The calculation is based on the formula:

$$\cos D = \sin La \cdot \sin Lb + \cos La \cdot \cos Lb \cdot \cos Lo$$

Where D is the angle of area between two points; La is the latitude of first town; Lb is the latitude of second town; Lo is the difference in longitude between a and b. This formula was obtained from the *Radio communication handbook*, Volume 2 page 11.23 printed by the Radio Society of Great Britain. The flowchart in figure 1 shows how to use the program. A final note, if the latitude of either town is south of the equator, it should be negative. For example, Capetown is 33° 59" south. Therefore enter it as -33° 59". The flowchart may seem complicated but after a few calculations it becomes easy and one will remember whether a co-ordinate should be negative or not.

After entering the program, put 69.06 kin 4
1.151 kin 5
and your latitude in k memory 1. For example:

53°999 15°999 kin 1

For distance in kilometres, put 111.2 kin 4 1.853 kin 5

Mode 0 P1	13 kout 1	25 ENT
01 ENT	14 COS	26 ×
02 +	15 ×	27 kout 4
03 ENT	16 kout 2	28 =
04 =	17 COS	29 Min
05 kin 3	18 ×	30 kout 6
06 kout 1	19 kout 3	31 inv °999
07 SIN	20 COS	32 ENT
08 ×	21 =	33 ×
09 ENT	22 COS ⁻¹	34 kout 5
10 kin 2	23 kin 6	35 =
11 SIN	P2	36 M+
12 +	24 inv °999	37 Mr

Here is the old favourite game of mastermind, but this time for the PC-1211 pocket computer, writes Robin Ager of Wimbledon, London SW19. The idea of the game is to guess the computer's four-digit number, each of which can be the numbers 1 to 9. No numbers appear twice in the computer's code.


The computer marks correct numbers in the correct place and correct numbers in the wrong place.

The program uses 564 steps. When typing in the program do not type semi-colons after the line numbers.

This jackpot program for the Casio FX-602P was originally written for the FX-502P, and after purchasing the FX-602P, I altered it a little, and improved the read-out, writes Fred de Heer of IJmuiden in the Netherlands.

Before entering the program MODE 3, invMAC, MODE 2, MODE 20 must be executed, to put the calculator in the correct format. For end-

Figure 1.

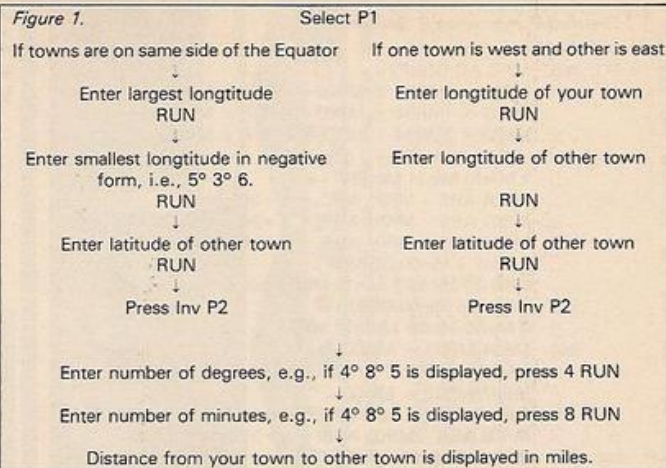

ing an Alpha-statement in the WRT mode, FST is used instead of invA1, which works as well.

The words in the Alpha-statements in the program are written without commas for separation, as well as the two-digit numbers in the normal status. With most inverse button-functions, inv is deleted on the program.

In the program, several extra RAN# functions have been added to reduce the possibility of repetition of combinations, after you have played for a time. Since it uses 502 steps and 22 data registers, the program can only be used in the

FX-602P, and possibly in a calculator of the 700-series.

After inserting the program, followed by Mode 1, the jackpot is initiated with P9 — twice, if the credit counter equals 0 and reads out the following:

10 ■ —
↑
credits 1 2 3 ← reel number

P0 decreases the credit counter by 1 and starts the jackpot, displaying a digit for reels 1, 2 and 3, followed by WIN: X

if the combination is a winning one.

The win may be collected, P0 or EXE, or can be gambled, P4, after (continued on next page)

```

1: "A" CLEAR
3: INPUT "ENTER A NUMBER(1-1000)"; X: X=X/1000
4: M=0: FOR Y=1 TO 4
5: T=147*X: T=T-INT(T): X=T: T=INT(T*10)
10: IF T=0 THEN 5
13: A(Y)=T
16: NEXT Y
17: IF (A=B)+(B=C)+(C=D)+(A=C)+(B=D)<1 THEN 20
18: GOTO 4
20: M=M+1: INPUT "ENTER YOUR GUESS "; Z
22: W=0: R=0
23: FOR Y=0 TO 5 STEP -1
25: Z=Z/10: J=(Z-INT(Z))*10: Z=INT(Z)
28: A(Y)=J
30: NEXT Y
40: FOR Y=1 TO 4
45: FOR Q=5 TO 8
50: IF A(Q)=A(Y) LET W=W+1
55: NEXT Q
57: IF A(Y)=A(Y+4) LET R=R+1
60: NEXT Y
85: W=W-R
90: IF R=4 THEN 200
95: PRINT "RIGHT PLACE="; R; " WRONG="; W
110: GOTO 20
200: BEEP 3: PAUSE "WELL DONE YOU GUESSED IT"
210: FOR Y=1 TO 3
212: PAUSE "*****"
220: PAUSE "IT TOOK YOU "; M; " GOES"
222: NEXT Y
225: INPUT "WANT TO PLAY AGAIN(Y/N)"; U$
230: IF U$="Y" THEN 4
240: END
    
```

Robin Ager's Mastermind program.

FINGERTIPS

The matrix inverter by G Devilee.

MODE .25

PO: Ibl0 MAC AC GSBP7

MR01 x (MR05 x MR09 - MR08 x MR06) -
MR02 x (MR04 x MR09 - MR07 x MR06) +
MR03 x (MR04 x MR08 - MR07 x MR05) =
"DET = \$" HLT x=0 goto1

1 Min10 Min14 Min18

MR04 ABS - MR01 ABC = x=>0 goto2

MR07 ABS - MR01 ABS = x=>0 goto3 goto4

Ibl2 MR07 ABS - MR04 ABS = x=>0 goto3

0 MinF 3 Min00 GSBP1

0 Min10 Min14 1 Min11 Min13 goto4

Ibl3 0 MinF 6 Min00 GSBP1

0 Min10 Min18 1 Min12 Min16

Ibl4 MR04/MR01 = Min00

0 MinF GSBP2 3 +/- Min00 GSBP6

MR07/MR01 = Min00

0 MinF GSBP2 0 Min00 GSBP6

MR08 ABS - MR05 ABS = x=>0 goto5 goto6

Ibl5 3 MinF 6 Min00 GSBP1

12 MinF 15 Min00 GSBP1

Ibl6 MR02/MR05 = Min00

3 MinF GSBP2 6 +/- Min00 GSBP6

MR08/MR05 = Min00

3 MinF GSBP2 0 Min00 GSBP6

MR03/MR09 = Min00

6 MinF GSBP2 6 +/- Min00 GSBP6

MR06/MR09 = Min00

6 MinF GSBP2 3 +/- Min00 GSBP6

9 Min00 MR01 GSBP5 MR05 GSBP5 MR09 GSBP5

9 Min00 MinF 1 +/- Min22 GSBP7 goto0

Ibl1 "NO INVERSE" HLT goto0

18 Min1F

Ibl1 1 M+F M+1F M+00

ind MRF ind Min1F ind MR00 ind MinF ind MR1F ind Min00
MRF/3 = FRAC x=0 goto2 goto1

Ibl2

18 Min1F

Ibl1 GSBP3 x=0 goto2 goto1

Ibl2 6 M+F

Ibl3 GSBP3 x=0 goto4 goto3

Ibl4

P3: 1 M+1F M+F

MR00 x ind MRF = ind Min1F

MR/3 = FRAC

P4: 6 M+00

Ibl1 1 M+F ind MRF +/- + GSBP8

MRF/3 = FRAC x=0 goto2 goto1

Ibl2

P5: 1/x MinF x GSBP8

MRF x GSBP8 MRF x GSBP8

P6: 18 MinF GSBP4 GSBP4

P7: Ibl0 1SZ MR00 - MR1F = Min19/3 + 4/1 x = F1X0 MinF

MR19 - 3 x MRF + 3 = Min19 MR1F

"A ar22 (arF: ar19)" x=0 goto1 goto2

Ibl1 HLT ind Min00 goto3

Ibl2 PAUSE PAUSE ind MR00 F1X8 HLT

Ibl3 MR00 - 9 - MR1F = x=0 goto4 goto0

Ibl4

P8: 1SZ ind MR00 = ind Min00

(continued from previous page)

which the combination win can be doubled or nothing.

If there is no winning combination in the display, each reel can be held with P1, P2 or P3. The hold can be cancelled with P4. Reels cannot be held with a winning combination or twice in succession.

Combination	Win	Combination	Win
9-9-9	50	3-3-3	14
9-9-8	50	3-3-8	14
8-8-8	24	2-2-2	10
7-7-7	20	2-2-8	10
7-7-8	20	1-1-1	10
6-6-6	18	1-1-8	10
6-6-8	18	0-0-0	8
5-5-5	18	0-0-8	8
5-5-8	18	-0-0	4
4-4-4	14	-0-0	2
4-4-8	14		

9-9-9 is the jackpot and adds 50 credits and another 50 which can be gambled.

P0 Start/collect win

P1 Hold reel 1

P2 Hold reel 2

P3 Hold reel 3

P4 Gamble win/cancel hold

P9 Initiate/reset credit counter

This program runs on the Casio FX-602P and inverts a three-by-three matrix using the Gauss-Jordan method, writes G Devilee, Voorburg also in the Netherlands.

The user enters

A0 (1.1) - A0 (3.3)

to evaluate the determinant and the inverse matrix. When the determinant equals 0 then

"NO INVERSE"

is displayed. When the determinant does not equal 0, then an inverse is possible and

A-1 (1.1) - A-1 (3.3)

is displayed. The total number of steps used is 444.

Finally, another brain teaser,

Let $g(n) = n + 2(n-5)$

and

$$c = \left[g \left(\frac{10}{3} \right) \right]^2$$

Can you write a program which will find the roots of

$$f(n) = 1 - 2 \exp \left[\frac{-g^2(n)}{c^2} \right]$$

from first principles.

Fred de Heer's jackpot game.

P0 invA1, ;, FST, MR04, X=0, GOTO0, GOTO7, LBL0, MR05, X=0, GOTO9, -, 1, =, Min05, GSBP5, 0, Min04, 3, Min00, LBL1, GSBP5, RAN#, RAN#, X9, 1, 1, X * Y, /, RAN#, -, X=0, GOTO1, -, 1, =, INT, IND, Min00, -, MR12, =, X=0, GOTO1, MR06, X=0, GOTO2, /, MinF, MR07, Min1F, X = F, GOTO3, Min01, LBL3, MR08, M+1F, X=F, GOTO4, Min02, LBL4, MR09, M+1F, X=F, GOTO2, Min03, LBL2, DSZ, GOTO1, GSBP5, MR06, X=0, GOTO5, MR1F, /, 3, =, X=F, GOTO5, 0, Min06, MRF, Min09, Min08, Min07, GOTO6, LBL5, 1, M-06, LBL6, MR03, MinF, MR02, X=F, GSBP6, MR04, X=0, GSBP7, MR04, X=0, GSBP7, MR04, X=0, GOTO7, invA1, WIN:, space, #, FST, HLT, LBL7, GSBP8, LBL9

P1 invA1, ;, FST, MR06, X=0, GOTO1, invA1, HOLD, -, ar03, -, ar02, -, ar01, FST, MR03, Min09, RAN#, M-06, LBL1, GSBP5

P2 invA1, ;, FST, MR06, X=0, GOTO1, invA1, HOLD, space, ar03, -, ar02, -, ar01, FST, MR02, Min08, RAN#, RAN#, M-06, LBL1, GSBP5

P3 invA1, ;, FST, MR06, X=0, GOTO1, invA1, HOLD, space, ar03, -, ar02, -, ar01, FST, MR01, Min07, RAN#, M-06, LBL1, GSBP5

P4 invA1, ;, FST, MR04, X=0, GOTO0, 0, MINF, invA1, Gamble:, space, ar04, FST, RAN#, RAN#, x, 35, =, INT, Min00, LBL4, MRF, X!, invA1, N, FST, 2, M+F, DSZ, GOTO5, LBL8, 0, invA1, ;, othine, FST, GOTO9, LBL5, MRF, X!, 1, M+F, invA1, E, FST, DSZ, GOTO6, 1, invA1, ;, ven, FST, GOTO9, LBL6, MRF, X!, 1, M+F, invA1, N, FST, DSZ, GOTO7, GOTO8, LBL7, MRF, X!, 1, M+F, invA1, D, FST, DSZ, GOTO4, 2, invA1, ;, ouble, FST, LBL9 x, MR04, =, Min04, X=0, GOTO1, GOTO2, LBL1, 1, M-04, GOTO2, LBL0, MR06, X=0, GOTO2, invA1, ar05, space, #, Cancel, FST, /, Min09, Min08, Min07, LBL2, GSBP8

P5 IND, GOTO0, LBL2, invA1, ar05, space, #, space, ar03, -, space, -, space, FST, GOTO9, LBL1, invA1, ar05, space, #, space, ar03, -, ar02, -, space, FST, GOTO9, LBL0, RAN#, invA1, ar05, space, #, space, ar03, -, ar02, -, ar01, FST, GOTO9, LBL3, invA1, ar05, space, #, space, space, -, space, -, space, FST, LBL9

P6 MR01, X=F, GOTO1, -, 8, =, X=0, GOTO4, LBL1, -, 9, =, X=0, GOTO3, GOTO2, LBL3, 50, M+05, invA1, JACKPOT, space, #, FST, PAUSE, LBL2, MR11, M+F, IND, MRF, Min04, LBL4

P7 MR01, X=0, GOTO1, 0, GOTO2, LBL1, MR02, X=0, GOTO3, 2, GOTO2, LBL3, 4, LBL2, Min04


P8 MR04, X=0, GOTO1, X=0, GOTO2, GOTO3, LBL2, invA1, Collect:, space, #, FST, M + 05, LBL3, 0, Min06, Min04, LBL1, GSBP5

P9 MR05, X=0, GOTO1, 0, Min05, GOTO2, LBL1, 1, Min09, Min08, Min07, 50, Min19, 24, Min18, RND1, Min17, 18, Min16, Min15, 14, Min14, Min13, RND1, Min12, Min11, Min05, LBL2, invA1, ar05, space, #, Credit, FST, 8, Min10, AC, Min06, 3, Min00, GSBP5

dk'tronics

ZX80/81 Hardware SPECTRUM Software

KEYBOARD

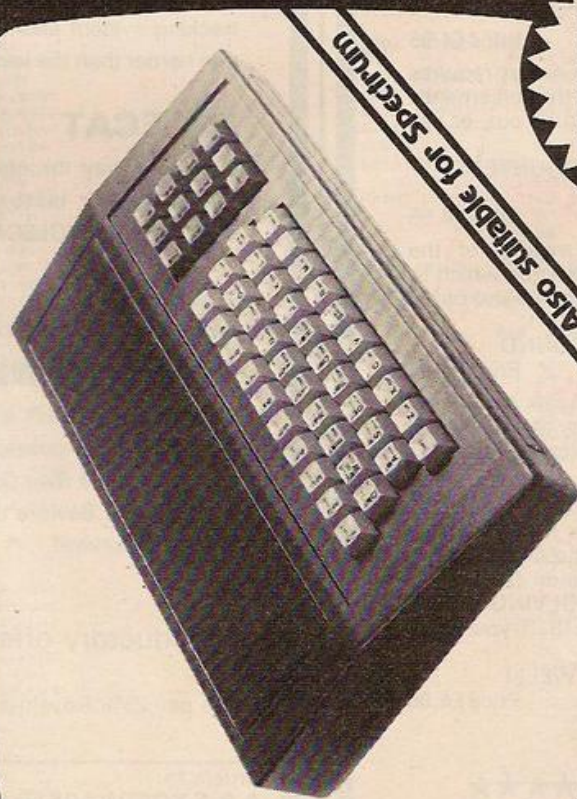

Also suitable for Spectrum


Fully cased with numeric pad £45
Uncased with numeric pad £30
Case £15

NEW FROM dk TRONICS

- (A) 16K RAM MASSIVE ADD ON MEMORY FULLY ASSEMBLED AND TESTED £19.95
64K MEMORY EXPANSION £19.95
- (B) 4K TOOL KIT FULL OF UTILITIES TO AID THE PROGRAMMER IN CONSTRUCTING AND DE-BUGGING E. PROM VERSION FOR USE WITH GRAPHICS ROM £9.96
CASSETTE VERSION £6.95
- (C) FLEXIBLE RIBBON CONNECTOR (AS ILLUSTRATED) £10

SPECTRUM
MEMORY
UPGRADE
TO 48K
£39.95

4K Graphics Rom

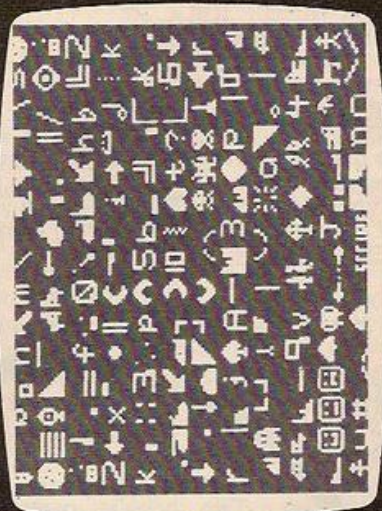

SOME OF THE GRAPHICS NOW POSSIBLE ON THE ZX81

The DK Graphic module is our latest ZX81 accessory. This module, unlike most other accessories fits neatly inside your computer under the keyboard. The module comes ready built, fully tested and complete with a 4K graphic ROM. This will give you an unbelievable 448 extra pre-programmed graphics, your normal graphic set contains only 64. This means that you now have 512 graphics and with their inverse 1024. This now turns the 81 into a very powerful computer, with a graphic set rarely found on larger more expensive machines. In the ROM are lower case letters, bombs, bullets, rockets, tanks, a complete set of invaders graphics and that only accounts for about 50 of them, there are still about 400 left (that may give you an idea as to the scope of the new ROM). However, the module does not finish there, it also has a spare holder on the board which will accept a further 4K of ROMRAM. This holder can be fitted with a 1K2K4RAM and can be used for user definable graphics so you can create your own custom character sets.

£29.95



16K GRAPHICS ROM SOFTWARE

★ ASTEROIDS

★ SPACE INVADERS

★ CENTIPEDE

★ DEFENDER

dk'tronics

23 Sussex Road,
Gorleston,
GREAT YARMOUTH,
Norfolk.



Please send me
Please send me
Please send me
Please send me
Please add on £1 for P/P. I enclose £

Name
Address

Cheque/P.O. payable to dk'tronics.

A

ATOM & BBC



ADVENTURE COMPETITION

FIRST PRIZE £50 CASH

DEATH SATELLITE

Your Time Capsule has materialized on a deserted satellite. The only way to escape is to find a fuel source to recharge your capsules energy cells.
Can you solve the mystery and avoid the traps on the "DEATH SATELLITE" or will you fail?
Hidden within the game are the answers to the competition we are running with this program entry is free to buyers of

Requires 12K RAM
Price £6.00

Competition closing date 31st August 1982

SUMMER SALE
DEATH SATELLITE
REDUCED TO £5.00
OFFER CLOSES 31/8/82

ATOM

CYLON ATTACK

A FAST MOVING 3D SPACE BATTLE

As you sit in your starfighter looking out into the void of space remember the CYLON race only want Mankind for food!! You glance up at your long range scanner, the CYLON fleet is in range. Quickly you select a target and turn to meet it ready to defend Earth to the end!!

5K Text 6K Graphics Price £4.95

MINEFIELD A fast moving all action game that requires skill and quick reaction! You must shoot the supermines with your killer tank before their time fuse runs out, or risk being destroyed when they explode!!!

SCORE/HI SCORE — FUEL/AMMO COUNTERS — SOUND

5K Text 1/2K Graphics Price £4.95

MISSILE COMMAND A fast moving version of the popular arcade game. You have three bases from which to fire your defence missiles, protecting your cities and bases from the missiles and aircraft attacking you!!

SCORE/HI SCORE/MULTIPLE LEVELS/SOUND

5K Text 6K Graphics Price £4.95

POLARIS Your submarine is ordered to sink an enemy convoy. By using skill, cunning and strategy can you avoid the escorting warships and dangerous shallows to succeed with your mission?

5K Text 6K Graphics Price £3.95

ATOMIC CUBE Our version of the popular RUBIK CUBE. A 3D front and rear view of the cube is displayed in high resolution colour graphics. Mixed and ready for you to solve. THIS IS NOT AN AID TO CUBE SOLVING BUT A PUZZLE WHICH YOU HAVE TO SOLVE!!! If you think RUBIK is easy try our challenge!!

*LOOKS GREAT IN MONOCHROME AS WELL!

5K Text 6K Graphics *FP ROM Price £4.95

BBC

Two popular games from our Atom range converted and enhanced to run on the BBC MICRO.

BBC MODEL 'B' ONLY

EARLY WARNING

Destroy the attacking waves of ICBMs using a radar tracking system and intercept missiles. 48 Levels — Each one harder than the last **BBC MODEL A, B** £6.00

POLECAT

Find your way through the warren onto the surface and return to your burrow with winter supplies. Easy!!! — **BEWARE THE POLECATS** £6.00

BBC MODEL 'B' ONLY

ROADRUNNER

The opposition will stop at nothing to get you. In this arcade style car chase: dodge through the Sunday traffic, weave to avoid their fire as the black cars try to shoot you off the road! Beware the hells angels who assist them! Can you survive!

Introductory offer £6.00.

We pay 25% Royalties for good Atom and BBC programs

★ **A & F SOFTWARE** ★

Orders to:
A & F SOFTWARE (Dept. AC1),
10 Wilpshire Ave., Longsight, Manchester M12 5TL
Access/Visa orders on (061) 320 5482.
All prices as stated, no hidden extras.
Send sae for catalogue.

SOFTWARE FILE

(continued from previous page)

This is done by calling the print-scores routine at 424E. Data for this routine is stored between 41AF and 41C0, while the actual scores are stored in system variables; Spare 1 at 4021 is the number of moves made; Spare 2 a at 407B is the bombs left, and Spare 2 b at 407C is the tries made. The actual mechanics of printing the scores involve first loading the b register with 00, and then loading the c register with the actual score. When this has been done, the bc register pair contains the score, and a call is made to a ROM subroutine which conveniently prints the contents of this register pair as a decimal.

A player can move up, down, to the left, or to the right, using the arrowed cursor keys, 5, 6, 7, and 8, providing there is a door to move through. If there is no door, he has the option of using force and can blow a hole into a wall using a bomb. He does this by first pressing the A key and then the arrow key indicating the direction of blast required.

Only four bombs are available, and the number remaining is printed as part of the score. If a player thinks he is in the Zero Room, he can press the Newline key and have a try. If he is correct, a message will appear indicating such, otherwise the game continues and the tries score is incremented.

The perform-keypress module starts at location 4297, and is the longest routine of them all. Its job is to determine which key has been pressed, and act on it. Its operation is straightforward in that the accumulator is

loaded with the value of the key which has been pressed, or if no key has been pressed, it waits for one, and the program works its way through the various commands available until it finds the one which matches the key press; it then executes the command and returns to the command subroutine. If it cannot find a command which matches the key press, a jump is made back to 4297, and the routine waits for another keypress before trying again.

The command subroutine calls all the program modules in sequence and increments the moves made counter. By having this routine at the end of the program, it can be seen that the game can be easily expanded by adding a few subroutines of your own. Using the upper nybble of each maze element, it would be possible, for example, to put various items of treasure, or terrible beasts, into various rooms and thus create an Adventure-style game.

To add your own subroutines, place them in the space indicated on the listing and move the command routine to a position in RAM above them. The call instructions for these routines are placed in the space indicated on the listing within the command routine. When adding calls in this manner, make sure that the jump relative byte is correctly adjusted so that it still jumps to the second call instruction, indicated by the label #31.

To add commands is just as easy and is achieved by changing the instruction at #32 to 20 XX 00 where XX is the number of bytes needed to jump forward to reach the beginning

of your new command test. When your test is finished you must either perform a return or a jump instruction. If the key test proved positive, i.e., the player pressed the key you were checking for, and you therefore perform the required function, a return should be used to get back to the command routine.

If, however, the key test proved negative, you should use a jump instruction to return to 4297. If you are unsure of how to add a command, I suggest that you study the commands which the program already uses such as up, bomb, or try, and follow a similar pattern of construction.

Before loading the program into memory, you must make room for it by setting up a Rem statement containing 680 letter Es. To relieve boredom and frustration from this tedious task, I would recommend that it is done while the computer is in fast mode. When the Rem statement is complete, enter the hex loader program and Run it.

In response to the prompt, enter the hex digits given in the listing, two characters at a time, for example 06 FF D0 0C and so on, and follow each pair with a press of Newline. When complete, enter the Basic part of Dungeons which will overwrite the hex loader, and save the whole thing. When saved, be brave and Run it.

When you have the program working properly, here are a few tips on play: avoid using too many bombs, you may need them to break into the zero room; if a bomb does not destroy a wall, the wall must be one of the outer ones.

(listing continued from previous page)

21 9D 41	Ld hl,419D	Door data	4F	Ld c,a
28 03	Jr z #15	Jump if no door	AF	Xor a
21 9E 41	Ld hl,419E	Wall data	D7	Rst 10
#16 E5	Push hl		CD 98 0A	Call 0A98
01 00 02	Ld bc,0200		Ret	
CD F5 08	Call 08F5	Print at	1704B (429B)	Call 4297
E1	Pop hl		22 32 40	Ld (4032),hl
7E	Ld a,(hl)	Print right hand	C9	Ret
FE 18	Cp 18	wall or door data	CD 09 41	Call 4109
28 0F	Jr z #17		01 0A 00	Ld bc,0A0A
06 09	Ld b,09		2A 32 40	Ld hl,(4032)
#18 AF	Xor a		FE 21	Cp 21
D7	Rst 10		20 06	Jr nz #20
10 FC	Dj nz #18		CB 4E	Bit 1,(hl)
7E	Ld a,(hl)		20 02	Jr nz #20
D7	Rst 10		2B	Dec hl
3E 76	Ld a,76		C9	Ret
D7	Rst 10		#20 FE 22	Cp 22
23	Inc hl		20 06	Jr nz #21
C3 23 42	Jr 4223		CB 56	Bit 2,(hl)
#17 E1	Pop hl		20 02	Jr nz #21
CB 4E	Bit 1,(hl)		09	Add hl,bc
21 7D 41	Ld hl,417D	Door data	C9	Ret
28 03	Jr z #19	Jump if no door	#21 FE 23	Cp 23
21 8D 41	Ld hl,418D	Wall data	20 07	Jr nz #22
#19 E5	Push hl		CB 5E	Bit 3,(hl)
01 00 02	Ld bc,0200		20 03	Jr nz #22
CD F5 08	Call 08F5		ED 42	Sub c,hl,bc
E1	Pop hl		C9	Ret
CD C1 41	Call 41C1		#22 FE 24	Cp 24
C9	Ret		20 06	Jr nz #23
01 00 0F	Ld bc,0F00		CB 46	Bit 0,(hl)
CD F5 08	Call 08F5	Print at	20 02	Jr nz #23
21 AF 41	Ld hl,41AF	Data	23	Inc hl
CD C1 41	Call 41C1	Print string	C9	Ret
06 00	Ld b,00		#23 FE 26	Cp 26
3A 21 40	Ld a,(4021)	Moves made	20 34	Jr nz #24
4F	Ld c,a		3A 7B 40	Ld a,(407B)
AF	Xor a		FE 00	Cp 00
D7	Rst 10		C8	Ret z
CD 98 0A	Call 0A98	Print space	3D	Dec a
3E 76	Ld a,76	Print score as a	32 7B 40	Ld (407B),a
D7	Rst 10	decimal	CD 09 41	Call 4109
D7	Rst 10	Newline	2A 32 40	Ld hl,(4032)
21 B5 41	Ld hl,41B5	Newline	FE 21	Cp 21
CD C1 41	Call 41C1	Data	20 04	Jr nz #25
06 00	Ld b,00	Print data	CB 9E	Res 1,(hl)
3A 7B 40	Ld a,(407B)	Bombs left	18 06	Jr #26
4F	Ld c,a		#25 FE 22	Cp 22
AF	Xor a		20 04	Jr nz #27
D7	Rst 10		CB 96	Res 2,(hl)
CD 98 0A	Call 0A98		#26 18 06	Jr #28
3E 76	Ld a,76		#27 FE 23	Cp 23
D7	Rst 10		20 04	Jr nz #29
D7	Rst 10		CB 9E	Res 3,(hl)
21 B5 41	Ld hl,41B5	Data	#28 18 06	Jr #30
CD C1 41	Call 41C1	Print data	#29 FE 24	Cp 24
06 00	Ld b,00		20 0E	Jr nz
3A 7C 40	Ld a,(407C)	Tries made	CB 86	Res 0,(hl)
			#30 E5	Push hl

SOFTWARE FILE

```

CD E6 40      Call 40E6
E1            Pop hl
C9            Ret
#24 FE 75      Cp 75
#32 C2 97 42   Jp nz,4297
E5            Push hl
21 7C 40      Ld hl,407C
34            Inc(hl)
E1            Pop hl
3E 82         Ld a,82
ED            Cp l
C0            Ret nz
3E 40         Ld a,40
BC            Cp h
C0            Ret nz
C1            Pop bc
C1            Pop bc
C9            Ret
*****
Add here your own routines
17175 (4317)  CD E6 40      Call 40E6 (Perimeter)
#31 CD DF 41    Call 41DF (Print room)
'COMMAND ROUTINE' CD 4E 42    Call 424E (Print scores)
*****
Here you add the calls to your own routines
CD 90 42      Call 4290 (Keypress)
21 21 40      Ld hl,4021
34            Inc(hl)
18 F1         Jr #31
HEX LOADER PROGRAM
1 REM EEEEEEEEEEEEEEEEE ETC
5 FAST
10 POKE16510,0
20 LETX=16614
30 INPUTA$
40 POKEX,16*CODER$+CODER$(2)-476
50 SCROLL

```

```

60 PRINTX,A$
70 LETX=X+1
80 IFX=17192THENSTOP
90 GOTO30
BASIC PROGRAM FOR DUNGEONS
5 CLS
10 PRINT"DUNGEONS, PLEASE WAIT WHILST THE"
20 PRINT"MAZE IS CREATED"
30 RAND
40 FORI=16514TO16613
50 POKEI,INT(RND*16)
60 NEXTI
70 CLS
80 RAND 16613-INT(RND*25)
90 POKE16417,0
100 POKE16507,4
110 POKE16508,0
120 LETI=USR17175
130 PRINTAT1,14;"WELL DONE"
140 PRINTAT4,14;"PRESS A KEY TO"
150 PRINTAT6,14;"PLAY AGAIN"
160 IFINKEY$<>" "THENGOTO160
170 IFINKEY$=" "THENGOTO170
180 RUN
To increase difficulty, change
line 50 to read: POKE I,INT(RND*6)+10

```

Word processor

Nigel Langley,
Weeping Cross,
Stafford.

BBC

THE PROGRAM is a word processor written entirely in BBC Basic for the model B or, like mine, a model A which you have upgraded yourself, to include the printer interface and the extra 16K of DRAM. When all unnecessary spaces are removed the program will reside in less than 2K bytes.

The best mode to operate a word processor in is mode 0, as it has 80 columns, as do many printers, and has 32 lines of text of which I have used 31 for the work area.

However, in mode 0 the BBC computer holds the video data in eight bytes per character and printers will only accept ASCII codes. To overcome this problem I have set aside a section of RAM, just below the video

RAM, and use this to store the ASCII code for the data on the screen.

Full screen editing is enabled by the use of *fx4,2, which makes the cursor-control keys generate numerical values. Other editing facilities are insertion and close-up, which although slow make the program a very usable tool.

The hash symbol calls insertion Proc; the double bar calls close-up Proc; and Escape calls the menu Proc.

Line 10 puts page mode on.

Line 20 alters the interlace timing, effectively moving the display down by one line upon the next mode change.

Lines 80 to 130 set up my parallel display memory and set it to 820 (spc).

PROCopt is the default PROC as set by line 220.

This sets up the menu.

PROCwrite takes the code from PROCget and either dumps it on the screen, or moves into the edit modes. It is important that CHR\$(67F)

(delete) is ignored as it ruins the edit operation. PROCwrite also keep the parallel video memory updated.

PROCprint carries out the control of the printer. It takes data out of the parallel video RAM one byte at a time and dumps it in the printer's buffer.

PROCinsert and PROCclose are the procedures that make the word processor so versatile. They carry out large amounts of memory management in the parallel video RAM, after which they transfer the results on to the screen.

PROCget is my universal keyboard reading procedure. It handles the cursor controls, manages the address pointer of the parallel video RAM and returns any other key values which are entered. Again this could easily be replaced by an assembler routine using OSRDCH.

PROCsave and PROCload are standard methods of loading and storing sections of memory; in this case the parallel video memory.

```

10 VDU14
20 XFX144,235
30 MODE0
40 PRINT TAB(20,10);"WORDPROCESSOR"
50 PRINT TAB(19,12);"IN B.B.C. BASIC"
60 PRINT TAB(10,15);"Written by Nigel Langley."
70 REM***N.C.J.LANGLEY, 7/5/82.
80 HIMEM=9808
90 W=12287
100 FOR X=HIMEM TO W
110   TX=820
120   NEXT X
130 X=HIMEM
140 CLS
150 PRINT TAB(15,0);"WordProcessor-to-0 line is mode select";
160 AS=INKEY$(500)
170 PROCopt
180 GOTO 170
190 END
200 DEFPROCopt
210 LOCAL RA,A
220 ON ERROR GOTO 230
230 VDU30:PRINT SPC(78)
240 VDU30
250 PRINT TAB(15,0);"1=WRITE,2=SAVE,3=LOAD,4=PRINT ";
260 AS=GET$
270 A=EVAL AS
280 IF A>4 OR A<1 GOTO 230
290 ON A GOTO300,310,320,330
300 PROCwrite:GOTO 230
310 PROCsave:GOTO 230
320 PROCload:GOTO 230
330 PROCprint:GOTO 230
340 ENDPROC
350 DEFPROCwrite
360 VDU30:PRINT SPC(78)
370 VDU30:PRINT" # for insertion routine. : for close up routine."
380 XFX4,2
390 PROCget
400 IF A=67F THEN X=X-1
410 IF A=80 THEN VDU31,0:(VPOS+1):GOTO 460
420 IF A=67F GOTO460
430 IF A=124 PROCclose:GOTO 480
440 IF A=35 PROCinsert:GOTO 480
450 PRINT CHR$(A):TX=A
460 IF POS=79 AND VPOS=38 GOTO 480
470 GOTO 390
480 ENDPROC
490 DEFPROCprint
500 LOCAL A,X,Y
510 VDU30
520 PRINT SPC(78):VDU30
530 VDU30:W=12287
540 PRINT TAB(15,0);"PRINTING!"
550 VDU1,80F,1,800
560 FORX=HIMEM TO W
570   Y=TX
580   VDU1,Y
590   NEXT X
600 ENDPROC
610 DEFPROCinsert
620 LOCAL A,T
630 VDU30:PRINT"INSERTION-move cursor to insertion point, then Press space bar
640 PROCget
650 IF A<620 GOTO 640
660 VDU30:PRINT SPC(78):VDU30
670 PRINT"Now enter the phrase for insertion (END WITH #). PRESS ANY KEY."
680 AS=INKEY$(1000)
690 VDU30
700 PRINT SPC(78)
710 VDU30
720 AS=""
730 A=GET$
740 PRINT CHR$(A);
750 IF A=35 OR POS=79 GOTO 780
760 AS=AS+CHR$(A)
770 GOTO 730
780 VDU30,10
790 FOR T=W TO X STEP-1
800   TX=LENAS)+1
810   NEXT T
820 FOR T=1 TO LENAS
830   TX=X-1+T:ASDC(MID$(AS,T,1))
840   NEXT T
850 FOR T=HIMEM TO W-1
860   PRINT CHR$(TX);
870   NEXT T
880 ENDPROC
890 DEFPROCsave
900 VDU30:PRINT SPC(78):VDU30
910 PRINT"PRESS RECORD THEN RETURN."
920 VDU21

```

(continued on page 79)

DOWNSWAY

ELECTRONICS (UK) LTD

MORE MEMORY FOR YOUR ZX81 !



give your ZX81 more memory than a 48K Spectrum — for less than £50!

If you already have a 16K RAM pack, of any make and regardless of condition, you can trade it in for **£12.50** against a Downsway 64K Memory, bringing the price down to only £47.45 (plus £2 p & p), compared to the Spectrum's price of £175!

Without trade-in, the Downsway 64K Memory costs just £59.95 plus p & p — still incredible value!

The 64K Memory gives 56K of available memory, and simply plugs into the ZX81 without needing an additional power supply, or adding any extra load to the internal 5V regulator.

Should you only need 16K of memory for your ZX81, the Downsway 16K RAM Pack offers the same benefits of high standards and low price at only £24.95 plus p & p.

The slim, "low-profile" styling of both memories complements the ZX81, and a special foam cushion provides added mechanical stability.



Naturally, Downsway add-on memories are fully tested and guaranteed, but should you be dissatisfied for any reason, just return the memory within 14 days for a full refund (and your old 16K RAM pack, where appropriate).

Please allow up to 28 days for delivery.

To: Downsway Electronics (UK) Ltd
Dept. M, Downsway House, Epsom Road,
Ashted, Surrey.

Please send me:

Qty	Item	Price	Total
	64K Memory at special trade-price (my old 16K RAM pack is enclosed)	£47.45	
	64K Memory at normal price without trade-in	£59.95	
	16K RAM Pack	£24.95	
	Post and Packing		£2.00
	Total		£

My cheque/P.O./Money Order is enclosed

NAME: _____

ADDRESS: _____

YC8

ZX81 16K SOFTWARE ZX81

NEW! SEA STRIKE NEW!

Your mission as submarine commander is to destroy enemy ships using controlled torpedoes — but beware of depth charges which home in on your submarine and of the randomly placed mines.

This compulsive, fast action machine code program has 16 game variations; flicker free, full screen display and uses the entire keyboard for direction control. As well as an on-screen timer and status display a result screen/printout helps you to record your best scores.

THE ORACLE'S CAVE

Trapped in a mysterious cave complex you must use skill and daring to fulfil your chosen quest. Only then will the oracle release you from the fiendish monsters which confront you at every turn.

A fascinating adventure game with graphics for one or two players. Each descent into the Oracle's Cave presents a different and exciting experience.

Sea Strike	£4.95	Despatched by
The Oracle's Cave	£6.95	return • Postage
Both cassettes	£11.00	Free in UK.

Send cheque/PO with order to:



DORIC COMPUTER SERVICES
17 CLAYBROOK AVENUE
LEICESTER LE3 2GX

SIR Computers Cardiff

Official agents for ACORN COMPUTERS and COLNE ROBOTICS

BBC MICRO COMPUTERS MODELS A (£320) & B (£400)

Available from stock

Prices include VAT. Securicor delivery £7

Conversion of your Model A to Model B £80
All Atoms available with accessories and software.

ADD ON'S FOR ZX SPECTRUM

8 Bit input output port	£9.50
8 Bit input output port with status monitor	£13.50
One Channel Analogue input port	£15.50
4 Channel Analogue input port for use with joy sticks	

p.o.a. All Add On's are ZX81 compatible. Please add £1 p.p. and 15% VAT.

SIR COMPUTERS

38 DANYCOED ROAD, CYNCOED,
CARDIFF CF2 6NB, WALES
Tel: 0222 — 759015

(continued from page 77)

```

930 *SAVE*TEXT* 2650 2FFF 2650
940 VDU5
950 ENDPROC
960 DEFPROCload
970 LOCAL Z
980 VDU30:PRINT SPC(78):VDU30
990 PRINT:"PRESS PLAY."
1000 VDU21
1010 *LOAD*TEXT*
1020 VDU5
1030 VDU31,0,1
1040 FORZ=HMEM TO W
1050 IF Z=127 THEN Z=32
1060 PRINT CHR$(Z);
1070 IF POS=79 AND VPOS=30 GOTO 1090
1080 NEXT Z
1090 ENDPROC
1100 DEFPROCclose
1110 LOCAL A,Z
1120 VDU30:PRINT:"Position the cursor at the end of the area you are closing. TH

```

```

IN PRESS SPACE."
1130 PROCset
1140 IF A<K20 GOTO 1130
1150 VDU30:PRINT SPC(78)
1160 VDU30:INPUT:"How many spaces do you wish to close",A
1170 FOR Z=K TO W
1180 Z(Z-A)=Z
1190 NEXT Z
1200 VDU30,10
1210 FOR Z=HMEM TO W
1220 IF POS=79 AND VPOS=30 GOTO 1240
1230 PRINT CHR$(Z);
1240 NEXT Z
1250 ENDPROC
1260 DEFPROCget
1270 AGET
1280 *WAP*VPOS-1:VPOS:HMEM
1290 IF A=136 VDU31,(POS-1),VPOS:GOTO 1270
1300 IF A=137 VDU31,(POS+1),VPOS:GOTO 1270
1310 IF A=138 VDU31,POS,(VPOS+1):GOTO 1270
1320 IF A=139 VDU31,POS,(VPOS-1):GOTO 1270
1330 ENDPROC

```

Earth invader

Bharat Patel,
Oldham,
Greater Manchester.

VIC-20

EARTH INVADER runs on an unexpanded Vic-20. The game uses good colour and sound, and needs skill, quick reactions and is by no means easy.

The Vic draws a maze and then plays a tune; the maze is different every time it is run. You are a soldier who has to manoeuvre up to the fortress in the upper-left corner and break through its walls without crashing into the maze. During the adventure an Earth Invader will roam about, gradually swallowing the maze, and so making life a little easier.

Many asteroids will appear during the journey at random positions. These must be

carefully avoided or you will be blown up. When you have reached the fortress you have to break in and save the lonely princess who has been so far kept hostage by the Earth Invader.

The next task of the soldier is to move on top of the Invader and by pressing f, destroy it. This will need very quick reactions. After that you will have your Earth Invader adventure. You have about one minute to accomplish this and the time will be found ticking away at the top of the screen.

To move around use the following keys: up, O; down, L; right, P; and left, I. To fire press F.

The program consists mainly of Peeks and Pokes. Line 50 switches all speakers and volume off. Line 180 changes the colour of screen to black and border to red. It clears the screen and sets the cursor colour to white. Lines 200 to 208 set up the variables and draw

the fortress and the princess. Lines 290 to 500 pick random positions and print blocks on each line for the maze. Lines 505 to 612 play a tune using the Read and Data statements. Lines 700 to 775 move the soldier and produce asteroids at random positions and also register whether there has been any collision or score.

Lines 800 to 900 make a crash when a collision occurs between the soldier and the maze or an asteroid. Lines 910 to 932 give various endings depending on the state of play and the time. Lines 950 to 1200 give the changing circle effect after reaching the princess. Variable K is a test to see whether the soldier has reached home and so he can continue to run after and shoot at the invader. Lines 1200 to 4010 make various sounds and symbols when firing and when on target: lines 4000 onwards are used when time runs out, making flashes and sounds.

EARTH INVADER

```

10 REM*EARTH INVADERS*BY (BHARAT PATEL)
50 FORI=36074T036878:POKEI,0:NEXTI:POKE36879,255:V=0
55 PRINT:"*****EARTH INVADERS*****"
57 PRINT:"*****"
60 PRINT:"***** HIT SPACE TO PLAY"
70 GETS:IF S="O" THEN70
30 PRINT:"*****THANK-YOU" FORG=1T0400:NEXTG
180 PRINT:"C" POKE36879,10
200 P=7724:WIN=100:V=36878
205 POKEP+5,90:POKE36844+5,4
207 POKEP-17,114:POKEP-10,114:POKEP-16,114
208 POKEP+4,107:POKEP+6,115:POKEP+26,113:POKEP+27,113:POKEP+28,113
210 REM=DRAW MAZE=
230 FORI=1T08
300 X=INT(RND(1)*22)+1:POKE7680+X,102
330 Y=INT(RND(1)*15)+7:VY=INT(RND(1)*2)+0
340 POKEP+Y,102:POKEP+VY,102
350 CC=INT(RND(1)*15)+7:POKE7768+CC,102
360 DD=INT(RND(1)*15)+1:POKE7790+DD,102:POKE38510+DD,3
370 ST=INT(RND(1)*2)+0
380 TR=INT(RND(1)*22)+1:POKE7790+22+TR,102
390 TV=INT(RND(1)*22)+1:POKE7812+22+TV,102:POKE38554+TV,6
400 EM=INT(RND(1)*22)+1:POKE8054+EM,102:POKE8075+3+TR,102:POKE8142+DD,102
410 AM=INT(RND(1)*22)+1:POKE7856+AM,102:POKE7878+TR,102:POKE7900+DD,102
420 GJ=INT(RND(1)*22)+1:POKE7922+GJ,102:POKE7966+TV,102:POKE386
96+TV,5
430 UI=INT(RND(1)*22)+1:POKE7988+UI,102:POKE8010+GJ,102:POKE38730+GJ,6
500 WE=INT(RND(1)*22)+1:POKE8076+WE,102:POKE8120+10+WE,102:POKE8142,102:NEXTI
363 REM=MUSIC=
365 POKE36878,0
510 READP
512 POKE36878,10
515 IFP=-1THEN700
520 READD
525 POKE36875,P:POKE36876,P
528 FORBK=1TOD*30:NEXTBK
530 POKE36875,0:POKE36876,0
535 GOTO510
580 DATA187,4,187,4,201,2,201,4,201,2,195,2,195,2,183,2,163,2,175,6,163,1,175,1
510 DATA183,2,195,2,195,2,201,2,195,2,183,2,163,3,175,1,183,2,175,2,175,2,163,6
512 DATA-1,-1
535 REM=INVADER+SOLDIER*
700 H=8164+19:Z1=7910:O=7680
706 POKEH,43
707 O1=INT(RND(1)*506):IFO1=49 THEN707
708 POKEO+O1,42
709 PRINT:"*****TIME=WIN:POKE7680+16,32
710 POKEP+5,90
711 IFPEEK(H)=90THENS90
712 POKEH,43:POKEP+5,90:POKE36844+5,4
713 POKEZ1,88:FORSI=1T010:NEXTSI:REM-Z1=INVADER
714 Z2=INT(RND(1)*5)+1:IFZ2=2THENPOKEZ1,32:Z1=Z1-1:POKEZ1,88
715 IFZ2=3THENPOKEZ1,32:Z1=Z1+1:POKEZ1,88
716 IFZ2=4THENPOKEZ1,32:Z1=Z1+2:POKEZ1,88
717 IFZ2=1THENPOKEZ1,32:Z1=Z1-2:POKEZ1,88
718 POKE36879,10:POKE36875,190:FORI=1T0100:NEXTI:POKE36878,0
719 IFZ1=8165THENZ1=7910
720 IFZ1<7680THENZ1=7910
723 POKEH,43
724 GETR:IFR="I"THENPOKEH,32:H=H-1
730 IFA="P"THENPOKEH,32:H=H+1
740 IFA="O"THENPOKEH,32:H=H-22
742 X1=PEEK(197)
750 IFA="L"THENPOKEH,32:H=H+22
751 IFPEEK(H)=88ANDI=2ANDX1=1 THEN2500
752 IFX1=42THEN2000:REM=TEST FOR FIRING
753 IFPEEK(H)=102THENPOKEH,80:POKE36875,0:GOTO800
755 IFPEEK(H)=42THENPOKE36878,10:GOTO800
756 IFPEEK(H)=90THEN350
770 WIN=WIN-1:IFWIN=99THENPOKE7680+15,32
771 IFWIN=9THENPOKE7680+14,32:POKE7680+13,32
772 IFWIN=-1THEN4000
775 POKEH,43
776 GOTO707
800 POKEH,86:FORK=1T010:POKE36870,10:POKE36876,190:FORI=1T0275:POKE36878,0:REM=
CRASH=
910 POKE36875,150:NEXTK:POKE36870,0:FORI=1T0100:NEXTI
900 POKE36879,170
910 PRINT:"***** GAME OVER*****"
911 PRINT:"***** HARD CHEESE***** PRINT*W* YOU WERE KILLED*GOTO924
914 POKE36879,170:PRINT:"*****YOU TOOK*100-WIN*SECS TO REACH BASE*GOTO92
924 PRINT:"*****"
925 PRINT:"*****"
926 POKE198,0
930 PRINT:"***** ANOTHER GO***** INPUT*Y* IF*Y*="YES"OR*Y*="Y"THENPOKE36878,0:POKE3687
5,0
935 IFY="Y"THENRUN
940 END STOP
945 REM=FIRE NOISE=
950 PRINT:POKE36875,0:POKE36878,10
1000 FORB=1T050:POKEH,91:FORBP=1T010:NEXTBP:POKEH,87:POKE36875,150:POKE36877,1
1100 POKE36878,0:POKE36879,10:POKE36875,200:NEXT
1200 K=1
2000 POKEZ1,88:FORB2=1T030:POKEV,0:POKE36875,250:POKEH,87:POKEH,81:POKE36878,0
NEXTB2
2100 POKEH,32:GOTO711
2500 FORS3=1T090:POKE36878,10:POKE36875,200:POKEH,90:POKEH,81:POKE36878,0:NEXT
S3
2600 POKEZ1,32:GOTO914
4000 PRINT:"***** THE END ***** PRINT PRINT ***** SAN OUT OF TIME"
4001 FORSO=200T0250:POKE36879,50:POKE36875,10:POKE36876,10:POKE36876,205:FORSA=1T020:NEXTSA
4002 POKE36878,0:NEXTSO:POKE36879,27
4010 PRINT:"***** HARD CHEESE*****"

```

Basic renumber

R Eglin,
Hayling Island,
Hampshire.

SPECTRUM

THIS SIX-LINE program can be stored on tape and when required can be merged with

current program already in the computer. All you need is the first six lines free in your program. Since most people start at line 10 you should have no problem.

My program uses the addresses of the two variables NXTLIN which is obtained from
PEEK 23637 + 256 * PEEK 23638
and program variables which is obtained from

PEEK 23627 + 256 * PEEK 23628

The former gives start address for renumbering and the latter provides the halt signal for the end of the program. To merge with your existing program already in the computer, select Merge and type "renumber", thus Merge "renumber". Start the tape, and press
(continued on page 81)

PUT YOUR MICRO TO WORK!



**YOUR
MACHINE**

CONTROL MACHINES, ROBOTS, FACTORY OR HOME

Have you ever wanted your MICRO to control a machine for you, or manage your house? If so, the MDR 'MICROCOMPUTER CONTROL INTERFACE' will give you isolated channels of OUTPUT (8A @ 250 volts) and switch sensing INPUTS.

Available now for connection to PET USER, PORT, RS232 and IEEE488, allowing expansion up to more than 900 channels. Supplied complete with connecting cables, full data and guarantee from £12.54 per channel. Complete preprogrammed systems or individual components available. Write or phone for details.

M D R (INTERFACES) LTD.
Little Bridge House, Dane Hill,
Nr. Haywards Heath, Sussex RH17 7JD.
Telephone: 0825-790294.

ZX81

16 K SOFTWARE

ADVENTURE 1£6.00

The ZX81 generates a random maze of 100 caves. Choose which of two caves to start from. You must find 30 treasures in the caves. Unfortunately you can only carry 6 at once. You must find the exit cave, if you're lucky a singing goblin might tell you. Beware of the Troll, he wanders around looking for you. The evil magician will turn you into a silicon frog if he finds you. A maximum of 8 caves to choose from when moving. Go counter. Game save option.

CASSETTE DESIGN£5.00

Create and LPRINT your own cassette case designs. 24 lines by 32 columns. Design supplied with fold indicator. Save option.

AS/DIS£5.00

You no longer need type in long REM's Hex loader, Hex dump, Hex clear, Hex save, USR run. A REM is reserved with 693 spaces in it. To load in your Hex just type starting address, a space then your Hex code-hit newline and sit back. To check on your code use the Hex dump. Enter start address, finish address and then watch it scroll up. Code no good? Hex clear will clear the REM between two addresses. USR run will run the machine code from a given address.

Prices include P + P.

Cheques/P.O. payable to:

D J MOODY

1 Starnhill Cottages, Granby Lane,
Bingham, Notts, NG13 8DH
Tel. Bingham (0949) 37127

Also Giro transfer to 40 816 1302



THE PROFESSIONAL ZX81 KEYBOARD

- All-you-need Keyboard Kit £28.95.
- Case only £15.00.

*All prices inclusive of VAT, postage and packing.
Please allow 21 days for delivery.*

- Plug in — no desoldering.
- Space bar linked to space key.
- Full travel keys. Six spare keys for your own use.
- Case available to hold keyboard and ZX81 microcard.

- 16K RAM pack clamp supplied with case to eliminate white outs!!



**COMPUTER KEYBOARDS DIV.
DEAN ELECTRONICS LIMITED**
Glendale Park Fernbank Road Ascot Berkshire England
Dial-a-leaflet 03447 5661 Telex 849242

SOFTWARE FILE

(continued from page 79)

enter. When you have finished, List and you will see the program installed above yours. Select Run and you have renumbered your program.

You can select the first line number and the step by changing line 2, but obviously the first line must be more than 6. When you have finished renumbering, you should delete the line Save "renumber", also to prevent the

renumber program working everytime you run, change the first line to read Goto 30, which will now be the first line of your program or you can of course delete the renumber program altogether after use, but if you are anything like me — always adjusting programs — you will find it useful to leave in.

```
1 Let Z = 23627 : GOTO 5 : Rem R EGLIN
  renumber Spectrum
2 For X = 20 to 9970 STEP 10 :
```

IF M = Peek Z + 256 * Peek (Z + 1) then stop.

```
3 Poke M, Int (X/256) : Poke (X + 1), X - 256 *
  Int (X/256)
4 Let M = M + 2: let A = Peek M + 256 * Peek
  (M + 1):
  Let M = M + A + 2 : Next X
5 Let M = Peek (Z + 10) + 256 * Peek (Z + 11) :
  GOTO 2
6 Save "renumber".
```

3D triangle

D Konig,
Hexham,
Northumbria.

BBC

THIS PROGRAM will run on the BBC model A microcomputer and possibly on the model B. It simulates the random movement through three dimensions of a triangle. It can also be made to leave a trace of itself on the screen. The background and foreground colours are user-definable in accordance with the tables on page 55 of the *Provisional User Guide*. The user also has the choice of just bouncing triangles or a trace leaving a bouncing triangle.

When the program is running pressing the space bar will stop the action; pressing X will continue it; pressing C will clear the screen but continue as before; pressing E will escape from the program.

```
100 REM***3-D TRIANGLES AND PATTERNS***
110 REM***BY D.KONIG AND P.MCCOWIE***
115 REM*****C) 14/5/1982*****
120 MODE7:FOR I=1 TO 2:PRINT TAB(5,10+I)CHR$141" PATTERNS AND TRIANGLES":NEXT
130 BZ=INKEY(500):MODE4:VDU19,1,3,0,0,0,19,2,1,0,0,0
140 PRINT TAB(1,3)"WHEN ROUTINE BEGINS PRESS:":PRINT TAB(1,5)"<SPACE> TO PAUSE."
150 PRINT TAB(1,7)"<X> TO CONTINUE.":PRINT TAB(1,9)"<E> TO END"
160 PRINT TAB(1,11)"WHICH BACKGROUND COLOUR ?":INPUT TAB(1,13)"(0-15) ",BC
170 IF BC<0 OR BC>15 THEN 160
180 PRINT TAB(1,13):SPC(10)
190 PRINT TAB(1,11)"WHICH FOREGROUND COLOUR ?":INPUT TAB(1,13)"(0-15) ",FC
200 IF FC<0 OR FC>15 THEN 190
210 PRINT TAB(1,11)"DO YOU WANT A PATERM OR TRIANGLE ?"
220 PRINT TAB(1,13):SPC(10):INPUT TAB(1,13)"(P-1) ",F$:IF F$="P" THEN Z=1 ELSE Z=2
230 MODE4:VDU19,1,FC,0,0,0,19,2,BC,0,0,0,A=RND(30):B=RND(30):C=RND(30)
240 D=RND(30):E=RND(30):F=RND(30):X1=400:Y1=400:X2=700:Y2=500:X3=500:Y3=700
250 GCOL0,1:MOVE X1,Y1:DRAW X2,Y2:DRAW X3,Y3:DRAW X1,Y1
260 AS=INKEY$(1):IFA$=" " THEN PROC PAUSE
270 IFA$="C" THEN CLS
280 IFA$="E" THEN END
290 IF X1>1280 OR X1<0 THEN A=-A
300 IF X2>1280 OR X2<0 THEN C=-C
310 IF X3>1280 OR X3<0 THEN E=-E
320 IF Y1>1024 OR Y1<0 THEN B=-B
330 IF Y2>1024 OR Y2<0 THEN D=-D
340 IF Y3>1024 OR Y3<0 THEN F=-F
350 MOVE X1,Y1:GCOL0,Z:DRAW X2,Y2:DRAW X3,Y3:DRAW X1,Y1
360 SOUND1,-15,X1/5,1:SOUND2,-15,X2/5,1:SOUND3,-15,X3/5,1
370 X1=X1+A:Y1=Y1+B:X2=X2+C:Y2=Y2+D:X3=X3+E:Y3=Y3+F:GOTO 250
380 DEF PROC PAUSE
390 IF GET$(1)>"X" THEN 390:FX 15,0
400 END PROC
```

Permutations

David Guest,
Selly Park,
Birmingham.

GENIE

MY SUBROUTINE can be used in any program that needs to use a large number of permutations, such as the recent *Your Computer* competition with six trolls in six caves.

Each permutation is individually generated

so very little memory space is needed. The program was written for a Video Genie, but is easily adapted for other machines. The two short demonstration programs are to demonstrate its use and function.

```
900 REM ** PERMUTATION GENERATING SUBROUTINE
910 REM ** THE P'ITH PERM OF NUMBERS 1,2,...,N IS
920 REM ** GENERATED IN A(1),A(2),...A(N)
930 REM ** THE VALUE OF P IS DESTROYED IN PROCESSING
940 REM ** J,K,L,Q,R,B(1),B(2),...B(N) ARE USED AS WORK VARIABLES
950 REM ** THERE ARE N FACTORIAL POSSIBLE PERMS SO
960 REM ** P SHOULD BE IN RANGE 0 TO N!-1
970 REM ** P=0 GIVES IDENTITY PERM 1,2,...,N
980 REM
990 REM ** INITIALISE A(1),A(2),...A(N)
1000 FOR J=1 TO N:A(J)=J:NEXT J
1010 L=1
1015 REM ** START OF LOOP
1020 IF P=0 THEN RETURN
1030 IF L=N THEN RETURN
1040 L=L+1
1050 Q=P/L
1060 R=P-Q*L
1070 P=Q
1080 IF R=0 THEN 1020
1090 REM ** ROTATE L ELEMENTS R PLACES TO RIGHT
1100 FOR J=1 TO L
1110 K=J+R : IF K>L THEN K=K-L
1120 B(K)=A(J) : NEXT J
1130 REM ** COPY B INTO A
1140 FOR J=1 TO L:A(J)=B(J) : NEXT J
1150 GOTO 1020
```

```
1 REM ** DEMONSTRATION PROGRAM 2
5 REM
10 DEFINT A-Z
20 DIM A(7),B(7)
30 INPUT N
35 IF N=0 THEN STOP
40 LIM=1: FOR J=2 TO N:LIM=LIM*J: NEXT J
50 FOR PP=0 TO LIM-1
55 P=PP
60 PRINT PP
70 GOSUB 1000
80 FOR J=1 TO N:PRINT A(J); :NEXT J
90 PRINT
100 NEXT PP
110 GOTO 30
1 REM ** DEMONSTRATION PROGRAM 1
5 REM
10 DEFINT A-Z
20 DIM A(7),B(7)
30 INPUT N
40 INPUT P
50 IF P<0 THEN STOP
60 PRINT P
70 GOSUB 1000
80 FOR J=1 TO N:PRINT A(J); :NEXT J
90 PRINT
100 GOTO 40
```

Graphics strings

Julian Stradling,
Portsmouth,
Hampshire.

ZX-81

THREE PROBLEMS I have always found with complicated ZX-81 graphic displays are:

- If Break is pressed, then any following command will clear the screen, losing the display.
- Changes in the display are relatively slow, and
- Changes in the display using Print At etc., are

sequential — it would look far neater in many cases if the whole of the screen changed at once.

These problems are overcome to a certain extent by storing the display in a dimensioned string and by using

LET S\$(X TO Y) = "whatever"

which is slightly quicker than

PRINT AT X,Y;"whatever"

When the changes have been made, using

PRINT AT 0,0;S\$

will print the whole of the display at once. The advantages of this method of screen display are

illustrated in the Patience program shown.

Line 15 stores the screen in S\$ — 704 characters long. If a 24-line screen were used, then this would read Dim S\$(768), and a Poke 16418,0 would be inserted before the print statement in line 355. Line 3 warns that there will be a delay of anything up to 20 seconds while the machine shuffles the cards and draws the screen.

The screen display consists of seven depot piles numbered 1 to 7, each containing five cards, a foundation pile marked with an

(continued on next page)

SOFTWARE FILE

(continued from previous page)

inverse F, and a face-down stock pile marked with an inverse S.

The bottom card of each depot pile is exposed. Any exposed card may be placed on to the top card of the foundation pile, so long as it differs from that card by one. For




















example, a seven may be placed on a six or an eight, but not on any other card — irrespective of suit. This is done by pressing the number, 1 to 7, of the corresponding depot pile.

Kings are high, aces are low, and neither may be placed on the other. When the patience becomes blocked, a card may be dealt from the

stock pile on to the foundation pile by pressing S. This will decrease the number of cards in the stock pile by one.

You win if you manage to clear all seven depot piles. You lose if you are blocked, and have run out of stock cards. In either case, pressing S will display your score.

```

1 SLOW
2 PRINT AT 8,12;"PATIENCE"
3 PRINT AT 18,0;"WHEN YOU PRE
SS A KEY, THE SCREEN WILL BLANK O
UT FOR ABOUT 20 SECS"
4 PRINT AT 21,10;"PRESS                                                                                                                                                                                                                                                                                                                                                                             
```


SOFTWARE FILE

Speed ball

Michael Rigby,
Morecambe,
Lancashire.

ZX-81

THIS PROGRAM is written entirely in machine-code with two lines of Basic used to store and run the program. It can be used with only 16K as the screen must be memory-mapped.

When run, a moving ball will appear from a

random position along the side of the screen. You must manoeuvre a cross, which is controlled by keys 5, 6, 7, 8 to cover the ball. The number of points gained is displayed at the bottom of the screen.

After the 354 characters have been entered, the machine-code can be stored using the following program which allows more than one code to be entered at one time.

10 LET A\$ = "

```
20 LET B = 16549
30 IF A$ = " THEN INPUT A$
40 SCROLL
50 PRINT B; "; A$ (TO 2)
60 POKE B (CODE A$-28) * 16 + (CODE A$ (2)
  - 28)
70 LET B = B+1
80 LET A$ = A$ (3TO)
90 GOTO 30
```

The program is terminated by pressing Newline.

```
16549-2A 0C 40...LD HL.(400C)
11 07 02...LD DE.0207
19...ADD HL,DE
EB...EX DE,HL
21 82 40...LD HL.4082
01 09 00...LD BC.0009
ED 80...LDIR
18...DEC DE
ED 53 3C 40...LD (403C).DE
ED...PUSH HL
21 0A 00...LD HL.000A
19...ADD HL,DE
EB...EX DE,HL
01 0A 00...LD BC.000A
E1...POP BC
ED 80...LDIR
18...DEC DE
3E 53 3E 40...LD A.83
3E 83...CALL 4202
CD 02 42...LD C.14
0E 14...LD A.85
3E 85...RST 10
3E 08...LD B.08
05 1F...LD B.1F
16561-18...RST 10
3E 05...LD NZ.FD
07...LD NZ.05
D7...RST 10
0D...DEC C
20...LD NZ.F0
3E 03...LD A.03
CD 02 42...CALL 4202
11 19 0A...LD DE.0A19
ED 53 41 40...LD (4041).DE
3A 34 40...LD A.(4034)
CB 3F...SRL A
06 7F...LD B.7F
B8...CP B
F2 01 41...JP P.4101
07...LD H.A
D8...LD B.A
06 14...SUB 14
47...LD B.H
7C...LD B.H
18...LD F4
99...LD B.F
3C...INC A
97...LD D.A
11 02...LD E.02
3E 01...LD E.01
16548-BA...CP D
20 04...LD NZ.04
3E 14...LD A.14
18 07...LD 07
3E 14...LD A.14
B8...CP D
20 05...LD NZ.05
3E 13...LD A.13
3E 20 41...LD A.15
3E 02...LD A.(412C).A
BB...CP E
20 04...LD NZ.04
3E 1C...LD A.1C
18 07...LD 07
```

```
3E 1F...LD A.1F
BB...CP E
20 05...LD NZ.05
3E 1D...LD A.1D
3E 2D 41...LD (412D).A
14...INC D
1C...INC E
CD E5 41...CALL 41E5
7E 08...LD A.(HL)
7E 08...CP B
20 1E...LD NZ.1E
20 3E 40...LD HL.(403E)
7E...LD A.(HL)
25...CP 25
28 03...LD NZ.03
14...LD (HL)
18 05...LD A.05
36 1C...LD (HL).1C
2B...DEC HL
18 F3...LD F3
3A 57 41...LD A.(4157)
FE 5B...CP 5B
28 02...LD NZ.02
D6 05...SUB 05
3E 27 41...LD (4157).A
18 9A...LD 9A
36 80...LD (HL).80
06 00...LD B.00
0E 0F...LD C.0F
0D...DEC C
20 FD...LD NZ.FD
10 F9...LD NZ.F9
3E 03...LD (HL).08
ED 53 43 40...LD (4043).DE
CD BB 02...CALL 02BB
7C...LD A.H
2F...CPL
95...SUB L
ED 56 41 40...LD DE.(4041)
FE 29...CP 29
20 01...LD NZ.01
10...DEC E
FE 19...LD NZ.19
20 01...LD NZ.01
1C...INC E
FE 21...CP 21
20 01...LD NZ.01
15...DEC D
FE 31...CP 31
20 01...LD NZ.01
14...INC D
7A...LD A.D
FE 13...CP 13
20 01...LD NZ.01
15...DEC D
FE 01...CP 01
20 01...LD NZ.01
14...INC D
7E...LD A.E
FE 1F...CP 1F
20 01...LD NZ.01
1D...DEC E
FE 03...CP 03
20 01...LD NZ.01
1C...INC E
```

```
CD E5 41...CALL 41E5
ED 53 41 40...LD (4041).DE
37...SCF
11 22 00...LD DE.0022
ED 52...LD BC.0004
16586-EB...EX DE,HL
21 95 40...LD HL.4095
0E 04...LD C.04
C5...PUSH BC
01 04 00...LD BC.0004
ED 80...LDIR
EB...EX DE,HL
01 1D 00...LD BC.001D
09...ADD HL,BC
EB...EX DE,HL
C1...POP BC
0D...DEC C
20 F0...LD NZ.F0
ED 5B 43 40...LD DE.(4043)
2A 3C 40...LD HL.(403C)
7E...LD A.(HL)
FE 14...CP 14
20 10...LD NZ.10
05 04...LD B.04
2A 3C 40...LD HL.(403C)
36 1C...LD (HL).1C
2B...DEC HL
18 FB...LD NZ.FB
3E 00...LD A.00
3E 57 41...LD (4157).A
C9...RET
FE 1C...CP 1C
20 04...LD NZ.04
3E 03...LD (HL)
C3 06 41...LD 4106
36 25...LD (HL).25
2B...DEC HL
18 DE...LD DE
26 00...LD H.00
6A...LD L.D
CB 25...SRL A
CB 25...SRL A
CB 25...SRL A
CB 14...LD H
CB 25...SRL A
CB 14...LD H
06 00...LD B.00
4A...LD C.D
09...ADD HL,BC
48...LD C.E
09...ADD HL,BC
ED 4B 0C 40...LD BC.(400C)
09...ADD HL,BC
C9...RET
06 20...LD B.20
D7...RST 10
18 FD...LD NZ.FD
16593-C9...RET
```

```
1 REM TIME=2000BALLS=0000
2 RAND USR 16549
```

Faster graphics

Jonathan Brazier,
London E2.

ZX-81

POTTERING ALONG on my ZX-81, I have discovered a device which speeds up moving graphics by some four or five times without venturing into the tortuous world of machine-code. It is based on the fact that any number of At instructions may be included in one Print instruction, even if the co-ordinates are identical or overlap. The program makes it clear, of course, it only works for horizontally-moving objects if you want the object's track erased as it goes. With a little ingenuity the increase in speed is well worth the extra typing.

```
5 PRINT AT 0,0;" SLOW "
10 FOR F=1 TO 30
20 PRINT AT 10,F;" >"
30 NEXT F
35 PRINT AT 0,0;" FAST "
40 PRINT AT 10,1;">" AT 10,1;">"
  AT 10,2;">" AT 10,3;">" AT 10,4;">"
  AT 10,5;">" AT 10,6;">" AT 10,7;">" AT 10,8;">"
  AT 10,9;">" AT 10,10;">" AT 10,11;">" AT 10,12;">"
  AT 10,13;">" AT 10,14;">" AT 10,15;">" AT 10,16;">"
  AT 10,17;">" AT 10,18;">" AT 10,19;">" AT 10,20;">"
  AT 10,21;">" AT 10,22;">" AT 10,23;">" AT 10,24;">"
  AT 10,25;">" AT 10,26;">" AT 10,27;">" AT 10,28;">"
  AT 10,29;">" AT 10,30;">"
50 GOTO 5
```

Loony lander

Roger Valentine,
Staines,
Middlesex.

PET

THIS IS the most appalling computer game ever. It combines the worst of Invaders with the worst of Breakout to create an abysmal Lunar landing-type scenario. Perhaps its only redeeming feature is that it is so incredibly difficult to gain a decent score that you quickly tire of playing it, and so might use your computer for something more useful.

It is written for a 40-column Pet, but if you really think it is worth the effort converting it to another machine, I shall explain all the screen-Pokes. There are no machine-dependent features other than the screen-mapping, apart from the few Pet cursor controls, which are also explained.

The object is to land your space-craft — or aeroplane, the graphics are so poor that it does not matter which — on a rubble-laden runway. Before you land, you must clear the runway completely by destroying the rubble with either bombs or missiles.

You have five aircraft, each with unlimited

armaments, and the planes fly from left to right — they wrap-round the right-hand side of the screen — until they either hit something or land safely. Each block of rubble destroyed with a bomb scores one point. Missiles are fired horizontally and will also wrap-round the screen, so they must always destroy the next block of rubble in your flight-path.

The problem is that destroying a block of rubble with a missile scores -20 points, and you must have a total of more than 20 for the missile button to be operative. Press Space to drop a bomb, and Shift/Space to launch a missile.

The 40-column Pet has 1,000 screen positions, with 32768 the address of the top left-hand corner. The program will run on any micro with a memory-mapped display by altering the value of P in line 5 — e.g., to 7680 for the Vic — and inserting suitable values in place of the following:

■ 480 to 999 in line 20: these are numbers representing approximately the bottom half of the screen.

■ 500 in line 25: line 25 ensures greater density of rubble at the lower part of the display, so any number close to the lower limit of J in line 20 will do.

(continued on next page)

SOFTWARE FILE

(continued from previous page)

■ 999 in lines 85, 1030 and 2010: the number which, when added to P, represents the bottom right-hand corner of the machine's screen.

The characters Poked to the screen are, in most cases, arbitrary but as these are Pet codes and not ASCII, I will explain what they represent. Note that Vic codes are the same as Pet's:

- Lines 20 and 1010: any character to illustrate the rubble. 247 equals an inverse space.
- Line 40: five characters representing the shape of the plane. 182-PL is the number of the plane, in inverse video.
- Line 75 and elsewhere: 32 equals a space — as in ASCII.
- Line 1000: a single character bomb.
- Line 1010: any explosion pattern, ending with a space.

- Line 2020: a missile or minus sign.
 - Lines 6005-6030: a more elaborate explosion pattern.
- The Pet cursor controls are:
- Line 15: clear screen.
 - Line 50: cursor left/space/space/home. This ensures that a single-digit number will completely over-write a dual-digit.
 - Lines 6220 to 7000: Home/down/down.
 - Line 7020: The R and E are in inverse.

```

5 P=32768
10 O1=41:O2=42:O3=43:O4=44:O5=45:O6=33
15 PRINT "SCORE="; SC=0:PL=5
20 FOR J=480 TO 999 STEP 2:POKEP+J,247
25 J=J-RND(1)*J/500
30 NEXT J
35 IF=0
40 G=480*(5-PL)
45 POKEO+O1,91:POKEO+O2,64:POKEO+O3,182-PL:POKEO+O4,91:POKEO+O5,64
50 PRINTSC;"II 3".TAB(6);
55 IFBP=0 THEN BP=0+02
60 GETO:IF O=0 THEN BP=1
65 IF O=0 THEN BP=160 AND SC=20 THEN GOSUB 2000
70 IF BP=1 THEN GOSUB 1000
75 POKEO+O1,32:O=O+1
80 IF PEEK(O+O5)=247 THEN BP=0
85 IF O=O5 THEN P=999 THEN 7000
90 GOTO 45
1000 POKEP,81:BN=BP+40
1010 IF PEEK(BN)=247 THEN POKEBN,42:POKEBN,163:POKEBN,42:POKEBN,32:POKEBN,32:BP=O+
1020 POKEBP,32:BP=BN
1030 IF BP=P+999 THEN BP=0
1040 RETURN
2000 BP=O+O5+1
2010 IF PEEK(BP)=247 OR BP=P+999 THEN 2100
2015 IF BP=P+999 THEN 2100
2020 POKEP,45
2030 POKEP,32
2040 BP=BP+1:GOTO 2010
2100 POKEP,42:POKEP,32:POKEP,42:POKEP,32
2110 SC=SC+20
2120 RETURN
2200 FOR I=1 TO 5
2205 POKEO+O1,42:POKEO+O2,42:POKEO+O3,42:POKEO+O4,42:POKEO+O5,42
2210 POKEO+O1,163:POKEO+O2,163:POKEO+O3,163:POKEO+O4,163:POKEO+O5,163
2215 POKEO+O1,163:POKEO+O2,163:POKEO+O3,163:POKEO+O4,163:POKEO+O5,163
2220 POKEO+O1,42:POKEO+O2,42:POKEO+O3,42:POKEO+O4,42:POKEO+O5,42
2225 POKEO+O2,42:POKEO+O3,42:POKEO+O4,42
2230 POKEO+O1,32:POKEO+O2,32:POKEO+O3,32:POKEO+O4,32:POKEO+O5,32
2240 NEXT I
2210 PL=PL-1:IF PL=0 THEN 35
2220 PRINT "YOU FAILED! ALL 5 PLANES LOST FOR ONLY "SC;"POINTS!"
2230 IF SC=20 THEN PRINT "K! PATHETIC!"
2240 GOTO 7020
2300 PRINT "WELL DONE! YOU LANDED PLANE NUMBER";6-PL
2310 PRINT "WITH A SCORE OF";SC
2320 PRINT "SCORE-RUN"
2330 GETO
2340 IF O=0 THEN RUN
2350 IF O=0 THEN PRINT "END"
2360 GOTO 7030

```

Calculator

Malcolm Taylor,
Riyadh,
Saudi Arabia.

ZX-81

The program is intended for those who have a 16K ZX-81, but wish they had a printing calculator. It will keep a running total of up to 100 entries, which may be simply numeric or any of the ZX-81 keyboard maths functions.

The screen is automatically cleared when full, and the program is menu-driven to allow alteration of any line number; review of previously scrolled-off entries; clear and restart or continue.

```

10 REM "CALCULATOR"
15 REM "COPYRIGHT M.J.H.TAYLOR
1982"
20 GOTO 110
30 REM SET UP HEADINGS
40 CLS
50 PRINT "LN";TAB 4;"ITEM";TAB
20;"TOTAL"
60 PRINT "-----"
70 PRINT
80 PRINT
90 PRINT "-----"
100 RETURN
110 PRINT TAB 5;"PRINTING CALCU
LATOR"
120 PRINT TAB 5;"-----"
130 PRINT
140 PRINT
150 PRINT "YOU MAY ENTER ANY MA
THEMATICAL "FUNCTION. REVIEW FR
OM ANY LINE "BY ENTERING "R".
CLEAR ALL "ENTRIES BY ENTERING
"S". ALTER "ANY LINE BY ENTE
RING "A".
160 PRINT
170 PRINT "PRESS "NEU LINE" T
O START"
180 INPUT A$
190 GOSUB 40
200 REM SET UP FOR MAX 100 ENTR
IES
210 DIM B$(100,12)
220 DIM C(100)
230 FOR I=1 TO 100
240 GOTO 800
250 LET B$(I)=R$
260 REM SPECIAL CONDITION FOR
COUNT NUMBER ONE
270 IF I=1 THEN LET C(I)=VAL B$
(I)
280 IF I=1 THEN GOTO 300
290 LET C(I)=C(I-1)+VAL B$(I)
300 PRINT I;TAB 4;B$(I);TAB 20;
C(I)
310 REM LIMIT NUMBER OF ENTRIES
PER PAGE TO 12
320 IF I/12=INT (I/12) THEN GOS
UB 40
330 IF I/12=INT (I/12) THEN PRI
NT AT 5,0;I;AT 5,4;B$(I);AT 5,20
;C(I)
340 NEXT I
350 PRINT
360 PRINT AT 2,0;"WHICH LINE DO
YOU WISH TO ALTER?"
370 INPUT D
380 IF D>I THEN GOTO 310
390 PRINT AT 3,0;"ENTER NEU VAL
UE OF LINE "D;"
400 INPUT F$
410 LET B$(D)=F$
420 GOSUB 40
430 IF D=I-1 THEN LET C(D)=C(D-
1)+VAL F$
440 IF D=I-1 THEN GOTO 550
450 FOR G=D TO (I-1)
460 IF G=1 THEN LET C(G)=VAL B$
(G)
470 IF G=1 THEN GOTO 520
480 LET C(G)=VAL B$(G)+C(G-1)
490 REM LIMIT NUMBER OF ENTRIES
PER PAGE TO 10
500 IF G>I-10 THEN GOTO 520
510 GOTO 530
520 PRINT G;TAB 4;B$(G);TAB 20;
C(G)
530 NEXT G
540 GOTO 560
550 PRINT D;TAB 4;B$(D);TAB 20;
C(D)
560 PRINT
570 PRINT
580 GOTO 750
590 PRINT AT 2,0;"FROM WHICH LI
NE NUMBER?"
600 INPUT D
610 GOSUB 40
620 LET T=(I-D-1)
630 IF T>10 THEN LET T=10
640 FOR J=0 TO T
650 PRINT D+J;TAB 4;B$(D+J);TAB
20;C(D+J)
660 NEXT J
670 PRINT
680 GOTO 750
690 GOSUB 40
700 LET I=I-1
710 PRINT I;TAB 4;B$(I);TAB 20;
C(I)
720 GOTO 340
730 REM SET UP CUES
740 REM SET UP CUES
750 PRINT AT 18,0;"ENTER "C"
TO CONTINUE"
760 PRINT "ENTER "S" TO CLEAR
ALL ENTRIES"
770 PRINT "ENTER "A" TO ALTER
ANY LINE"
780 PRINT "ENTER "R" TO REVIE
U"
790 REM SET UP RESPONSE TO CUES
800 INPUT R$
810 IF R$="C" THEN GOTO 700
820 IF R$="S" THEN GOTO 190
830 IF R$="A" THEN GOTO 360
840 IF R$="R" THEN GOTO 590
850 GOTO 250
860 STOP
870 SAVE "CALCULATOR"
880 GOTO 1

```

Board-game

N D Willink,
Exeter, Devon.

ZX-81

FOR THOSE interested in how the ZX-81 can play games other than chess or draughts, this 16K program will be of some interest.

The rule of the game is that no fruit of the same kind can be in an adjacent square.

```

2 LET S=0
5 LET GO=0
10 LET K$=""
20 FOR N=5 TO 15
30 PRINT AT N,8;K$
40 NEXT N
50 DIM A(7,7)
60 FOR N=2 TO 6
70 FOR M=2 TO 6
75 LET A(M,N)=3
80 PRINT AT 2*M+2,2*N+5;" "
85 NEXT M
90 NEXT N
100 FOR N=1 TO 5

```

```

110 PRINT AT 2*N+4,7;N
120 PRINT AT 4,2*N+7;N
130 NEXT N
140 PRINT AT 21,0;"IN AUTOPLAY
?"
150 INPUT B$
160 IF B$(1)="Y" THEN LET S=1
170 PRINT AT 21,0;"DO YOU WANT
TO PLAY FIRST?"
180 INPUT D$
190 PRINT AT 21,0;"
195 IF D$(1)="N" THEN GOTO 500
200 INPUT A$
201 LET K=0
202 LET K=0
205 LET GO=GO+1
207 PRINT AT 21,0;"
208 PRINT AT 17,10;"TURN";GO
210 LET V=VAL A$(2)+1
215 LET V2=VAL A$(2)+1
220 IF A(V,2)=3 THEN GOTO 300
225 PRINT AT 21,0;"INVALID MOVE"
230 GOTO 200
300 PRINT AT 21,0;"ORANGE OR AP
PLE"
310 INPUT C$
315 PRINT AT 21,0;"
320 IF C$(1)="O" THEN LET X=1
325 IF C$(1)="A" THEN LET X=2
330 IF A(U+1,U2)=X OR A(U,U2+1)=X
THEN GOTO 340
335 GOTO 400
340 LET A(U,U2)=X
400 IF X=1 THEN PRINT AT 2*U+2,
2*U2+5;"O"
410 IF X=2 THEN PRINT AT 2*U+2,
2*U2+5;"A"
500 LET Z=INT (RND*2)+1
502 LET M=INT (RND*4)+2
503 LET N=INT (RND*4)+2
507 IF A(M,N)=3 AND (A(M+1,N)<)
Z AND A(M-1,N)<Z AND A(M,N+1)<Z
AND A(M,N-1)<Z THEN GOTO 600
510 FOR M=2 TO 6
515 FOR N=2 TO 6
520 IF A(M,N)=3 AND (A(M+1,N)<)
Z AND A(M-1,N)<Z AND A(M,N+1)<Z
AND A(M,N-1)<Z THEN GOTO 600
530 NEXT N
540 NEXT M
545 LET K=K+1
547 IF K=10 THEN GOTO 700
550 GOTO 500
560 IF Z=1 THEN PRINT AT 2*M+2,
N+2+5;"O"
620 IF Z=2 THEN PRINT AT 2*M+2,
N+2+5;"A"
625 LET A(M,N)=Z
630 IF S=1 THEN GOTO 500
640 GOTO 200
700 PRINT AT 21,0;"I GIVE UP YO
U WIN"

```


SOFTWARE FILE

No question

Tim Miller,
Appleby-in-Westmorland,
Cumbria.

ATOM

THIS SHORT routine is written in Atom Basic and overcomes the problem of the sometimes misleading question mark which is generated by Basic's Input statement. A response such as "Enter amount : " is much more suitable than "Enter amount ?".

When the Atom encounters the word Input,

it first jumps to a subroutine in the operating system to print out a prompt. The address of this subroutine is determined by the contents of addresses #209 and #208 as a 16-bit address.

All this program does is alter these addresses to a free area of memory at #80 in RAM where a machine-code routine replaces the original values of #209 and #208 and jumps back to the Input routine without printing a prompt. This in effect means that the last character printed in Basic becomes the prompt.

Although the program is simple, it is handy because of its length. The more complicated method of achieving this, which Acorn gives, is not only more than twice as long but uses three more of the precious 26 Atom variables.

```
10 REM * SUBROUTINE TO REMOVE INPUT
    PROMPT
20 P = # 80; LDA@82; STA # 208; LDA@254;
    STA # 209; RTS; Z = # FE940080
30 REM * DEMONSTRATE USE
40 PRINT "ENTER AMOUNT : "; !# 208 = Z;
    INPUT A
50 END
```

Sounds of alarm

David Harmes and David Martin,
Chesterfield,
Derbyshire.

VIC-20

THIS IS A basic program for an alarm clock for the Vic-20 with 3.5K. It starts by asking you when the alarm should sound — TI\$ is a 24-hour clock. Then you must enter the time at which the clock should start. The information is then displayed on the screen.

In lines 34 and 330 in the inverted commas — "f1" and "f7" — just press the corresponding function key. Press "f1" to switch the alarm off when the alarm is rung. Press "f7" when the alarm is not on to change the setting of the alarm. Note that 2.35 am should be entered in the form: 023500.

```
1 PRINT "Q"
3 PRINT CHR$(5)
4 POKE 36879,8:GOSUB 100
10 INPUT "CORRECT TIME "; TI$
20 PRINT "Q"
25 PRINT "TIME"
30 PRINT "TIME"; LEFT$(TI$,2); ":"; MID$(TI$,3,2); ":"; RIGHT$(TI$,2)
31 PRINT "ALARM"
33 PRINT "TIME"; LEFT$(AL$,2); ":"; MID$(TI$,3,2); ":"; RIGHT$(TI$,2)
34 GETA$: IFA$ = "F7" THEN GOSUB 400
36 IFA$ = TI$ THEN GOSUB 200
40 PRINT "VIC ALARM"
110 INPUT "ALARM TIME "; AL$
120 RETURN
200 POKE 36878,15
210 PRINT "Q"
220 POKE 36874,250:FORN=0T0500:NEXTN
320 POKE 36874,0:FORN=0T0500:NEXTN
330 GETA$: IFA$ = "F1" THEN POKE 36878,0:RETURN
340 GOTO 220
400 PRINT "Q"
410 INPUT "ALARM TIME "; AL$
420 PRINT "Q":RETURN
```

Search and replace

Darren Ilston,
Stockport,
Cheshire.

ZX-81

SEARCH AND replace will search the screen for a character you specify and replace it with any other. Load this machine-code routine into a Rem Statement no shorter than 23 bytes long. Search and replace runs in a 16K ZX-81 only.

Z-80 assembly listing	Hexadecimal dump
LD HL, (D.FILE).	2A 0C 40.
LD B, 24d.	06 19.
DEC HL.	2B.
INC HL.	23.
LD A, (HL).	7E.
CP 118.	FE 76.
JRNZ, + 3.	20 03.
DJNZ - 8.	10 F8.
RET.	C9.
CP CHR\$(n).	FE CHR\$(n).
JRNZ - 13.	20 F3.
LD, (HL), CHR\$(x).	36 CHR\$(x).
JR - 17.	18 EF.

If this machine-code routine is loaded into a Rem statement, then Poking the values:

16530, CHR\$(n)

where CHR\$(n) means the character to be searched for.

16534, CHR\$(x)

where CHR\$(x) means the character to be replaced.

Test timer

J Laidlaw, Aberdeen.

MZ-80K

I WROTE THIS program to make use of the fact that the MZ-80K's internal clock can be Poked to count to an accuracy of one-sixtieth of a second although, unfortunately, the hour

count is lost and the minute count's maximum is 24. The program is short, occupying approximately 0.7K, and will run on all MZ-80Ks whatever the memory size.

```
10 X=4465:Y=4466:REM cursor positions
20 PRINT "Reaction timer - hit a key"
30 GET A$: IF A$="" GOTO 30
40 TI$="000000" REM set clock to zero
50 FOR Z=1 TO 3
60 READ A,B:REM alter clock to count
70 POKE A,B:REM to 1/60 of a sec.
80 NEXT Z
90 PRINT "Q"
100 FOR Z=1 TO INT(RND(1)*2000):NEXT Z
110 POKE A,B:REM start clock
120 POKE 53248+Z/2,109:REM display
130 GET A$: IF A$="" GOTO 130
140 A$=TI$:REM time taken to react
150 POKE X,8:POKE Y,20
160 PRINT "Your time - "; LEFT$(A$,2);
170 PRINT " "; MID$(A$,3,2);
180 PRINT " "; RIGHT$(A$,2)
190 POKE X,11:PRINT "Continue? (Y/N)"
200 GET A$
210 REM restore data and resume
220 IF A$="Y" THEN RESTORE:GOTO 40
230 REM return clock to normal and end
240 IF A$="N" THEN TI$="000000":END
250 GOTO 200
260 DATA 57351,116,57359,9,57349,2
```

Words of wisdom

F K Carver,
Plymouth,
Devon.

ATOM

THIS PROGRAM is a very simple and easy-to-use substitute for a proper word processor and can be used by anyone who can use the Atom editing facilities. It is important that the first three lines are typed in exactly as shown.

To use the program, input your text anywhere after line 3 and it can be edited, added to, and so on, by using the standard Atom editing function. To print, type Control-B then run the program.

Micro maestro?

J P McGowan,
Huddersfield,
West Yorkshire.

ZX-81

THIS PROGRAM produces "music" on your ZX-81. I am not absolutely sure how it works, but when the computer changes from fast mode to slow and vice versa, it makes a click in the cassette output port. If an amplifier is attached the oscillations can be heard. If you are without an amplifier you could use a tape recorder to tape it and then play it back.

For a lower note you can add the following lines:

```
15 REM
25 REM
```

Here is the main program listing:

```
10 FAST
20 SLOW
30 RUN
```

```
1 I=?18*256+#46:DODO
2 P. ?I:I=I+1:U. ?I=13
3 P. 'I=I+3:U. I)=TOP:E.
4
5 FKC ATOM 'CHEAP WORDPRO'
6 =====
7
8 TO USE PUT YOUR OWN TEXT
9 ANYWHERE AFTER LINE 3 AND IT
10 CAN BE EDITED, ADDED TO ETC.
11 BY USING THE STANDARD ATOM
12 EDITING FUNCTIONS.
13
14 TO PRINT TYPE CONTROL-B THEN
15 RUN THE PROGRAM ABOVE
```


Quality Acorn ATOM & BBC MICRO SOFTWARE from

PROGRAM POWER




CHESS (12K)

Improved graphics, plays black or white, mid game level changes, look ahead up to 8 moves, offensive, normal & defensive play, 10 sub levels, casting, 'En passant' by player, Rejects illegal moves. Take back moves & action replay with take over. Set up problem games. £7.95




AIR ATTACK

Command an East Coast anti-aircraft battery. Destroy enemy fighters, bombers and doodle-bugs. Ingenious graphics depict planes approaching, veering and flying off. Search the sky and scan the landscape through 360 degs. GOOD SOUND. GREAT ENTERTAINMENT £7.95



SPACE FIGHTER (6K + 3Kgr)

Super High speed 'Defender' game. 5 types of intelligent aliens. Repeating laser cannon, smart bombs, hi-score, rankings, bonus points, 6 skill levels. Exciting sound effects. £7.95



COWBOY SHOOT-OUT (12K)

Full feature, two player, arcade shooting game. Cactus plants, wagons, animated cowboys. Superb graphics and sound £6.95

PROGRAMMER'S TOOLBOX

(PACKED 4K EPROM) £24.50

- ★ 1200 BAUD CASSETTE OPERATING SYSTEM
- ★ VISIBLE LOAD & SAVE

● TRACE (X)	READ	ON ERROR	HEX
● LTRACE	DATA	RENUMBER X, Y	IHEX
● STEP	RESTORE	AUTO X, Y	OFF
● FIND	ELSE	CURSOR X, Y	VECTOR
VAR	WHILE	BEEP X, Y	ZERO
LVAR	ENDWHILE	KEY X	POP
DELETE X, Y DUMP	INKEY \$X		STOP

(● VIA chip required). Suitable for any memory size. Greatly enhances ATOM existing facilities.

Now available from many Atom Dealers.

ROM SELECTOR BOARD

Suffering from congestion? (PROGRAMMER'S TOOLBOX, WORD PROCESSOR etc.) Switch between up to 4 ROMS located at Hex A000. Assembled and tested unit with compact, professionally produced PCB and good quality components. Fits easily into the Utility Socket (IC24). Only £19.50

Adventure

ALL THE EXCITEMENT, INTRIGUE AND FRUSTRATION OF A MAIN-FRAME ADVENTURE! 12K
Explore the tortuous forests, dark caverns & castle dungeons. Beware the maze of twisting tunnels and the desert wastelands. Outwit the predators. Rescue the PRINCESS and carry off the treasures.

Great skill & imagination are required to play this excellent game & you may still never exhaust all the possibilities. By devising methods of condensing messages, the author has been able to include many features which would otherwise be available only on much larger computers. Start your adventure now - £7.95

SPECIAL OFFER

Deduct £1 per cassette when ordering two or more.

BBC MICRO

MODEL B (or 32K MODEL A)

The ultimate 'real-time' Star Trek, with Battle Zone indecision your main enemy. Brilliant colour and sound. 'One-screen' presentation. 20 skill levels. Panic Button for 'once-only' space leap. Torpedo sight control. A programming masterpiece! £7.95

ELDORADO GOLD

Welcome to a past age, when cowboys ruled the roost and indians terrorised the new settlers. In ELDORADO COUNTY many fortunes were made - and nearly as many lost! Legend has it that Old Bill McClusky, who met a rather sudden death, had built up a vast treasure somewhere in the nearby territory. Can you end up a rich man where many have failed? If the mauling Apaches or Big Jake's gang don't get you, you may die of thirst in the desert or starve to death in jail. £6.95

SPACE MAZE

You have crash landed in the legendary labyrinth of Titan, inhabited by alien monsters known as 'Frogs'. Find your way out to the 'Transmat' probe before being cornered and eaten. 8 skill levels and 3D colour graphics. £5.95

CHESS

High quality, machine-code, Chess program. Six skill levels, play black or white, illegal moves rejected, 'en passant', casting, 'take-back' of moves, and display of player's cumulative move-time. Options include Blitz Chess where you must move in 10 seconds, Set-up of positions for analysis. Replay of a game just played and saving of part completed games on tape. On loading, a 1972 Spassky/Fischer game can be replayed. £7.95

MUNCHYMAN

Colourful and highly entertaining version of this popular arcade game. Munch your way to a high score, before the 'munchers' devour you. Reverse roles by munching the stars. The more you score, the harder the game gets. £5.95

STAR TREK

Full feature version of the classic battle against the Klingons. All the usual features-phasers, photon torpedoes, long and short range scans, 'on-board' computer - together with sound effects and 'real-time' torpedo battles. £5.95

DISASSEMBLER £5.95

CAT & MOUSE £4.95

GOMOKU £3.95

WRITTEN ANY PROGRAMS!
WE PAY 20% ROYALTIES
FOR ATOM, NASCOM &
BBC MICRO PROGRAMS

Please add 55p order P & P + VAT at 15%

Send SAE for our Full Catalogue

PROGRAM POWER

MICRO POWER Ltd.,
8-8A Regent Street
Leeds LS7 4PE
Tel. (0532) 683186




COMPETITION CORNER

POWER CUBE

BY ANTHONY ROBERTS

AMONG THE Klingon's treasures that you so cleverly won in our competition in April, is a puzzling little cube which could provide fabulous amounts of free energy should you just be able to connect it up correctly.

There are 12 connectors, each of which connects a pair of symbols on one face with the

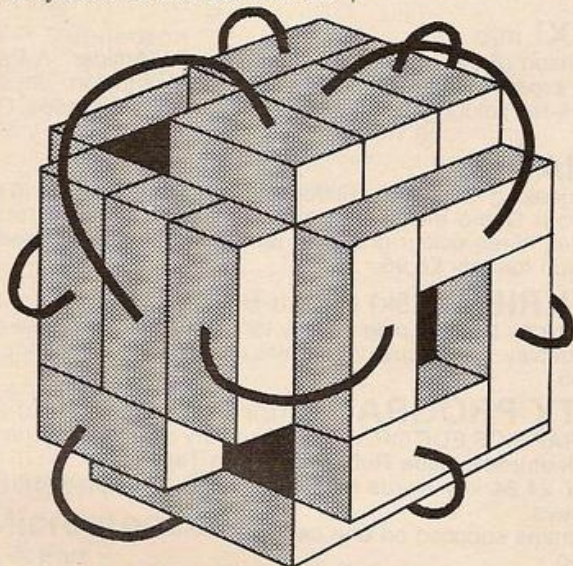

same pair of symbols on an adjacent face of the cube — as the picture shows. When they are all in place, one symbol is left exposed on each face — and if it is not the same symbol left on every face of the cube, you will have short-circuited it and the resulting explosion will destroy everything for miles.

Here is the unfolded plan of the cube. What symbol should be left?

Competition results


THE NUMBER OF correct entries for the Vic expansion system competition in June made the choice of a winner as hard as ever. We finally awarded the Arfon motherboard to J W Brawn of Highfield, Willow Lane, Goxhill, South Humberside, for his "One good Vic deserves a mother".

Several other competitors felt that their Vics suffered from maternal deprivation. As Matthew Lewis explained "Vic needs mother — bored without her", while, on a different Solution to the June crossword.



A £15 book token will be awarded to the first correct solution drawn from the competition bag. All entries must be at the *Your Computer* offices by the last working day in August. The name of the winner, the solution, and a competition report will be published in the October issue of *Your Computer*.

If you want to set a competition for Competition Corner, remember that the simplest solution should be calculable by a short program rather than by any other form of reckoning.

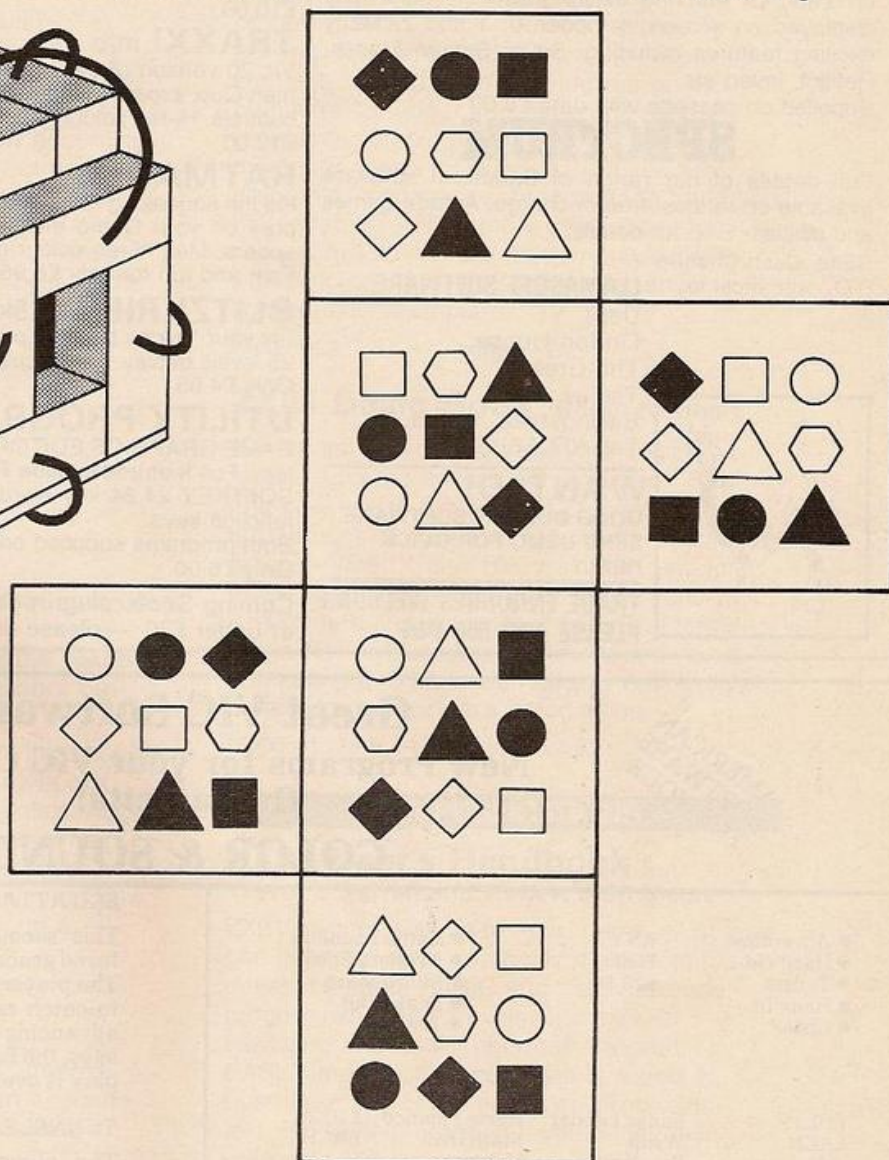

tack, Jane Finlatson revealed that "My children are bored with their mother and want to expand".

Some puns were more groan-provoking than others. John Keogh claimed "I Arfon got a good memory" and J Williams expressed the Vic owner's plight with "A Vic's 'arf off without an Arfon". Others that caught the eye were R White's "Such inflation becomes stimulation without aggravation" and Sue Dealler's sinister "VICious micros have more byte".

The Golden Nugget problem attracted comparatively few entries. If you noticed that the number of nuggets collected on leaving the park is the cube of the number of trips through the park, it was easy to arrive at a solution without a computer: the answer, 32, is the cube root of the final number of nuggets collected. Programming for a solution is

straightforward once you have worked out a formula for the number of pearls collected from the island on each trip through the park.

Several programs found the simplest line, using only three variables. Since the number of coins used and the number of bags is the same, a single variable can serve for both.

The winning solution drawn from the hat was sent in by Peter Hall of 10 Spean Drive, Aspley Hall, Nottingham:

```
10 LET B = 0
20 LET N = 0
30 LET B = B + 1
40 LET P = B * (B - 1)
50 LET N = N + 3 * P + 1
60 IF N = 32768 THEN GOTO 80
70 GOTO 30
80 PRINT B; "COINS"
```

B = number of bags; N = number of nuggets;
P = number of pearls.

ARCADE QUALITY SOFTWARE FROM LLAMASOFT!!

Spectrum ATARI

GRAPHICS/CHARACTER CREATOR

Now you can define your very own custom character sets. Or edit the existing sets. Results fully displayed on screen in modes 0, 1 and 2. Many exciting features including: Save, Screen Modes, Reflect, Invert etc.

Supplied on cassette with data £8.00

SPECTRUM

Full details of our range of Spectrum software available on request free of charge. Arcade games and utilities. SAE for details.

Send Cash/Cheque/
P.O. with order to:

LLAMASOFT SOFTWARE,
Dept, YC,
Lindon House,
The Green,
Tadley,
Basingstoke, Hants.
Tel: (07356) 5038

WANTED!

GOOD QUALITY SOFTWARE.
SEND DEMO FOR QUICK
REPLY.

TRADE ENQUIRIES WELCOME
PLEASE ADD 50P P&P



by Jeff Minter

DEFENDA! m/c

Full feature version of the popular arcade game including: Swarmers, Baiters, Pods, Landers and Humanoids. Controls: Up, Down, Thrust, Reverse, Fire and Smart Bomb. High resolution colour graphics. Joystick controls. 8k or 16k expansion needed. Only £10.00

TRAXX! m/c

Vic 20 version of the brand new arcade game "Amidar" A Packman/Quix crossbreed. All machine code, fast and fun. Joystick controls. Hi-res colour graphics. 8k or 16k expansion needed. Only £10.00

RATMAN! m/c

Kill the squeaking rats which fall from the sky before they dig in and prey on you! Game includes rats, hammers, men, mutants and spears. M/c, hi-res colour graphics. 8k or 16k expansion needed. Fast and fun for only £8.95

BLITZKRIEG (3.5k) (Bomb B.A.)

Fly your Vulcan bomber over enemy territory and destroy the city. 25 levels of play. Hi-res colour graphics on the unexpanded Vic 20. Only £4.95

UTILITY PROGRAMS (for unexpanded Vic 20)

GAME GRAPHICS EDITOR. Create your very own custom characters. Full features include Reflect, Save on Tape etc. SOFTKEY 24.24 key words inc. Peek, Poke, List, Save on your function keys.

Both programs supplied on one cassette.
Only £6.00

Coming Soon, plug-in games cartridges
at under £20 — please ring for details.

AMERICAN
SOFTWARE
FOR YOUR
VIC

Great VIC Software

New Programs for your VIC Computer
On Cassette!

ALL PRICES
INCLUDE VAT @ 15%
AND POSTAGE/PACKING

COLOR & SOUND

- Adventure
- Head On
- Target
- Hang In
- Chase

ANY 3
FOR
£28.50

- Cattle Roundup
- Artillery Shoot
- Micro Maze
- Snake Out
- Trapper

£10.25
EACH

Lunar Lander
Wrap
Breakout
Black Jack
Pong
Slots
Alien Raiders
Bombs Away

Home Finance £10.25
Math Drill EACH
Hangman
Yahtzee
Othello
Target Moon
Shooting Gallery
Capture

EGG ATTACK

JOYSTICK

This seemingly innocent electronic game of catch turns gradually into a hurried race of joystick control. The player must maneuver a nuclear reactor in order to catch radioactive eggs as they are dropped from advancing "monsters". If the player misses three eggs, the Earth is no longer habitable and their turn of play is over. **12.95**

TUNNEL PATROL

JOYSTICK

The player is required in this arcade game to manoeuvre an android through a maze in order to harvest "Energy Crystals" and score points. As an obstacle the program randomly throws the android into the fourth dimension where it must battle the dreaded "Batwing" in order to survive. **12.95**

SEND 75p FOR FULL CATALOGUE
(Refundable against purchase)
DEALER ENQUIRIES WELCOME

ANGLO AMERICAN SOFTWARE

138a Stratford Road, Sparkhill
Birmingham B11 1AG 021-771 2995/2736

ALL PRICES INCLUDE VAT & POSTAGE
24 Hour answering service
on 021-771-2995 for Access orders.



Please supply

I enclose a cheque/PO for £..... made payable to
ANGLO AMERICAN or debit my

Access card number

Signature

NAME

ADDRESS

COMPUTER NEWS

JUNE PUBLICATIONS

Beginner's Guide to BASIC Programming

A P Stephenson

Written with two primary purposes. First, many people wish to understand and make use of the exciting new technology that is now becoming available to the man in the street, but have no previous knowledge or experience. Second, there is need for a book that explains BASIC as used on microcomputers.

Since computer programming is best learnt by 'doing', the book encourages the reader to write his own programs rather than slavishly copy out other people's 'masterpieces'.

0 408 01184 X 160 pages £3.95

Beginner's Guide to Microprocessors

E A Parr

- A down-to-earth and factual treatment of how microprocessors work.
- A beginner's book suitable for the reader with an interest in microprocessors but with little previous knowledge.

Avoiding the sensational aspects of the subject that have been a feature of so many books, Andrew Parr gets down to fundamentals. After an introduction to computers in general he explains in detail how the microprocessor works, its software and programming, and how it is integrated with peripherals to form a complete microcomputer system.

Later chapters describe applications of microprocessors in control systems, robots, small business computer systems, etc. There is also a survey of microprocessor families (Z80, 8080, 6800 and 6502), and an appendix covers the various number systems used in microprocessor work.

0 408 00579 3 224 pages £3.95

ORDER NOW from your local bookseller or in case of difficulty from the publisher

26 BASIC Programs for your Micro

Derrick Daines

A collection of 26 new and varied games programs, from spelling tests to submarine-hunting. They are graded from the most elementary, usable on the simplest home computer, to longer and more complex programs suitable for more advanced machines. Derrick Daines has written the programs in an easy subset of BASIC and lists the variables and memory size required and a sample run so that the reader should have little difficulty in modifying them for any suitable microcomputer.

0 408 01204 8 128 pages £4.95

ZX81 Basic Book

Robin Norman

Covers the basic 1K version, the additional facilities offered by the 16K expansion RAM and how to use the Sinclair ZX printer. There are 14 original programs for you to run on the machine (for 1K and 16K versions), and for those confused by computer jargon (and who isn't?) there is a glossary of technical terms. Robin Norman assumes no initial knowledge of computing and his undemanding writing style is perfect for a beginner's introduction.

0 408 01178 5 176 pages £4.95

JULY PUBLICATIONS

ZX81 User's Handbook

Trevor J Terrell and Robert J Simpson

ZX81 owners wishing to learn more about their computer will want this book. It answers many questions about BASIC and machine code programming, and it explains the ZX81 hardware and how it operates. Programs in BASIC and machine code are included, to illustrate many of the points covered in the text and to help readers develop their own programs.

0 408 01223 4 144 pages £4.95

Please send me _____ copy/ies of

I enclose a cheque/PO for £ _____ in total payment

_____ **Beginner's Guide to BASIC Programming**

(Stephenson) 0 408 01184 X £3.95

_____ **Beginner's Guide to Microprocessors**

(Parr) 0 408 00579 3 £3.95

_____ **ZX81 Basic Book**

(Norman) 0 408 01178 5 £4.95

_____ **ZX81 User's Handbook**

(Terrell and Simpson) 0 408 01223 4 £4.95

_____ **26 BASIC Programs for Your Micro**

(Daines) 0 408 01204 8 £4.95


FROM _____

ADDRESS _____

(YC/8.82)

Newnes Technical Books

a division of Butterworths, Borough Green, Sevenoaks, Kent TN15 8PH

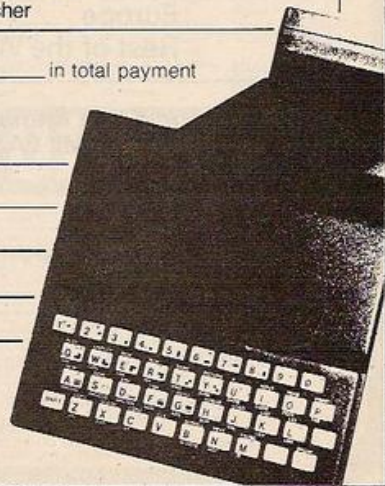



ZX81 OWNERS

**SPECIALISED PRODUCTS
MODULAR EASY TO USE
FOR HOME/INDUSTRY &
EDUCATION**

TE10 INPUT/OUTPUT PORT — Easy to use. Fits between ZX & RAM PACK/PRINTER (if required). No skill required to connect. Can be used for such things as: — motor control; sound/music generators, connection to printers/floppy discs/light pens/other computers, temperature monitoring, square wave generating, control of rotating aerials, even train sets etc. Port has 16 programmable I/O lines and may be used without any electronics knowledge to connect other add-ons. Motherboard required ONLY when two or more add-ons are used at any one time.

FULLY ASSEMBLED £17.95
KIT (WITHOUT CASE) £14.95

TE12 4 CHANNEL RELAY BOX — To suit Port Contact rating: — 240V AC/1.5A — 24V DC or 110V AC/3A. Up to 4 units i.e. 16 relays can be operated. £14.95

TE15 8 WAY TRANSISTOR DRIVER — £9.95

TE17 8 WAY SWITCH UNIT (EDUCATIONAL) — £12.95

TE18 8 WAY INDICATOR UNIT (EDUCATIONAL) — £12.95

TE20 JOYSTICK & FREE GAME — (2 Joysticks may be connected via Motherboard.) £12.95

TE30 MOTHERBOARD — Allows multiples combinations of add-ons — up to 16 I/O lines may be used — £15.95

TE126 POWER SUPPLY — 6/7.5/9V DC at 300 mA — Required for use with add-ons TE12/15 & 18. £4.95

23 + 23 WAY ZX Edge Con £2.95. Contact cleaner £2.30.

16 WAY SINGLE SIDED EDGE CON £1.95. EXTENDED PIO NOTES £1.

PRICES INCLUDE VAT

Receipts always provided: — Delivery normally ex-stock. ADD 50p towards p&p on all orders under £20.00, with the exception of accessories, e. g. Edge on. Full instructions and examples with all products.
SEND S.A.E. FOR CATALOGUE. TELEPHONE ORDERS ACCEPTED.

THURNALL (ELECTRONICS) ENG.

DEPT Y, 95 LIVERPOOL ROAD,

CADISHEAD, MANCHESTER M30 5BG

TEL: 061-775 4461 (24 hour)



THE ZX81 COMPANION

ISBN 0 90721 01 1

Price £7.95 incl. UK P&P

If you have a Sinclair ZX81 and want to use it to its full potential then, as the experts have all agreed, this is the book for you. It contains detailed guidelines and documented programs in the areas of gaming, information retrieval and education, as well as a unique listing of the 8K ROM for machine code applications.

'Far and away the best . . . once again Linsac has produced the book for the serious end of the market'. — *Your Computer*, November 1981.

'The ZX81 Companion is a most professional product . . . with many good illustrative programs, tips and warnings'. — *Education Equipment*, October 1981.

'Bob Maunders' attempt to show meaningful uses of the machine is brilliantly successful . . . thoughtfully written, detailed and illustrated with meaningful programs . . . To conclude — the book is definitely an outstandingly useful second step for the ZX81 user'. — *Educational ZX80/81 Users' Group Newsletter*, September 1981.

Send your cheque for £7.95 to:

LINSAC (YC)

68 Barker Road, Linthorpe
Middlesbrough TS5 5ES



YOUR COMPUTER

As a reader of *Your Computer* you'll agree that every issue is an invaluable reference.

To keep your copies in order you'll need a binder, specially designed for *Your Computer*, to ensure every issue remains in good condition for your future use.

To order your binder complete the coupon below and return it to us, with your cheque. Prices, including VAT, postage and packing, are as follows:

UK	£3.45
Europe	£4.00
Rest of the World	£5.00

To: General Sales Manager, Room 108, Quadrant House, The Quadrant,
Sutton, Surrey SM2 5AS, England.

Please send me.....*Your Computer* binders at £.....each.

I enclose my cheque/postal order for £.....made payable to IPC Business Press Ltd.

Name.....

Address.....

100 FREE PROGRAMS FROM SILICA SHOP — WITH EVERY PURCHASE OF AN ATARI 400 800



ATARI PRICES REDUCED

We at Silica Shop are pleased to announce some fantastic reductions in the prices of the Atari 400/800 personal computers. We believe that the Atari at its new price will become the U.K.'s most popular personal computer and have therefore set up the Silica Atari Users Club. This club already has a library of over 500 programs and with your purchase of a 400 or 800 computer we will give you the first 100 free of charge. There are also over 350 professionally written games and utility programs, some are listed below. Complete the reply coupon and we'll send you full details. Alternatively give us a ring on 01-301 1111 or 01-309 1111.

ATARI 400 with 16K	£199
ATARI 400 with 32K	£248
ATARI 800 with 16K	£449

400/800 SOFTWARE & PERIPHERALS

Don't buy a T.V. game! Buy an Atari 400 personal computer and a game cartridge and that's all you'll need. Later on you can buy the Basic Programming cartridge (£35) and try your hand at programming using the easy to learn BASIC language. Or if you are interested in business applications, you can buy the Atari 800 + Disk Drive + Printer together with a selection of business packages.

Silica Shop have put together a full catalogue and price list giving details of all the peripherals as well as the extensive range of software that is now available for the Atari 400/800. The Atari is now one of the best supported personal computers. Send NOW for Silica Shop's catalogue and price list as well as details on our users club.

THE FOLLOWING IS JUST A SMALL SELECTION FROM THE RANGE OF ITEMS AVAILABLE:

ACCESSORIES Cables Cassettes Diskettes Joysticks Le Stick - Joystick Misc Supplies Paddles ADVENTURE INT Scott Adams Adv No 1 Adventureland No 2 Pirate Adv No 3 Mission Imp No 4 Voodoo Cast No 5 The Count No 6 Strange Ody No 7 Mystery Fun No 8 Pyramid of D No 9 Ghost Town No 10 Saw Island 1 No 11 Saw Island 2 No 12 Golden Voy Angle Worms Deflections Galactic Empire Galactic Trader Lunar Lander	Mountain Shoot Rearguard Star Flite Sunday Golf AUTOMATED SIMULATIONS Crush Crumble Cmp Datestones of Ryn Dragons Eye Invasion Orion Rescue at Rigel Ricochet Star Warrior Temple of Apshai Upper Reaches Aps BOOKS Basic Ref Manual Compute Atari DOS Compute Bk Atari Compute Magazine De Re Atari DOS Utilities List DOS2 Manual Misc Atari Books Op System Listing Wiley Manual	BUSINESS Calculator Database Managemt Decision Maker Graph-It Invoicing Librarian Mort & Loan Anal Nominal Ledger Payroll Personal Finl Mgmt Purchase Ledger Sales Ledger Statistics 1 Stock Control Telelink 1 Visicalc Weekly Planner Word Processor CRYSTALWARE Beneath The Pyram Fantasyland 2041 Galactic Quest House Of Usher Sands Of Mars Op System Listing Waterloo World War III	DYNACOMP Alpha Fighter Chompelo Crystals Forest Fire Intruder Alert Monarch Moonprobe Moving Maze Nominos Jigsaw Rings of The Emp Space Tilt Space Trap Stud Poker Triple Blockade EDUCATION from APX Algebraic Atlas of Canada Cubbyholes Elementary Biology Frogmaster Hickory Dickory Inst Comptg Dem Lemonade Letterman Mapware	Maths-Tac-Toe Metric & Prob Solv Mugwump Music Terms/Notatn Musical Computer My First Alphabet Number Blast Polycalc Presidents Of U.S. Quiz Master Starware Stereo 3D Graphics Three R Math Sys Video Math Flash Wordmaker EDUCATION from ATARI Conv French Conv German Conv Italian Conv Spanish Energy Czar European C & Caps Hangman Invit To Prop 1/2/3 Kingdom Music Composer	Scram States & Capitals Touch Typing EMI SOFTWARE British Heritage Cribbage/Dominos Darts European Scene Jig Hickory Dickory Humpty Dumpty Jumbo Jet Lander Snooker & Billiards Submarine Comdr Super Cubes & Title Tournament Pool ENTERTAINMENT from APX Alien Egg Anthill Attack Avalanche Babel Blackjack Casino Block Buster Block Em Bumper Pool	Castle Centurion Checker King Chinese Puzzle Codecracker Comedy Diskette Dice Poker Dog Date Domination Downhill Eastern Front Galahad & Holy Grl Graphics/Sound Jax-O Jukebox Lookahead Memory Match Midastouch Minotaur Outlaw/Howitzer Preschool Games Pro Bowling Pushover Rabbott Reversi II Salmon Run 747 Landing Simul Seven Card Stud	Sleazy Adventure Solitaire Space Chase Space Trek Sultans Palace Tact Trek Terry Wizards Gold Wizards Revenge ENTERTAINMENT from ATARI Asteroids Basketball Blackjack Centipede Chess Entertainment Kit Missile Command Pac Man Space Invaders Star Raiders Super Breakout Video Ease!	Jawbreaker Mission Asteroid Mouskattack Threshold Ulysses/Golden Fl Wizard & Princess PERIPHERALS Cintronics Printers Disk Drive Epson Printers Program Recorder RS232 Interface Thermal Printer 16K Memory RAM 32K Memory RAM PERSONAL INT from APX Adv Music System Banner Generator Blackjack Tutor Going To The Dogs Keyboard Organ Master Code Tutor Personal Fitness Prg Player Piano Sketchpad	PROGRAMMING AIDS from Atari Assembler Editor Dsembler (APX) Microsoft Basic Pascal (APX) Pilot (Consumer) Pilot (Educator) Programming Kit SANTA CRUZ Basics of Animation Bobs Business Display Lists Graphics Machine Kids 1 & 2 Horizontal Scrolling Master Memory Map Mini Word Processor Page Flipping Player Missile Gr Player Piano Sounds Vertical Scrolling	SILICA CLUB Over 500 programs write for details
--	---	---	--	---	--	---	--	---	--	--

FOR FREE BROCHURES - TEL: 01-301 1111

FREE LITERATURE

I am interested in purchasing an Atari 400/800 computer and would like to receive copies of your brochures and test reports as well as your price list covering all of the available Hardware and Software:

Name

Address

.....

Postcode

(YC 0882) - Your Computer - August 1982

SILICA SHOP

For free brochures and reviews on our range of electronic products, please telephone 01-301 1111. To order by telephone, just quote your name, address, credit card number, and order requirements and leave the rest to us. Post and packing is FREE OF CHARGE in the UK. Express 24 hour delivery available at an additional charge.

- **SHOP DEMONSTRATION FACILITIES** - we provide full facilities at our shop in Sidcup, Monday to Saturday 9am to 5.30pm (closing Thursday, 5pm, Friday 8pm).
- **MAIL ORDER** - we are a specialist mail order company and are able to supply goods direct to your door.
- **MONEY BACK GUARANTEE** - if you are totally unsatisfied with your purchase, you may return it to us within 10 days. On receipt of the goods in satisfactory condition we will give you a full refund.
- **PART EXCHANGE SECOND HAND MACHINES** - we offer a part exchange scheme to trade in many makes of T.V. game for personal computers.
- **COMPETITIVE PRICES** - our prices, offers and service are very competitive. We are never knowingly underbid, and will routinely match any lower price quoted by our competitors.
- **HELPFUL ADVICE** - available on the suitability of various computers.
- **AFTER SALES SERVICE** - available on all computers out of guarantee.
- **VAT** - all prices quoted above include VAT at 10%.
- **CREDIT FACILITIES** - we offer credit over 12, 24 or 36 months, please ask for details.

SILICA SHOP LIMITED

Dept YC 0882, 1-4 The Mews, Hatherley Road, Sidcup, Kent DA14 4DX.
Telephone: 01-301 1111 or 01-309 1111.

Read this ad

You: "Darling, I've decided to buy a computer."

Her: "***++**?!@XX??££**?!? off!"

You: "Yes, I know we could do with a new washing machine. But the new Dragon 32 Computer is much more important. It's the first computer actually designed for all the family - and it costs under £200!"

Her: "***++?!@££?! fortune!"

You: "No, I'm not being selfish. Computers are for the whole family - and they're going to play a big part in the children's future."

Her: "Oh?"

From this point on, the conversation should follow more reasonable lines.

Allowing you to fully explain the many advantages of the new Dragon 32 family computer.

32K RAM FOR UNDER £200.*


For a start, the Dragon offers 32K RAM. Your wife may not understand that, so just tell her that the Dragon's capabilities are truly massive - at least twice as powerful as its competitors, with some features you won't find even in more expensive units. The Dragon will give you all the power you're likely to need, and more, to create your own programs - along with

an exciting range of software which can do anything from helping with kids' spelling and arithmetic to creating your own cartoons.

THE FIRST FAMILY COMPUTER.

All of which brings you nicely to the point where you tell your wife just how much fun the kids will have with the Dragon. How it will save her all that

*Television not included in price.

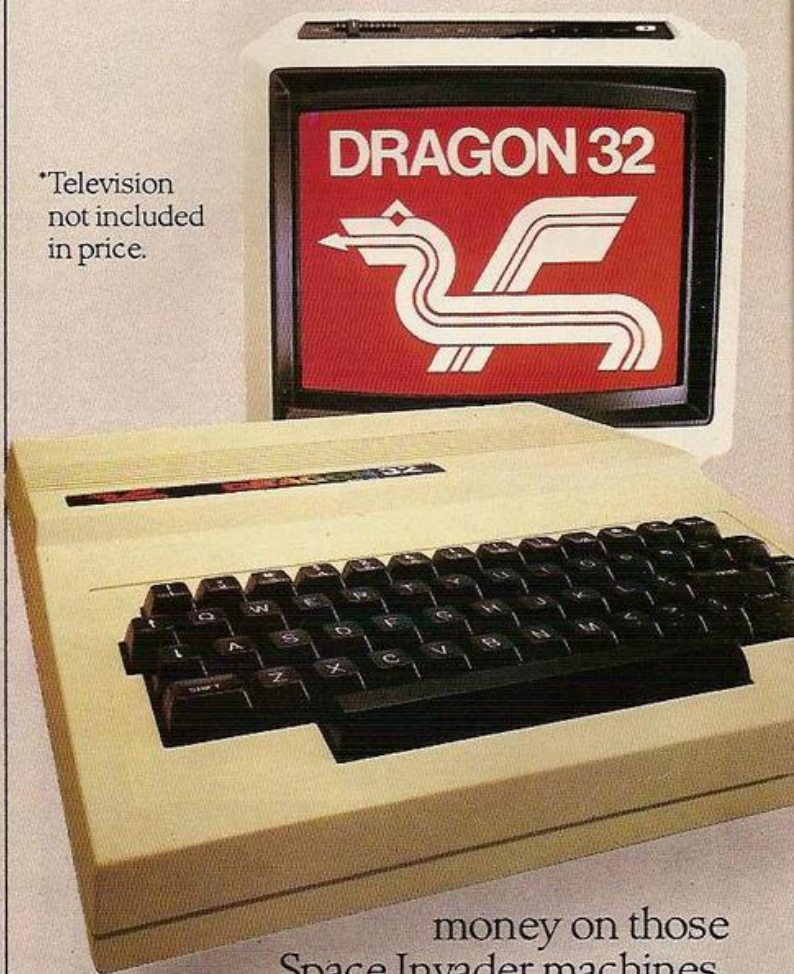

money on those Space Invader machines. How it will magically translate simple typed instructions into beautiful drawings and designs using set, line, circle, draw, scale, rotate and paint features, in up to 9 colours - and play and compose

to your wife.

SPECIFICATIONS

6809E MICROPROCESSOR. Pet, Apple, Atari 400, BBC Micro, and VIC 20 still have the less powerful 6502.

32K RAM (as standard). At least twice the power of similarly priced machines. Expandable to 64K RAM.

EXTENDED MICROSOFT COLOUR BASIC (as standard).
Featuring: ADVANCED GRAPHICS (set, line, circle, paint, print, draw, rotate and print using).
ADVANCED SOUND 5 octaves, 255 tones.
AUTOMATIC CASSETTE RECORDER CONTROL.
FULL EDITING with INSERT and DELETE.

9 COLOUR, 5 RESOLUTION DISPLAY.

USE WITH ANY U.H.F. TV and/or separate P.A.L. monitor.

PROFESSIONAL QUALITY KEYBOARD.
Typewriter feel. Guaranteed for 20 million depressions.

PRINTER (Centronics parallel).

JOYSTICK CONTROL PORTS.

with 5 octaves of music. How it will engross your children in mind-boggling adventures in dungeons and caves without even getting their knees dirty. And the Dragon works with any U.H.F. TV.

THEY'LL LEARN AS THEY PLAY.

And then you can casually point out that although the kids are having fun, they're also learning. And within a very short space of time, the whole family will be completely at home with programming - with computer language - with every aspect of how computers work. Which can't do their future prospects any harm at all.

BRILLIANTLY SIMPLE INSTRUCTION MANUAL.

The Dragon is made in Britain, designed with the help of British Universities. And it's also worth remembering

that the Dragon's instruction manual is clearer and easier to understand than any other homecomputer's.

That its top-quality keyboard is as easy to use as a typewriter, and so well made it's guaranteed for twenty million depressions.

TAKE THE FAMILY DOWN THE HIGH STREET.

And if she still wants to know more, take her to see the Dragon 32. It'll soon be available in most good stores - or you can send the coupon for further details.

And if you're one of our many lady readers, please accept our apologies.

Perhaps you'd like to read this ad to your husband.

DRAGON 32

The first family computer.

To: Jean Webster, Dragon Data Ltd., Queensway, Swansea Industrial Estate, Swansea, Glamorgan SA5 4EH.
Tel: 0792 580651.

Please send me further information about the Dragon 32.

Name _____

Address _____

YC

A member of the Mettoy Group of Companies.

ADD ON, PLUG IN, PRINT OUT

AMBER 2400 MATRIX PRINTER

the flexible print out facility for home computers.

At long last it's possible for every home computer user to have a hard copy of program listings. The AMBER 2400 Matrix Printer is the first low-cost complete printer with the flexibility of parallel or serial inputs to make it compatible with most home computers.

Priced at just £69.99 plus VAT, the AMBER 2400 is available for the first time this August and has a most impressive specification.

• 24 characters per line standard text • Full graphics capability - each dot is individually programmable • Conventional 25 pin 'D' type plug • Serial and parallel input • CTS/Busy output • Serial baud rate selectable from 75 to 9600 baud • Mains Powered • Injection moulded case for strength • Size of just 80mm x 160mm x 160mm (H x W x D) • Uses low-cost plain paper rolls (90ft for 45p) • This is not a thermal or spark discharge type printer

This is the printer you need, write now telling us what computer you use, including a SAE, and we'll send you the AMBER 2400 Matrix Printer leaflet. We're also accepting advance orders for the AMBER 2400.



AMBER CONTROLS LTD.

Central Way, Walworth Industrial Estate,
Andover, Hampshire.

MICROAGE ELECTRONICS LONDON'S BIGGEST ACORN STOCKIST

Working BBC 'A' and 'B' machines in the shop.
Call in for 'hands on' demonstration.

BBC Bargains

BBC Model 'A' **£299** (+£7 p+p)

16k RAM 32k ROM

Full-colour high-resolution graphics.

BBC Model 'B'

£399 (+£7 p+p)

32k RAM 32k ROM

16 colour graphics

BBC Disk Interface **£69***

BBC 'B' Upgrade Kit **£130***

This is the official kit, beware of imitations, they will invalidate your guarantee. * (These prices include fitting - send or bring in your machine for instant upgrading)

BBC Single Disk Drive



£235 (+£2.50 p+p)

BBC Dual Disk Drive

£389 (+£2.50 p+p)

BBC Cassette **£28** (+£2 p+p)

BBC Joystick **£13** (+£1 p+p)

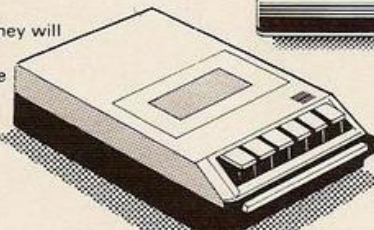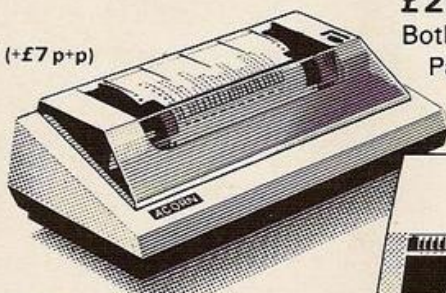

Powerful Printers

Acorn AP80A Printer

£199 (+ £4.50 p+p)

Lowest ever price!

Acorn AP100A Printer


£228 (+ £4.50 p+p)

Both with free cable below.

Parallel printer cable

£15 (+ 75p p+p)

Paper £14 per 2,000 (+ £3.50 p+p)

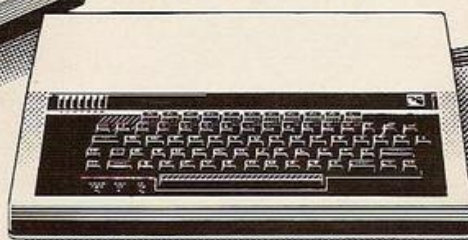


Mighty Monitors

12" Green Screen Monitor

£95 (+ £6.50 p+p)

14" BBC Colour Monitor

£279 (+ £9.50 p+p)



Atom Attractions

Atom kit **£135** (+ £3.50 p+p)

Colour Atom **£199** (+£3 p+p)

Atom Disk pack

£335 (+ £2.50 p+p)

Cut - price Cassettes
C12 Data Cassettes 40p each
£4 per 10 (£1 p+p)

**OFFICIAL
BBC
STOCKIST**

Attention Local Authorities, Schools, Businesses. As London's largest Acorn dealer we can supply from stock all your hardware and software requirements - after - sales servicing guaranteed. Official orders accepted.

**ALL PRICES INCLUDE VAT. FOR FURTHER
DETAILS AND MAIL ORDER LIST SEND LARGE S.A.E.
Open Mon - Sat 9am - 6pm. Thurs 9am - 1pm**

MICROAGE ELECTRONICS
135 HALE LANE EDGWARE MIDDLESEX HA8 9QP
TEL: 01-959 7119 TELEX 881 3241

ZX81

Organic Micro

What do you do when you want to make your micro more powerful?

You add memory. Memory is the most expensive part of a microcomputer. For example, to increase a ZX81 from 1K to 16K of RAM costs over 70% the price of the micro itself. The rest of the cost is shared between the CPU, ROM, the circuit board, the case, the keyboard, the various plugs and sockets, as well as the manufacturing and marketing expenses.

What do you do when you grow out of your ZX81, ATOM or VIC?

Throw them away or give them to your kid, and buy a more powerful machine. All you really wanted was a new CPU and a new ROM, probably the least expensive bits of integrated electronics, and yet you have normally to replace everything. One way of tackling this redundancy problem is to have a system which uses a universal bus, such as the S100. The major cost of this type of mother board system is a big case full of sockets, and a large fan-cooled power supply to cope with future expansion. The case alone will cost more than, for example, a VIC or ATOM. Although such a system allows some versatility in plugging in various boards ranging from CPU to disc controller, and allows upgrading of the computer, it is fundamentally limited by both the finite number of expansion slots and the large initial outlay.

What is so different about ORGANIC MICRO?

ORGANIC MICRO is a new concept in the packaging and organisation of a microcomputer. It relieves you of all the constraints on expansion and upgrading.

IT GROWS WITH YOU.

It consists of a family of modular units, each housed in an identical case, carefully designed to be both stylish and functional. Each unit can be equipped with different internal circuitry to perform respectively different functions. Each carries its own physical and electrical connections so that units can be connected into a linked multifunctional assembly which can be readily modified or extended. In this way a microcomputer can grow from a simple starter system into a fully fledged machine as your needs evolve. The system will always be smartly packaged at each stage of its expansion because of the way the identically packaged modules interlock. Specific requirements can be met by adding a new unit, and the CPU module can be replaced when necessary, instantly creating a new and more powerful upgraded microcomputer. The old CPU could be used as the heart of another system, there is no reason to throw it away.

ORGANIC MICRO will serve you forever.

AVAILABLE NOW - modules to turn your ZX81 into an Organic Micro.

PERSONA — This module is the basis on which the system grows. It buffers in all the signals from the ZX81 expansion port via a 44-way ribbon connector. It then talks to other modules via a 64-way ORGANIC BUS configured so that it fits onto the given ZX81 Memory Address Map. Up to 4 Mbytes of the addressable positions are allowed, all signals for dynamic memory operation are generated on board. Other modules respond when PERSONA sends their individual SLOT signal along the bus. A generous + / - 5 volt regulated DC supply powers all the modules. **£24.95**

MINIMAP — This extends the 64K of the ZX81 address space up to a possible 1 Mbyte. The space is organised into vertical 64K PAGES divided into SEGMENTS labelled FILE A, FILE B, ROM, TOOL, DATA, PATH and SLOT. Up to 16 horizontal PAGES can be supported. All this memory can be defined dynamically from within a program, allowing, for example, a program in a FILE SEGMENT to manipulate the contents of DATA SEGMENTS. **£29.95**

RAM 08 — This low-cost basic memory module has 2K of memory expandable up to 8K simply by plugging in extra RAM chips in the vacant sockets. It is located in a region of address space not used by BASIC programs and is ideal for data or machine-coded routines which might be shared by several programs. **£19.95**

RAM 16 — The remarkably low cost of this memory expansion module demonstrates the economy achieved by generating all signals necessary to operate the dynamic memories from PERSONA. On-board address decoding permits the simultaneous use of many RAM 16 modules. In common with all the memory modules it can be enabled/disabled under the control of an external signal. **£21.95**

RAM 64 — Providing 64K of memory expansion arranged as four blocks of 16K all of which can be used simultaneously (unlike other available 64K add-on) under the control of MINIMAP. **£64.95**

DROM — This sophisticated and useful module is a non-volatile memory of 2K expandable to 8K. This is achieved using ultra low power CMOS static memory in conjunction with a Nickel-Cadmium battery, which is continuously recharged during normal operation. An invaluable module, especially for saving programs under development, or often-used routines or data, making tedious cassette reloading and saving unnecessary. Individual 2K blocks can be protected against accidental overwriting. **£32.95**

TOOLKIT — Up to four 2K EPROMS can be used in this module, which are located in address space after the ZX81 on-board ROM. This allows the calling of TOOLKIT-held routines using the USR function. Since they can be individually enabled/disabled, several TOOLKIT modules can be used under MINIMAP control. **£17.95**

PERICON-a — General purpose peripheral interface providing 24 lines of Input/Output. Up to four such modules can be simultaneously used allowing basic I/O, strobed I/O, and bidirectional 8 bit data transfer with handshakes. **£22.95**

PERICON-b — For access and control of the outside world. The 24 lines are capable of directly operating relays or driving long signal lines. On-board address decoding allows the simultaneous use of up to four such modules. **£27.95**

PERICON-c — A Centronics parallel interface permitting the ZX81 user to drive a 80-column dot-matrix printer. **£34.95**

USERFONT — An option available on DROM, ROM 08, or TOOLKIT, this allows the ZX81 user to define a set of 128 display characters dynamically under program control. **£6.95**

How to order: Simply use the order form below and either enclose a cheque or fill in your Barclay/Access card number. Please allow 28 days for delivery. There is a 14 day money-back option.

QTY	Module	Price	Total
1	PERSONA	£24.95	£24.95
		TOTAL	
		VAT 15%	
		POSTAGE	£1.50
		GRAND TOTAL	

I enclose a cheque/PO to
BASICare Microsystem Ltd for £
Please charge my Access/Barclay card

No:

Name:

Address:

BASICare Microsystem Ltd,
5 Dryden Court, London SE11 4NH

Tel 01-735 6408

YC8

ZX99

AUTOMATIC TAPE CONTROLLER FOR THE SINCLAIR ZX81

● DATA PROCESSING

The ZX99 gives you software control of up to four tape drives (two for reading, two for writing) allowing merging of data files. This is achieved by using the remote sockets of the tape drives, controlled by USR statements or commands.

● RS232C INTERFACE

The ZX99 has an RS232C output allowing connecting with any such printer using the full ASCII character code (you can now print on plain paper in upper or lower case, and up to 132 characters per line) at a variable band rate up to 9,600.

● SPECIAL FEATURES

There are so many special features it is difficult to list them all, for example:

AUTOMATIC TAPE COPY: You can copy a data file regardless of your memory capacity as it is processed through the Sinclair block by block.

TAPE BLOCK SKIP: Without destroying the contents of RAM

DIAGNOSTIC INFORMATION: To assist in achieving the best recording settings.

The ZX99 contains a 2K ROM which acts as an extension to the firmware in the Sinclair ROM. The ZX99's ROM contains the tape drive operating system and the conversion to ASCII for the RS232C output.

There is an extension board on the rear to plug in your RAM pack (larger than 16K if required). The unit is supplied with one special tape drive lead, more are available at £1 each.

£59.95
plus
£2.95p+p



● ZX99 SOFTWARE

We now have available "Editor 99", a quality word processing program including mail-merge, supplied on cassette for £9.95. Also following soon:

- * Stock Control
- * Sales Ledger
- * Business Accounts
- * Order Processing
- * Debtors Ledger
- * Tax Accounting

Dept. YC4 Data — Asstette, 44 Shroton Street, London NW1 6UG. 01-258 0409



● E399 CASSETTE RECORDER

£25 inc. P & P.

Tested with ZX81 and Acorn. Ideal for recording and loading your programs. Features: Cue and Review, Din socket, tape counter, tone control, built-in mic, autostop, mains/battery operation, auto-record level. 12 month guarantee.


Please enquire about our BBC recorders.



● STAR DP8480S

£299 — plus £6 Securicor delivery

RS232C interface, bi-directional, 80 CPS, 80 column printer. Works with ZX81 and ZX99 also BBC, Atom, Tandy and most other major computers.

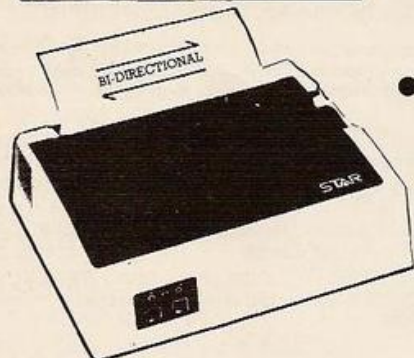

● BBC CASSETTE LEAD

7 pin plug to two 3.5mm plugs and one 2.5mm plug. Only £2 inc. P & P.

● E690 REVOLVING CASSETTE RACK



Single — £2.99 (holds 32 tapes or 20 in cases)
Double — £5.99 (holds 64 tapes or 40 in cases)
Treble — £8.99 (holds 96 tapes or 60 in cases)
Quad — £11.99 (holds 128 tapes or 80 in cases)

COMPUTER CASSETTES

High quality, screw assembled cassettes supplied with library boxes. Any lengths available.

C5 — 35p C10 — 37p C12 — 38p
C15 — 39p C20 — 41p C25 — 45p
C30 — 44p

ORDER FORM

Dept. YC4 Data — Asstette, 44 Shroton Street, London NW1 6UG. 01-258 0409

Item/Code	No.	Price inc. P & P	Total

Cassettes: Add min £1.50 or 10% P & P.

Cheques/PO made payable to Storkrose Ltd.



Charge my Access/Visa No.

Signed _____ Name _____

Address _____

MEMORY DEVICES FROM: GCC ELECTRONICS

Tel: 0223 21044

Telex: 817672

EPROMS		6500 Family	MEMORIES	
2708	200p	6502	375p	2114LP-2 90p
2716+5V	200p	6520	285p	2114-450 85p
2732	385p	6522	375p	4116-150 90p
2532	365p	6532	520p	4116-200 88p
2764	1200p	6545-1	900p	4816-2+5V 250p
				4164-200 410p
				6116-150 370p
				5516-250 635p
6800 Family		Z80 Family		
6800	270p	CPU	315p	
6802	325p	ACPU	350p	
6810	110p	CTC	270p	
6809	850p	ACTC	290p	
6850	135p	PID	340p	
6821	110p	APIO	350p	

We supply 74LS TTLs, CMOS 4000 Diodes, Transistors, etc., etc. All components are guaranteed prime parts, from leading manufacturers.

Orders from Government, Educational and Overseas buyers welcome. Special prices for volume enquiries. Please add £1. post and packing plus VAT at 15%. Minimum order £15.00.

GCC ELECTRONICS

18 CLAYGATE ROAD, CHERRY HINTON
CAMBRIDGE CB1 4JZ

TEL: 0223 210444

TELEX: 817672

ZX81 SOFTWARE

NIGHT GUNNER

Enemy aircraft approaching from the rear!!! Can you defend your plane against enemy attack? Beware, the more you shoot down, the faster they get.

An exciting machine code video game with impressive graphics. Features include: best score of the day, auto-repeat on the control keys, auto-return to the self-demonstrating title page.

Requires 16k RAM

Supplied on tape, with instructions.

Action packed fun for only £4.45

FIGHTER PILOT

15 feet.... 7 feet.... Touchdown!

Another successful instrument landing. Approaching at 150 knots is not always as easy as this. You are in full control from take-off to landing during this real-time flight simulation of a jet fighter. The sky is the limit! Fly a different mission every time. Endless scope for improving your instrument flying skills. 16k RAM Required. Supplied on tape, with full instructions.

Super value at £4.45

All prices inclusive
(Overseas add £0.55 p&p per tape)

All products guaranteed, refund if not satisfied

Digital Integration.

22, Ash Church Road,
Ash, Aldershot,
Hants, GU12 6LX.

MAIL ORDER ONLY

4th. ZX MICROFAIR

Buying your first computer?

Looking for SPECTRUM software?

Want to expand your ZX81?

Need technical advice?

Whatever the problem you'll find the answer at the ZX Microfair—the user friendly show exclusively for ZX Computers.

With the growing range of ZX products now available you'll want to choose the best. Now you can see for yourself and try them all out.

Chat with the experts before you buy (there's a whole section for local user groups) or just browse through the new books and magazines.

You can see demonstrations, displays and many new products. You can even sell your micro or pick up a bargain at the bring-and-buy sale.

The Westminster Exhibition Centre is large enough to see it all in comfort — without queuing!


Whatever your interest — hobby/home, business or educational, there's lots to see at the Microfair.

So come along to the ZX event of the year and make the most of your Sinclair Computer!

Admission: Adult 60p; Child (under 14) 40p.
Advance tickets from:
Mike Johnston, 71 Park Lane,
London N17 0HG (Enclose S.A.E.).

4th. ZX MICROFAIR

One day: 10am to 6pm.
August 21st. Westminster Exhibition Centre
(Royal Horticultural Society New Hall)
Greycoat Street, London SW1.
Nearest Tube, Victoria or St James' Park.

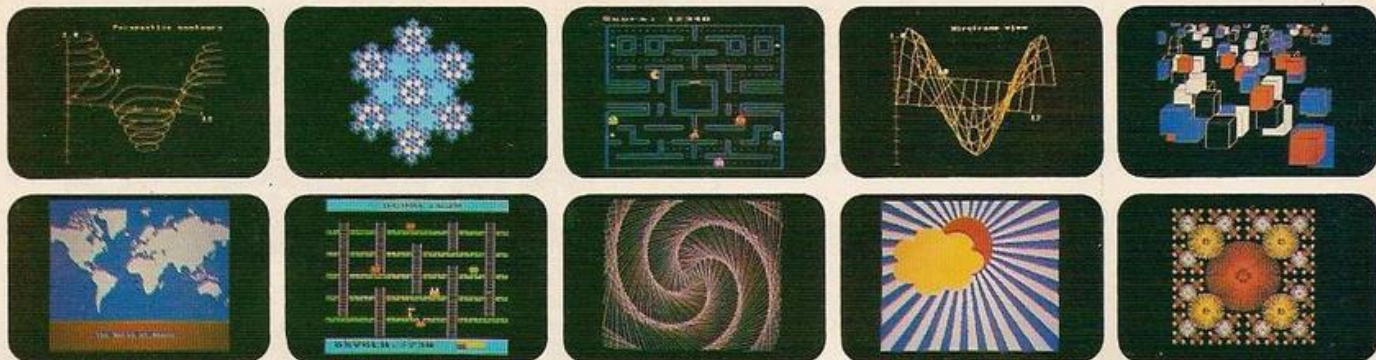

YOU'VE SEEN THE PICTURES NOW SEND FOR THE BOOKS

BBC Microcomputer or Acorn Atom

Acornsoft is the software division of Acorn Computers, designers and manufacturers, of the BBC Micro and Atom. We know better than anyone the capability of the machines, we know how to get the very best from the hardware. And we have produced a range of exciting games, exacting business and useful household software.

The Biggest Range Available

Acornsoft software ranges from authentic arcade games like Snapper to Algebraic Manipulation to Desk Diary to other languages like FORTH and LISP. Striking colour, amazing sound effects and powerful

graphics are all used to the full. And it does not stop there. There is a complete range of manuals, accessories and plug-in ROMs.

Free Brochures

Just clip the coupon or write to us and we will rush our catalogue absolutely free. Can't wait for the post ring 01-930 1614 now! Don't delay — do it today. Let Acornsoft help you get the best from our machine and open the doors to your imagination.

Acornsoft and Atom are registered trade marks of Acorn Computers Ltd.

ACORNSOFT

4A Market Hill,
CAMBRIDGE CB2 3NJ.



Please rush me my free literature from Acornsoft.

☐ Atom
☐ BBC Please tick

Name _____

Address _____

Postcode _____

The ultimate SINCLAIR ZX 81 (16K) & SPECTRUM DATABASE FILING SYSTEM

by DALE HUBBARD

Fed up with boring games — make your ZX81 work for you!
The one you've been waiting for!!

Cassette based

Clear "menu" operation

Facilities include sort, search, list, delete, change, total numeric field, save and load file, line print, etc.

Complete with demonstration file and full instruction/application leaflet.

Requires 16K Ram pack.

Applications: Recipe file
Stamp/coin collections
Inventory Control
Employee Data
Record Collections
Magazine article catalogue

May be used for any application where fast access is required to stored information

Access accepted

Send cheque or P.O. or credit card number to:

GEMINI MARKETING LTD.

9 Salterton Road, Exmouth, Devon EX8 2BR.

Or telephone us with your credit card order
on Exmouth (03952) 5832

DESPATCH BY RETURN

ONLY

£5.95 FULLY INCLUSIVE!

Special Offer
FREE
Computerised decision
making program

COME AND MEET VIC AT YOUR NORTH LONDON VIC CENTRE

SALE — VIDEO GENIE — SALE

EG3003	£240.00	EG400	£195.00
GENIE I	£269.00	EG3020	£35.00
GENIE II	£269.00	EG3022	£55.00
EG3014	£185.00	EG3015	£85.00

VIC SINGLE FLOPPY DISK



- * 174K Byte Storage
- * Direct Interface to VIC
- * Direct Compatibility with printer

ONLY £335.00

VIC CASSETTE DECK

- * Direct Interface to VIC
- * Tape Counter

ONLY £34.00

supplied with Free cassette with 6 Programmes

VIC EXPANSION UNIT

- ★ 7 Slot expansion board, for: extra memory, Programming, Games, etc.
- ★ Modulator Holder
- ★ Enclosed Power Supply

**EXPANSION UNIT
with LID
ONLY £85.00**



**** SPECIAL SUMMER OFFER ****
EXPANSION UNIT WITH LID AND MACHINE
CODE MONITOR CARTRIDGE **ONLY £100.00**

VIC 20 COMPUTER

- * A Typewriter Keyboard.
- * 5K memory-expandable to 29.5K.
- * 8 programmable function keys.
- * High resolution graphics
- * Music in three voices and three octaves, as well as sound effects
- * Eight border colours and sixteen screen colours

** SPECIAL SUMMER OFFER **


**ONLY £165.00 + FREE
CHOICE OF GAMES
CARTRIDGES
(Worth over £17.00)**



SALE — UK101 KITS — SALE

P.P.I.	£19.95	Colour
Prog. Sound	£19.95	£59.95
P108 Eprom	£19.95	Memory
J1 Expand	£ 9.95	£79.95

VIC PRINTER



- * 80 characters per line
- * 30 characters per sec
- * Dot Matrix printer
- * Tractor Feed

ONLY £185.00

CARTRIDGES

8K Memory **£34.00**
16K Memory **£56.00**
Programmers Aid
ONLY £27.50

Super Expander
High Resolution
graphics with 3K
RAM
ONLY £27.50

*** SPECIAL SUMMER OFFER ***
**MACHINE CODE
MONITOR
ONLY £25.00**

TERMS OF BUSINESS

Please add 15% VAT to all Prices.
Deliver charged at Cost. Prices valid
for coverdate of this magazine.
Phone or Send your Order **TODAY**
using

**ACCESS
OR
BARCLAYCARD**



Please send me a copy of your 'VIC
LIST' containing Software, Hard-
ware and Books for the VIC 20

NAME _____

ADDRESS _____

CHROMASONIC electronics

48 JUNCTION ROAD, ARCHWAY, LONDON N19 5RD 100 yds FROM
ARCHWAY STATION TEL: 01-263 9493/01-263 9495 TELEX: 22568.

ARE YOU A ZX81 USER WHO'S NOT PLAYING GAMES?



£47.50
Including VAT.
complete

- Each ECR81 comes complete with its own individual certification tape, tested and serial numbered to prove your machine reliability.
- Mains Operation only.
- Mains & DIN connector leads provided.
- Certification of tape head alignment - height and azimuth.
- Certified tape tension, torque and speed.
- Fast forward and rewind tape search controls.

The ECR81 is also suitable for Sinclair ZX80

- Please allow up to 28 days delivery. ● The ECR81 is backed by our 14 day money-back option.

MONOLITH
electronic products

Telephone: Crewkerne 0460 74321 Telex: 46306

ECR 81 DATA RECORDER SAVES AND LOADS YOUR PROGRAMS EVERY TIME!

The ECR81 Enhanced Certified Recorder from MONOLITH is a major advancement in cassette recorder technology which minimises the problems associated with standard audio recorders. The unit is a high reliability program store for ZX computers based on a modified, proven cassette mechanism. The two sections of data recording circuitry automatically ensure precise levels are written onto the tape and that optimised signals are received by the computer.

THE ECR81 IS NOT SUITABLE FOR AUDIO REPRODUCTION
NO MANUAL VOLUME OR TONE CONTROL ADJUSTMENT PROVIDED

To: MONOLITH ELECTRONICS CO. LTD., 5/7 CHURCH STREET, CREWKERNE, SOMERSET

Please supply me with:

----- (Qty.) Monolith ECR 81 Enhanced Certified Recorder(s)
to be used with my ZX81

Price Total

£47.50
(Each)

I also enclose postage & packing per recorder

£2.50

Please print

Prices include VAT

£

Name: Mr/Mrs/Miss.

Address

PSS

PERSONAL SOFTWARE SERVICES, 112 OLIVER STREET, COVENTRY CV6 5FE.

ZX81 OWNERS LOAD/SAVE 16K IN ONLY 26 SECS

- Verify successful saving of programs
 - Compatible with your existing recorder
 - No hardware modifications
 - No extra power supply necessary
 - No more wasted time waiting for programs to load or save — ideal for business users
- All this is now possible with the incredible **QSAVE**

QSAVE COMES IN TWO PARTS

A. HARDWARE — Simply plug the QSAVE amplifier/filter between your existing recorder and the ZX81.

B. SOFTWARE — Load the QSAVE program before you load a cassette or key in a program and you can then save + reload a full 16K (including ramtop) in only 26 seconds i.e. a data transfer rate of 4000+ baud compared to only 250 on standard ZX81.

QSAVE Also gives you a verify function just like the Spectrum which allows you to check that your programs save properly.

REVOLUTIONISE YOUR PROGRAMMING NOW FOR THE ALL INCLUSIVE PRICE OF ONLY £14.95

MAKE CHEQUES/P.O. PAYABLE TO PSS — FULL MONEY BACK GUARANTEE. DELIVERY 7-14 DAYS.
WE ALSO HAVE THE WIDEST RANGE OF SOFTWARE AVAILABLE. SAE FOR DETAILS.

Autoram

The sole ZX81 agent for the Arab World is interested in software, publications, add-ons, etc.

Don't miss this opportunity — ACT NOW!

Send samples of all you have to:

AUTORAM

P.O. Box 147, Jeddah,
Saudi Arabia, Tel: 6604212,
Telex 402 276 Autoram S.J.

THE BUFFER MICRO SHOP (NEXT TO STREATHAM STATION)

NEW SOFTWARE SHOP EXCLUSIVELY FOR

ZX81

PROGRAMS, GAMES, "ADD-ONS"

MOST OF THE MAIL ORDER ITEMS ADVERTISED
IN THIS MAGAZINE AVAILABLE OVER THE COUNTER

LOADING PROBLEMS? TRY OUR INTERFACE
BUSINESS & TECHNICAL DATA HANDLING PROGS;
PROPER KEYBOARDS; CONSOLES; VDUs

The BUFFER Micro Shop,
374a Streatham High Road,
London SW16
Tel: 01-769 2887

Quality ZX Software from CAMPBELL SYSTEMS ZX SPECTRUM

SPDE DISASSEMBLER & EDITOR for all serious machine
coders. High-speed relocatable m/c decoder, plus block
move, dec-hex conversion, etc. Very friendly £5.95

Other SPECTRUM software under rapid development.

ZX81 16K-64K

THE FAST ONE still the best generalised business filing and
reporting system around. Ultra fast and flexible, TFO
includes sorting, totalling, and user-defined data and reports.
Entirely machine coded, with 11-page manual. £15.00

DATA the original and best mailing-list system. £10.00

Special Offer: TFO + DATABASE for £20.00

ZX81 16K

NEW: GULP II Successor to GULP, and the ultimate
experience in pursuit games. Has a huge choice of mazes,
speeds, grades — even a choice of joystick methods. Will
keep you up into the small hours just watching it run in
Demo mode. £4.75

Special Offer: Original GULP + GULP II for £6.75

All software is supplied on tape, and sent return post 1st
class. Prices include VAT.

SAE for full catalogue, and orders to:

CAMPBELL SYSTEMS Dept YC
15 Rous Road, Buckhurst Hill
Essex IG9 6BL, England

microz ZX81 (16K) Software

Will a million monkeys on a million
typewriters eventually produce a
Shakespearian sonnet?

The answer is Yes. And so will POET.

POET writes verse with a vocabulary of over 300 words and
grammatically correct sentences using up to eight different parts
of speech.

This is not a simple slogan scrawler but a sophisticated and
entertaining versifier. It has four different "moods", the constancy
of which you can control.

The vocabulary can be amended so for a bit of fun you can change
a few nouns to names of friends and watch out!

And if you keep at it long enough, it will produce a Shakespearian
sonnet.

Do you have money problems?

Don't we all. But don't worry — CASHCAST can help you.

CASHCAST will project your cash flow and cash balances for up
to fifteen months ahead.

By estimating your income and expenses in up to eighteen
different categories for each of the next fifteen months, you can
use CASHCAST to project which will be your most difficult
months. You can test whether you can afford a holiday or whether
you will need an overdraft. By running "what if" projections, you
can see how much you can afford to spend monthly on, for
example, smoking or entertainment.

Very easy to use, menu-driven, with graphics, CASHCAST is a
must.

To MICROZ, Dept A, 86 Lowther Road, LONDON SW13.

Please send me the following cassettes at £4.95 each including post and packing.

☐ POET ☐ CASHCAST

Name

Address

SOUND with ZX~81!

MAKE AMAZING SOUND EFFECTS WITH
YOUR ZX-81



£25.95 THE ZON X-81
incl p&p & VAT.

- * The ZON X-81 SOUND UNIT is completely self-contained and
especially designed for use with the ZX-81. It just plugs in —
no dismantling or soldering.
- * No power pack, batteries, leads or other extras.
- * Manual Volume Control on panel — ample volume from built-in
loudspeaker.
- * Standard ZX-81 — 16K Rampack or printer can be plugged into
ZON X-81 Sound Unit without affecting normal ZX-81 operation.
- * Huge range of possible sounds for games or: Music,
Helicopters, Sci-Fi, Space Invaders, Explosions, Gun-shots,
Drums, Planes, Lasers, Organs, Bells, Tunes, Chords etc., or
whatever you devise!
- * Uses 3-channel sound chip giving programme control of pitch,
volume of tones and noise, all with envelope control.
- * Easily added to existing games or programmes using a few
simple "BASIC" lines.

FULL instructions with many examples of how to obtain effects and the
programmes, supplied. Fully Guaranteed.

BI-PAK

Dept. YC8 P.O. Box 6,
63A High Street,
Ware, Herts.



Access & VISA accepted
Ring 0820 3182 for
immediate despatch.



**moving ahead
with
ZX software**

ZX CHESS & ADVENTURES

PROGRAMS FOR THE ZX81/80 INCLUDING -

NEW
NEW
NEW

**16K BYTE RAM
PACKS
£31.95**

**1K ZX CHESS!!
£2.95**

**ADVENTURES
ADVENTURE 'A'
£6.00**

**ADVENTURE 'B'
£7.00**

**ADVENTURE 'C'
£8.00**

Full implementation of FORTH on ZX, No longer held up by the slow BASIC - FORTH runs 10-26 times faster than BASIC.
"Simplicity of BASIC with speed of Machine Code"

'BYG BYTE' Ram pack, no Wobble problems, 1 year guarantee on each Ram Pack. Simply the best you can buy. Immediate Delivery.

We didn't think it was possible but this game plays against you. Two opening moves, needs 1K of RAM to run. Incredible.

Exciting machine code games with instant response, choose from the range below. You find yourself stranded on an alien planet. Can you reach your ship and escape?

In a jungle clearing you come across an Inca temple. You must break in, collect treasure and escape alive. Beware. Includes a cassette save routine.

You are unfortunate enough to be drawn to an alien cruiser. Can you reach the control room and free yourself or will they get you first? Includes a cassette save routine.


GALAXIANS £3.95

All the features of the arcade game in a fast machine code program. Swooping attackers, explosions and personalised scoring.

ZXBUG £7.00

A 30 in 1 machine code tool and disassembler, allows access to registers and search through and modify memory; with cassette routines.

ZXCHESS



TWO GREAT ZX81 16K CHESS GAMES ZXCHESS (ENHANCED)

- Written totally in machine code.
- Full graphic display of Chess board.
- Six levels of play: Two play within competition time limits.
- Option to play Black or White.
- Plays all legal moves including castling and en-passant.
- Cassette routines for saving unfinished game and returning to later.
- Displays moves of game on screen or printer for analysis.
- Print a copy of the Chess board onto the printer.
- Board can be set up in any position, you can even swap sides midgame.
- Clear whole board with one command: for end game analysis.

£6.50

ZXCHESS II We believe the strongest ZX81 Chess game as no other has beaten it!!

- All the features of ZXCHESS plus:
- Book of 32 opening moves.
- Seven levels of difficulty: FOUR play within competition time limits.
- A move is suggested by the ZX81 if wanted.
- Optional Full Graphic version using the QS CHRS Board.

£9.95

2 copies supplied on cassette with full instructions. Cheques and postal orders payable to:



ARTIC COMPUTING "Dept IP"
396 JAMES RECKITT AVENUE,
HULL HU8 0JA



The Atom Magic Book

By Mike Lord. A wealth of games and other programs: storing speech in your ATOM, converting programs written in other BASICs, tape recording hints, and many more useful software and hardware tips. **£5.50**

Getting Acquainted with your Acorn Atom

By Tim Hartnell and Trevor Sharples. 80 programs including Draughts! 184 pages. **£7.95**

Practical Programs for the BBC Computer & Acorn Atom

By David Johnson-Davies **£5.95**

The Memory for your Atom

(Or other 1MHz 6502/6800/6809 machine)

16 or 32K BYTE VERSIONS. Expand your ATOM to 28 or 38K RAM. Ideal for Word Processing, Chess programs and Business Software.

Fully Compatible with other Acorn ATOM software and hardware, including the Acorn disc drive.

Versions available to fit inside the ATOM while still leaving room for other extensions such as the Acorn ATOM colour encoder board. Eurocard rack mounting types also available.

NEW!! Versions of the above boards designed to run from a single +5V supply. s.a.e. for details.

ATOM Cassettes.

We stock a selection of the best ones available, including:

CAAD:	Muncher + Mancala + Target + Life 7K	£6
CAAE:	Galaxian 12K	£8
CAAF:	Chess 12K	£9
CAAG:	Invaders 12K	£8
CAAH:	747 12K	£8
CAAI:	Backgammon 7K	£7
CAAJ:	Labyrinth 12K + FP	£7
(CAAE-J from Bug-Byte)		

THE EXPLORER'S GUIDE To The ZX81

The Book for the ZX81 Enthusiast.

By Mike Lord, 120 pages.

Programs for 1K RAM, and programs for 16K RAM. Games, Business and Engineering Applications. RAM & I/O Circuits. Useful ROM Routines. Hints and Tips.

£4.95

What Can I Do with 1K?

By Roger Valentine. A fresh and original book containing 40 programs and routines for the unexpanded ZX81. **£4.95**

The ZX80 Magic Book

With 8K ROM/ZX81 Supplement **£4.75**

Mastering Machine Code on your ZX81

By Toni Baker. 180 pages of immense value to beginner and expert alike. **£7.50**



ALL PRICES INCLUDE U.K. P & P AND 15% VAT WHERE APPLICABLE. OVERSEAS CUSTOMERS ADD £1.50 CARRIAGE PER ORDER.

TIMEDATA LTD Dept A 57 Swallowdale, Basildon, Essex SS16 5JG Tel: (0268) 411125 (MON-FRI)

TIMEDATA

FULLER FD SYSTEM £39.95

Professional Keyboard & Case for Sinclair ZX81 & ZX Spectrum



The ZX81 fits inside

The tough ABS injection moulded plastic case measures 8" x 14" x 2½" and hooks up to your ZX printed circuit board in minutes. No technical know how or soldering is required.

The ZX16K Memory Module will fix inside the case, using the new Adaptor Board at £9.75 or the Motherboard.

By removing the ZX PSU from its case this can also be fixed inside. We will carry out the installation work free of charge if required.


KEYBOARD LAYOUT:

All the Sinclair ZX81 keys are duplicated on our layout, with extra shift and new line keys. The professional momentary action key switches have a guaranteed life of 10⁶ operations. The unit is fully built tested and comes complete with a money back guarantee.



INSTALLATION

Simply unscrew the ZX printed circuit board from its case and screw it into the FD Case.

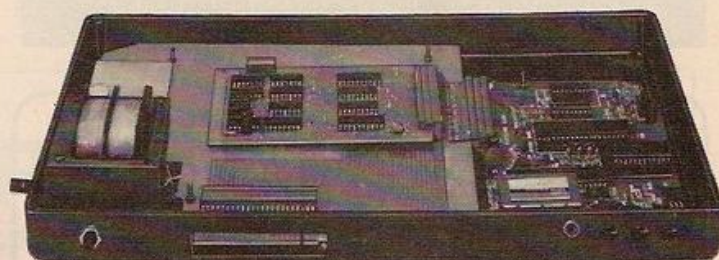

MOTHERBOARD:

We also manufacture a mother board which allows expansion to the ZX memory and I/O facilities WITHIN the case, as well as our power supply unit and reset switch.

AD Code	
---------	--

	Price †	Qty	Amount
Fuller FD System 42 Keyboard & case	39.95		
FD System Motherboard	15.95		
FD 16K. Memory Module	29.95		
FD 64K. Memory Module	78.95		
FD PSU 9 Volts at 2 amp.	12.95		
FD Shipping and Handling	2.50		

Mail to **FULLER MICRO SYSTEMS,**
The ZX Centre, Sweeting Street, Liverpool 2. England, U.K.
SAE for more details — Enquiries: Tel. 051-236 6109

Name

Address

City/State/Zip

Keyboard Only Available!
Built £24.95
Kit £18.95 (+P.P. 80p)

ZX81 Software

Business Software 16k & 32k

BUSINESS BANK ACCOUNT This program enables you to make debits under 11 subheadings. The search facility will enable you to list & total all payments to one supplier, or all payments from one client. You can also list all entries under one subheading. The statements include totals of all your subheadings.

PURCHASE DAY BOOK Keeps a complete record of all your purchases under 11 subheadings. The search facility will enable you to list & total all invoices from one supplier, or all entries under one subheading. The program will also calculate & deduct VAT.

SALES DAY BOOK For all your invoices. This program can be used to prepare statements for your clients of outstanding invoices. The search facility will enable you to list & total all invoices to one client. The program will also calculate VAT.

All programs will accept entries up to £99999.99. It will also enable you to prepare accounts for both VAT returns & your accountant. Programs can also be used by companies not registered for VAT.

16k Programs accept 150 entries£8.75
32k Programs accept 440 entries£10.75

Special 16k Pack including all 3 programs£25.00
Special 32k Pack including all 3 programs£30.00

VAT & PROFIT CALCULATOR A fast VAT & profit calculating program£3.50

32k Memory£49.95

We now have available the new MEMOTECH 32k Memory for use with our programs.

TRANSFORM LTD. For details send S.A.E. to
41, Keats House, Porchester Mead, Beckenham, Kent.
01-658 1661 Callers welcome by appointment.

All prices includes VAT Post & Packaging.

TRANSFORM LTD.

COMPUTACALC ZX

FAMILY BUDGET FIGURES

1	DEC	JAN	FEB	MAR	APR	MAY
2	MORTGAGE	167	167	167	167	167
3	PHONE	42		35		
4	GAS		62		31	
5	ELECT.	43		35		
6	CAR	63	71	68	61	70
7	INSUR.	12	12	12	12	12
8	RATES		235			
9						
10	TOTAL	284	293	544	275	284

An advanced spreadsheet program for the Sinclair ZX81 with 16K RAM.

This versatile software allows manipulation and inspection of data in the most convenient way ever. Ideal for financial planning, personal budgeting, cashflow analysis and countless other business, home, scientific and technical applications.

The screen acts as a window on a much larger grid (up to 38 x 38) of titles and numbers (up to 9 digits). Change one number or formula and all dependant results change automatically. Save on tape or printout for a permanent record. Tasks that would take hours with pencil, paper and calculator can be performed in seconds with COMPUTACALC ZX.

For cassette and full documentation send £7.95 to: Silicon Tricks, Dept YC8, 2-4 Chichester Rents, London WC2 1EJ. (Tel: 01-603-6074).

Silicon Tricks

MICROWARE MICROWARE

RETAIL SHOP IN LEICESTER FOR SINCLAIR COMPUTERS

Keyboards, Ram Packs I/O Ports, Monitors, G/Roms; Games, Serious, Home/Business, Education Programs; Books & Magazines.

Also — Now stocking Books and software for SPECTRUM, BBC, and VIC 20


MICROWARE
131 Melton Road
Leicester
Tel: 0533 681812

Closed
Thurs

Open
9.30-5.30

MICROWARE MICROWARE

VIC 20 16K ZX81

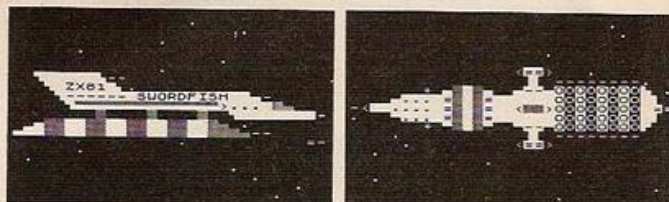

SUBSPACE STRIKER . . . It comes from out of nowhere and then vanishes back into the shadows. With your deadly Antimat torpedoes, you unleash havoc in the Federation spacelanes.

STARQUEST . . . A voyage of discovery and adventure in the cosmos. With the help of your onboard computer, you seek a habitable planet amidst the perils of deep space.

ENCOUNTER . . . Would you know what to do if you were abducted by alien beings? In this game the space invaders play YOU!

TRADER . . . A Trilogy of full 16K programmes that are chained to give a fantastic 48K graphic adventure. As an intergalactic trader you seek your fortune and deal with some very bizarre customers indeed.

Pixel games are a delightful change from the usual arcade rip-offs. Full screen animated graphics and good value too at only £9.50 for VIC 20 and £5.50 for ZX81 per 16K game. Trader is £10.50 for ZX81 only at present. Ask your dealer now or send to us for tapes by return of post.

PIXEL

Pixel Productions 39 Ripley Gdns., London SW14 8HF

REGISTERED REFERRAL CENTRE
FOR THE BBC PROJECT

BEEBUG FOR THE BBC MICRO

INDEPENDENT NATIONAL USER
GROUP FOR THE BBC MICRO

IF YOU OWN A BBC MACHINE, OR HAVE ORDERED ONE, OR ARE JUST THINKING ABOUT GETTING ONE, THEN YOU NEED BEEBUG. BEEBUG runs a regular magazine devoted exclusively to the BBC Micro (10 issues per year).

Latest news on the BBC project.
What you should know before you order a machine.
Members' discount scheme on books and hardware.
New program listings, regular advice clinic, and hints and tips pages in each issue.
April Issue: 3D Noughts and Crosses, Moon Lander, Ellipse and 3D Surface. Plus articles on Upgrading to Model B, Making Sounds, and Operating System Calls.
May Issue: Careers, Bomber, Chords, Spiral and more.
Plus articles on Graphics, Writing Games Programs, and Using the Assembler.
June Issue: Mazetrap, Mini Word Processor, Polygon; plus articles on Upgrading, The User Port, TV set and Monitor Review, Graphics Part II, More Assembler Hints, Structuring in BBC Basic, plus BBC Bugs.

Membership

6 months £4.90
1 year £8.90

Send £1.00 and A4 SAE
for sample

(Overseas add £1.00 for 6 mths,
£1.50 for 1 year)

Make cheques to
BEEBUG
and send to
BEEBUG, Dept 4,
374 Wandsworth Rd.,
London, SW8 4TE.

GAMES PACK

Beat this for value! Five 16K programs Plus two 1K programs
3-D Battle (Miccode - 1K)
City Bombs (Miccode - 1K)
Warp Wars (Basic & Miccode - 16K)
Snake (Basic 16K)
Sweet Tooth (Basic & Miccode - 16K)
Slalom (Basic 16K)
Black Holes (Basic 16K)
ALL ON ONE CASSETTE FOR ONLY £4.95 (\$9.90)

NEW GRAPHICS TOOLKIT

(another masterpiece by Paul Holmes)

22 exciting MACHINE CODE routines that give you control over your screen as never before!

(ZX81 - 16K RAM ONLY)

Draw/UnDraw draws or deletes your multi-character shape which is defined in a REM statement.
Foreground On/Off use this to 'protect' existing characters on your screen.
Border/Unborder draws a border round the edges of your screen area. Edit lines can be used if required.
Fill fills any number of lines you specify, starting at any line you specify, by your chosen character.
Reverse converts all characters to their inverse video, control as in FILL.
Print Position Controls UP, DOWN, LEFT, RIGHT. Alter your next PRINT position in the direction indicated.
Edit/print moves next PRINT position to first edit line.
Scroll Facilities UPSCROLL, DOWNSCROLL, RIGHTSCROLL, LEFTSCROLL. Scroll your screen in the direction indicated.
Onscreen/Offscreen turns your screen on or off.
Background On/Off fills your screen by your specified character.

An ESSENTIAL addition to your 16K RAM ZX81

TOOLKIT

(written by Paul Holmes)
Provides the following additional facilities:
Line renumber - you state starting number and increment value. GOTO's and GOSUB's included in line renumber.
Search and List - searches for and lists every line containing specified character.
Search and replace - changes every occurrence of a character as you require.
Free space - tells you how many free bytes you have left.

NEW BATTLESHIPS & CRUISERS GAME (16K - ZX81)

First computer version of this popular game of strategy and tactics. Both grids on view together. Establish the position of your fleet then locate and destroy the computer's fleet. Visual display shows hits and misses made and gives running score.
ONLY £4.95 (\$9.90)

Search and Replace will search the screen for every occurrence of the character you specify and replace it with your new character.

Square draws a square or rectangle from your specified co-ordinates.

All these routines are in machine code for SUPER-FAST response! GRAPHICS TOOLKIT uses only 2K of your RAM and that includes space to load the programmers TOOLKIT described above.

ALL FOR ONLY £5.95 (\$11.90)

This includes a cassette with 2 copies of the program, 2 copies of a demonstration program plus a comprehensive instruction booklet with examples. All prices are fully inclusive.

SPECIAL GRAPHICS ROUTINES

Hyper graphics mode - graphics never seen on a ZX81 before.
Fill - fills your screen instantly with your specified character.
Reverse - changes each character on your screen to its inverse video.
TAPE ROUTINE - provides a system WAIT condition until a signal is received in the cassette ear jack.
All these routines are written in machine code and together take up only 1K of your precious RAM - an incredible achievement!!
FOR 16K ONLY £4.95 (\$9.90)

As reviewed in 'Your Computer' March 1982

16K RAM PACK

ONLY £26.50

Quite simply the best available plus FREE 'Alien Attack' (7K-Miccode) on cassette. Value £5.75 (\$11.00).



Fully built tested and guaranteed. Uses existing power supply (min. 600 m.a.)
Compatible with printer.
No wobble problems.
Gold plated edge connector for perfect contact with your ZX81. Normally despatched within 10 days of receipt of your order.

With advances in microtechnology we are now able to offer the 64K RAM PACK.

Same quality as the 16K but giving massive memory to your ZX81, with external dimensions no larger than the 16K RAM Pack (above).
ONLY £62.95 (\$119.95).

OVERSEAS CUSTOMERS PLEASE NOTE: ALL PRICES ARE APPLICABLE FOR EXPORT, INCLUDING AIRMAIL POSTAGE. PAYMENT MAY BE MADE IN STERLING MONEY ORDER AVAILABLE AT YOUR BANK OR YOUR OWN U.S. CHECK. MADE PAYABLE TO JRS SOFTWARE. DESPATCH NORMALLY 7 DAYS FROM RECEIPT OF ORDER.

JRS SOFTWARE

19 WAYSIDE AVENUE, WORTHING, SUSSEX. BN13 3JU Telephone: (0903) 65691

ZX80/1 WAR IS OVER!

(ALSO FITS SPECTRUM!!!)

ZX KEYBOARD
with REPEAT KEY
and SINGLE KEYS
FOR EDIT, RUBOUT
and FUNCTION



£25
FULLY INCL P+P
BUILT

This is a highly professional keyboard using industrial keys with a life of over 1,000,000 operations each! It has a full repeat function on all keys, and single keys for EDIT, RUBOUT and FUNCTION. There are TWO shift keys and large SPACE and NEWLINE keys! All symbols shown in three colours. Single key cursor control keys can be fitted (Extra £3).

Why wait to pay more — for less!
Send SAE (overseas send two international reply coupons) for catalogue of many other products.
Payment Cash with order.
ACCESS or now COD!
Official orders welcome. Phone orders welcome!

HARRIS & LOCKYER ASSOCIATES (YC)
33 PEDMORE CLOSE, WOODROW SOUTH, REDDITCH, WORCS. B98.
TEL (0527) 24452.



ZX81 ADVENTURE SPECIALISTS

C2: VOLCANIC DUNGEON/HANGMAN £4.50

- A) VOLCANIC DUNGEON: Rescue if you can, the Elfin Princess. Mythical monsters, pits, fiery caverns, diminishing strength and water make your quest anything but easy.
FULL 16K PROGRAM** SAVE GAME ROUTINE** SINGLE KEY ENTRY**
"Volcanic Dungeon is terrific value and I would recommend it to anyone."
Mrs. Thomas, Cornwall.
- B) HANGMAN: Deluxe version of the classic game. Play against an opponent, or the computers 400 word vocabulary. Good graphics.

C3: ALIEN INTRUDER/HIEROGLYPHICS £5.00

- A) ALIEN INTRUDER: You awaken to find you are the only survivor on the Explorer Class 3 Starship. Can you escape before you also fall victim to the Alien monstrosity that devoured the crew? There are many ways to end this adventure but only one way to survive!
FULL 16K PROGRAM** INTERACTIVE GRAPHICS**
SAVE GAME ROUTINE**
- B) HIEROGLYPHICS: Decode the ancient 39 symbol alphabet in time to save the famous explorer, "Wullie Makeit" from a sandy grave.
FULL 16K PROGRAM** ANIMATED GRAPHIC DISPLAY**
RANDOM CODE**

C4: WUMPUS ADVENTURE/MOVIE MOGUL £5.00

- A) WUMPUS ADVENTURE: FOR 1 TO 4 PLAYERS! Seek the famous creature in the most dangerous Wumpus hunt ever. All the usual features are there SUPERBATS* PITS* TREMORS* SWAMPS* MAGIC ARROWS**
PLUS Exciting new features: EVIL GOBLINS that will try to sacrifice you to the Wumpus. GIANT SERPENTS* WUMPUS MUCK* MAGIC SPRINGS**
FULL 16 PROGRAM** RANDOM & PRESET CAVE PATTERNS**
YOU CONTROL THE LEVEL OF DIFFICULTY** GREAT FUN FOR YOU AND YOUR FRIENDS**
- B) MOVIE MOGUL: Guide your film through the often hilarious traumas of production. Use your budget wisely and you may make a fortune. Success depends on many factors and not just luck.
FULL 16K PROGRAM**

ORDERS: Plus 50p P&P or large S.A.E. for list to:

CARNELL SOFTWARE,

4 STAUNTON ROAD, SLOUGH, BERKS. SL2 1NT.

The above are also available from:
BUFFER MICROSHOP, STREATHAM, LONDON.

MICRO GEN QUALITY PRODUCTS

ZX81 A/D CONVERTER BOARD

This 4 channel analogue to digital converter, originally developed for joystick control, can be used for such applications as measurement of voltage, temperature, light intensity etc.

The board fits in between the RAM pack and the ZX81. (No skill is required to make this connection, and it actually improves the stability of the RAM pack).

Price now only £18.50.

JOYSTICKS FOR THE ZX81 only £9.60 each

*The most exciting add-on ever for the ZX81, free yourself of that dead, unresponsive keyboard.

*1 or 2 joysticks may be connected via our A/D board.

*Turns your ZX81 into a true programmable games machine.

*Extends the capability of the ZX81, imagine the tremendous variety of games and applications that now become possible.

*Details supplied on how to use the joysticks in your own programmes.

Please note that you cannot connect conventional analogue joysticks directly to the digital input ports found on most I/O boards, an A/D convertor such as ours is required.

A free copy of ZX AMAZE plus any one of the games listed below when ordering a joystick and an A/D board.

PROGRAMS AVAILABLE

ZX SPACE INVADERS. You've tried the rest, now try the BEST. This program has many features including an ever increasing rate of play (they'll get you in the end).
only £3.95

ZX BREAKOUT. Quite simply the best breakout on the market. Features seven bat angles, (you won't find this one easy).
only £3.95

ZX BOMBER A very addictive arcade game. Bomb and shoot your way out of trouble, otherwise you are doomed to crash. Generates a different pattern, for a different game each time you play. On the reverse of the cassette is ZX REFLEX, find out how fast you really are.
now only £3.95

ZX CHESS. The original and still the best. * Graphic display of chessboard * 6 levels of play. * Displays record of your moves and the computers. * Board can be set up to any position. * Has ability to change sides or level in mid-game. * PLUS * CHESS CLOCK on reverse side, records time taken by each player. * Resettable function. * Single key entry.

NOW ONLY £6.50

DISASSEMBLER & MONITOR Allows you to enter and run your own machine code. Relocates to top of memory to allow you to load other programs and find out how they work. Block move. Byte search. Load display and alter all CPU registers. Window on memory facility, uses standard mnemonics, an absolute necessity if learning machine code
Only £3.95

All our games are written in machine code, and can be used with joysticks or keyboard, (except chess, keyboard only). Supplied on cassette with library case.

ZX SCRAMBLE This is the fastest arcade type game we know. 32 zones, thrust and altitude controls, smart bombs and firing control.
Only £3.95

SORCERER'S CASTLE New from Microgen magical adventure game with graphical position, allowing a host of options.
Only £3.95

If you write a program which is exceptional, please submit it to us. We will offer a royalty if it is suitable.

Please add 40p postage and packaging.

Cheques + POs Payable to MICROGEN 24, Agar Cres, Bracknell, Berks.

EDUCATIONAL COMPUTING

Suit children ages 5-11

ZX81

No comparable collection offers so much for so little

THE LITTLE PROGRAMMES WHICH ARE BIG EDUCATORS

Here at last. A set of programmes to turn your Sinclair ZX81 into a powerful educational tool. And you don't even need to know programming. There are clear instructions and plenty of tips & advice. Designed to go beyond drill & practice to promote learning through interaction & discovery.

Includes:-

TORTOISE
A simplified version of the famous Turtle programme

CODED MISSILE

Combines the fun of arcade games with learning

£4.95 only
incl. p & p

Educare's
50
1K PROGRAMMES
for
PRIMARY
EDUCATION

All programmes fit 1K

Creative use of graphics

Many innovative ideas

Fully documented

Includes many games

Graph-plotter • Histogram • Simon-spell • Sketchboard • Times-table • Sets Series-quiz • XY-coordinates • Count • Equations • Areas • Guess-a-Volume • Angles • Upstairs-Downstairs • Music-notes • See-saw • Wipe-out • Spell • Temperature • Clock • Money • Snake • Mastermind • Number-shoot • +26 more

EDUCARE

To: EDUCARE
139a Sloane St.
London
SW1X 9AY

Please send mecopies Educare's 50.
I enclose cheque/postal order for £
Name
Address

Let your child benefit early. Send now.

BBC SOFTWARE

3D GOLF — £8.00

A new approach to computer golf, in which the player is presented with a 3-dimensional view of the hole ahead. Includes TREES, WATER, BUNKER and OUT OF BOUNDS.

* * *

MONSTER MAZE — £6.00

Eat the dots before the monsters eat YOU in this arcade type game.

Prices include P&P, Carr & VAT. Both games for model B.

* * *

HARDWARE

BBC models A&B available ex-stock. Ring us for prices.

PERSONAL COMPUTERS

20 Wellington Square
Ayr, Scotland
Tel: (0292) 285082

ZX81 HARDWARE

40 KEY KEYBOARD. Kit £20.95. Built £25.75 (RE77)

- Proper typewriter style keys.
- All legends and graphics in two colours.
- No soldering required to ZX81. Plugs in.
- (RAM/Printer not affected)
- Complete with all parts, connectors, feet and comprehensive instructions.

24 LINE IN/OUT PORT. Kit £16.95. Built £18.95 (RE98)

- Each line either in or out.
- Controlled by BASIC.
- Allows printer/RAM to be used without a motherboard.
- (Motherboard version kit £13.50. Built £14.50)

3 CHANNEL SOUND/TIMER BOARD. Kit £16.95. Built £18.95 (RE161)

- 3 independent channels.
- Controlled by BASIC.
- Full range of notes.
- Complete instructions with examples provided.
- Can be used as a sophisticated timer/counter.

MOTHERBOARD. Kit £15.75. Built £18.50 (RE82)

- Two connectors on board.
- Six connector board. TBA.

CONNECTORS & PLUGS

- 23 Way female connector for ZX80/81. (RE80) £2.95.
- 23 Way male connector. (RE87) £1.30.
- 23 Way male connector to fit two female connectors together. (RE90) £1.60.
- 30 Way ribbon cable. £1.40 metre.
- RAM pack connector. Allows RAM pack to be remote from ZX80/81. RE170. £6.95 built.
- In/out connector and sound board connector. (RE78B) £2.95.

BOOKS AND TAPES

Getting acquainted with ZX81. £4.95.
Mastering machine code. £5.95.
Programming for real applications. £6.95.
Tape for real applications book. £11.44.

Send SAE 5" x 7" for free illustrated catalogue.

All products available ex stock (allow 7 days extra for built products).

PAYMENTS: Cash with order or ACCESS/BARCLAYCARD. Official order welcome. Dealers write for rates.

All prices include p&p and VAT. Overseas add £1.80.

REDDITCH ELECTRONICS, DEPT. YC

21 Ferney Hill Ave., Redditch, Worcs. B97 4RU
Tel (0527) 61240.

Great games packs for 16K ZX81 ...

PACK 1

ASTRO-INVADERS

Just look at these features ...

... then look at the price!

- Superior machine code programming
- Rapid-firing with explosive on-screen kill effect
- High-scoring saucers • aliens • accelerating attack
- Destructable defence shields • On-screen kill count
- High-score update
- Fast action space graphics

— a new dimension in ZX81 value

Astro-Invaders is yours on cassette for **ONLY £3.65** with

FOUR BONUS GAMES:

ARCADE GRAND-PRIX — drive four levels of machine code skill
PENALTY — defend your goal against the sharp-shooting ZX81
GOLF — judge shot-strength, angles, bunkers ...
plus machine code insect fun with **SWAT**

PACK 2

PLANET DEFENDER

— blast aliens in planet orbit ...

- ultra-dynamic machine code action • hostile alien-waves
- fast responsive controls: ship up/down, thrust, laser-bolt, and smart bomb • comprehensive scoring
- explosive graphics

..... explosive price!

Planet Defender comes on cassette for **ONLY £3.65** with machine code **STORM-FIGHTERS** — combat 5 fleets of swooping aliens as you blast through space, **BREAKOUT** (machine code) — race against the clock, plus **GRAPHIC HANGMAN**.

16K ZX81 cassette packs 1 and 2 are £3.65 each (post free in U.K.). Fast despatch from

John Prince

29 Brook Avenue, Levenshulme,
Manchester, M.19



Keyboard with Electronics for ZX81

A full-size, full-travel 43-key keyboard that's simple to add to your ZX81 and requires no soldering in the ZX81.

Complete with the electronics to make "Shift Lock", "Function", and "Graphics 2" single key selections making entry far easier.

Powered from ZX81's own standard power supply — with special adaptor supplied. Two-colour print for key caps.

Amazing low price for complete build-it-yourself kit, only £19.95 incl. VAT and carriage.

Order As LW72P

Full details in the June 1982 issue of "Electronics—The Maplin Magazine" on sale at all good newsagents price 60p. In case of difficulty send 60p to address below, or £2.40 for annual subscription (4 issues).


MAPLIN

Electronic Supplies Ltd

P.O. Box 3, Rayleigh, Essex SS6 8LR. Tel (0702) 552911

Retail shops at
159 King St., Hammersmith, London W6. Tel 01-748 0926
284 London Road, Westcliff-on-Sea, Essex. Tel (0702) 554000
(Shops closed Mondays). All mail to Rayleigh address.

Wherever you are in the UK there's a Genie dealer nearby

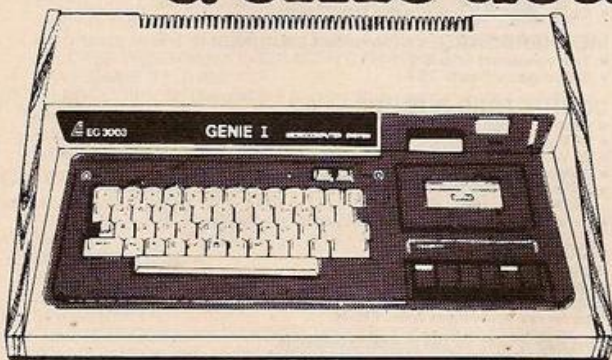

Genie I & II Approved Dealers

AVON Microstyle, Bath, 0225 334659/319705. **BEDFORD** Comserve, Bedford, 0234 216749. **BERKSHIRE** P.C.P., Reading, 0743 589249. Castle Computers (Windsor), 07535 58115. **BIRMINGHAM** Ward Electronics, Birmingham, 021 554 0708. Consultant Electronics, Birmingham, 021 382 7247. A. E. Chapman and Co., Cradeley Heath, 0384 66497/8. **BUCKINGHAMSHIRE** Photo Acoustics, Newport Pagnell, 0908 610625. **CAMBRIDGESHIRE** Cambridge Micro Computers, Cambridge, 0223 314666. **CHESHIRE** Hewart Electronics, Macclesfield, 0625 22030. Mid Shires Computer Centre, Crew, 0270 211086. **CUMBRIA** Kendal Computer Centre, Kendal, 0539 22559. **DORSET** Blandford Computers, Blandford Forum, 0258 53737. Parkstone Electrics, Poole, 0202 746555. **ESSEX** Emprise, Colchester, 0206 865926. **GLOUCESTERSHIRE** **HAMPSHIRE** Fareham Computer Centre, Fareham, Hampshire, Fareham, 231423. **HERTFORDSHIRE** Photo Acoustics, Watford, 0923 40698. Q Tek Systems, Stevenage, 0438 65385. Chrislid Systems and Software, Berkhamsted, 044 27 74569. **KENT** Swanley Electronics, Swanley, 0322 64851. **LANCASHIRE** Harden Microsystems, Blackpool, 0253 27590. Sound Service, Burnley, 0282 38481. Computercat, Leigh, 0942 605730. BEC Computerworld (Liverpool) 051-708 7100. **LEICESTERSHIRE** Kram Electronics, Leicester, 0533 27556. **LONDON** City Microsystems, EC2, 01 588 7272/4. Wason Microchip, N18, 01 807 1757/2230. Premier Publications, Anerley SE20, 01 659 7131. **NORTH EAST** Briers Computer Services, Middlesbrough, 0642 242017. General Northern Microcomputers, Hartlepool, 0783 863871. HCCS Associates, Gateshead, 0632 821924. **NOTTINGHAMSHIRE** Midland Microcomputers, Nottingham, 0602 298281. Mansfield Computers, Mansfield, 0623 31202. East Midland Computer Services, Arnold, 0602 267079. Electronic Servicing Co., Lenton, 0602 783938. **NORFOLK** Anglia Computer Centre, Norwich, 0603 29652. Bennetts, Dereham, 0362 2488/9. **OXFORDSHIRE** Micro Business Systems, Whitney, 0993 73145. Peblelgow Ltd. (Thame) 084421 5368. **SCOTLAND** Esco Computing, Glasgow 041 427 5497. Edinburgh: 031 557 3937. Computer and Chips, St. Andrews, 0334 76206. Scotbyte Computers, Edinburgh, 031 343 1055. Victor Morris and Co., Glasgow, 041 221 8958. **SHROPSHIRE** Tarrant Electronics, Newport 0952 814275. **SOUTH WEST** Diskwise, Plymouth (0752) 267000. West Devon Electronics, Yelverton, 082 285 3434. Bits and Bytes, Barnstaple, 0271 72789. **SUFFOLK** Elgelec Ltd., Ipswich, 0473 711164. **SURREY** Catronics, Wallington, Surrey, 01 669 6700/1. Croydon Computer Centre, Thornton Heath, 01 689 1280. **WALES** Tryfan Computers, Bangor, 0248 52042. **WEST MIDLANDS** Allen TV Services, Stoke on Trent, 0782 616929. **WILTSHIRE** Everyman Computers, Westbury, 0373 823764. B&D Computing (Swindon), 0793 762449. **YORKSHIRE** Media 5 Ltd; Sowerby Bridge 0422 33580. Advance TV Services, Bradford, 0274 585333. Huddersfield Computer Centre, Huddersfield, 0484 20774. Comprite, Bradford, 0274 668890. Superior Systems Ltd., Sheffield, 0742 755005. Photo Electrics, Sheffield, 0742 53865. Ebor Computer Services (York) 0904 791595. **NORTHERN IRELAND** Business Electronic Equipment, Belfast, 0232 46161. Britain Laboratories, Belfast 0232 28374.



Sole Importers:

LOWE

electronics

Chesterfield Road, Matlock, Derbyshire DE4 5LE.
Telephone: 0629 4995. Telex: 377482 Lowlec G.

IMAGE ENGINEERING

6502 BASED MICRO? SINCLAIR ZXPRINTER? THEY CAN WORK TOGETHER WITH SILVERPRINTER I,

the low cost interface YOU can build to connect the ZXPRINTER to your micro (ATOM, BBC, PET, UK101, TANGERINE etc.)

There are few components needed, costing around £12. Our booklet "spills the beans" for £4.50 inc. Roms, kits and completed units are also available.

Send cheque or SAE for further details to:

IMAGE ENGINEERING
PO BOX 22
AYR KA7 2RZ

HILDERBAY LTD Professional Software

SPECTRUM SOFTWARE NOW AVAILABLE!

Details from us
48K Payroll £25
until 21 September

Tape recorder suitable for microcomputer use, aligned and tested on computer signals £22 + £2 p&p
Hilderbay Loading Aid. Load your microcomputer from tape first time, every time! £5.95
ZX81 16K RAM packs, comprehensively tested (for bad bits, addressing faults, printer, saving) £30

HILDERDAY SUMMER ZX81 SALE!

Beamscan (beam analysis))
Payroll) £13 each
Stock Control)

Optimax £20 until 21 September

Budget I & II £9 (2 programs)

Time Ledger) £5 each
Critical Path)

These programs have been described and reviewed previously (or we can provide details).

All prices include VAT, and are post free. Sale prices are valid until 21 September 1982. Free updates, comprehensive telephone and personal support, and competition prizes are not available for summer sale purchases.

Hilderbay Ltd
Professional Software
8/10 Parkway
Regents Park
London NW1 7AA

Tel: 01-485 1059 Telex: 22870



FOOTBALL MANAGER

*Addictive
Games*

for
ZX81
ZX80
TRS80
VIDEO GENIE

- ★ AS MANY SEASONS AS YOU LIKE ★ 4 DIVISIONS ★
★ PROMOTION & RELEGATION ★
★ FULL LEAGUE TABLES ★
★ TRANSFER MARKET ★
★ INJURIES ★
★ 7 LEVELS OF PLAY ★
★ SAVE GAME FACILITY ★
★ MANAGERIAL RATING ★
★ PICK YOUR TEAM FOR EACH MATCH ★ F.A. CUP ★

This is NOT a mere simulation. This is an exciting and highly enjoyable game in which you play the part of a Football Manager coping with the problems and decisions involved in running your club. There are so many features it is impossible to list them here but included are form (top teams NORMALLY win), giant-killings, wage bills to pay, and you can even be sacked! It is a game requiring a great deal of skill, and people play it for literally hours on end (we have proof!).
WE GUARANTEE that this is one of the best computer games you've ever played!
BUT BEWARE, this game is extremely addictive!

FOOTBALL MANAGER - IS SUPPLIED WITH INSTRUCTION BOOK
HARDWARE REQUIRED - OCCUPIES THE ENTIRE 16K RAM

ZX81/ ZX80	TRS80/ Video Genie
8K ROM	LEVEL 11
16K RAM	16K RAM

To Order send Cheque/P.O. for £7.95
made payable to: ADDICTIVE GAMES
at: Dept. Y.C. P.O. Box 278
CONNIBURROW
MILTON KEYNES MK14 7NE
PLEASE STATE COMPUTER

GREAT NEWS for ZX81 AND Spectrum owners!

HIRE ZX cassettes for just £1 each!

Why pay from £4 to £15 or more for a single cassette of programs—which may only interest you for a while—when you can hire from a wide range, for three weeks, for just £1 each?

Software Library caters for users of ZX81 (1K and 16K) and Spectrum—and it's ideal if you're thinking of upgrading, for you can switch to tapes suitable for your new hardware at any time, and at no extra cost. We'll even make you an offer for your existing tapes!

Subjects include exciting machine-code games, educational, toolkit and home/business utility programs. All cassettes offered are genuine commercial originals, and a free quarterly newsletter keeps you up-to-date with new introductions.

SPECIAL OFFER! Join now and get your first tape on **FREE** hire!



The Sinclair Owners' SOFTWARE LIBRARY

Heather Cottage, Warren Road,
Liss, Hants GU33 7DD.

YC8

I'd like to join the Software Library for the next 12 months, and enclose my membership fee of £5. Please send my first program tape on free hire, plus a list of others available. I understand that I am under no obligation to hire any minimum number of further tapes, and that if I'm dissatisfied with my first tape you will refund my money in full and without question.

NAME.....

ADDRESS.....

Tel.No.....

I own a Sinclair ZX81 1K / ZX81 16K / ZX Spectrum (delete as appropriate)

C.P.S. GAMES

THE LORD OF THE RINGS : part 1

Don't say 'NOT ANOTHER ONE!'

This adventure takes you *right through the book!* The first part (there are six) is now available and the other parts will follow soon.

Part 1 takes you from the Shire to Rivendell. It is a real adventure, and on the way the Dark Lord throws everything at you Tolkien could think of. The game contains graphics too. Plus a few surprises we'd rather not talk about. Any one of the tapes can be played independently from the other ones.

AC.P.S. GAME £8.00

DARWIN

Evolution as a game. You start as a single cell. Environmental circumstances change and you have to make decisions. If you adapt you may survive and change. Ideally you end up as man but beware, depending on your decisions you might end up being a fish or a bird. Perhaps even a worm. AC.P.S. GAME £7.00

EVOLUTION OF MAN

The evolution of the human race started long ago. The game begins somewhere in that remote past, when our remote ancestors were roaming the plains. As climate and other factors change, you must adapt. The way in which you decide to do this influences the line of evolution you will take: Neanderthal, Cromagnon, extinct? Who knows.

Darwin and Evolution of Man are based on scientific facts and have a definite educational value. AC.P.S. GAME £7.00

THE GAMBLER'S PARADISE

A real treat for gamblers this tape contains craps, chemin de fer, zanzi (a French dice game), roulette, heads and tails, horse race and a few more. Money on the table, please... AC.P.S. GAME £3.00

PETER RABBIT AND THE MAGIC CARROT

An adventure for the very young

There is no longer any need for your youngest children to gaze wistfully at your computer.

This new series of adventures is mainly based on graphics, and has some very elementary instructions (for which the help of a grown-up may be needed). Peter Rabbit goes on a quest for the magic carrot. On the way he can get lost in the forest, meet nice (and not so nice) friends and he must find the secret cave, then get out with the magic carrot.

Want to see some little eyes light up? AC.P.S. GAME £3.50

Also available! Peter Rabbit and the naughty Owl.

Peter Rabbit and father Willow.

Available for ATARI and ZX81 + 16K.

C.P.S. 14 BRITTON STREET LONDON EC1M 5NQ

ZX81 HEWSON CONSULTANTS ZX81


HINTS AND TIPS FOR THE ZX81 by Andrew Hewson £3.95

The most complete book at the price
"Good value and quite fascinating... a very inexpensive way of acquiring months of programming experience" Your Computer Nov 1981
80 pages explaining how to squeeze a computing giant out of a Sinclair print out. Saving Space - vital reading for all ZX81 users.
Understanding the Display File - using the display file as memory, clearing a part of the display using tokens in PRINT statements. Converting ZX80 programs - explaining simply but comprehensively how to convert the hundreds of published ZX80 programs. Chaining programs - revealing techniques for passing data between programs, calling subroutines from cassette and establishing data files. Machine Code Programs - all you want to know about ZX80 machine language. Explaining how to write, load, edit and save machine code and how to debug your routines. Routines and programs are scattered liberally throughout the text and the final chapter consists of 12 useful, interesting and entertaining programs such as LINE RENUMBER, BOUNCER, SHOOT, STATISTICS, etc.

16K MEMORY


THE BEST VALUE FOR MONEY 16K RAM on the market. Coming complete with case, simply plugs into the port at the back of your Sinclair. Money back guarantee.

£26.95



48+8K NEW

0-8K "Sinclair Ram 8-16K". The contents of this area of RAM are unaffected by loading programs from cassette. Can be used to store machine code routines or to store data for use by more than one program.
16-32K "Basic program area and display file."
32-64K "Variable and array area. Massive memory area for storage of data."
"Directly addressable and user transparent."
"Facts sheet FREE with each RAM purchased."



£61.95

64K MEMOPACK

0-8K "Same as 48+8K"
8-16K "Can be switched out in 4K blocks to leave room for memory mapping and vacant addresses for graphics etc ROM(s). The contents of this area of RAM are unaffected by loading programs from cassette. Can be used to store machine code routines or to store data for use by more than one program."
16-32K "Same as 48+8K"
32-64K "Same as 48+8K"

£79.00



Z80 OP CODES

£1.45

A must for the beginner and the experienced programmer alike. This handy ready reckoner lists all 600 plus Z80 machine code instructions in decimal and hexadecimal with their mnemonics. Each Op Code is succinctly explained and cross-referenced. Supplied in a protective transparent wallet for easy reference and durability.

PROGRAMMERS TOOLKIT

£6.50

The Programmer's Friend and Slave! Are you writing your own programs for the ZX81? How can you do that without our Toolkit? It will encourage you to go on to write bigger, better and more sophisticated programs by doing your donkey work.


Simply create 3K of space above Ram top and then load the Toolkit in the normal way. The Toolkit hides above the Ram top awaiting your command. You can now load existing programs from cassette for the Toolkit to operate on. Or type in a whole new program!

Toolkit functions include:
* RENUMBER including the destination lines of GOTO's and GOSUB's.
* START and Finish lines and Step size specified by you.
* DELETE part or all of a program at your command.
* REPLACE character(s) or token(s) with an equal number of others specified by you.
* EDIT to create subroutines at a stroke by moving blocks of code to program lines.
* FIND a basic program string specified by you.
* INPUT prompts for a two digit hexadecimal code and pokes it in at a specified address.
* Separate version available for 48+8 and 64K memories (resides at 8192).

PUCKMAN NEW!

£5.95

- * All action display
- * Scour the maze for food
- * Dodge the ghosts who come to devour you
- * Automatic option - the machine plays itself
- * Full keyboard display
- * Full instruction display
- * Continuous scoring
- * Beat the best score to date
- * Super graphics when used with Quick Silva graphics board




PILOT ★

£5.95

★ NEW!


New and exciting. Pilot challenges you to take off, fly between beacons, then land whilst watching wind speed and dodging craggy mountains - either could lead to disaster! If you take the challenge, you may soon learn to fly solo - no detailed are the flying instructions. Coast along in Autopilot to gain confidence, then battle your way through 6 further modes. 6 different ways of trying to steer your plane safely back to base, increasing in difficulty, testing your skills. Good luck with your fight against the unreluctant elements!

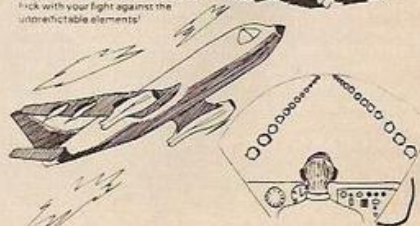

SEND S.A.E. FOR FULL CATALOGUE OF HARDWARE, SOFTWARE & LATEST PRICES

Cheque with order or quote Access or Barclaycard number to: HEWSON CONSULTANTS, Dept YC, 60A St Mary's Street, Wallingford, Oxon OX10 0EL.

NEED MORE MEMORY FOR YOUR ZX81...?

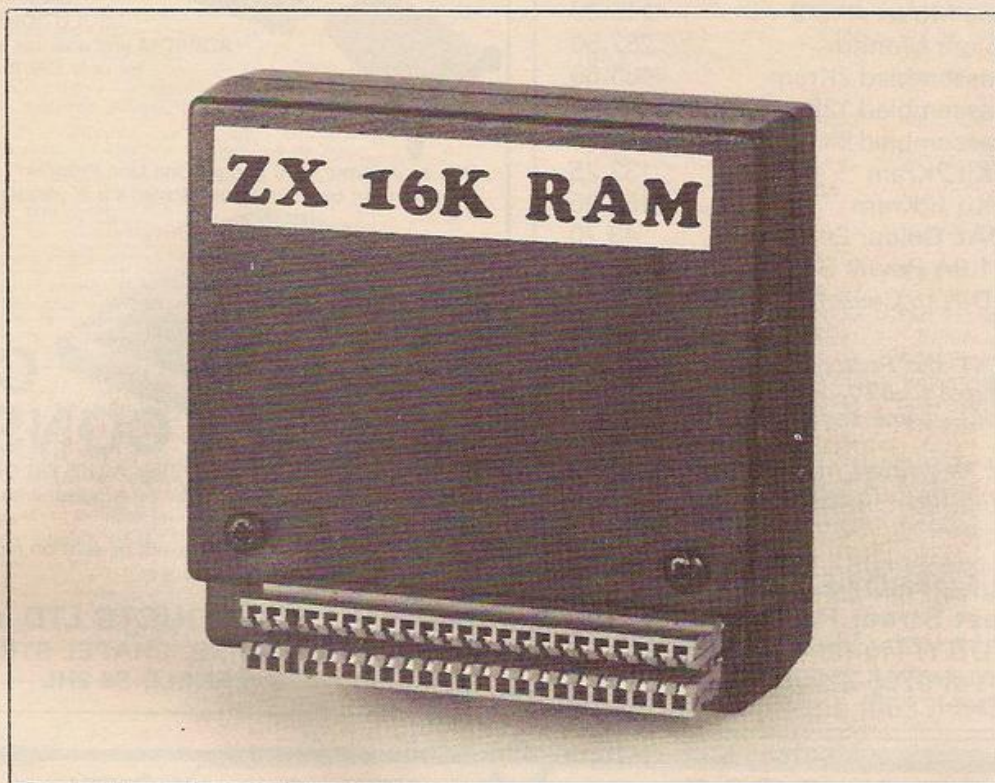

*** FREE ***

16K-£24.95

16k Bank Account cassette by
Futuresoft + £10 Trade in on our 16k unit
for a 64k unit if returned within 6 months.

64K-£54.95

we at Pretorius Systems have commissioned a leading electronics company to design for us a low cost **VERY** high quality memory module specifically for the ZX81. It can be used in any expansion system and simply plugs into the back of your ZX81 and as such is fully compatible with the ZX81 printer.

The 16k module will give you 16 times more memory and is finished in ABS plastic. There is also a 64k version which will provide you with a pure 64k of program **POWER**. This amazing achievement is packed into exactly the same casing as the 16k module and looks identical. Note: these units are **BRITISH** made and should not be confused with low quality imports that overheat and have sloppy connectors.

Nothing more to pay! Prices include VAT + **FREE** postage (overseas orders +£2) 14 days money back offer if not satisfied + 6 months warranty.

Your order is received at 8.30 and is despatched by 12.30 the same day.

PLEASE SEND ME :

Date _____

Name _____

Address _____

Quantity Price Total

16k		24.95	
64k		54.95	

Payment to: PRETORIUS SYSTEMS

Mail to: B.C.M. BOX 7977. WC1N. LONDON. ENGLAND.

YC8

Electronequip

BBC1	BBC Micro Model A	299.00
BBC2	BBC Micro Model B	399.00
BBC21	Upgrade Model A to B	115.00
BBC22	14" Colour Monitor	287.50
ATM1	Atom assembled 2Kram	165.60
ATM2	Atom assembled 12Kram	188.60
ATM3	Atom assembled 5Kram colour	188.60
ATM10	Atom Kit 2Kram	132.25
ATM11	Atom Kit 12Kram	155.25
ATM25	New PAL Colour Encoder	43.70
ATM26	Atom 1.8A Power Supply	9.66
ATM53	Atom DIN to Cassette DIN lead	2.30


Prices include VAT and Postage
(except BBC micro's £2.50).

All items in stock — same day despatch.

All upgrades etc. are fitted free of charge and the computer fully retested. Credit cards not accepted for BBC micro's.

ELECTRONEQUIP
128 West Street Portchester,
(opp. RUBY) Hants PO16 9XE.
Tel 0705-325354

ATOM USERS!

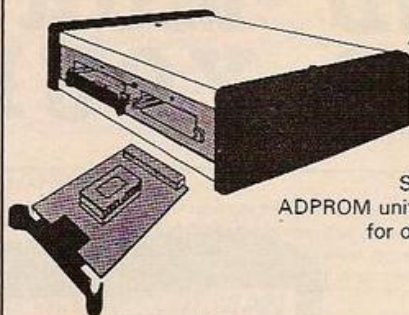

ADROM 4000 WITH 2 CARDS

Problem! Two or more
Eproms and only one
socket on your Atom.

SOLUTION! is an ELINCA
ADPROM unit and use any as required
for only £39.10 incl. VAT etc.

Win an Adprom 4000 in our "One Line Program" competition.
Details in our brochure (don't forget s.a.e. please)



ATOM CASE CONSOLE

Type AC155 £31.63 incl. VAT etc.
can be supplied with single Adprom
as in photograph

Full details of all our products will be sent on receipt of an A5
s.a.e.

ELINCA PRODUCTS LTD (Dept. C)
LYON WORKS, CHAPEL STREET
SHEFFIELD S6 2HL

ZX81 16K ZX-MC

- **ELIMINATE MACHINE CODE PROBLEMS** with ZX-MC — a new machine code debug/monitor for the ZX81 16K.
- **ENTER, RUN & DEBUG** your machine code programs independently of Basic commands. ZX-MC resides in RAM, and leaves you 12½K of memory to work with.
- **SAVE & LOAD** your machine code programs **AT DOUBLE SPEED**. At last you are freed from storing your M/C in arrays or REM lines.
- **REGISTERS DISPLAY & BREAK POINTS** to make de-bugging easier — PLUS many more useful commands.
- **A MUST FOR BEGINNERS & ADVANCED USERS** — concentrate on your M/C programs, not on how and where to store them.
- **ZX-MC** is supplied on a high quality cassette, with a 36 page operating manual.

£7.50 Incl. VAT & P+P
(C.W.O.)

SCREEN KIT 1

A suite of machine code routines for use in Basic programs, to enhance your screen display, and create DATA FILES on cassette. Screen Kit becomes part of your Basic program.

- **DATA FILES** — Save & Load, at double speed, just the Basic variables. Load different variables into the same program, or exchange variables between programs.
- **DRAW A BORDER**
- **CLEAR PART OF SCREEN**
- **INVERT VIDEO OF PART OF SCREEN**
- **CLEAR SCREEN BY SCROLLING UP, DOWN, LEFT OR RIGHT**
- **Supplied on cassette with instructions.**
- **KEYBOARD SCAN + FLASHING CURSOR**
- **LOAD ANY CHARACTER TO WHOLE SCREEN**
- **MEMORY LEFT**

£5.70 Incl. VAT & P+P
(C.W.O.)

Send SAE for more details.
Allow up to 14 days for
delivery.

Programs available mail order
only. Please make cheques/PO
payable to:

PICTURESQUE 6, Corkscrew Hill, West Wickham,
Kent BR4 9BB.

NEW softwares for NEW computer ZX SPECTRUM

Also available for ZX81 (16K).
SOUND & COLOUR ON ALL ZX SPECTRUM PROGRAMS
SEA WAR: (ZX-sp £7.00; ZX81 £6.00)

Completely new designed game for one or two players.
Attractive screen display and super control.

IQ GAME PACK I: (ZX-sp £4.00; ZX81 £3.50)
IQ GAME PACK II: (ZX-sp £4.00; ZX81 £3.50)

Each game pack contains three individual programmes. You will
have lots of fun with them, and improve your IQ too.

FREE IQ GAME PACK (I or II state which when ordering) is
offered to the first 222 orders of "SEA WAR" game.

Send s.a.e. for full details. Mail order only.

(All cheques and postal orders made payable to:

Panda Software,
51 Elgin Street, Shelton
Stoke-on-Trent ST4 2RD

Please send me:

Game	ZX-sp	ZX-81
Sea War	_____ at £7.00	_____ at £6.00
IQ Game Pack I	_____ at £4.00	_____ at £3.50
IQ Game Pack II	_____ at £4.00	_____ at £3.50

I enclose £ _____ for above items.

My address is _____

My name _____ Signed _____

All prices included VAT and P&P.
U.K. delivery: Allow up to 28 days.



The specialists in internal plug-in memories for ZX computers announce:

80K SPECTRUM

now attainable for the price of a 48K model!! with our SP80 low-power Sinclair look-alike.

Functionally identical to the Sinclair 32K internal plug-in expansion but with double the capacity (64K) the SP80 plugs into the sockets provided on the 16K SPECTRUM by Sinclair for his 32K expansion board. Instructions to our usual high standard makes fitting very simple indeed. The SP80 in no way interferes with Sinclair add-ons - ZX Printer, RS232 interface, Microdrive...


* New low prices on our highly successful internal memories for ZX81 to: East London Robotics, 'Finlandia House', 14 Darwell Close, LONDON E6 4BT.

Item	Item price	Quantity	Total
CHIPSWITCH kit doubles your ZX81 memory to 2K (this kit requires soldering)	£4.70		
INCREMENTAL internal 2K plug-in memory extension for ZX81 expandable to 16K	£17.75		
Additional 2K chips for above (HM6116P-3)	£4.50		
MAXIMEM 64K internal plug-in memory for ZX81	£49.95		
MINIMAX 16K version of MAXIMEM upgrade-able to 64K with our chip exchange service	£34.95		
SP80 64K internal plug-in memory extension for ZX SPECTRUM giving 80K of user RAM	£50.00		
SP80 Kit version with full instructions	£44.00		
SP80 fitting service (price includes excess p&p)	£9.00		
Telephone enquiries on 01 471 3308		Postage and Packing	45p
All prices already include VAT		TOTAL £	

Please tick if you require a VAT receipt ☐
 Refunds less £1.50 handling on all items returned within 14 days of receipt.
 Send stamped addressed envelope plus additional 12½p stamp for catalogue.
 Cheque/Postal Order payable to EAST LONDON ROBOTICS £

Name: Mr/Mrs/Miss _____
 Address: _____

STOP PRESS!!! Transfer all your ZX81 BASIC and Machine code programs and data onto your SPECTRUM in minutes with our new SLOWLOADER available soon!! YC8



VIC-20

	£		£
ATOM 8K + 2K Kit	119.00	VIC-20 CPU	150.00
ATOM 8K + 2K Assy.	149.00	VIC-20 C2N Cassette	34.00
ATOM 8K + 12K Assy.	170.00	VIC Printer	187.00
ATOM 12K + 12K Assy.	199.00	VIC Floppy Drive	304.00
ATOM Power Supply	8.00	VIC Memory Exp. Board	98.00
ATOM Econet	70.00	VIC 3K RAM Cartridge	23.50
ATOM Eprom		VIC 8K RAM Cartridge	35.00
Programmer	40.00	VIC 16K RAM Cartridge	56.50
Prog. Power Toolbox	24.50	VIC Programmer's Aid	27.00
ATOM Disc Pack	275.00	Cart.	
ATOM-BBC ROM	43.00	VIC Super Exp. High	27.00
*10% off Acorn & Bug-Byte		Res.	27.00
ATOM Software		VIC Machine Code Cart.	27.00
		VIC Joystick	6.50
		*10% off VIC Tapes and	
		Games Cartridges	

PERIPHERALS

PERIPHERALS		B.B.C.	
Printers (Atom or B.B.C.)			
MX80T	290.00	A - B Expansion + Test	90.00
MX80T/3	299.00	Part Expansion (32K RAM +	
MX80FT/3	340.00	Printer I/face) + Test	46.00
MX82	330.00	RAM Expansion Kit	26.00
MX82FT	362.00	Printer Interface Kit	9.83
MX100/3	440.00	Bus Expansion Kit	8.65
GP 80	185.00	Analogue Input Kit	9.90
BBC or ATOM Jumper	15.00		
Monitors (B.B.C.)			
BMC	240.00	* Please Add 15% V.A.T *	
Microvitec	260.00	* Orders Over £20 Post Free *	
2114L RAMS	0.89	* Orders Under £20 Add 50p.	
		Postage *	

Books & Software — Spares and Repair Service
 ———— Send for Stock/Price Lists ————

D.A. Computers Ltd.
 184, London Road, Leicester, LE2 1ND.
 Telephone (0533) 549407

**NEW
for ZX81 users**

BYGER BYTE 32K + Ram Pack

Why put aside your 16K Ram Pack when you can use it together with the **NEW BYGER BYTE 32K + Ram Pack.**
 The result being 48K of memory!!

No trailing leads or wires and no extra power supply required, all you need do is plug existing 16K ram pack into the back of the NEW BYGER BYTE Ram Pack.

And BINGO!! 48K of memory.
 The NEW 32K + Ram Pack is tested and guaranteed with the following 16K ram packs;
 Bug Byte, Sinclair & Downsway
 Please telephone for further information.

£39.50 inc.

Please rush me by BYGER BYTE 32k Ram Pack

NAME

ADDRESS YC8

PLEASE MAKE ALL CHEQUES PAYABLE TO

Phoenix Marketing Services

Oaklands House, Solartron Road, Farnborough, Hants. GU14 9QL.

Tel: (0252) 514990.




ZX 81, SPECTRUM OWNERS


IT'S HERE! THE BOOK YOU'VE BEEN WAITING FOR!

LEARN WITH YOUR SINCLAIR MICRO-COMPUTER

BY FRANK ORVILLE



- 1 DOVER
- 2 BARROW
- 3 CAMBRIDGE
- 4 DUBLIN



LOOK AT THESE PROGRAMS:-

ALPHABETICAL ORDER Input up to 450 words. The computer sorts them.

•**ANTI-AIRCRAFT GUN** A very enjoyable game.

MORTGAGE Works out all the information you need to know about mortgage loans for house purchase.

•**DRAWING** Draw trees, faces. Make your drawings come alive.

CALENDAR Print out a calendar starting in any year.

LETTER WRITING Store up to 20 names and addresses. Write letters fast.

WORD GUESSING TYPING An amazing typing program which remembers up to 200 words from your text and every time you type in a new letter, it attempts to guess at the word you are currently typing. If the guess, printed below the line, is correct, the complete word is placed with a following space in one stroke.

•**GEOGRAPHY QUIZ** Draws a map of the British Isles and works through a 25 round quiz in which you have to pick out the name of the flashing location. Very educational.

ALSO If you have a full-sized keyboard, you can teach yourself to type.


•Programs not suitable for Spectrum.

Learn With Your Sinclair Micro-Computer £5 inclusive
Book with set of cassettes £12.50 inclusive

Send P.O. or crossed cheque made payable to Mr. P.L. Donovan, to:-

Mr. P.L. Donovan,
20 Dixon Drive,
Stoneygate,
Leicester LE2 1RA

ACORN ATOM

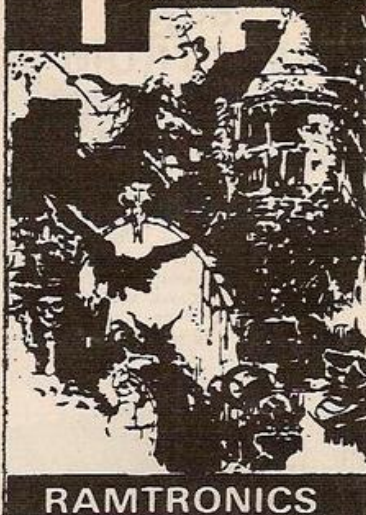

Somewhere in the Old Country House, the famous AFRICA DIAMOND was hidden. Legend has it that possession of the gem will give countless wealth and even magical powers! However, to take the gem is no easy task! Vampires, wild dogs, to name a few, have taken over the house, and will welcome you with open jaws! All this makes the AFRICA DIAMOND a true test of cunning, intelligence and wit. Are you smart enough to take the gem? After all, the most you have to lose is your life!

RAMTRONICS

An advanced adventure game written for the ACORN ATOM. AFRICA DIAMOND was written to give you a full 10K of program power for the regular expanded ATOM, in doing so AFRICA DIAMOND has used techniques new to ATOM programs.

THE AFRICA DIAMOND

Please rush me AFRICA DIAMOND. I enclose cheque/PO for only £6 (fully inclusive). Payable to Ramtronics.

Name

Address

Send to:
RAMTRONICS, P.O. BOX 173, LONDON SE24 9QZ

ADVERTISEMENT INDEX

A		Downsway	78	Microware	104
Abacus	10	Dragon Data	92, 93	Microz	101
Acornsoft	98	E		Mono Lith	100
Adda	12	East London Robotics	113	N	
Addictive Games	109	Educare	106	National ZX-81 Users Club	33
A&F Software	74	Electronequip	112	Newnes	89
Afdec	53	Elinca	112	Northern Computer Fair	18
Amba	45	Essential Software	44	P	
Amber Controls	94	F		Panda	112
Anglo-American	88	Fuller Designs	103	Personnel Computers	107
Anirog	28	G		Phoenix	70, 113
Applied System Knowledge	16	GCC	97	Picturesque	112
Artic	102	Gemini	57, 98	Pixel	104
ASP	49	Grundy	24, 25	P.L. Donovan	114
Audio Computer	Inside Front Cover	H		P.P.S.	100
Autoram	100	Harris & Lockyear	105	Pretorius Systems	111
B		Hewson Consultants	110	Program Power	53, 86
Basicare	95	Hilderbay	109	Q	
Beebug	105	I		Q-tech	39
Bi-pak	101	Image Engineering	109	R	
Buffer Microshop	101	Ivor Killerbyte	28	Ramtronics	114
Bugbyte	11	J		Redditch Electronics	107
Butler, Currie & Hook	4	J.K. Grege	10	S	
C		John Prince	107	Silica Shop	91
Cambridge Collection	45	J.P. Gibbons	68	Silicon Tricks	104
Cambridge Computer Store	4	J.R.S.	105	Silver Soft	60
Campbell	101	K		Simon Hessel	39
Carnell	106	Kayde	61	Sinclair	34, 35
Chromasonic	99	Kempston	4	Sir Computers	78
C.J.E.	53	L		Software Library	110
Compshop	Inside Back Cover	Laser Bug	49	Spectrum	6, 7
Computers for All	5	Linsac	90	S.R.S.	10
Computers User Aids	49	Llamosoft	88	Stonechip	68
Control Technology	Back Cover	Lowe Electronics	19, 108	Storkrose	96
C.P.S.	110	M		T	
D		Maplin	8, 9, 107	Taurus	45
D.A. Computers	113	M.D.R.	80	Texas	23
David Heartford	39	Melbourne House	29	Thurnal	90
Deans Electronics	80	Memotech	65	Timedata	102
Digital Integration	97	Michael Orwin	60	Transform	104
D.J. Moody	80	Micro Age	94	Z	
DKtronics	73	Micro Gen	106	ZX Microfair	97
Doric	78				

BEFORE YOU BUY YOUR MICRO!

COMPUTER, PRINTER, DISC DRIVES & ACCESSORIES

ALMOST EVERY MAKE OF POPULAR COMPUTER STOCKED
AT PRICES WELL BELOW RECOMMENDED RETAIL

GIVE US A RING ON 01-441 2922 AND SAVE £££'s WITH THE LOWEST PRICE GUARANTEE

All products carry a 1 year guarantee (parts & labour)
Pay and extra 10% for a 2 year guarantee

Shelves
of
Computer
Books

Spares & repairs on
all products, even if
you didn't buy from
Comp Shop

EXPRESS
MAIL ORDER
SERVICE

New
products
arriving
daily

'Phone
your order
to
reserve

Many items
over stocked
on Sale Offer

INSTANT CREDIT
*just pay the
deposit by Credit
Card and
take it away*

SATISFYING PRICE
CONCIOUS CUSTOMERS
FOR NEARLY 5 YEARS

P.S.
Hopeless
on Software

COMP SHOP

"Europe's Largest Discount
Personal Computer Stores"

TELEPHONE SALES
OPEN 24 hrs. 7 days a week
01-449 6596

MAIL ORDER SHOP

14 Station Road, New Barnet,
Hertfordshire, EN5 1QW
(Close to New Barnet BR Station -
Moorgate Line)
Telephone: 01-441 2922 (Sales) 01-449 6596
Telex: 298755 TELCOM G
OPEN (BARNET) - 10am - 7pm -
Monday to Saturday



BARCLAYCARD
VISA

106 HILARY AVE

5/8



Software



FOR THE INCREDIBLE ZX Spectrum

AND THE ZX81

Available since July 1st, probably the first Spectrum Software in the world (as was our ZX81 software), here it is:

SPECTRUM ARCADE PACK 1

featuring: **Missile Commander**: defend your city against ICBM's streaming from the heavens, causing a series of multicoloured noisy explosions, you must also deal with marauding enemy bombers. There are 10 skill levels, as the city quakes under a nuclear attack you are given an on screen score. **Lunar Lander**: falling towards the lunar surface your lander must be brought to a safe halt on the green moon, a new surface is generated, on each run. You have only limited time and fuel. This program makes full use of the Spectrum HIRES graphics and programmable characters. ALSO, in the same package, **AVALANCHE**, a breakout game where knocked bricks don't just disappear they drop — on you! **PATTERN**, spectral Kolaidoscope. **PLANO**, turns the Spectrum in to a musical instrument. These programs use m/code and exploit the fullest Sound and Hi resolution graphics potential from your Spectrum.

£5.00 (the entire package)

Available end of August: **ARCADE PACK II**, featuring two more all time favourite Video Arcade games.

ZX BUSINESS SYSTEM

Now installed in many businesses, comes with PURCHASE, SALES LEDGER for 100+ entries per week, does daybook analysis, VAT incl. and excl., totals, password protection plus many more excellent features. You also get a STOCK CONTROL, MAIL LIST and PHONEBOOK. Easy to use, designed for everyday small businesses. Includes instruction book and tape. £17.00 incl. VAT. And does the job of systems costing hundreds of pounds.

ZX AUTOCODER

Writing machine code?

Some love it, some hate it but AUTOCODER just gets on with it. Helping you produce machine code programs from BASIC. Easy to use and very helpful. Converts PRINT, PRINTAT, IF THEN, GOTO, GOSUB, LET INKEY\$, POKE, PEEK, CLS, etc.

ALL £5.00 incl.

MORE DEALERS ARE INVITED

ZX VIDEO GAMES

This latest package of software to be released must surely be the most amazing available in the world. It features on one cassette all the fast action machine code games that other companies would sell for £5.00 each, but we are able to bring you all the following Machine Code Arcade games for that price. Not only are they excellent value for money but they are of the finest quality available for the ZX81. ZXVG contains:

UFO BOMBER

You are on a mission to destroy enemy fuel pumps and installations, eight directions of movement through caves, fuel dumps and over rocky lunar terrain. You drop smart bombs and can strafe with your gun that fires streaming laser shells. This game is completely addictive, and gives you on screen and Hi scores.

SPACE INVADERS

This is not our "version", this is just like the real thing, with four types of crawling invaders, defences that crumble as they are hit, UFO's for extra scores, Onscreen scoring and Hi scores. This game is brilliant!

GALAXIANS


Wave after wave of sweeping invaders drop their bombs at you. Your only hope is to dodge and destroy them. This is a most addictive game, and we guarantee that this game will make your ZX81 really come to life.

This game pack contains some other exciting machine code games, but you'll have to get a copy to find out what they are!

We absolutely guarantee that this will be the best value pack of video games software you have ever had, for quantity and quality. To make sure, just ask someone who has had this pack, enquire at your local computer shop, or send off for it to us.

SHOWROOM

Opening shortly opposite Debdale Park, Gorton, Manchester.
All prices incl. VAT and p&p. Please send to:
**CONTROL TECHNOLOGY, 39 Gloucester Road, Gee Cross,
Hyde, Cheshire SK14 5JG (061-368 7558).**

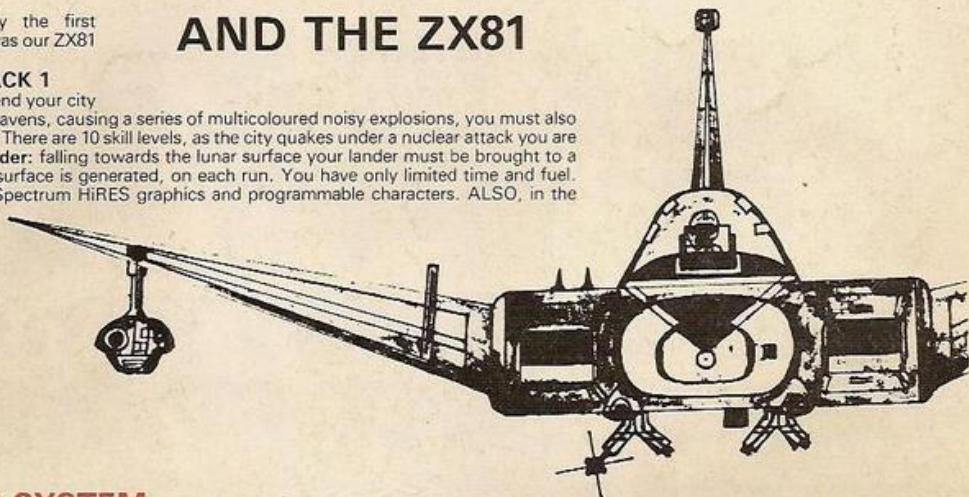


16K PACK 123

Pack 1, 2 & 3 include all of:


AIR TRAFFIC CONTROL: Animated radar screen of busy airport shown. You must bring planes into land; **INVADERS SELFPLAY**; **PHONEBOOK** — keep friends' and relatives numbers on cassette. **COMPUTER DATING**, who will it pick for you and those around you for a laugh. **ADVENTURE ATLANTIC**: you may become very rich or marooned forever. **BREAKOUT**; **SQUASH**: **LANGUAGE TRANSLATOR**: translates any European language to any other. **COMPUTAPUNT**: predict horse races and football pools with you ZX. **INDISCO**, video road racer. **DRAUGHTS** computer chequers, with kings. **BATTLESHIPS**, nautical naval battle at home. **MASTERMIND**: brain teaser, see if you can beat a microelectronic mind.

THIS MASSIVE PACK OF SOFTWARE IS ONLY £5.00

Air Traffic Control (ZX81)




Space Invaders (ZX81)



Draughts (ZX81)



UFO Bomber (ZX81)



OUR LAST MOVE WAS TO E.I.
HIS MOVE FROM

Please send me as soon as possible the following:

☐ £

☐ £

I enclose a Cheque/P.O. for the total £

NAME

ADDRESS

POSTCODE