

60p

YOUR COMPUTER

DECEMBER 1982

BRITAIN'S BIGGEST-SELLING HOME COMPUTER MAGAZINE

Vol.2 No.12

**Free ZX-81,
Spectrum
and Vic
flexidisc
games**

**Inside:
top-flight
Atari, Atom,
BBC, Dragon,
MZ-80K, Vic,
Spectrum and
ZX-81 games**

Win an Atari

PROGRAM POWER MICRO POWER

PROGRAM POWER MICRO POWER PROGRAM POWER MICRO POWER PROGRAM POWER MICRO POWER

BBC

ALIEN DESTROYERS

NEW-DEVASTATING MODEL B (or 32K MODEL A) GAME FROM BRITAIN'S LEADING SOFTWARE HOUSE!



Sensational, high speed program incorporating brilliant use of colour graphics and sound. 48 strong alien fleet of 3 different types plus Mothership scoring mystery bonus. Choice of 6 alien speeds and 3 bomb speeds. Vertical, angled and exploding missiles. Options to replace defences and suppress new fleet advances. Bonus bases awarded each new sheet. Scoring according to overall difficulty level plus end of game ranking of top scores.

This program also has many unique extras including "Battle Analysis" showing numbers of aliens shot down, how many Motherships destroyed, number of sheets cleared, shots fired percentage hits and bases lost.

ONLY £6.95

OTHER BBC PROGRAMS

MODEL A or B

CHESS (32K). Our excellent machine code program—now with superb MODE 1 graphics. Six skill levels, play back or white, illegal moves rejected, 'en passant', castling, 'take-back' of moves, and display of player's cumulative move time. Options include Blitz Chess, where you must move in 10 seconds, set-up of positions for analysis, replay of a game just played and saving of part completed game on tape. On loading a 1972 Spassky/Fisher game can be replayed. £6.95. Model A version still only £4.95. Graphics Upgrade exchange. £2.50.

ADVENTURE. All the excitement, intrigue and frustration of a main-frame adventure. Explore the tortuous forests, dark caverns and castle dungeons. Beware the maze of twisting tunnels and the desert wastelands. Outwit the predators. Rescue the Princess and carry off the treasures. Great skill and imagination are required to play this excellent game. You may never exhaust the possibilities. YES—this is our highly acclaimed ADVENTURE for the Atom!

Other NEW 16K Titles: £8.95 FILER (Database). £5.95 each—ASTEROID BELT, SEEK (Adventure), Junior Maths Pack, Where (UK Geography). £4.95 Reversi I, £3.95 Mastermind (2-way).

All programs now available from good dealers. We pay 20% Royalties on BBC, Spectrum, Dragon and Atom programs.

AUTHORISED BBC, ACORN AND DRAGON DEALERS

Special Offer—Deduct £1 per cassette when ordering two or more.

MODEL B (or 32K Model A)

GALACTIC COMMANDER (Aptitude Test). Nine phase test for aspiring Space Vehicle Commanders. Begin by separating your craft from the command module and landing under acceptable gravity conditions. Then GRADUATE through combinations of lower gravities, circulating command modules, defended planets (some with homing missiles), and eventually to underground landing sites in cave systems with unfriendly inhabitants. The program presents a real challenge. The use of machine code and high-res. graphics give beautifully smooth action. Very good sound £6.95.

FOOTER. Exciting Advance in Computer Games. This is a TWO PLAYER football match, masterfully presented in HIGH-RES graphics. Out-run and out-dribble your opponent and finally blast the ball into the net. You will be amazed at the realism of this program! Newly designed graphics handling routines give a totally smooth movement to both player and ball. (See the players' legs in running action!) £6.95.

Other NEW 32K Titles: £6.95 each—METEOR BATTLE, LASER COMMAND, £5.95 each—MARTIANS, CONSTELLATION, £4.95 each—REVERSI II, MAZE INVADERS, ROULETTE, 'New Prices'—TIMETREK £6.95, ELDORADO GOLD £5.95.

PLEASE NOTE!

We now offer over 30 BBC and 60 Atom programs of the highest quality and at highly competitive prices. Order NOW or send for our full catalogue.



Please add 55p order P & P + VAT at 15%



MICRO POWER LTD.
8/8a REGENT STREET
CHAPEL ALLERTON
LEEDS LS7 4PE.
Tel. (0532) 683186

PROGRAM POWER MICRO POWER

YOUR COMPUTER

YOUR LETTERS

Waiting for Sinclair; BBC control keys; disabled computer library; bug-free Spectrums.

NEWS

Sharp's new micros; *Your Computer* software top 10; Lynx and Oric updates.

COMPUTER CLUB

Finding out what mainframes and micros have in common at the Thames Valley club.

FLEXIDISC

Bill Bennett shows you how to make the most of this month's free flexidisc games.

SORD M-5



Exclusive review of the £100 colour micro which the Japanese think will storm the British market.

VIC SOFTWARE

The many faces of Vic software reviewed by Neville Ash.

Editor
TOBY WOLPE

Assistant Editor
MEIRION JONES

Staff Writer
SIMON BESLEY

Sub-editor
PAUL BOND

Editorial Secretary
LYNN COWLING
Editorial: 01-661 3144

Advertisement Manager
PHILIP KIRBY 01-661 3127

Advertisement Executives
BILL ARDLEY 01-661 8484
PETER RICE 01-661 8441

Midlands Office
KEITH SALT 021-356 4838

Northern Office
RON SOUTHALL 061-872 8861

Advertisement Secretary
JEANETTE MACKRELL

Publishing Director
CHRIS HIPWELL

Your Computer, Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS.

Subscriptions: U.K. £8 for 12 issues.

©IPC Business Press Ltd 1982

Typesetting by In-Step Ltd, London EC1.

Printed by Riverside Press Ltd, Whitstable, Kent.

Published by IPC Electrical-Electronic Press Ltd, Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS. Tel: 01 661

3500 Telex/grams: 892084 BIPRESG. ISSN 0263-0885

19

20

23

25

26

30

GAMES SPECIAL

Spectrum Flight Simulator

This month's cover game puts you at the controls of a modern high-performance jet.

Atari Chicken

Why did the chicken cross the road? Find out with this Atari game.

Dragon Nightmare Holiday

Brave the hazards of a holiday drive in the comfort of your own home.

Sharp Coup d'Etat

You are in charge of a desperate band fighting to free a banana republic.

ZX-81 Probe

Match the right key to the right lock in the minimum time and become a crackman.

Vic Breakout

John Cullen skilfully mixes Basic and machine code to produce a top-class Breakout game for the Vic.

BBC Maze Muncher

Your chance to use those expensively acquired arcade skills on your BBC.

Atom Quest

A goblin is behind you, a pit fiend threatens; your mission — to recover the magic chalice.

ZX-81 CHESS

Part 1 of David Horne's series on building a working chess game in just 1,000 bytes.

ATOM ACCOUNTS

Check your solvency at the touch of a button.

BBC MUSIC

Chris Melville on keyboards.

ZX-81 GAMES WRITING

Stuart Nicholls makes it look easy.

BASIC DICTIONARY

Tony Edwards' Basic lexicon.

ZX-81 FORTH

Simulating Forth on a ZX-81.

CONTROL



John Dawson reviews Multitech's multi-purpose controller, the MPF-I.

RESPONSE FRAME

Your technical enquiries answered.

FINGERTIPS

Our pocket computer and calculator column.

SOFTWARE FILE

Nine pages packed with programs for the ZX-81, Vic, BBC, Atom and Spectrum.

COMPETITION CORNER

The result of October's Enigma Code and a new £15 Christmas Box. Atari competition falls between pages 18 and 19.

Cover photograph by Stephen Oliver.

ABC

MEMBER OF THE ADVERTISING

SURFACE OF CIRCULATIONS

EDITORIAL

THE FAIRY LIGHTS are going out all over Europe this Christmas as computing's over-zealous yuletide recruits find that such seasonal fripperies as Christmas trees take up too much valuable socket space. This year home computers will shatter the traditional Noel idyll. Families will no longer cluster around roaring hearths opening presents and arguing about which of the four channels to watch — from now on it will be channel 36 or thereabouts. For the first time, this Christmas, people have a real choice of machines for less than £200 and an even wider selection if they can afford to go as high as £350.

But those who have decided to treat themselves or a member of their family to a micro will know that choosing a computer involves a selection process which makes the rest of the Christmas shopping almost look like fun. Few of those who emerge from this ordeal clutching a gift-wrapped micro will have given any real thought to what they want it for — most will be only too pleased to have found one at all in time for Christmas. The first discovery the would-be buyer makes is that only half of the dozen or so most attractive machines advertised are readily available. Having swallowed this unpalatable fact the next question must be: "Do I really need a micro for Christmas? Would a machine like the Lynx or the Oric — both unlikely to be seen in volume this side of the Feast of Stephen — better suit my needs and my budget?"

Waiting a few months for a machine which has already been launched can be a wise decision — but only if you are sure that it really fits your bill. What you should never do is put off buying a micro because you are convinced a wonder-machine is just round the corner. At the rate that microcomputer technology is accelerating, you will just defer your entry into computing indefinitely. Talk to someone who already has a machine and decide which features you most want to have on your micro. When you have shortlisted some candidates with the power, flexibility and software you require and which are available when you want them, your next major consideration must be price. Minimum outlay can mean minimal computing but on the other hand there is no point spending hundreds if you are not sure how long your interest in micros will last.

The final word must, regrettably, be a word of warning. If you want a micro by Christmas Day, make sure that the machine can be supplied on time and get it in writing. After all, children believe in Santa Claus; adults believe in delivery dates.

THE HOBBIT



Step into the future: VISIT MIDDLE EARTH WITH YOUR SPECTRUM.

Melbourne House Publishers, in association with the Tolkien Estate, are very proud to announce the release of THE HOBBIT, a super-program like no other before, for the 48K Spectrum.

THE HOBBIT is totally unique, with features never before seen on any computer, let alone on the Spectrum.

Based on the fantasy land described in J. R. R. Tolkien's brilliant novel, in this program you take on the role of Bilbo, the hobbit: danger, adventure, and excitement are all part of it, presented to you in words and graphics, but it is you who must confront and solve the problems this time.

You instruct the computer in completely ordinary English sentences!

THE HOBBIT program is capable of very sophisticated communications, including features not previously thought possible on a microcomputer: adjectives, adverbs, multiple sentences, are just a part of the power of this program.

You will meet all your favourite characters from J. R. R. Tolkien's book, and amazing as it sounds, they will all have an independent life of their own. They can make decisions and act on them! They react not only to what you do, but also to every other character in THE HOBBIT!

Because of this unique feature, you will find that each time you play THE HOBBIT, events will proceed in a slightly different way, and the further you get into Tolkien's world, the more different each visit may be.

THE HOBBIT also allows you to talk to the other characters! At last you can answer the questions they may put to you, or more importantly, you can suggest to them what you would like them to do!

THE HOBBIT program follows closely the plot of the book, and so a copy of the book is included as part of THE HOBBIT package at no extra charge.

THE HOBBIT brings to you the future of microcomputers in an exciting and challenging fantasy. A super-program that is a milestone in computer software.

Other cassette software includes PENETRATOR, a 48K state-of-the-art arcade game—£6.95 including VAT.
Spectrum books include: Over The Spectrum—£6.95.
Spectrum Machine Language—£6.95.
Understanding Your Spectrum—£7.95.

Melbourne House Publishers

YC12

Orders to: 131 Trafalgar Road, Greenwich, London SE10.

Correspondence to: Glebe Cottage, Station Road, Cheddington, Leighton Buzzard, BEDS LU7 7NA.

Please send me:

☐ The Hobbit package—48K Spectrum cassette, four colour instruction manual and Hobbit book—£14.95

☐ Other

I enclose cheque/money order £

(Please add 80p for post and pack)

☐ Spectrum Catalogue

Name

Address

Postcode

Dealer enquiries welcomed. Phone 01.6921475 and ask for a Melbourne House operator.

MELBOURNE HOUSE PUBLISHERS

TAKE THE DRAG OUT OF BUYING A DRAGON!

We give the best service

Why drag yourself from shop to shop or spend hours trying to find the best deal on a DRAGON 32? It's easy... our way.

COMPUTERS FOR ALL are DRAGON specialists

Not only do we give you best value for money, we also give you a complete back-up after-sales service if, and when, required.

We know the computer inside out

Our knowledge of DRAGON 32 is probably the most complete in the country. We don't just sell them. We use them, play with them, analyse them, program them... enthuse about them!

We can show you how to use it professionally

Unlike some computers, DRAGON 32 is not just a toy! It's fun, but it's also very professional. Whatever you want to do with it, COMPUTERS FOR ALL can advise you at every stage, and as your knowledge of programming grows, you can always turn to us for the latest peripherals.

We have a wide range of hardware / software

It doesn't do to stand still in the computer market. That's why COMPUTERS FOR ALL are always looking for and stocking the newest hardware and software for the DRAGON 32. Printers, Joysticks, ROM Cartridges, Cassette Software, Monitors... practically everything you will need now or in the future is available under one roof... our roof!

We look after our customers

Some dealers are content to take your money and forget all about you. We're different. We want you to have the very best service. You needn't worry about contacting us if you need information or advice. That's what we're here for... and we'll help whenever we can.

We don't quibble

Needless to say, if you buy a DRAGON 32 from COMPUTERS FOR ALL it comes complete with a year's warranty.

But we go further than that: our service is completely "quibble-free" if, in the unlikely event of a complaint, you contact us, we will settle the matter immediately. In short, COMPUTERS FOR ALL can take the DRAG out of buying a DRAGON. You can call us with confidence... anytime.

HOW TO GET YOUR DRAGON IN TIME FOR CHRISTMAS

You don't have to go to the North Pole.

All you have to do is visit North Street ROMFORD or post the coupon!

As soon as we receive your order, it will be straight back in the post to you... but a word of warning - please allow enough time for the rush! Do it now. WE'LL DELIVER THE GOODS!



ONLY £199.50
PLUS £3 CARRIAGE
TV NOT INCLUDED
IN PRICE



SEND TODAY OR CALL AT OUR SHOP

For fast, efficient mail order post to COMPUTERS FOR ALL, 72 North Street, ROMFORD, Essex, or phone: (0708) 752862

NAME

ADDRESS

Please send me the following items:

..... DRAGON 32 Microcomputers @ £199.50 + £3.00 Cartridge

..... DRAGON Joysticks @ £19.95 pr

DRAGON CARTRIDGES

Ghost Attack @ £24.95 ea
Berserk @ £19.95 ea
Meteoroids @ £19.95 ea
Cosmic Invaders @ £19.95 ea
Cave Hunter @ £19.95 ea
Tube Frenzy @ £19.95 ea
Starship Chameleon @ £19.95 ea
Personal Finance @ £19.95 ea

DRAGON CASSETTES

Compendium of Games @ £7.95 ea
Comp of applications @ £7.95 ea
Quest @ £7.95 ea
Madness & the Minotaur @ £7.95 ea
Computavoice @ £7.95 ea
Graphic Animator @ £7.95 ea
Mazercase @ £7.95 ea

I enclose cheque/P.O. to the value of

£..... made payable to

COMPUTERS FOR ALL

Please bill my Access/Barclaycard/Visa/

Mastercharge/Amex

No.....

**COMPUTERS
FOR ALL**

**"THE SHOP WHERE
PEOPLE MATTER"**



PROGRAM DIRECT

IS DELIGHTED TO ANNOUNCE A NEW RANGE OF
STUNNING, HIGH QUALITY SOFTWARE, FOR:—



SPECTRUM BBC & DRAGON

BBC

SPACE TREK (32K) Model B **£5.99**
Probably the most sophisticated STARTREK game ever! All the standard features plus BLACKHOLES, RED GIANT STARS, SUPERNOVA & machine coded ASTEROID STORM. **With:** INVADERS, BLITZ, PINBALL.

ADVENTURE (32K) Model B **£5.99**
One of the biggest adventures on cassette! Nearly 200 locations, 50 monsters etc. (uses nearly all available memory space). Explore, discover treasure, avoid monsters & trade with merchants. You'll have to be clever. **With:** INVADERS, PONTOON, LUNAR LANDER.

SCRAMBLE (16K) Model A & B **£5.99**
Written in superfast machine code. Latest action game requires total concentration. Superb sound effects. **With:** INVADERS, BREAKOUT, BATTLESHIP.

ALL PROGRAMS
RECORDED ON
TOP QUALITY
TDK CASSETTES

SPECTRUM

PACKMAN GAMES PACK (16K) **£4.99**
Latest arcade crunchie! Full colour plus sound effects. Eat the power fruits & destroy the ghosts before they pollute the crazy maze. **With:** BREAKOUT, PONTOON.

LUNAR LANDER GAMES PACK (16K) **£4.99**
Probably the most sophisticated lunar lander ever! Pilot the command module into lunar orbit and then start the descent. You'll never do it!! (super sound effects). **With:** BOMBER, ROBOT NIM.

STARTREK ADVENTURE (48K) **£5.99**
Ultra-sophisticated program (almost all memory used up). Too complex to describe! Grons, Tribbles, Black Holes, Klingons. Totally compulsive. (Full sound & colour).

DRAGON

DRAGON GAMES PACK **£5.99**
BREAKOUT — LUNAR LANDER — BOMBER. Maximim addictiveness, total concentration required.

PROGRAM DIRECT GUARANTEE! —

SHOULD YOU FOR ANY REASON NOT BE ABSOLUTELY DELIGHTED WITH THE QUALITY OF CASSETTE SUPPLIED, SIMPLY RETURN IT WITHIN 14 DAYS & WE WILL DISPATCH ANY ALTERNATIVE CASSETTE ABSOLUTELY FREE!

PROGRAM DIRECT
37B NEW CAVENDISH STREET,
LONDON W1M 8JR

All prices include V.A.T. & P&P

PLEASE SEND ME THE FOLLOWING IMMEDIATELY.

- ☐ _____ £ _____
☐ _____ £ _____


I ENCLOSE A CHEQUE/P.O. FOR THE TOTAL

NAME _____

ADDRESS _____

_____ POSTCODE _____

Jupiter ACE

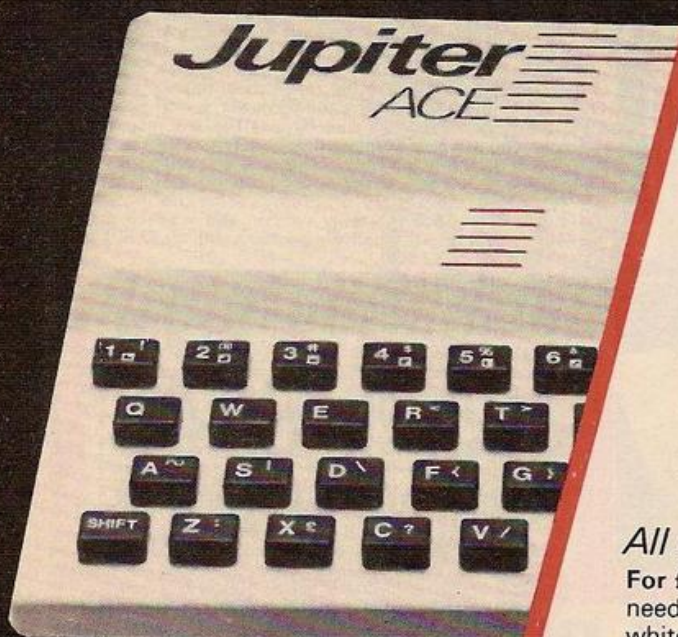

"The Ace is
an excellent way
of using
FORTH"

Popular Computing Weekly

"FORTH is
an easy
language"

Byte

The Jupiter Ace personal computer runs in FORTH, an easily understood language, typically four times as compact and ten times as fast as BASIC. Before the Ace all personal computers used BASIC and FORTH was only available to a privileged few.

The Jupiter Ace also features a full-size moving-key keyboard, high-resolution graphics, sound, floating point arithmetic, a fast and reliable cassette interface and 3K of RAM.

If you own a personal computer you will be aware of the limitations of BASIC. You know how slowly your programs run and how quickly your computer's memory gets filled. The Jupiter Ace is your answer.

If you already know FORTH, the Jupiter Ace closely follows the FORTH 79 standard with extensions for floating point, sound and cassette. It has a unique and remarkable editor that allows you to list and alter words that have been previously compiled into the dictionary. This avoids the need to store screens of source, allowing the dictionary itself to be saved on cassette. Comprehensive error checking removes the worry of accidentally crashing your programs.

All inclusive price

For £89.95 you receive your Jupiter Ace, a mains adaptor, all the leads needed to connect to most cassette recorders and T.V.s (colour or black and white), a software catalogue and a manual.

The manual is a complete introduction to the world of personal computing and a course in FORTH programming on the Ace.

Even if you are a complete newcomer to computers, the manual will guide you step by step from first principles to confident programming.

The price includes postage, packing and V.A.T.

The Jupiter Ace is backed by a full 12 month warranty.

Available soon

Plug-on parallel printer interface.

For around £20.00 this will connect your Jupiter Ace to anything from high-speed dot matrix to letter-quality daisy wheel printers.

Plug-on 16K Memory Expansion

For around £30.00 you will increase the memory of your Jupiter Ace to 19K giving you instant access to enormous amounts of information.

Software

A catalogue will be sent with every machine, and includes, initially, programs for education and entertainment.

FORTH Finishes First!

Speed Comparison Chart showing times in seconds to perform one thousand operations.

Type of Operation	Jupiter Ace	BBC Micro	Vic 20	Spectrum	ZX81
Empty loop	0.12	0.67	1.3	4.2	17.7
Print a number	7.5	13.5	26	19	430
Print a character	0.62	1.3	3.1	7.5	24
Add two numbers	0.45	1.4	5.5	7.5	28
Multiply two numbers	0.9	1.6	6.5	7.5	32

Because of the difficulty in devising exactly equivalent programs, these measurements should only be taken as a guide.

only £89.95

Designed by Jupiter Cantab

Computer Designers Steven Vickers and Richard Altwasser played a major role in creating the ZX Spectrum and then formed Jupiter Cantab to develop advanced ideas in personal computing. The Ace is the result, another all-British computer to lead the world.

Technical Information

Hardware

Z80A running at 3.25 MHz.
8K bytes ROM
3K bytes RAM

Keyboard

40 Moving-key keyboard with auto repeat on every key and Caps Lock.

Screen

Memory mapped 32 column x 24 line flicker-free display with upper and lower case ascii character set.

Graphics

Chunky graphics (64 x 46 pixels) may be plotted, unplotted or over-plotted (XOR operation). Also, the entire character set (128 characters and their video inverses) may be redefined allowing intricate shapes to be drawn with a resolution equivalent to 256 x 192 pixels.

Control Structures

IF-ELSE-THEN, DO-LOOP DO-+LOOP, BEGIN-WHILE-REPEAT, BEGIN-UNTIL, all may be mixed and nested to any depth.

Cassette

Programs and data in the compact dictionary format may be saved, verified, loaded and merged. Blocks of memory can be saved, verified, loaded and relocated. All tape files are named. Running at 1500 baud, the Ace will connect to most portable tape recorders.

Expansion Port


Contains D.C. power rails and full Z80 Address, data and control signals. May be used to connect extra memory and other peripherals. IN and OUT words allow port-based peripherals to be addressed.

Data Structures


Integer, Floating point and String data may be held as constants, variables or arrays with multiple dimensions and mixed data types. There are no restrictions on names.

Sound

Internal loudspeaker may be programmed to operate over the entire audio spectrum.




In Schools Teachers already know how quickly children take to computing, and the Jupiter Ace is an ideal introduction. FORTH is an easy and important language to learn and by making learning fun, the Ace can help to teach science, music and many other subjects.



In Laboratories For monitoring and controlling experiments, the Jupiter Ace has many advantages. The language is perfect, even the Jodrell Bank Radio Telescope is controlled in FORTH. The Ace expansion port enables it to be interfaced to almost anything, and the built in quartz timer allows experiments to run all weekend.



At Home The Jupiter Ace is powerful enough to play games as complex as Chess and with sound and high resolution graphics, action games written in FORTH will stretch your reaction speeds to their limits.



In the Office Stock control, Accounts and Financial forecasts are all possible on the Jupiter Ace. With a printer and extra memory attached you can do word processing as well.

"FORTH is very flexible"

"FORTH is compact"

Electronics and computing

"FORTH is in general very much faster than BASIC"

Computing Today

Programming in FORTH

Programming in FORTH

FORTH programs are constructed without line-numbers, as words which are defined in terms of other words that already exist. Consider the following definition of the word STARS. Comments are in parenthesis and have no action.

```
(: starts word definition)
" *** " (print 3 asterisks)
200 100 BEEP (play a note for 100 mSecs)
;
```

The semi colon at the end finishes the word definition. Now, whenever you say STARS the computer will print out 3 asterisks and sound a short tone. (Notice how the word BEEP comes after the numbers it uses, 200 and 100. This characteristic occurs throughout FORTH so that you write, for instance, 28 76 + instead of 28 + 76.)

The Jupiter Ace already has 140 FORTH words defined in ROM.

The Jupiter Ace is available only by mail order. Please allow up to 28 days for delivery.

Send cheque or postal order with the form to:—
JUPITER CANTAB, 22 FOXHOLLOW, BAR HILL,
CAMBRIDGE CB3 8EP



ORDER NOW!

Please send me:—

☐ JUPITER ACE MICROCOMPUTER(S) @ £89.95.

Name. Mr/ _____
Mrs/Miss _____
Address _____


_____ F

SPECTRUM COMES TO LIFE !

ABBEX


THE GAMES PEOPLE

SPOOKYMAN

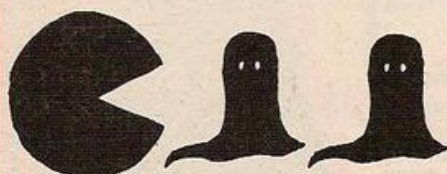

EAT THE PILLS AND KEEP AWAY FROM THE GHOSTS. EAT THE VITAMINS AND CHASE THE GHOSTS. FULL MACHINE CODE ARCADE ACTION AND SOUND. DESIGNED TO MAKE YOUR ADRENALINE RUN HIGH. PRICE £4.95

COSMOS

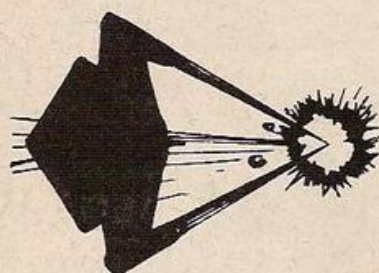

YOU HAVE THE JOB OF PROTECTING A CONVOY FROM ALIENS AND METEOR STORMS. WATCH OUT FOR THE SPACE MINES AS YOU PLAY THIS AMAZING MACHINE CODE ARCADE ACTION SIMULATION PROGRAM. PRICE £4.95

WRITE OR PHONE FOR LIST OF GAMES FOR OTHER COMPUTERS OR JUST MORE GAMES

ABBEX ELECTRONICS LTD

20 ASHLEY COURT, GREAT NORTHWAY, LONDON NW 4
Tel: 01-203 1465

PLEASE COMPLETE IN BLOCK CAPS

NAME (Mr/Mrs/Miss).....

ADDRESS.....

(CARD HOLDERS).....

POST CODE PHONE NO.

Make cheques payable to ABBEX
I enclose my cheque for £

I wish to pay by ☐ CHEQUE ☐ VISA ☐ ACCESS ☐

Please debit my creditcard a/c

NUMBER ☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐

Signed

date

Please send me the following
(Allow 14 days for delivery)

POST BY DEC 8th and receive your order in time for Christmas

☐ **SPOOKYMAN**
PRICE £4.95


☐ **COSMOS**
PRICE £4.95

sinclair
ZX Spectrum

for the
16k or 48k
ZX Spectrum

**NOT THE FIRST...
JUST THE BEST!**

GROUND FORCE

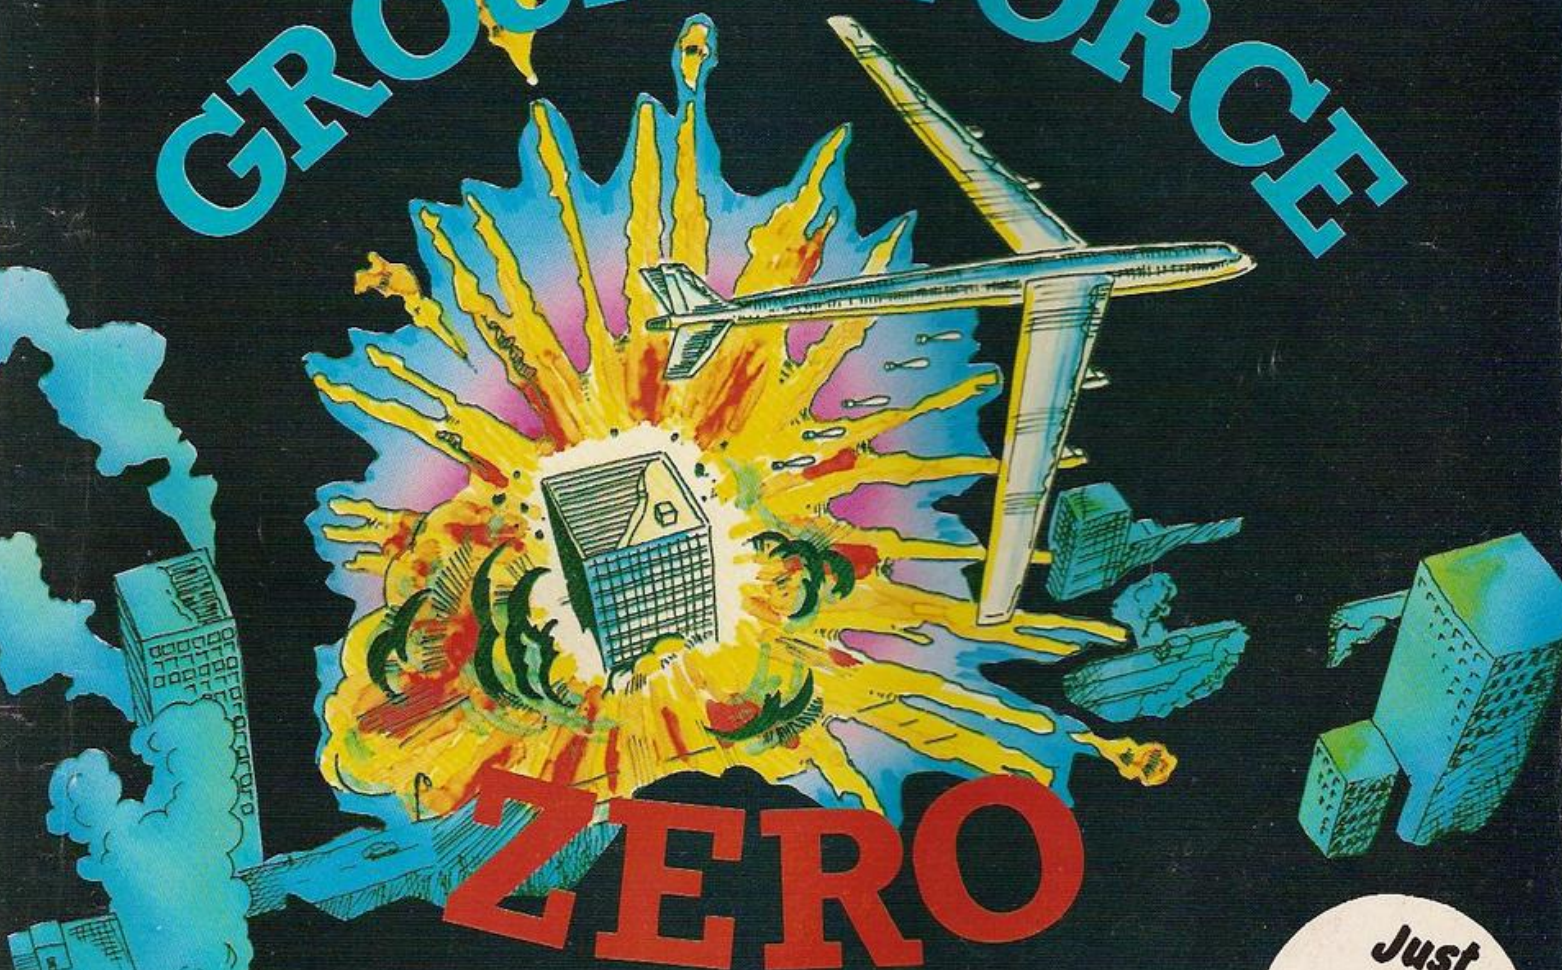

The Ground Forces have been destroyed
so the air attack must begin and
you're in control!

A Superb Arcade Game for the 16k or 48k Spectrum

Just
£5
inclusive

TITAN
PROGRAMS



TITAN HOUSE, 83 ASHWOOD ROAD, RUDLOE,
CORSHAM, WILTSHIRE SN13 0LG

IMMEDIATE DELIVERY

Please send me
I enclose cheque/P.O. for
OR Please debit my Access No.
Barclaycard No. Expiry date
Name
Address
Post Code

Dealers Discount Available
ACCESS, BARCLAYCARD ORDERS WELCOME ON 24hr
ANSAPHONE 0225-810132, or mail to:
TITAN PROGRAMS, TITAN HOUSE,
83 ASHWOOD RD., RUDLOE, CORSHAM,
WILTSHIRE. SN13 0LG





ORIC-1TM

TIMELESS TECHNOLOGY FROM ORIC PRODUCTS INTERNATIONAL

The Computer Challenge

**16 colours
professional keyboard
full graphics
real sound**

- Superb styling
- Choice of 16K RAM or massive 48K RAM
- Ergonomic keyboard with 57 moving keys
- 28 rows x 40 characters high resolution
- Teletext/viewdata compatible graphics
- 6 octaves of real sound plus Hi-Fi output
- Centronics printer interface and cassette port
- Comprehensive user manual

OPTIONAL MODEM OFFERS COMPUTER PHONE LINK FOR:
● ELECTRONIC MAIL ● TELESOFTWARE ● PRESTEL

COMING SOON, TO COMPLETE YOUR SYSTEM: ORIC MICRO-DRIVE DISCS & SPEED PRINTER

THE REAL
COMPUTER SYSTEM
FOR

£ **99** .95
incl VAT

FOR HOME: The ORIC-1 is the professional alternative for home computing. Superbly styled, the 57 key layout is based upon computers costing many times more than the ORIC, and will help the whole family to learn and understand computing, right from day one. The ORIC incorporates an improved version of Microsoft Basic for ease of programming and use. For the enthusiasts the computer has laser zaps, explosions, etc. pre-programmed for games use, with Hi-Fi output for incredible effect. The communications Modem will allow 'Telesoftware', message sending, and Prestel use.

FOR BUSINESS: The ORIC-1 is the answer to many day to day problems. Software is becoming available for payroll, accounts, stock-control, and many more systems to help your day to day business organising and control. In addition, the ORIC COMMUNICATIONS MODEM will allow you to access up to 200,000 pages of Prestel information, to send and receive 'electronic mail', to book hotels, and flights (and pay for them) and to look at the latest stock-market and share indexes. In short the ORIC-1 is a must for all businesses large or small.

HOW TO ORDER YOUR ORIC-1: By phone: Just ring our telesales number Ascot (0990) 27641.

By post: You can pay by cheque, postal order ACCESS - BARCLAYCARD - AMEX - DINERS. (Please allow 28 days for delivery).

Money back if not satisfied.

© Copyright ORIC PRODUCTS INTERNATIONAL 1982.

ORIC-1


The Real Computer System

ORIC PRODUCTS INTERNATIONAL LTD
Coworth Park, Ascot, Berks SL5 7SE

* Please delete/complete as applicable.
* I enclose a cheque/ P.O. payable to: ORIC PRODUCTS INTERNATIONAL for £

Name _____ Address _____
Please charge my Access Barclaycard Amex. Diners Club account no. _____
Qty _____ Price Inc VAT _____
£ 99.95
£ 169.95
£ 79
TOTAL £ 5.95

If you require a brochure please tick ☐ CT

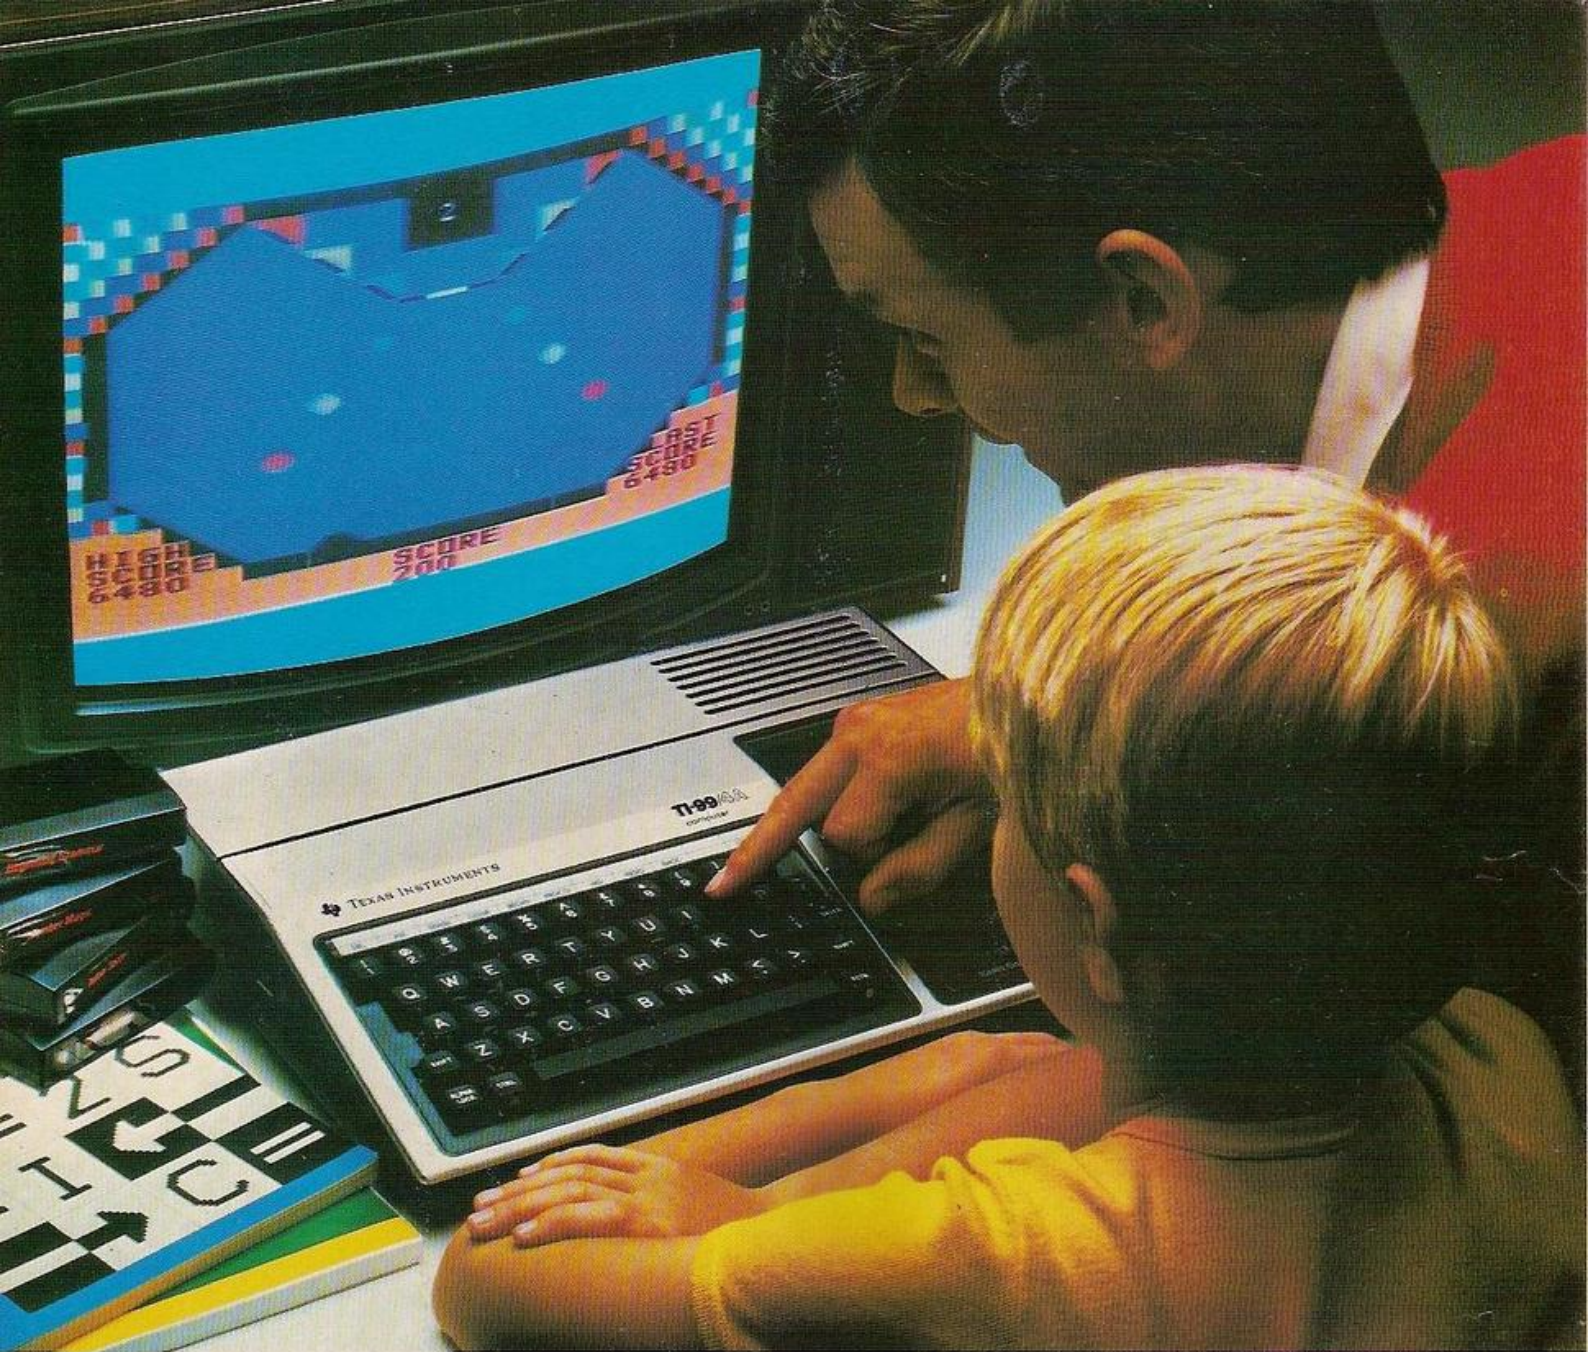

TI's Home Computer. Unbeatable value. Unrivalled software.

When you choose a TI Home Computer you're choosing a "real" computer. A computer that can grow with you and your family. A computer that lets you play, invent, discover... that lets your imagination soar.

What makes this possible is our wide range of software. You'll find subjects as simple as "Early Reading" and as complex as "TMS 9900 Assembler Editor." Many of our programs are packaged in our unique Solid State Software™ Command Modules. Some have sound. Others have superb colour graphics. Simply plug them in and begin.

When you want to learn to

program for yourself, the TI 99/4A is ready too. TI BASIC is built in. The programming manual is easy to understand, easy to follow every step of the way. You will be amazed

to discover how much fun programming can be.

And when you're ready to expand your system, we're ready too. Our unique Peripheral Expansion System can house up to seven peripherals without extra cables or clutter. There is even a speech synthesiser that gives your computer a voice.

Sound impressive? Try the TI Home Computer for yourself at your nearest dealer. At around £200 you'll look no further.



TEXAS INSTRUMENTS

WHAT THE PROFESSIONALS LOOK FOR IN A HOME COMPUTER

Feature	Texas Instruments TI 99/4A
Microprocessor	TMS 9900 16 BIT
Graphics	16 colour, high resolution
Languages	TI-BASIC (built-in), extended BASIC, UCSD-PASCAL, TI-LOGO, Assembler
Memory	16K RAM standard—expandable to max ROM/RAM of 110K
Keyboard	Full size, standard typewriter style
Software	1000 programs to choose from worldwide
Solid State	Yes
Speech Capability	




ZX Spectrum



Sinclair ZX Spectr

**16K or 48K RAM...
full-size moving-
key keyboard...
colour and sound...
high-resolution
graphics...**

**From only
£125!**

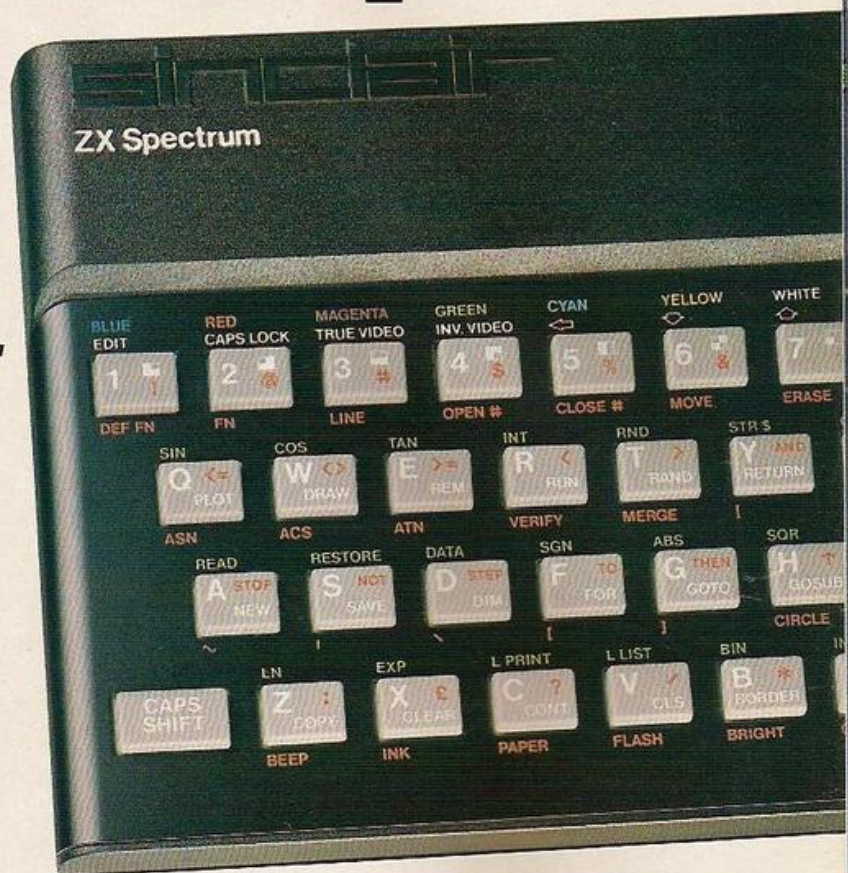

First, there was the world-beating Sinclair ZX80. The first personal computer for under £100.

Then, the ZX81. With up to 16K RAM available, and the ZX Printer. Giving more power and more flexibility. Together, they've sold over 500,000 so far, to make Sinclair world leaders in personal computing. And the ZX81 remains the ideal low-cost introduction to computing.

Now there's the ZX Spectrum! With up to 48K of RAM. A full-size moving-key keyboard. Vivid colour and sound. High-resolution graphics. And a low price that's unrivalled.

Professional power— personal computer price!

The ZX Spectrum incorporates all the proven features of the ZX81. But its new 16K BASIC ROM dramatically increases your computing power.

You have access to a range of 8 colours for foreground, background and border, together with a sound generator and high-resolution graphics.

You have the facility to support separate data files.

You have a choice of storage capacities (governed by the amount of RAM). 16K of RAM (which you can uprate later to 48K of RAM) or a massive 48K of RAM.

Yet the price of the Spectrum 16K is an amazing £125! Even the popular 48K version costs only £175!

You may decide to begin with the 16K version. If so, you can still return it later for an upgrade. The cost? Around £60.

Ready to use today, easy to expand tomorrow

Your ZX Spectrum comes with a mains adaptor and all the necessary leads to connect to most cassette recorders and TVs (colour or black and white).

Employing Sinclair BASIC (now used in over 500,000 computers worldwide) the ZX Spectrum comes complete with two manuals which together represent a detailed course in BASIC programming. Whether you're a beginner or a competent programmer, you'll find them both of immense help. Depending on your computer experience, you'll quickly be moving into the colourful world of ZX Spectrum professional-level computing.


There's no need to stop there. The ZX Printer—available now—is fully compatible with the ZX Spectrum. And later this year there will be Microdrives for massive amounts of extra on-line storage, plus an RS232 / network interface board.



Key features of the Sinclair ZX Spectrum

- Full colour—8 colours each for foreground, background and border, plus flashing and brightness-intensity control.
- Sound—BEEP command with variable pitch and duration.
- Massive RAM—16K or 48K.
- Full-size moving-key keyboard—all keys at normal typewriter pitch, with repeat facility on each key.
- High-resolution—256 dots horizontally x 192 vertically, each individually addressable for true high-resolution graphics.
- ASCII character set—with upper- and lower-case characters.
- Teletext-compatible—user software can generate 40 characters per line or other settings.
- High speed LOAD & SAVE—16K in 100 seconds via cassette, with VERIFY & MERGE for programs and separate data files.
- Sinclair 16K extended BASIC—incorporating unique 'one-touch' keyword entry, syntax check, and report codes.

um

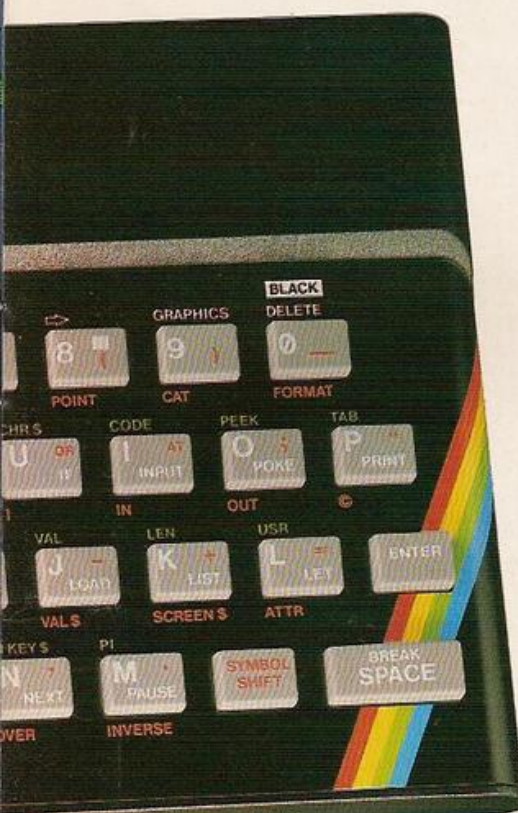

The ZX Printer—available now

Designed exclusively for use with the Sinclair ZX range of computers, the printer offers ZX Spectrum owners the full ASCII character set—including lower-case characters and high-resolution graphics.

A special feature is COPY which prints out exactly what is on the whole TV screen without the need for further instructions. Printing speed is 50 characters per second, with 32 characters per line and 9 lines per vertical inch.

The ZX Printer connects to the rear of your ZX Spectrum. A roll of paper (65ft long and 4in wide) is supplied, along with full instructions. Further supplies of paper are available in packs of five rolls.



The ZX Microdrive—coming soon

The new Microdrives, designed especially for the ZX Spectrum, are set to change the face of personal computing.

Each Microdrive is capable of holding up to 100K bytes using a single interchangeable microfloppy.

The transfer rate is 16K bytes per second, with average access time of 3.5 seconds. And you'll be able to connect up to 8 ZX Microdrives to your ZX Spectrum.

All the BASIC commands required for the Microdrives are included on the Spectrum.

A remarkable breakthrough at a remarkable price. The Microdrives are available later this year, for around £50.



ZX Spectrum software on cassettes—available now

The first 21 software cassettes are now available directly from Sinclair. Produced by ICL and Psion, subjects include games, education, and business/household management. Galactic Invasion... Flight Simulation... Chess... History... Inventions... VU-CALC... VU-3D... 47 programs in all. There's something for everyone, and they all make full use of the Spectrum's colour, sound and graphics capabilities. You'll receive a detailed catalogue with your Spectrum.

RS232/network interface board

This interface, available later this year, will enable you to connect your ZX Spectrum to a whole host of printers, terminals and other computers.

The potential is enormous. And the astonishingly low price of only £20 is possible only because the operating systems are already designed into the ROM.

sinclair

Sinclair Research Ltd, Stanhope Road,
Camberley, Surrey GU15 3PS.
Tel: Camberley (0276) 685311.

How to order your ZX Spectrum

BY PHONE—Access, Barclaycard or Trustcard holders can call 01-200 0200 for personal attention 24 hours a day, every day. BY FREEPOST—use the no-stamp needed coupon below. You can pay by cheque, postal order, Barclaycard,

Access or Trustcard.

EITHER WAY—please allow up to 28 days for delivery. And there's a 14-day money-back option, of course. We want you to be satisfied beyond doubt—and we have no doubt that you will be.

To: Sinclair Research, FREEPOST, Camberley, Surrey, GU15 3BR.

Order

Qty	Item	Code	Item Price £	Total £
	Sinclair ZX Spectrum—16K RAM version	100	125.00	
	Sinclair ZX Spectrum—48K RAM version	101	175.00	
	Sinclair ZX Printer	27	59.95	
	Printer paper (pack of 5 rolls)	16	11.95	
	Postage and packing: orders under £100	28	2.95	
	orders over £100	29	4.95	
			Total £	

Please tick if you require a VAT receipt ☐

*I enclose a cheque/postal order payable to Sinclair Research Ltd for £

*Please charge to my Access/Barclaycard/Trustcard account no.

*Please delete/complete as applicable

Signature

PLEASE PRINT

Name: Mr/Mrs/Miss

Address

YOC812

FREEPOST—no stamp needed. Prices apply to UK only. Export prices on application.

Sinclair ZX Spectrum-technical data.

Dimensions

Width	233 mm
Depth	144 mm
Height	30 mm

CPU/ memory

Z80A microprocessor running at 3.5 MHz.
16K-byte ROM containing BASIC interpreter and operating system.

16K-byte RAM (plus optional 32K-byte RAM on internal expansion board) or 48K-byte RAM.

Keyboard

40-moving-key keyboard with full upper and lower case with capitals lock feature. All BASIC words obtained by single keys, plus 16 graphics characters, 22 colour control codes, and 21 user-definable graphics characters. All keys have auto repeat.

Display

Memory-mapped display of 256 pixels x 192 pixels; plus one attributes byte per character square, defining one of eight foreground colours, one of eight background colours, normal or extra brightness and flashing or steady. Screen border colour also settable to one of eight colours. Will drive a PAL UHF colour TV set, or black and white set (which will give a scale of grey), on channel 36.

Sound

Internal loudspeaker can be operated over more than 10 octaves (actually 130 semitones) via basic BEEP command. Jack sockets at the rear of computer allow connections to external amplifier/speaker.

Graphics

Point, line, circle and arc drawing commands in high-resolution graphics.
16 pre-defined graphics characters plus 21 user-definable graphics characters. Also functions to yield character at a given position, attribute at a given position (colours, brightness and flash) and whether a given pixel is set. Text may be written on the screen on 24 lines of 32 characters. Text and graphics may be freely mixed.

Colours

Foreground and background colours, brightness and flashing are set by BASIC INK, PAPER, BRIGHT and FLASH commands. OVER may also be set, which performs an exclusive-or operation to overwrite any printing or plotting that is already on the screen. INVERSE will give inverse video printing. These six commands may be set globally to cover all further PRINT, PLOT, DRAW or CIRCLE commands, or locally within these commands to cover only the results of that command. They may also be set locally to cover text printed by an INPUT statement. Colour-control codes, which may be accessed from the keyboard, may be inserted into text or program listing, and when displayed will override the globally set colours until another control code is encountered. Brightness and flashing codes may be inserted into program or text, similarly. Colour-control codes in a program listing have no effect on its execution. Border colour is set by a BORDER command. The eight colours available are black, blue, red,

magenta, green, cyan, yellow and white. All eight colours may be present on the screen at once, with some areas flashing and others steady, and any area may be highlighted extra bright.

Screen

The screen is divided into two sections. The top section – normally the first 22 lines – displays the program listing or the results of program or command execution. The bottom section – normally the last 2 lines – shows the command or program line currently being entered, or the program line currently being edited. It also shows the report messages. Full editing facilities of cursor left, cursor right, insert and delete (with auto-repeat facility) are available over this line. The bottom section will expand to accept a current line of up to 22 lines.

Mathematical operations and functions

Arithmetic operations of +, -, X, ÷, and raise to a power. Mathematical functions of sine, cosine, tangent and their inverses; natural logs and exponentials; sign function, absolute value function, and integer function; square root function, random number generator, and pi.

Numbers are stored as five bytes of floating point binary – giving a range of $+3 \times 10^{-39}$ to $+7 \times 10^{38}$ accurate to $9\frac{1}{2}$ decimal digits.

Binary numbers may be entered directly with the BIN function. =, >, <, >=, <= and <> may be used to compare string or arithmetic values or variables to yield 0 (false) or 1 (true). Logical operators AND, OR and NOT yield boolean results but will accept 0 (false) and any number (true).

User-definable functions are defined using DEF FN, and called using FN. They may take up to 26 numeric and 26 string arguments, and may yield string or numeric results.

There is a full DATA mechanism, using the commands READ, DATA and RESTORE.

A real-time clock is obtainable.

String operations and functions

Strings can be concatenated with +. String variables or values may be compared with =, >, <, >=, <=, <> to give boolean results. String functions are VAL, VAL\$, STR\$ and LEN. CHR\$ and CODE convert numbers to characters and vice versa, using the ASCII code.

A very powerful string slicing mechanism exists, using the form a\$(x TO y).

Variable names

Numeric – any string starting with a letter (upper and lower case are not distinguished between, and spaces are ignored).

String – A\$ to Z\$.

FOR-NEXT loops – A-Z.

Numeric arrays – A-Z.

String arrays – A\$ to Z\$.

Simple variables and arrays with the same name are allowed and distinguished between.

Arrays

Arrays may be multi-dimensional, with subscripts starting at 1. String arrays, technically character arrays, may have their last subscript omitted, yielding a string.

Expression evaluator

A full expression evaluator is called during program execution whenever an expression, constant or variable is encountered. This allows the use of expressions as arguments to GOTO, GOSUB, etc.

It also operates on commands allowing the ZX Spectrum to operate as a calculator.

Cassette interface

The ZX Spectrum incorporates an advanced cassette interface. A tone leader is recorded before the information to overcome the automatic recording level fluctuations of some tape recorders, and a Schmitt trigger is used to remove noise on playback.

All saved information is started with a header containing information as to its type, title, length and address information. Program, screens, blocks of memory, string and character arrays may all be saved separately.

Programs, blocks of memory and arrays may be verified after saving to confirm successful saving.

Programs and arrays may be merged from tape to combine them with the existing contents of memory. Where two line numbers or variables names coincide, the old one is overwritten.

Programs may be saved with a line number, where execution will start immediately on loading.

The cassette interface runs at 1500 baud, through two 3.5 mm jack plugs.

Expansion port

This has the full data, address and control busses from the Z80A, and is used to interface to the ZX Printer, the RS232 and NET interfaces and the ZX Microdrives.

IN and OUT commands give the I/O port equivalents of PEEK and POKE.

ZX81 compatibility

ZX81 BASIC is essentially a subset of ZX Spectrum BASIC. The differences are as follows.

FAST and SLOW: the ZX Spectrum operates at the speed of the ZX81 in FAST mode with the steady display of SLOW mode, and does not include these commands.

SCROLL: the ZX Spectrum scrolls automatically, asking the operator "scroll?" every time a screen is filled.

UNPLOT: the ZX Spectrum can unplot a pixel using PLOT OVER, and thus achieves unplot.

Character set: the ZX Spectrum uses the ASCII character set, as opposed to the ZX81 non-standard set.

ZX81 programs may be typed into the ZX Spectrum with very little change, but may of course now be considerably improved. The ZX Spectrum is fully compatible with the ZX Printer, which can now print out a full upper and lower case character set, and the high resolution graphics; using LLIST, LPRINT and COPY. ZX81 software cassettes and the ZX 16K RAM pack will not operate with the ZX Spectrum.

Sinclair ZX Spectrum

NOT A BUG

Concerning the "Spectrum Bugs" in the October *Your Computer* letter from Mr Dixon. He says that

CLS : PRINT CHR\$ 8; "X"

produces two black squares. If he reads his manual the instruction CHR\$ 8 means back space. Back spacing at the beginning of a line means moving into the address held for Newline. This corrupts the display file.

Secondly, when asked by the program Scroll?, normally one is expected to reply Yes or No, not with a Caps Shift. It is like saying my motor car has a bug, because although the road turns to the left I turn the wheel to the right and I do not make it round the corner!

I have found the Spectrum to be a good machine for its price.

B G Cornhill,
Aylesbury,
Buckinghamshire.

LOSS OF FAITH

It seems simple enough:—"Number on waiting list/weekly production = time in week of despatch". How, then, is it possible that the pioneer of the electronic calculator is unable to provide sensible delivery dates for the Spectrum?

My own order, after more than 16 weeks, is now cancelled. A telephone query after 14 weeks elicited "Any time now". After 15 weeks, I was back to "About another three weeks". After nearly 17 weeks, I was still at "2 to 3 weeks".

Like Mr Bloxham — *Your Computer*, October — I elected to order the Spectrum because of the expected Microdrive; also the wish to retain the use of my ZX Printer. Unlike Mr Bloxham, I do not believe in Sinclair any more, and the thought of going through the same hassle when the Microdrive is launched is too much.

Your leader postulating the possible decline of the British computer industry — in the same issue — is unfortunately both accurate and timely.

E R Keavy,
Pulborough,
West Sussex.

HANDICAP AID

We are a Cheshire Home for the physically handicapped and are building a library of programs for disabled computer users. We already have a number of Apple, Pet and TRS-80 programs. All of these programs will become available to anyone sending a stamped addressed envelope to the address below.

Most of the programs we have are operated using a two-switch system. For example: with the Apple we use the two switches on the games paddles. These switches can be used to mean anything from Yes/No to selecting from a menu where a

flashing cursor scans from item to item and you press one button when the cursor is over the item you have selected. The other button can be used to correct errors or Escape.

If a scanning system is used the speed of scanning must be selectable.

Where possible one button should be available to Gosub to a scanning Help menu.

Any program you write must be easy for you to operate. Try it out on one or two friends first.

We would like to see any programs from adventure to chess, from databases to educational. The scope is unlimited, but please bear in mind that many handicapped operators have restricted vision and the display needs to be extremely clear.

If you have any programs to add to our Library or want a catalogue of the programs we have to date, or would like some further guidelines on how to write programs for the handicapped, please write, enclosing a stamped addressed envelope, to:

Robin Nixon,
Seven Springs Cheshire Home,
Pembury Road,
Tunbridge Wells,
Kent TN2 4NB.

WORD PUZZLES

I particularly liked the Word Puzzles program by Chris Callender on page 94 of your October issue. It has many educational applications. However there were a few errors in the program.

The following lines should be inserted to get it to run correctly:

43 SCROLL
45 PRINT T
75 SCROLL

it is also enhanced if line 530 reads

PRINT T\$, "FIND THE FOLLOWING
HIDDEN WORDS"

Missing from line 620 is -1 which should appear as shown here:
620 IF S\$(A)<>" THEN PRINT AT INT
(A/16), A - 16*INT (A-16) - 1;
CHR\$(CODE S\$(A) + 128)

The program also takes an interminable time to produce its letter grid. This can be speeded up considerably by adding the following lines.

185 FAST
585 SLOW

J Bourne,
Bexhill on Sea,
Sussex.

THE REAL STORY

I think it's about time you got the record straight. Contrary to popular belief, the BBC Model A can have eight colours on the screen at once. This is proved by the following program:

1 MODE 7: FOR I = 129 TO 135
10 PRINT CHR\$(I); "Your Computer":
Next

In the new almost-legendary Sinclair pamphlet, there is a table showing a list of computers and their specifications. This has to be the

most biased and untrue table of all time. It states that the BBC can only have up to 32K RAM. This is not true. It can have 96K RAM via a second processor.

It states that the Vic and BBC do not have user-definable graphics; they do. The Vic can also have high-res graphics via a software routine. The BBC does have merge and verify facilities, which are under different names to the Spectrum.

The pamphlet does not state that the BBC has a built-in assembler, ROM expandable to 256K, a Plot command with 43 different functions, high-res graphics with 163,840 different points, a Pling command, and a microprocessor running up to five times the speed of the Spectrum.

J V Price,
Chorley,
Lancashire.

ZX-81 START

I have a 16K RAM ZX-81 and I have found the starting and finishing addresses for the screen. They are:

START 49340
FINISH 50066

Poke 49340, 38 would be the same as

PRINT AT 0, 0; "A"

Patrick Couser,
Berkhamstead,
Hertfordshire.

BBC FACTS

In Tim Langdell's article concerning the use of control keys on the BBC computer he says that where a VDU statement takes several bytes after it, the control version does not produce readily predictable results. It is not as bad as his article suggests. Consider his example, VDU19,1,4,0,0,0 which changes logical colour 1 to show blue. First the CTRL solution, then the understanding.

Get something on the screen using logical colour 1. For example:

MODE4:COLOUR1 return
PRINT "This is logical colour 1" return

Now holding CTRL down while all of the next six keys are pressed, type SAD@@@. Nothing will appear on the screen, but as soon as the third @ is pressed the colour change takes place.

To know what to press after the first letter, use the left-hand two columns of figure 1 in the article: CTRL A has generated the 1, CTRL D the 4, the CTRL@, the 0.

Now the understanding. It will be helpful to find the diagram for keyboard codes on page 497 of the new manual and to type each of the following statements:

PRINT "01AB"
PRINT CHR\$(48);CHR\$(49);CHR\$(65);
CHR\$(66)
VDU 48,49,65,66
PRINT CHR\$(830);CHR\$(831);
CHR\$(841);CHR\$(842)
VDU 830,831,841,842

Compare these hexadecimal codes with those in the keyboard code diagram. All these have the same

screen effect as typing 01AB — with-out return — on the keyboard.

The reason is that whatever code is produced by the keyboard, it is sent to the VDU drivers. Codes 32(&20) to 126(&7E) cause the ASCII characters to be displayed. Codes 0(&0) to 31(&1F) are interpreted as control codes. However, if a control code needing extra bytes has just been received then the next keyboard codes received will be treated as the data bytes rather than their usual meaning.

CTRL S, 1, 2, of the article, then, is equivalent to VDU 19,44,49,44,50,44 — that is VDU &13,&2C,&31,&2C,&32,&2C. No wonder the VDU driver is confused and not producing readily predictable results! Notice the commas — code 44 — are treated as data, and those dummy zeros for later expansions are now far from 0.

What we needed was to create data of 1,2,0,0 and 0. Looking at the keyboard codes shows CTRL A creates 1, CTRL B creates 2 and CTRL @ creates 0. Because CTRL S always has five data bytes, the VDU driver knows to treat the CTRL A etc. as data — rather than the usual printer meanings.

For VDU statements with no data, Tim is correct, the CTRL equivalent is quick and easy; for VDU statements where data is always below 31, the left-hand two columns of figure 1 of the article enables predictable results with little effort; where data can go beyond 31, the keyboard code diagram — or the ASCII tables before it — and a knowledge of hexadecimal is needed: for data larger than 127, life can be even more difficult, though later operating systems allow Shift-Function, CTRL-Function, and Shift-CTRL-Function combinations to create whatever codes you like — see *FX225 to *FX229; page 439.

The principal advantage of these is for getting teletext control codes — ASCII 128 to 159 — input directly from the keyboard without wasting *Key definitions, rather than Print and Copy required by OS 0.1 users.

Finally, a couple of other points. Remember when defining a function key, the split vertical line preceding a capital letter indicates a CTRL code, so |B is "enable the printer". To get a teletext code use the fact that |! adds 128 to the next code so |!B is code 128+2=130, that is, "use green letters".

Codes 0 to 31 cannot generate user-defined graphics characters, but Acorn has used the syntax for re-defining character 0 to give the user access to the registers in the CRT — typical Acorn design philosophy — permitting custom-built modes, paged screens and more — see *BBC Micro Revealed* by Jeremy Ruston for more details.

P K Chilvers,
Milton Keynes,
Buckinghamshire.

Christmas tidings cheer those micro Scrooges

PLUMMETING HARDWARE prices are a phenomenon of the micro market. *Your Computer* checked out just how cheaply you could buy a home computer this Christmas. All prices include VAT.

The Texas TI-99/4 is an extreme example. In 1980 it cost £750 — today it can be obtained for £150 under a cash-back scheme. Apart from its 16-bit processor and typewriter keyboard, the Texas has much in common with the Atari 400: both have 16K, three-tone sound, 16 colours, sprite graphics and plug-in software. The 400 is now £200. By shopping around you could find a 3.5K Vic-20 for less than £140 rather than £200 earlier in the year. Even Mettoy's 32K, 9-colour Dragon 32 costs £180 from some



stores, instead of the £200 official price. The 16K Colour Genie is still £200.

Multitech's MPF II Apple-impersonator costs £270 for 64K. Also chiming in at 64K is the £350 Commodore 64 although delivery before Christmas could not be guaranteed. Computers' £225 Lynx which has 48K and will be capable of running CP/M will also be available in numbers in the new year as will the £100 16K Oric, one of the first machines to break the £100 colour and sound barrier. Sanyo's PHC-25 20K Spectrum basher is unlikely to be in the stores until February, while the Spectrum itself is still good value at £125 for 16K or £175 for 48K.

If you still see the world in black and white, Jupiter's monochrome Ace runs fast as a purpose-built Forth machine for £90, and of course the ZX-81 now costs £50 made-up or £40 as a kit for a truly basic approach to programming.

Cunning Lynx avoids mail-order snares

YOU WILL NOT have to wait much longer for the Lynx. Sales Director Riva Gould is confident that at least 1,000 computer enthusiasts will wake up on Christmas morning to find Computers' new £225 machine in their stockings. This is just as well because Dick Greenwood, Computers' General Director describes the Lynx as "a modern-day train set plus the Encyclopaedia Britannica." Just the thing for Christmas.

So far Computers has resisted the temptation to sell the machine by mail order, partly because of the bad reputation that computer mail order has for late deliveries. The Lynx will go on sale in selected High Street stores later this month. In the spring Computers will make available disc drives and CP/M for owners who want to upgrade their machines so that they can run packages like VisiCalc. Greenwood envisages owners building up to a complete system of computer, printer, disc drive, light pen, modem, and software for around £1,000 all told.

Rather than using a Microsoft Basic, Computers used a custom-built language by Davis Jansons. Jansons modestly describes his creation as "maybe not the best in the world" and points out its shortcomings. "It does not scroll and



it has no string arrays." On the other hand Davis Jansons is confident that the ease with which his language can be adapted to the needs of particular users, the machine-code monitor, and what he describes as "maths overkill" makes the Basic more useful than on any comparable machine. He is also working on an extended Basic and a Forth, which will be available for the Lynx from the Spring.

Love on a hot ZX-81

LOVE ON A ZX-81 sounds quite uncomfortable, but this Love is an adventure game with a difference for machines with the 16K RAM pack. It is written by women for women. Remsoft, the distributors, maintain it will take men a while to get the hang of it.

The scene is set at a country house in Devon where you encounter Tom, your lifelong heart-throb. The game proceeds on the basis of your emotional response to people and situations. The authors say they have written Love for people who are more interested in playing than winning. It is available at £5.95 post paid from Remsoft, 18 George St, Brighton BN2 1RH. Telephone 0273 602354.

Now Forth speakers will be able to consult the Oric in their own tongue

ORIC EXPECTS to break the £100 colour and sound barrier this month by delivering 1,000 16K machines before Santa gets his boots on.

Demand has greatly exceeded Oric Products' expectations.

Plans to sell 50,000 units in the first year have been redrafted after receiving orders for 30,000 in the first two months.

Cynics might expect this to produce Sinclair-style delivery delays but Steven Mountford, Oric's U.K. sales manager says "We are going to be very careful not to oversell".

Prospective buyers will be encouraged by Oric's latest language packages, Forth and Extended Basic. Forth will be offered free on cassette with every 48K Oric. It loads into RAM and takes up around 10K.

The Extended Basic comes in a ROM chip which will replace the existing Basic. It will be launched in January together with the modem and the free telesoftware service and will cost £34.50.

Peter Halford who has written the new Basic says that it is at least as powerful as BBC Basic. Like David Simons who has written Simons Basic for the Commodore 64, he has included all the commands found in other Basics plus some extra features such as a built-in assembler and

disassembler. Full information from Oric Products International, Cosworth Park, London Road, Ascot. Telephone 0990 27641.

Wait for it — here comes the Microdrive

THE GOOD NEWS is that Spectrum delays are shrinking to reasonable limits, the bad news is that now you will have to wait even longer for the Microdrive. Despite repeated announcements that the Microdrive and RS-232 board for the Spectrum would be available by the end of this year, they are now unlikely to be launched before February 1983. The arrival of the first Spectrum Prestel adaptor of Spring is now not expected until the middle of 1983.

This news may confirm the view of some people that Sinclair Research operate on a different time scale from the rest of us. In Sinclair Time 28 days can embrace a period stretching from one to three or even four months.

Sinclair has recently been rapped on the knuckles by the Advertising



Standards Authority for consistently failing to deliver Spectrums within the advertised 28-day limit. The ASA was inundated with an unprecedented number of letters complaining about delays.

YOUR COMPUTER TOP 10

Game	Machine	Company
■ Flight Simulation	ZX-81	Psion
■ 3D Defender	ZX-81	JK Greye
■ Gulp 2	ZX-81	Campbell Systems
■ Orbiter	Spectrum	Silversoft
■ Meteor Storm	Spectrum	Quicksilver
■ Vic Panic	Vic-20	Bug-Byte
■ Amok	Vic-20	Audiogenic
■ Planetoids	BBC	Acornsoft
■ Defender	Atari	Atari
■ Ghost Attack	Dragon	Dragon

Artic has cracked it

RICHARD TURNER of Artic gives a wry smile if you try to make him give away the secret of Krakit — the Toronto based £10,000 competition which has caught the imagination of Sinclair computer riddlers in Britain and America.

The puzzle consists of 12 riddles, each of which contains the name of a country, a date, and a city. Richard Turner gives an example of how the riddles work.

"Look up 'Tour'. When was it first seen? No rhyme for hour but a rhyme for dance." The rhyme for dance is France, the 'Tour' is the Eiffel Tower in Paris and it was first seen when it was constructed — in 1889.

At £10.00 a copy, whoever wins, Richard Turner of Artic — which is distributing Krakit — is not going to lose.

Sharp sends PC-1251 to front line but keeps MZ-700 in reserve

SHARP PLANS to sell 250,000 a year of the new MZ-700 home computer launched this month in Japan. Sharp intends selling the MZ-700 worldwide but no date has been set for the 64K RAM colour computer's British launch yet. The price is unlikely to be as low as the £180 quoted in Japan where an optional colour plotter/printer costs £100.

Meanwhile in Britain Sharp is launching a new range of pocket computers distinguished by an optional integrated printer and microcassette recorder. The PC-1251 features an 8-bit CMOS CPU, 4K RAM and extended Basic for around £80. What makes the PC-1251 more interesting than most pocket computers though is the CE-125 printer and microcassette recorder which transforms it into an



low-power lost-cost rival to the Epson portable computer. The

whole unit is only 8in. wide, 6in. deep and 1in. high.

First glimpse of Acorn's Electron — the 32K £150 Spectrum rival

ACORN'S EAGERLY AWAITED Electron has joined the select band of micro-computers which are already late before they are even officially launched.

Until last month Acorn was still confident that the 32K Spectrum basher with full BBC graphics capabilities would be on sale before Christmas. Now the familiar ULA problems which have haunted Acorn in the past are again holding up production of the £150 Electron.

Acorn hopes to launch the machine early in the new year but if it becomes necessary to update the specification — for instance the single-channel sound capability or



the relatively slow processor, further delays cannot be ruled out. The cream-coloured machine has a real typewriter keyboard and measures 13in. wide, 6in. deep, and 2in. high.

Chart-topping software makes games hit parade

AS THE SOFTWARE industry becomes more like the music business — complete with album covers for cassettes, *Your Computer* publishes its first Top 10, in no particular order based on sales from shops and manufacturers all over Britain.

Top of the list for the ZX-81 are Psion's Flight Simulation, JK Greye's 3D Defender and Monster Maze, Trader from Pixel, and Campbell System's Gulp 2. Adventure games are steady sellers, in particular those from Artic and Phipps. Former high-flier Mazogs from Bugbyte is said to be slipping down while DJL's Frogger is tipped for a place in next month's top five.

In the Spectrum range chart leaders are Bug-Byte's Spectral Invaders, Silversoft's Orbiter and the Quicksilver games, Meteor Storm

and Space Invader. New entry, Escape from New Generation Software looks promising. Also selling well are Chromasoft's Adventure 1 and Startrek from Abersoft.


Top of the Vic-20 stakes were Vic Panic, Cosmiads and Another Vic in the Wall from Bug-Byte, and Bonzo and Amok from Audiogenic. Also selling well was Commodore's Blitz.

Dragon software is thin on the ground at the moment although Dragon's own programs, Ghost Attack and Berserk are moving up the charts. On the BBC front Acornsoft's programs are still the most popular especially Snapper, Planetoids and Monsters. Defender is taking over from Pac-Man as Atari's topper seller.

Stay with us next month for a new top 20 survey.

New ROMs for old is a common cry in computing. This Aszmic chip replaces the ZX-81/80's Basic ROM inside the case. Comprosys claims it turns the ZX-81 into an Assembly Language Program Station. As well as a Z-80 assembler it supplies many other features, including an extensive screen editor, file handling system, and 255 by 144 graphics resolution.

Capital Computers, Comprosys agent in this country, is developing a board which will take both the Aszmic and Basic ROMs and allow switching with a comprehensive manual from Capital Computers, 1 Branch Road, Park St, St. Albans AL1 4RJ. Telephone 0727 72917.

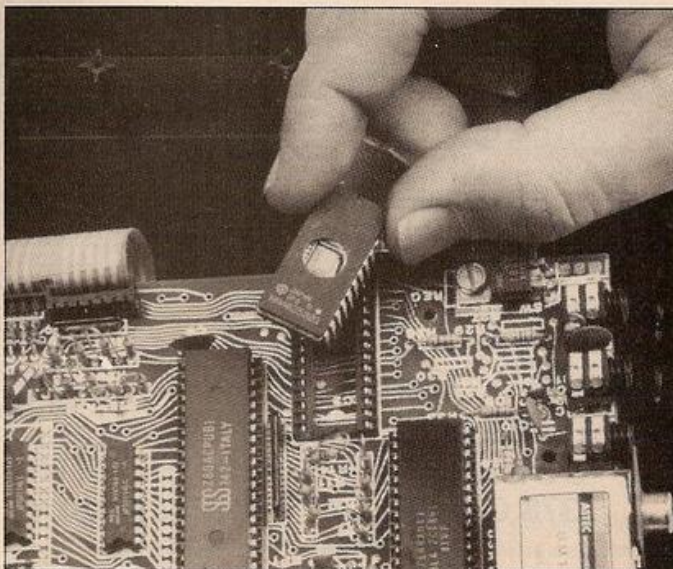

COBRA TECHNOLOGY LTD.



THE CHEAPEST INTERFACES ON THE MARKET RS232C INTERFACE

At last a high quality 232C interface to allow you to connect your ZX81 to any 232C printer.

Look at these features:

- * Baud rate variable by software control
- * Upper and lower case printout
- * Up to 120 characters per line
- * Small and compact — fits on to the back of your ZX like a RAM pack
- * Uses the ZXJ power supply
- * Output via a small 3 pin jack.

CENTRONICS INTERFACE

Connects your ZX to any Centronics printer. Has similar features to the 232C interface — one exception is that output is via a 24 way socket. Both these interfaces offered at only **£29.90** each (inclusive of VAT)



MOTHER BOARDS

At last, inexpensive high quality mother boards at a price everyone can afford.

	ZX81	Spectrum
2 socket	£10.50	£12.00
3 socket	£12.00	£14.00
4 socket	£14.00	£16.00
5 socket	£16.00	£18.00

FLEXIBLE RIBBONS AND LEADS

Flexible Ribbon Connector
Printer to Cobra 232 Interface lead

£8.75
£8.75

Unit/Code	No	Price	Total

(P&P free on orders over £3)

£

Please send SAE for brochure

COBRA TECHNOLOGY LIMITED
378 Caledonian Road, Islington,
London N1 1DY.

COBRA 1000

THE COMPLETE BUSINESS SYSTEM FOR THE ZX81

High quality computer system which allows you to expand your Sinclair ZX81 into a powerful and efficient computer for the small business.

- * Accommodates a full range of business hardware
- * Capacity for up to 9-12 boards
- * PCB slide guide systems ensure total stability
- * All add-on hardware comes complete with leads and sockets — no soldering or drilling necessary
- * Durable, lightweight metal case
- * Fully professional keyboard — with space bar
- * Mother board provided free


£71.30 inclusive of VAT

MICRO E.

SMALLER BROTHER OF THE COBRA 1000

Up to 6 boards may be connected inside this case. Same high quality keyboard fitted in smart plastic case. Connects to your ZX printed circuit board in minutes — no drilling or soldering necessary.

£36.50 inclusive of VAT

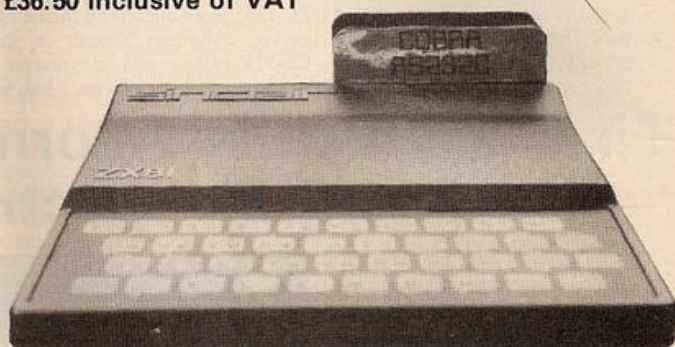

COBRA POWER SUPPLY BUFFER

Ever had hours of programming work lost in a moment owing to fluctuations in power or accidental switching of the wrong mains plug?

The Cobra Power Supply Buffer prevents such occurrences.

It is fitted between the Sinclair power supply and the ZX81. During any loss of power to the ZX the buffer will continue to supply 9 volts to the computer for up to half an hour (with a fully charged battery). The unit will recharge itself during normal power conditions. When a mains loss situation occurs, a red light emitting diode will warn the user of loss of electricity supply.

£12.50 inclusive of VAT

COMING SOON!

Watch this space
for details of the
Spectrum Microdrive
interface for the
2x 81 and others



COMPUTER CLUB

Computer Club is here to encourage you to start your own local computer club or, if one already exists, to join it and become involved. We would like to hear of anything which has made your club a success, or of any projects or programs you are developing.

THE READING CONNECTION

Simon Beesley finds the missing link between simple Sinclairs and the mighty Cray 1, at the Thames Valley Computer Club.



CAMBRIDGE MAY BE the hub of the micro-computer world but the Thames Valley has claim to be England's Silicon and Software Valley for mainframe and minicomputers. Scattered around Reading and Bracknell are many of the leading computer manufacturers.

This concentration is reflected in the membership of the Thames Valley Computer Club. Tim Moore, club chairman, estimated that almost 85 percent of the members work in the computer industry.

The club meets upstairs at the Griffin,

Caversham, just a few yards from the Thames itself.

As the members powered upstairs at 7.30pm, pints in hand, *Your Computer's* representative was impressed by a turnout of at least 50 people. The club can be said to be in the heavy-weight division of computer clubs. Meetings are very well organised.

They start with RAM time — a random access session in which anyone can offer or request information or advice. On the evening *Your Computer* visited the club a newcomer

asked if there were any other Sharp owners — there were — while someone else mentioned that he had been offered a job lot of "really rather sexy" Pericom terminals, going cheap.

Following RAM time Dr Ron Mount gave an entertaining talk entitled "WB-1 to Cray 2½". The WB-1 — the Weeny Bitter One — was a home-brewed computer Dr Mount built with the ACC way back in 1975. His theme was that improvements in computing power were largely a matter of clever technique rather than new technology. From the WB-1 via the PDP-11 to array processors, he showed their hardware architecture to be recognisably similar and the technology almost the same. Yet while the WB-1 could perform 100,000 operations per second and the latest PDP-11s a million instructions a second — matched by some micros — array processors can handle up to 12 million a second.

Dr Mount finished by describing the Cray-1 which performs 167 million operations a second.

As many people attend the club's Special Interest Groups as their main meeting. These meet elsewhere on other days and include groups for the Z-80 and the 6502 processors. The Z-80 group has been working on a cassette interface to enable programs to be passed between different machines like the Nascom and TRS-80.

There is also a basic Basic group for beginners. Details from Phil Warn on Reading 594874 or Roger Bird on Newbury 43855. ■

Local society news

ZX-Aid Walsall

ZX-81 AND Spectrum owners are invited to attend the meetings of ZX-Aid, a Sinclair users' club which meets on the first and third Thursdays of the month in a local church hall. Plans are afoot to for competitions, machine-code courses and hardware projects. Telephone Conrad Roe on Walsall 25465 after 6pm for details.

Bangor and District

BANGOR and District Microcomputer Users' Group meets fortnightly at the Bangor Community Centre, High Street, Bangor. Details from Dilwyn Jones, Fodol Farm, Hafod Lane, Bangor.

Micros in Perth

THE PERTH and District Amateur Computer Society has been formed recently and meets on the third Tuesday of each month at Hunters' Lodge Motel, Bankfoot. Meetings start at 7.30pm and include a talk or demonstration. Contact Alastair MacPherson on 0738-29633 for more information.

West Midlands group

THE WEST Midlands Computer Group was set up in August this year and has already produced two issues of their magazine, *Data-bus*. They will be holding monthly meetings in Birmingham. Details from Steve Walker on 021-422 7405.

HOW TO GROW UP TO A REAL COMPUTER



SEES AT
5th
ZX MICROFAIR
DECEMBER 1983
NEW HORTICULTURAL HALL, LONDON SW1

If you're enthusiastic about microcomputing, sooner or later you'll ask yourself the question... "where do I go from here?"

How BASICARE build into a complete computing package.



This is particularly true if you own a micro with limited expansion and hardware peripheral options... like the ZX81.

Now your question can be answered in three short words:

BASICARE MICRO SYSTEMS

BASICARE are the inventors, developers and manufacturers of a totally unique microcomputing upgrade system.

It's the sort of system others have dreamed about... a series of separate modules that

perform a whole range of microcomputing functions that simply (and firmly) stack together.

If you're confused... don't be... you only have to think of it in terms of the way Hi-Fi equipment has evolved.

You buy the hardware you want and add to the system! Each module may have a separate function or integrate functions. And when you want more... you add more!

In short you can develop a whole range of hardware options that fit together to form a complete package... "Computing" in the real sense of the word!

And what a package!

Apart from its good looks and stability under working conditions, BASICARE MICRO SYSTEMS offers a fantastic range of micro options for ZX81 users.

Of course, such a system needs a starting point from which to expand. The heart of BASICARE'S system is a unique computer interface which we call PERSONA.

This one unit simply plugs into your ZX81 without modification and acts as the "brains" of the whole operation.

Thereafter you choose how you want to expand your micro by simply plugging-in more modules.

Look at the choice you have:

PERSONA — An interface module to enable an ORGANIC MICRO to grow on the ZX81.

MINIMAP — A memory mapping device to extend the address space of the ZX81 from 64K bytes to 1M bytes.

RAM 08 — A low cost, low power memory expandable from 2K to 8K.

RAM 16 — 16K Add on memory at remarkably low cost.

RAM 64 — A TRUE 64K Add on memory.

DROM — Ultra low power memory backed by rechargeable battery for non-volatile storage of programs and data.

TOOLKIT — A module fully socketed to take up to 8K bytes of utilities in EPROM/ROM.

PERICON a — A general purpose, user programmable device providing 24 lines of input/output.

PERICON b — 24 lines of heavy duty output to access and control the outside world.

PERICON c — A module to drive 80 column printer with Centronics type parallel interface.

USERFONT option — User definable characters available for RAM 08, DROM and TOOLKIT.

Of course, there's lots more BASICARE Modules under development including joysticks, EPROM Programmer, Floppy Disc Controller and much more.

BASICARE is the sort of system that GROWS when you grow... and remember, when you change your micro, you will be able to change to a PERSONA unit to suit your new equipment!

In short, BASICARE will serve you forever... no matter how big you want to grow!

"As space is limited to describe BASICARE products, we have produced a fully documented brochure... send for it today (enclosing stamp please)."



BASICARE MICRO SYSTEMS are available by mail simply by sending today together with cheque/PO/Access or Barclaycard No. Please indicate clearly your exact requirements.

Name: _____

Address: _____

PERSONA @ £30.25	DROM(2K) @ £39.50
MINIMAP @ £35.95	TOOLKIT @ £22.20
RAMB(2K) @ £24.50	PERICON A @ £27.90
RAM16 @ £26.75	PERICON B @ £33.75
RAM64 @ £76.25	PERICON C @ £41.75

Options: USERFONT @ £8.00

Add 2K for RAMB @ £6.50, Add 2K for DROM @ £7.50

All prices include VAT, postage and packing in the U.K. (Overseas allow at least 15% for surface mail).

Post today to: BASICARE MICROSYSTEMS LTD., Dept Y2
5 Dryden Court, London SE11 4NH or Phone: 01-735 6408.



**BASICARE
MICRO
SYSTEM**

FLEXIDISC



Three games are included on this month's *Your Computer* flexidisc, one for the ZX-81, one for the Spectrum and one for the Vic-20. Bill Bennett keeps you on the right tracks.

THE FEEDBACK we received after the first *Your Computer* flexidiscs revealed two facts. First, we discovered that you wanted us to provide software for a wider variety of microcomputer. We regret that it is just not possible to provide a disc for every machine on the market, but our latest disc does cater for three of the most popular home computers, the ZX-81, Spectrum and Vic-20.

The second revelation concerned people who could not get the first flexidisc to load: often they had not read the instructions. Some

had even played the record upside down. This, then, is the first point to check. The software is recorded on the other side of the disc to the writing — so turn the disc over.

Make sure you select the right track for your computer. The first, and longest track is the ZX-81 game. To load it, you must have a 16K RAM pack. The program lasts over six minutes and is an adventure game based on *The Hitch-hiker's Guide to the Galaxy*.

At the end of the first two tracks is a special lock-groove. This is a groove which traps the

stylus, and stops it from moving any further in towards the centre of the disc. The reason for this lock-groove is that it stops the accidental loading of the next track on the disc, which could have chaotic consequences.

To load either the second or third track, you must first position the stylus before letting the turntable move. On modern equipment, the best technique is to raise the recording arm, start the turntable and gently lower the arm into place. On older equipment try locating the stylus while holding the turntable still with your other hand.

If you decide to record to tape from the record player, rather than loading directly — the first option is the wiser — the best method is to turn the tape recorder on early. After you have recorded the software on to tape, wind it back and then listen to it. Make a note of where the actual program starts, rewind a fraction and load from there.

Having successfully loaded the program into your computer, you should once again copy it, to provide a back-up version.

The second two programs both last less than one minute. It is important that the instructions regarding locating the grooves are followed correctly, otherwise the program will not load. The Spectrum program loads in two halves, and is called *Night Racer*, the Vic program is called *Antispace 2*.

To load the Vic program, you must have the Commodore cassette unit.

Be prepared to spend some time loading the tapes; it is doubtful that you will get everything right first go.

Sleeve notes

- The disc has been cut in mono. If you can, transfer it to a mono tape recorder. If this is not possible, record on one track only of a stereo recorder by turning one channel right down.
- Ensuring that the level is right is perhaps the most difficult stage. If your equipment has VU meters, set one channel right down, and the other to a point less than zero dB.
- Remember the speed is 33 rpm.
- If you can use a mono stylus then do.
- Record the software from the disc with the same tape recorder you intend to use for loading the computer with. Sometimes recording heads on different cassette records do not actually line up, and so many

sounds do not play back exactly as recorded.

- Look at the patterns on the screen when loading to Sinclair computers. You should be able to judge if the level is too high or too low.
- It is easier to type LOAD "" on the Spectrum and ZX-81, and just LOAD on the Vic-20.
- Finally, remember that the Spectrum program runs directly from Load. Also, expect the ZX-81 screen to go blank for a while as soon as it is run. If nothing happens after a minute, Break and look at the listing. Sometimes individual bits of the program can be corrupted on loading, but these are easily debugged once the program has been loaded.

REVIEW



SORD M-5

Made in Japan, but can Sord's £100 colour and sound micro make it over here. Tim Langdell tests its mettle.

HARD ON THE HEELS of the Sanyo PHC range we reviewed in October comes this new micro from Sord — Japan's fastest growing computer manufacturer. The M-5 is a Z-80A based micro with 8K of internal ROM, 4K of user RAM, and 16K of video RAM. It can produce up to 32 different colours on the screen at once, with a variety of resolutions from 32 by 24 up to 256 by 196. All this for £100 sounds almost too good to be true.

Externally the M-5 is beautifully designed and made to the high standards expected of Japanese electronics. It measures 10.5in. wide, 7.25in. deep, and 1.5in. high, which makes it slightly bigger all round than the Spectrum. The two-tone grey plastic casing opens to reveal a bright yellow back, which houses the ROM cartridge slot.

Stable and portable

The M-5 is heavier than it looks which makes it extremely stable whilst still being very portable. The keyboard is similar to the rubber matting of the Spectrum, but feels better. The keys are dark-grey with the letters and numbers sharply contrasted in white. Graphic characters are in bright yellow on each key, and have been designed to be easily visible without making the keyboard seem too cluttered.

There are two shift keys — one on each side — and these, along with a space and return key, are all larger than the other keys on the board.

The keyboard also boasts a control key, a function key and a reset key. Looking more

closely it becomes apparent that most keys have a Basic keyword on them in small light-grey letters. These are difficult to see, which might be a problem for the first-time user but the keyboard is easy to use once learnt.

On the negative side, the keys are not placed at typewriter pitch as the Spectrum's are — but are about three-quarters typewriter size. This undoubtedly makes typing harder — although considerably easier than on the calculator-style keyboards of pocket computers. The keys also do not have very much travel, making key presses a little less positive than they might be. An automatic keyboard beep partly makes up for this, but does nothing to remedy the lack of a full-size spacebar.

The Sord M-5 has single-key entry like the Sinclair. However, this is not its usual mode of operation, and far from all the keywords it recognises are on the keys. The M-5 responds like most micros, putting the letter or number on the key on to the screen rather than a keyword with the first key press. But single-key entry is quite easy by holding down the function key as the other key is pressed. The M-5 thus offers the best of both worlds.

What is puzzling, though, is why Sord has failed to put some keywords on the keyboard. For is there but To is not. Little-used keywords such as Auto, Renumber and Call are there, but If and Then have to be typed in.

The M-5 has 32 graphics symbols in ROM which speeds up games programming particularly.

The Sord's Basic is reasonably powerful



supporting all the major keywords, as well as Read, Data and Restore, Renumber, Auto line numbering, Joy to read the joysticks, and Hex\$ which converts decimal numbers to Hex. The Basic is supplied on a ROM cartridge rather than being resident inside the machine. This has the advantage that future enhancements can be sold in the form of a new Basic cartridge, but has the disadvantage that the unit is useless without a cartridge plugged in.

The Basic is more fussy than in Sinclair or



Microsoft-based computers such as the Dragon. Syntax checking is not done until the program is Run, and the error reports are very brief and hard to understand at first. They are of the form

ERROR 2 IN LINE 1

The keywords usually need a space after them, when Sord could have made the Basic automatically put them there. Let is understood but not necessary. However, it is added when a List is pulled. If you omit a space in a crucial spot the M-5 may assume it

is dealing with a Let statement and insert Let in the program. This could be rather confusing for a beginner.

Minor criticisms aside, the Sord performed very well, being one of the fastest Z-80A-based micros I have seen in anything like this price range. The screen handling seems considerably faster than the Spectrum's for instance, and the demonstration ROM's fast-moving graphics confirmed this impression. One program showed an entire screen, full of information being smoothly scrolled at a fair

rate, and large spacecraft being moved fast and smoothly across the screen which is not easy on many computers — even in machine code.

The Sord has at least two screens which can be written to independently. Up to 32 graphic shapes or sprites can also be defined and called at will to create cartoon effects and very smooth graphic movement. The M-5 has four modes of operation in addition to the sprite mode. The sprite mode allows the super-

(continued on next page)

(continued from previous page)

imposition of screens so that one is seen through another. In this manner the demonstration program showed a constant background of Mount Fuji with the letters comprising Sord moving smoothly around the screen.

The other four modes are:

- Text-only mode with no colours and a 40 by 24 screen display, each character made up of eight by eight character squares. This mode appears to be teletext-compatible in its format but not in its availability of colour.
- Graphics 1 mode in which the screen is mapped in eight by eight pixel character squares on a 32 by 24 grid with a possible 32 colours available.
- Resolution of 64 by 48 with 16 colours available. Each character square is a four by four dot matrix.
- Graphics 2 mode in which one has full graphics with a resolution of 256 by 192 and up to 32 colours. However, only two colours are available in any given character square.

There is only 4K of internal RAM, while the memory map is labelled in the Japanese manual with most of the remaining area as extra external RAM/ROM — which implies that Sord has extension RAM cartridges in mind. Certainly other languages such as Pips, Sord's equivalent of VisiCalc, are available on ROM.

The M-5 seems well equipped for the games player with joysticks and plug-in ROM games, but also well suited to the more serious user if the memory can be expanded. It has both a television output at the rear and a video and sound output. The joysticks simply plug into tiny DIN sockets, and there is a port for a Centronics printer. The power supply is external and rather cumbersome.


The M-5's sound capabilities are better than those on, say, the Dragon or the Spectrum. The Sord has three independent sound channels which can produce a variety of music and synthesised sounds. Again the demonstration cartridge showed off by depicting three animals on screen playing tunes in three voices complete with the striking of piano keys and bowing of a violin. The sound benefits from being sent via the TV or video system rather than from an internal speaker.

The M-5 supports Inp and Out in Basic to control Z-80A ports, but has no obvious connector to the external world other than the ROM cartridge slot into which the Basic must be inserted. This makes it unlikely that it could support a disc-drive or control equipment via I/O ports unless a custom-made unit will be made available to sit in the ROM socket.



CONCLUSIONS

- For £99.99 the Sord M-5 will be a strong contender in the home computer market when it becomes available next month.
- Stylish appearance and compact design could make it look attractive on the High Street.
- Games players will be attracted by plug-in software, joysticks, and definable sprites.
- The more serious user may be attracted by a fast Basic which has many useful characteristics such as Renumber and Auto, and by the presence of a Centronics interface and video outputs.
- 4K of internal RAM is inadequate. Sord would be well advised to consider a RAM upgrade cartridge to compete with the bigger memories of the Spectrum, Oric and the other colour micros in the £100 range. ■

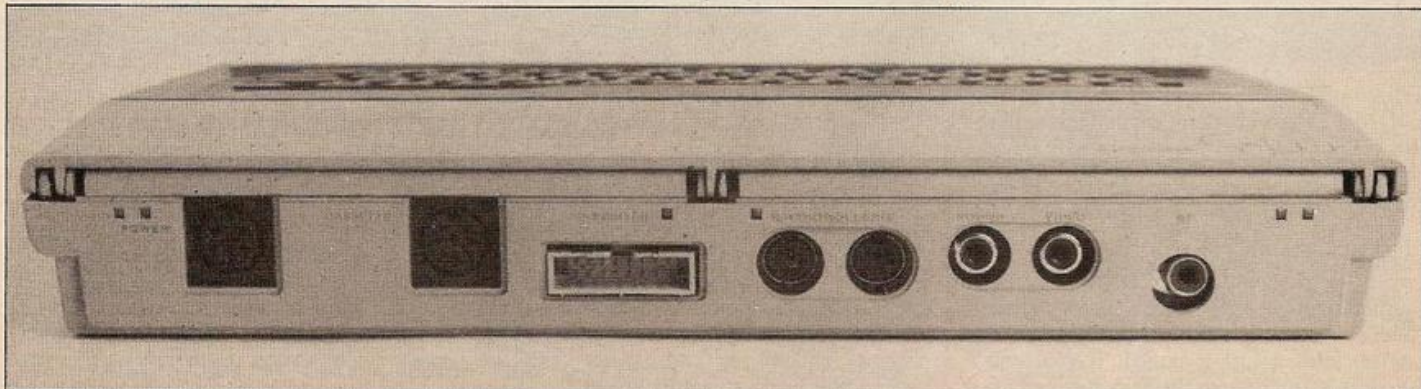

CHROMASONIC PERSONAL COMPUTERS

01-263 9493/5

48 JUNCTION RD, ARCHWAY, LONDON N19 5RD Telex 22568


*The
Home
Computer
Specialists*



DRAGON 32

- * 9 Colours
- * 32K RAM memory as standard, expandable to 64K
- * Extended Microsoft colour basic as standard
- * Typewriter Keyboard
- * 6809E CPU
- * Advance sound feature
- * 32 Columns x 16 Lines

FREE 'Basic' training manual supplied
OUR PRICE **£165**

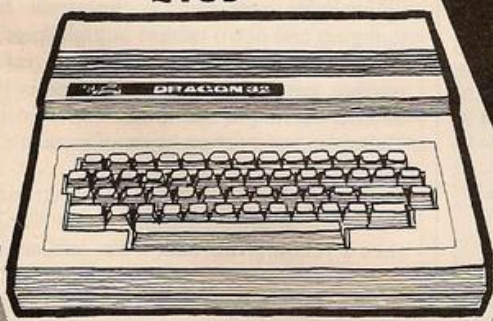

VIC20 COMPUTER


**NEW
LOW
PRICE
£129.00**



VIC PRINTER

£185.00

80 Characters per line,
30 Characters per sec.,
Tractor Feed Dot matrix
printer.



VIC SINGLE FLOPPY DISK

OUR PRICE **£249.00**
174K Byte Storage Direct
Interface to VIC Direct
Compatibility with
printer.

VIC CASSETTE DECK

£34.00

Free cassette
with
6 programs
supplied

ACCESSORIES FOR YOUR VIC20

- Super Expander High Resolution Cartridge **£27.50**
- Programmers Aid Cartridge **£27.50**
- Machine code Monitor Cartridge **£25.00**
- 8K RAM Cartridge **£34.00**
- 16K RAM Cartridge **£59.00**

TONS OF SOFTWARE


For a copy of our
VIC list containing
everything
you need for the
VIC computer,
send us
your coupon
NOW!

COLOUR GENIE

EG 2000 PAL VERSION

- * 8 colours
- * 16K RAM standard, expandable to 32K
- * Extended Microsoft colour basic standard
- * Typewriter Keyboard
- * CPU: Z80A/2.2 MHz
- * 3 Sound Channels
- * 40 Columns x 24 Lines

* Serial and Parallel I/O Ports
OUR PRICE **£173**

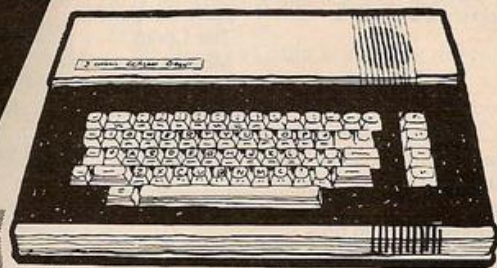

SPECIAL OFFER GENIE I OR II £249.00

Sinclair ZX81 available ex-stock **£49.95** inc. VAT.

Post to CHROMASONIC Personal Computers,
48 Junction Road, Archway,
LONDON N19 5RD

TERMS OF BUSINESS: Please add 15% VAT to all prices.
Delivery charged at Cost. Prices valid for cover date of this mag.
Access and Barclaycard orders welcome.

I am interested in a home computer.

Please send me further details

☐ VIC 20 ☐ DRAGON 32 ☐ COLOUR GENIE
☐ ADD-ONS ☐ SOFTWARE

NAME:

ADDRESS:

SURVEY VIC SOFTWARE

Neville Ash provides a yuletide round-up of all that is best in Vic-20 software

PROGRAMS FOR THE Vic come in two main types: cassettes which range in price from £5 to £10 and have the slight drawback of slower loading, or cartridges which give almost-instant loading — but can cost up to four times more than a cassette.

What about floppy discs for the Vic? They

are available at just a couple of pounds more than cassettes, so they appear the perfect choice. The only problem is the price of a Vic disc drive — around twice the price of the computer.

However, once 3in. and 3.5in. discs arrive on the market, companies like Commodore

may be forced to reduce the price of their disc drives in order to compete.

Audiogenic's games are supplied in both cartridge and cassette form and we had samples of games in each form. Three cartridges were supplied — one would not fit until pushed very hard into the slot at the back of the Vic; in fact it started to come apart. Even so its performance was not affected.

The three games supplied were Renaissance, a joystick version of the popular game Othello; Satellite, a game similar to Asteroids with excellent graphics; and Meteorite, similar to Defender but a well-implemented example of this type of game.

Audiogenic also supplied four games in cassette form. Cosmic Kamikaze, a game similar to Invader 4 — Space Invaders with mountains — is available in two versions, one for an extra 3K and the other for an extra 8K. This is a slow game that records the number of shots as you fire.

Amok is similar to Super Robots: you have to clear the space station of dangerous robots. You appear coloured purple and all the robots are green. It starts very simply, but once you reach the fourth level it is really difficult to win. Star Wars involved moving your space ship to the centre, then firing — not very challenging — and the last game — Alien — took longer to load than almost any other game and was still merely average.

Bug-Byte provided five different games in cassette form. Backgammon has three levels, with a realistic throwing of the dice, and could prove quite compulsive: good value.

Vic Panic is as good as the arcade game, going up and down ladders at high speed and digging holes. It is very effective, a real fast-moving game. Bug-Byte's Cosmiads is really another version of that tried and tested game Galaxians and as these types of game go, it is slow.







Another Vic in the Wall is yet another version of Breakout, starting with a blue wall, then a yellow/green wall, it has left and right keyboard operation and paddles. Initially it seems far too slow, but as you progress it really speeds up. Asteroids is another old friend and is a good example.

Commodore itself had recently started promoting a wide range of packages for the Vic and we obtained a wide range, including three in cassette form and five in cartridges.

All the cartridges were Adventure games: Adventureland, Pirate Cove, Mission Impossible, Voodoo Castle and the Count. Each one gives you full instructions for saving a game, as you are unlikely to finish one the first time.

More important, you are given details of mapping — a logical approach to checking your progress by producing a flow chart. Mapping saves time and lets you complete a game in a shorter amount of time.

Company	Program	Cassette	Cartridge	Extra memory	Price
Applied Systems Knowledge London House, 42 Upper Richmond Road, London SW14 8DD.	Facemaker	Yes	No	16K	£8.95
	Number Chaser	Yes	No	16K	£8.95
	Number Gulper	Yes	No	16K	£8.95
	We Want to Count	Yes	No	16K	£8.95
	Twister	Yes	No	16K	£8.95
	Rainbow Towers	Yes	No	16K	£8.95
Audiogenic Ltd, PO Box 88, Reading, Berkshire.	The Alien	Yes	No	3K	£7.99
	Amok	Yes	No	None	£6.99
	Kosmic Kamikaze	Yes	No	3K	£7.99
	Star Wars	Yes	No	None	£6.99
	Renaissance	No	Yes	None	£24.99
	Meteor Run	No	Yes	None	£24.99
Bug-Byte, 98-100 The Albany, Old Hall Street, Liverpool L3 9EP	Satellite and Meteorite	No	Yes	None	£24.99
	Asteroids	Yes	No	None	£7.00
	Another Vic in the Wall	Yes	No	None	£7.00
	Backgammon	Yes	No	3K	£7.00
	Cosmiads	Yes	No	None	£7.00
	Panic	Yes	No	None	£7.00
Commodore, 675 Ajax Avenue, Slough Trading Estate, Slough, Berkshire SL1 4BG.	English Language	Yes	No	8 or 16K	£9.99
	Mastermind	Yes	No	8 or 16K	£9.99
	— plus subject tapes	Yes	No		£1.99
	Quizmaster	Yes	No	8 or 16K	£8.00
	Adventureland	No	Yes	None	£24.95
	The Count	No	Yes	None	£24.95
	Mission Impossible	No	Yes	None	£24.95
	Pirate Cove	No	Yes	None	£24.95
Llamasoft, 49 Mount Pleasant, Tadley, Hampshire RG26 6BN.	Voodoo Castle	No	Yes	None	£24.95
	Grid Runner	Yes	No	None	£5.00
Postern, PO Box 2, Andovers Ford, Cheltenham, Gloucestershire GL54 5SW.	Siege	Yes	No	None	£6.99
	Shadowfax	Yes	No	None	£6.99
Rabbit Software, 380 Station Road, Harrow, Middlesex HA1 2DE.	Hopper	Yes	No	None	£9.99
	Myriad	Yes	No	3K	£9.99
	Nightcrawler	Yes	No	None	£9.99
	Space Phreeks	Yes	No	None	£9.99
	Space Storm	Yes	No	None	£6.99
Romik Software, 24 Church Street, Slough SL1 1PT.	Mind Twisters	Yes	No	None	£9.99
	Multisound	Yes	No	None	£9.99
	Synthesiser	Yes	No	None	£9.99
	Sea Invasion	Yes	No	None	£9.99
	Shark Attack	Yes	No	None	£9.99
	Martina Raider	Yes	No	None	£9.99

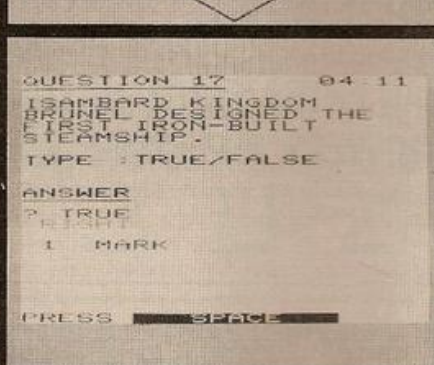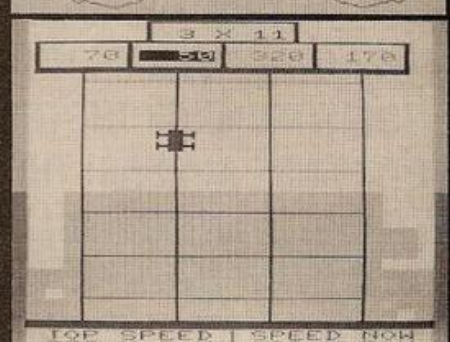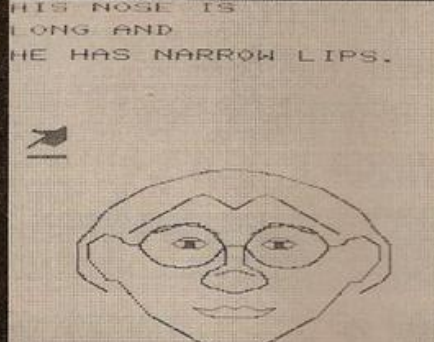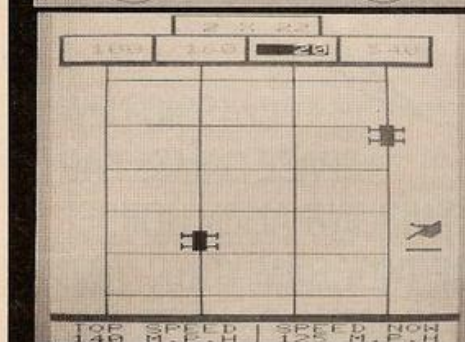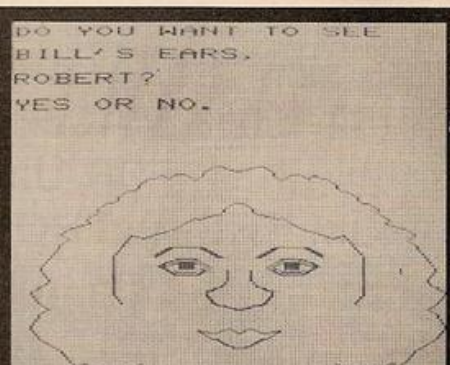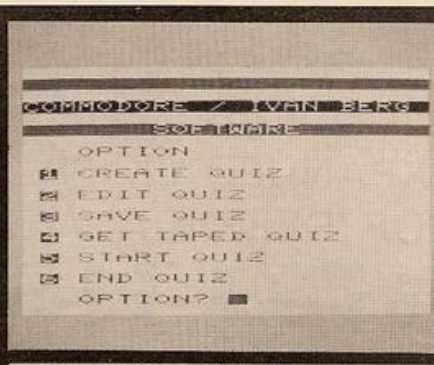

Commodore Mastermind is almost the same as the program, without Magnus Magnusson. Especially as extra cassettes are available for other specialised subjects. We were supplied with General Knowledge 4 and three specialised subjects: Sport and Games; Film and TV; Wine, Food and Music. Up to four people can play.

You first load the operating tape and start. You are asked how many players are involved, and their names and occupations — just like on TV. When they state their specialised subject, you must load the appropriate tape. After this part you repeat the process for each contestant.

The game comes complete with two cassettes, one for the operating system and the second for general knowledge questions. So if you want to play with four people, it is best to buy the extra specialised subjects cassettes which are only £1.99 each. An ideal family Christmas present.

Vic Quizmaster lets you create your own quizzes for teaching or your own entertainment. It comes complete with a data cassette demonstration and gives you a number of choices. A question with matched answer, true/false, multiple choice or if you want to create your own type of quiz just enter the last option. By creating your own quizzes this program could let you produce your own versions of Mastermind. Very good value.

English Language for the Vic, is squarely

aimed at people who are facing GCE O-Level and CSE examinations. It does its job well. There is a choice of composition, spelling, grammar, general, summary and comprehension. Further options available are a timed test, questions and answers, or answers left until the end. You are supplied with two



cassettes, the program and a data cassette. When you need to rewind the data cassette an instruction appears on the screen.

ASK stands for Applied Systems Knowledge, and this company produces a range of six tapes for learning and fun at home. Each one needs a 16K RAM pack and the loading time is clearly stated on each cassette.

Facemaker is an interactive program with three levels of difficulty. It is intended to improve spelling and vocabulary, plus sharpening up observation. You actually draw the faces on the screen and the graphics are of an

extremely high standard. Intended for 5-12 year olds, we showed it to some 10 and 12 year olds and they found it fun; they learnt too.

Number Chaser, as the name implies, improves skills that could have lapsed through the use of calculators — and micros. There are four levels. This one was also liked by the 10 and 12 year olds.

We Want to Count is aimed at the youngest audience — three-year-olds upwards and has excellent graphics with a four-part program that the children can use on their own.

Twister is a problem-solving program where a geometric puzzle must be rearranged so that no column or row contains a repeated colour. You can have from three to 10 columns and if you get stuck, there is a help facility. Once you have mastered Twister, then you can try Super Twister on the same tape.

Last of the six programs from ASK, Rainbow Towers, is a game concerning six towers, three of them with discs to be moved to the other ones. The discs are of different sizes and as they move the colours change. You must end up with each tower having a disc of a single colour arranged in a specific order.

It can be considered to be another version of the classic Towers of Hanoi, a puzzle which appears very simple in theory, but not in practice. Designed for eight-year-olds upwards; however, this game is one which would appeal to older people too.

(continued on page 33)

* NEW FROM LLAMASOFT *

2 100% MACHINE CODE ARCADE GAMES
FOR UNEXPANDED VIC-20

FROM THE AUTHOR OF 'DEFENDA' AND 'TRAXX'

ONLY
£6
EACH

GRID RUNNER

FINALLY: TRUE ARCADE QUALITY ON THE
UNEXPANDED VIC! SHOOT DOWN THE SEGMENTED
DROIDS INVADING THE GRID. BEWARE OF THE
PODS AND ZAPPERS! THE AWESOME
SPEED, SOUND AND GRAPHICS
GIVES YOU THE BEST BLAST
AVAILABLE FOR UNEXPANDED
YOU'LL GET VIC.

NEEDS
JOYSTICK

AN EXTRA STAGE ON YOUR SPACESHIP WITH DOUBLE
FIREPOWER! AWESOME 3.5K ACTION GUARANTEED!



ABDUCTOR

CLASSIC NEW
SPACE GAME! ZAP

THE SWIRLING ALIEN HORDES
BEFORE THEY RAM YOU - AND

ABDUCT YOUR HUMANIDS! SURVIVE
THE ASSAULT FOR LONG ENOUGH AND

ARCADE QUALITY SOFTWARE FROM LLAMASOFT!!

by Jeff Minter

Spectrum ATARI 400/800

VIC-20

ZX81

SPECTRUM

GRAPHICS CREATOR (16K)

NOT just another character editor! This one allows you to define not only the 21 user definable characters, but also allows you to change the entire 96 character ASCII set. Creates BYTES files ready for you to load into your own programs. Includes advanced Reflect, Invert, Field commands etc. Complete with full documentation. If you are at all serious about SPECTRUM graphics, then bin the BIN statement and use Graphics Creator with its easy on-screen cursor editing. £2.95 + 50p P&P.

BOMBER (16K)

Yes, a full feature version of the popular game 'Blitz', supplied for the 16K or 48K Spectrum. For only £2.95 + 50p P&P.

ROX III (16K)

Blast the falling meteors as they invade your planet, cruise missiles are your only defence in this world of disaster. If they break through the crust of your planet then your life support systems will fail. A very addictive game with fast action and great graphics. 16K or 48K Spectrum only £2.95 + 50p P&P.

SUPERDEFLEX (48K)

The idea of this new game is to bounce "Sid", the space invader, around the screen into the power pods, keeping away of course from the devil who chases you around the screen. Steer with your Deflex shields, but beware the mines or you may be buried alive! Superb graphics and fantastic sound on the 48K Spectrum only. Only £4.95 on cassette + 50p P&P.

VIC-20

ANDES ATTACK

Fly your ramjet fighter over the Andes mountain range and protect your llamas from kidnap by hostile UFOs. Features 5 kinds of UFO, controls include up, down, reverse, fire, thrust and smart bomb. Entirely machine code. Requires 8K expansion and joystick. £8 + 50p p&p.

TRAXX M/C 8K+ EXPANSION

This is the VIC 20 version of the brand new arcade game 'Amidar', a cross breed between the now famed 'Pacman' and the game 'Quix'. All in machine code, fast and fun with joystick controls, uses Hi-Res colour graphics. 8K or larger memory expansion needed. Only £8.00 + 50p P&P complete with instructions.

RATMAN!

Another amazing game from Llamasoft!! You are the man under attack by the deadly rats as they fall from the sky. You must dodge the arrows to get to the rats and then squash them with your hammer before they dig under the platform on which you stand, and mutate into devils. Fast action with really fun graphics to make an extremely addictive game. 8K or larger memory expansion needed. Uses Hi-Res colour graphics, in machine code. Only £5.00 + 50p P&P complete with instructions.

BREAKOUT/DEFLEX

Unexpanded package a full feature version of the popular arcade Breakout plus a new concept in computer games, Deflex!! Both programs on one cassette only £3.95.

BLITZKRIEG (3.5K)

As seen at the Commodore show and reviewed by the Daily Telegraph. Fly your Vulcan Bomber over the enemy city and destroy the buildings. 25 levels of play, uses Hi-Res colour graphics and plays Rule Britannia between waves. Only £4.95 complete with instructions.

GAME GRAPHICS EDITOR

Create your very own custom characters for the unexpanded VIC 20, up to 64 characters with facilities such as reflect and save on cassette etc.

SOFTKEY 24

This program, designed to run on the VIC 20 with any memory size gives you the facility of 24 key words on your function keys. Key words include peek, poke, run, save, list, for next etc. Both programs on one cassette only £6.00 + 50p P&P with full documentation.

ATARI 400-800

TURBOFLEX

Superb ultra-fast and totally new ball game unlike any you have seen before. Uses ATARI's unique features to the full. Incorporates superb colour/sound effects and uses Player/Missile graphics. Tables top 10 scores along with Scorer's name. £6.00 + 50p P&P.

GRAPHICS/CHARACTER CREATOR

Now you can define your very own custom character sets, or edit the existing sets. Results are fully displayed on screen in modes 0, 1, 2. Special features include reflect, invert, save character sets etc. Supplied on cassette with data sheet only £8.00 + 50p P&P.

ZX81

CENTIPEDE (16K ZX 81)

The ORIGINAL game from the ORIGINAL author. This is the identical program to that being sold by other companies for three times our price. The game has received ecstatic reviews in the computing press. Program has 30 speed levels and ever increasing Centipede hordes. Tables top 10 scores and their names. Why wait to pay more? Only £1.95 + 50p P&P.

LLAMASOFT SOFTWARE



Dept. YC4
49 Mount Pleasant
Tadley, Hants
RG26 6BN.
Tel: 07356-4478
Trade enquiries
welcome.

Please add 50p P&P with all orders

(continued from page 31)

Llamasoft provided just the one game — Gridrunner — in cassette form. The lowest-priced of all the software in this feature, Gridrunner is one of the most interesting games, being a version of Caterpillar with a red grid. You have to try to chop the caterpillar into tiny pieces until it is destroyed. A very fast game and really effective use of graphics.

Postern Software provided two games in cassette form, Siege and Shadowfax. Siege is another popular game available in similar versions on other brands of micro. The idea is to try to stop the hordes of infidels climbing up the wall of your stronghold and taking over. In this version you throw blue objects down at the increasing numbers of infidels and when you think you are winning, they increase and move faster. A good value game.


The second game from Postern, Shadowfax, is completely different from any of the games in this feature. You have two sets of horses and riders — one white, the other black — riding towards each other on a green background. A nice change from the versions of Space Invaders and Galaxians.

Rabbit Software of Harrow supplied five games on cassette and one of them stood out as being far better than most of the other games reviewed. Called Myriad, it needs an extra 3K and is one of the fastest-operating space games available. While lots of games have four, six or even ten levels, Myriad has almost 200 and a fantastic range of hazards — from ordinary bricks dropped by a builder to lethal bombs.

You can be attacked by a virus, but it takes three attacks to kill you. Dangerous reflectors send your beam back towards you, so you can wipe yourself out by mistake. On your side are shields, which last for just four and a half seconds and you get three of them for every 10,000 points — a compulsive keyboard or joystick-operated game.

Space Phrecks from Rabbit has 15 different phases before it repeats. You need to shoot down different types of alien and as you progress through the phases it becomes far more difficult.

Rabbit's Nightcrawler is a game like Centipede — a version of the one with the worm. Here you have 39 levels and you have to chop

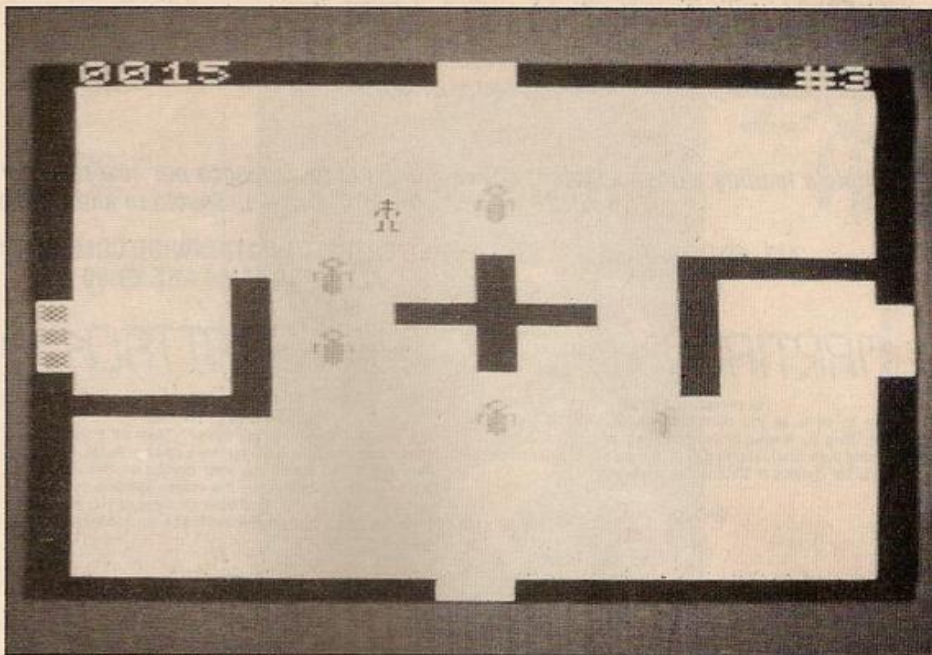

up this night crawler and destroy it. A version of Pac-Man goes across the screen at the same time to destroy it. This is a very fast game.

Hopper gives you the problem of crossing a busy motorway, then over a river full of logs running along it. You must dodge through the traffic, avoid being knocked down, then use the logs to cross the river. Another fast game.

Rabbit's Space Storm is really intended for young children. You are in space and must destroy the incoming aliens. You are given a long range view to see what will be coming towards you and if you are hit, a damage report in percentage terms is shown at the bottom of the screen. As you destroy the aliens the speed rapidly increases and you are given three lives.

Romik Software supplied five programs all designed to be used with the unexpanded Vic. Shark Attack sets you the objective of trapping the sharks before they can cause any damage. You control the net and the entire screen can be filled with nets. Your primary task is to separate each shark into its own space. The simplest way is to produce a lattice framework over the screen. Quite different from any of

the other games, but quite simple.


Sea Invasion from Romik frankly looked just like Space Invaders apart from the description on the cover of the cassette. A good example of this type of game, but nothing really different.

Martian Raiders would not load with the tape recorder and Vic I was using, so I gave it to someone else to use on their machine. Still no joy. The screen showed error 17184 plus run out of memory, but I could not see any indication of any extra memory being needed.

Mind Twisters shared the same problem as Martian Raiders. This one was also checked on another Vic, but still no luck.

Out of all the Romik tapes the best one of all must be the Music Synthesiser. Using the controls from Q to * and A to = it is possible to make music very quickly. You will be surprised how fast you can produce music for yourself.

Both Shark Attack and Martian Raiders have "Be Champion of the World" written across the packaging, so you have free entry to an exciting competition. It is a pity two of the programs would not run; however when lots of tapes are being copied you can find the odd ones that just do not copy properly.

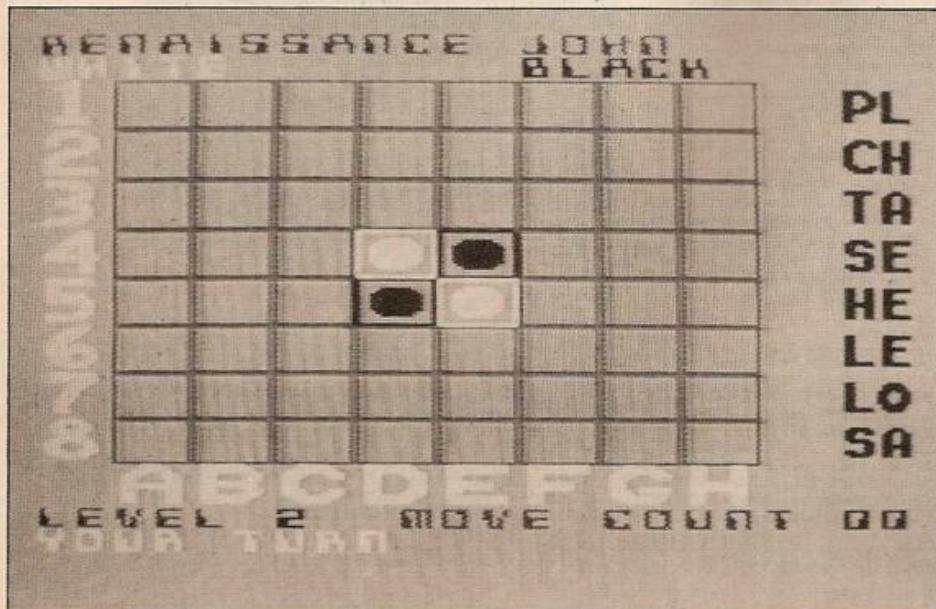

CONCLUSIONS

- Owners of the Commodore Vic-20 have one of the most popular micros in this country. Out of literally hundreds of games available we have looked at a cross-section of 39 — these span the range from Space Invaders derivatives to the thinking man's Adventure games, not forgetting the educational packages.
- Cassettes have the edge in price over cartridges: discs are almost as cheap, but it may be wise to see if the prices of disc drives fall radically as the market alters.
- Price is no indication of quality: cassettes costing £5 stood up very well against far more expensive programs.
- Beware of super graphics on the packaging, it is rare for them to look the same on the screen of your Vic.

ROMIK SOFTWARE

24 Church Street, Slough SL1 1PT. Telephone: Slough (STD 0753) 71535



**ROMIK PROMISE
A MINIMUM OF
ONE NEW GAME
EVERY MONTH**

Britain's leading games software house are proud to announce our new range of exciting games and other software for the Vic20. (Games for BBC, Dragon, Spectrum and Atari available soon.)

**ALL ACTION GAMES CARRY A FREE ENTRY TO NATIONWIDE COMPETITIONS WITH FANTASTIC PRIZES
ALL PROGRAMS ARE £9.99**

MARTIAN RAIDER

For unexpanded Vic20

Skim as close as you dare to the surface of the planet, devastating the Martian cities, destroying ammunition dumps (gaining more time), shooting down the ground-to-air missiles and UFOs, dodging or blasting the meteorites.




"A real action shot of the game"

AIR-SEA ATTACK

For expanded Vic20

You can use 3K or 16K RAM


Can you plot a modern jet fighter? Take off from your aircraft carrier and engage enemy aircraft in battle. Shoot them down and then drop your bombs on the enemy aircraft carrier. Watch out — the enemy fighter is trying to do the same! If he gets past your air defence you are left to defend your own carrier with sea-air missiles. You each have three jets.

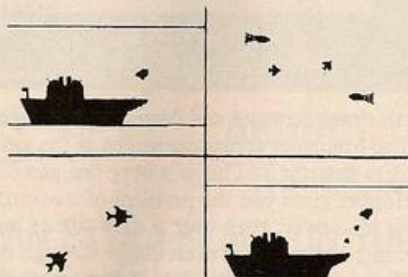

SHARK ATTACK

For unexpanded Vic20

You are in shark-infested waters after being thrown overboard from a pirate ship. Your only protection being an atomic net which you trail behind you, trying to cover all the visible ocean and ensnare the sharks at the same time. Beware of stopping or covering your tracks for too long, if you do, then the sharks will escape and come after you. Watch out for the ever increasing deadly octopi (sometimes the sharks will eat part or all of one!)

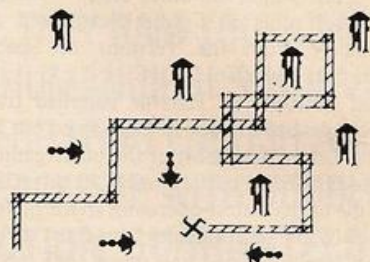

"A real action shot of the game"

MIND TWISTERS

For unexpanded Vic20

Four games to stretch your brain

Blackjack, Decipher, Four Thought and Teaser are our computerised versions of very popular home games and will test your mental agility and skill for many a long hour.

BLACKJACK

You start with £1,000, the objective being to break the bank, to do this you have to win (including your starting money) £20,000.

Instructions. You have to score nearer (but not over) 21, than the computer does. The computer deals your first card, you then place your bet and hit the return key, the computer then deals your second card. If you want another card hit the "C" key, if not hit the "S" key.

Points. Ace 1 or 11, Jack, Queen, King 10.

Scoring 21 points with 2 cards — you automatically win.

Scoring 21 points or less with 5 cards — you automatically win.

Draw — the computer wins.

Your kitty is automatically adjusted win or lose. If you lose all your kitty — game over.

DECIPHER

You have to guess what combination of colours the computer has selected — to enter a colour just hit the colour button on the computer, when you have entered your five choices of colour, the computer will display (a) Nothing at all — none right; (b) Black or white squares or both — for every black square you will have a correct colour in the correction position, for every white square you will have a correct colour in the wrong position. If you cannot find the complete combination, it will be displayed when you have had twelve attempts.

FOUR THOUGHT

You have to make a line of four squares — horizontally, vertically or diagonally BEFORE the computer does, taking turns to take a square (squares can only be placed at the bottom of the grid or on top of another square). **Keys.** Hit the number key of the column you want your square dropped in, then hit the return key.

TEASER

The aim of the game is to score "15" BEFORE the computer does, using any combination of three boxes. If you cannot score "15" then you must try and stop the computer from doing so and force a draw. **Keys.** Hit the number key of the box that you want (you can only select an empty box).

MULTISOUND SYNTHESIZER

For the unexpanded Vic20

The Vic Multisound Synthesiser is very flexible and can be played in more ways than can ever be explained here, to create music and special effects. For example, create any tune, up to 255 notes (after following appropriate instructions), then press "F1" or "F3", then key "9" and enjoy the added effect. Now hit "+", listen to the difference. For a surprise — hit "=". Now add a melody over the top — hit key "8" then "7" — now play a melody, or experiment. *Have fun!*

NEW NEW NEW

MOONS OF JUPITER

For expanded Vic20, 3K, 8K or 16K

SEA INVASION

For the unexpanded Vic20

Fight off the attacking sea creatures for as long as you can. Shoot the whale for a surprise score, watch out for the crabs, starfish and octopi.

You are a commander of a fleet of destroyers. Looking on from the safety of Mother Ship, you send in one destroyer at a time to blast a passage through the

MOONS OF JUPITER.

Your destroyers have to dodge and blast the UFOs... Watch out for the Gologs, they can smash your destroyers, but you cannot harm them.

**MACHINE CODE
ARCADE QUALITY GAME**

SPACE ATTACK is a game of skill. You as the pilot of an intergalactic battleship have to fight your way through wave after wave of various alien spaceships.

**MACHINE CODE
ARCADE QUALITY GAME**

NEW NEW NEW

SPACE ATTACK

For the unexpanded Vic20

OUR GAMES ARE AVAILABLE FROM ALL GOOD HOME COMPUTER SHOPS, INCLUDING:

Meteclean, 92 Victoria Street, London SW1. 01-828 2511... Meteclean, 137 The Strand, London WC2. 01-240 2321... Meteclean, 177 London Road, Croydon. 01-686 8626... All branches of Laskeys, Vic Centre, 154 Victoria Road, Acton W3. 01-992 9904... A. C. Systems, Exeter... Microtrading, Birmingham... Supersoft, Harrow... Anlog Computers, Horley, Surrey. 346083... Ozwise Computers, Harrow. 429 1060... Cavendish Data Systems, South Norwood. 656 8941... Software Master, 30 Lincoln Road, Birmingham... Tomorrow's World, Dublin... Algray Software, Barnsley. 83199... Computer & Business Systems, Nelson, Lancs. 0282 601191... Dyad Developments, Oxon. 08446 729... Lelsurronics/Blackpool Computer Stores. 0253 27091... Carlow Radio Ltd., Bedford. 60447... Byte Shop Computerland, Glasgow. 221 7409; Nottingham 40576; Manchester 236 4737... First Byte Computers, Main Centre, Derby. 365280... Simmons Magee Computers Ltd., Twickenham. 891 4477... Capital Computer Systems, Ilford 553 3026... A.O.M. Business Systems, L.V.E. Building, Leicester 548923... Jutea Ltd., Bridge, Near Canterbury, Kent. 0227 830083... Twickenham Computer Centre. 01-892 7896... Kent Microcomputers, Maidstone 0622 52784... J. S. Simnett Computers Ltd., The Computer Shop, Kingston. 01-546 3793... Chris Denning Ltd., Poole. 0202 761859... Yorkshire Micro Computers, Scarborough, Yorks. 0723 78136. Taylor Wilson Systems, Oakfield House, Station Road, Dorridge.

ONE FULL-TIME FULLY EXPERIENCED MACHINE CODE PROGRAMMER WANTED URGENTLY

SOFTTEK



3D MAZENTURE


An exciting new 3D Maze game and Adventure all in one — with more than a hint of Dungeons and Dragons. Amazing machine code animation. Only £5.95.

NEW!

COMPILER

FOR 48K SPECTRUMS WITH MANUAL

Ever wished you could wave a magic wand and turn your BASIC programs into machine code ones? Now you can (well almost!). You type in your program in SPECTRUM BASIC, then in seconds "SUPER-C" turns your program into a machine code version! Compiled versions run at least 10 times faster than BASIC, and much faster than other languages such as PASCAL, FORTH etc. Amazing value for £9.95 (including a manual written by Tim Langdell)

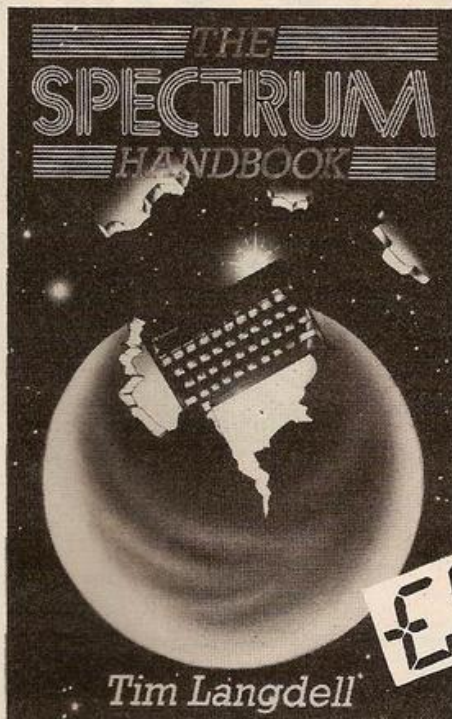

£4.95

Just out from CENTURY PERSONAL COMPUTER WORLD and written by Tim Langdell — writer for Your Computer, ZX Computing, Practical Computing and Popular Computing Weekly. Whether you're a beginner or experienced in computing, if you're a Spectrum owner then this is the book to buy. The Spectrum Handbook is the most complete guide to the machine on the market — taking you from first principles in programming through graphic art, education, business and games writing to an introduction to machine code and hardware modifications. Packed with over 80 exciting programs and routines — including 3D plotting, a filing system and a maze game and offering a host of hints and tips.



METEOROIDS

Many hundreds of buyers have acclaimed this the fastest and smoothest version of the popular arcade game for the Spectrum — the only version with full colour, three meteoroid sizes, hyperspace, thrust, shield, mothership, freeze-frame, high score, bonus ship at 10,000, etc. Even if you have another version, this one is a must for your collection. With machine code synthesised sound effects which left other software houses wondering how we did it, this has to be the best value around for only £4.95 (for 16K or 48K Spectrums) STOP PRESS: NOW WORKS WITH KEMPSTON ELECTRONICS' JOYSTICK! Available from us for only £19.50 inc.

SEE US ON STAND V37
AT THE

**Northern
Computer
Fair** Personal computers
Home computing
Small business systems

SEE US
AT

5th

ZX MICROFAIR

DECEMBER 18th

NEW HORTICULTURAL HALL, LONDON SW1.

WRITERS

Softtek, now one of the leading software houses are looking for good programmers to join our team of experts. If you are interested in making typically several hundred pounds a month in your spare time and can write for ANY popular micro computer, then we'd like to hear from you. We offer the best royalties, have many retail outlets here and abroad, can offer assistance with programming (we have most machines), and, of course, can allow programs to be developed with our COMPILER (and we alone retain the right to sell programs created with it).

SOFTIME

This amazing program uses several machine code tricks to give you a real time clock continuously on the screen, even when you're developing or running another program! has alarm facility, and option of disabling the NEW and/or BREAK keys. Special offer £3.95

SEND A S.A.E. for our free catalogue detailing such new products as CALC-U-VU, BIZICALL, SCREEN KIT 1, TOOLKIT 1, and more. Also ask about our software for the BBC machines and DRAGON 32.

THE SPECTRUM ROM DISASSEMBLED:

A reference guide for the serious user. In 3 volumes, with a full disassembly in HEX and mnemonics with guides to using ROM routines. Vol 1 (0000-1000H) £5.00

Please rush me in time for Christmas

I enclose a Cheque/Postal Order for £.....

DEALER DISCOUNTS AVAILABLE

SPECTRUM

SOFTTEK, 329 Croxted Rd.,
LONDON SE24.
24 hour Ansaphone: 01-674 4572

Introducing... new from **YOUR COMPUTER CLASSIFIED ADVERTISING**

From the February issue, Your Computer — Britain's largest selling home computer magazine is to introduce a classified advertisement section.

The introduction of this section opens up a new and exciting opportunity for advertisers to regularly, effectively and economically sell their products and services to the largest audience of potential customers offered by any home computer magazine.

It also provides an excellent "shop window" for private advertisers who wish to buy, sell or exchange equipment with other enthusiast readers of Your Computer.

To place a classified advertisement in Your Computer, simply complete and return the order form below.

SELL IT WITH **YOUR COMPUTER**

Classified Rates

Linage: 30p per word (Min 15 words) —
prepayable
Linage advertisers should complete the form
provided in BLOCK CAPITALS. Phone number
counts as 2 words. Name and address to be
paid for if used in advertisement. Box Number
if required is £3.00 extra.

Display — rates per scc (Min 2scc)

One insertion : £7.00
Three insertions : £6.70
Six insertions : £6.50
Twelve insertions : £6.00

Display advertisers should provide separate
copy and preferably reserve space by phone
(01-661 3036).

Method of Payment

Cheques etc. should be made payable
to Your Computer and crossed "& Co."
I enclose herewith cheque/PO for

£.....

Please debit my Access/Visa Barclay
Card/American Express/Diners Club Int'l
/as below



.....

SIGNATURE

Post to:
Cut out the order form and return
together with your remittance to:
Classified Department, Your Computer,
Room H211, Quadrant House, The
Quadrant, Sutton, Surrey SM2 5AS.
(01) 611 3036

CLASSIFIED ORDER FORM

Please insert the following advertisement in Your Computer Classified Section

				LINAGE
				£4.50
				£6.00
				£7.50
				£9.00
				£10.50
				£12.00
				£13.50
				£15.00

No. of insertions required ☐ Box No. required YES/NO

NAME



ADDRESS

Payment by credit card please state address card is registered


Daytime tel. no

THIS FORM SHOULD BE RETURNED BY JANUARY 10 FOR FEBRUARY ISSUE PUBLICATION


Big game thrills for Dragon owners!

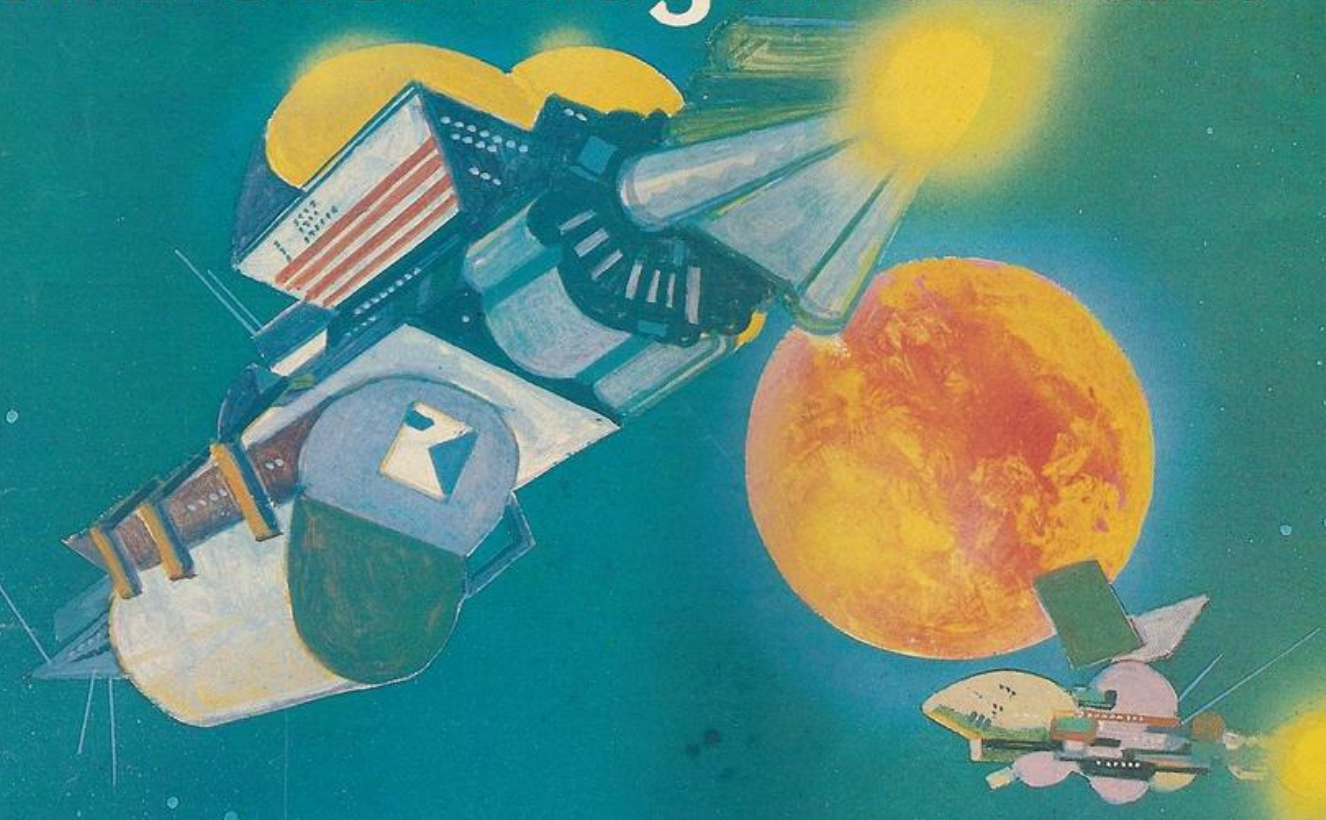

Inscrutable oriental
electronic strategy!



Find your way through
the endless maze –
but do it right or you're
doomed!



Monopolise
the Milky Way –
become a galactic
megabillionaire!



The clues are there;
so is the treasure ...
but can you find it?



Bust out and beat
the Minotaur

If you own a Dragon 32 Family Computer this is especially for you. Microdeal have on offer another 5 great games, games to get you guessing with ruthless opponents to test your every reflex, fortunes to be won and lost. These games are also available for the TANDY COLOR computer.

Cassette price £8.00 including VAT and postage.


You'll find them in dealers nationwide; or order direct from:
Microdeal, Deal House, Bridges, Bodmin, Cornwall PL30 5EF.
Tel: 0726 850821. TANDY & VIDEO GENIE owners send for our software lists.

M I C R O D E A L

NOW AVAILABLE IN SELECTED
STORES



GAMES SPECIAL

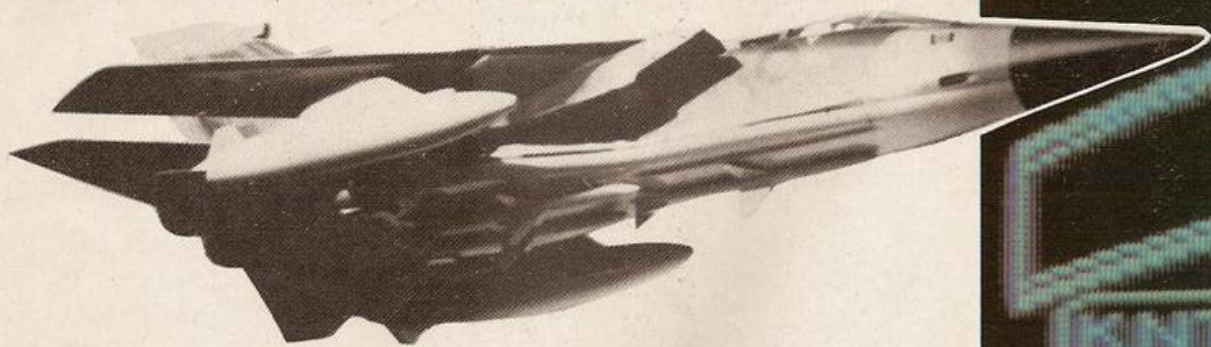

Rod Hopkins applies his knowledge of multi-million pound pilot trainers to produce the most realistic simulator ever published for a home computer.

THIS FLIGHT simulator is a fairly elaborate program leaving little memory to spare in a 16K Spectrum. In consequence, a methodical approach to some resolute typing is demanded of the would-be pilot.

Firstly, type in the main program, listed in figure 1, Saving it in auto-run mode:

SAVE "BA 111" LINE 1

Having verified the recording, turn to the machine-code dump in figure 2. Enter this code by way of a short routine such as the following:

```
9990 FOR N=1 TO 236:PRINT 23295+n;:INPUT
"Enter byte";i:POKE 23295+n,i:
PRINT i:NEXT n
```

This procedure allows checking of each byte as entered. Once complete, the code should be saved immediately following the main program on tape:

SAVE " " CODE 23296,236

Again, verify the recording. Leave the tape set at the end of the code and type in the screen-plotting routine listed in figure 3.

Now type Run, switch the recorder to record, press Enter, and the display will be saved. In future, the screen will be loaded directly from tape by the main program; but to be on the safe side, save the plotting routine elsewhere.

Next, a little guidance on using the program. In the first place, do not expect flying an aircraft to be too easy. Figure 4 enumerates the controls used — familiarise yourself with them before running. Note that the method of keyboard decoding used means that a single, brief key-press will be read. Notice also that some controls operate as on/off switches.

Shortage of RAM precludes any attempt at making the program completely bombproof, though most of the silly possibilities which delight bug-hunters have been foreseen. For example, the undercarriage cannot be raised on the ground, and the brakes will not work in the air! Figure 5 gives a concise chart of the area around Edinburgh Airport, the arena of



ZX SPECTRUM FL

Figure 6. Program breakdown.

From	To	Function
5	240	Main flying loop
2000	2070	Flap
2100	2108	Power
2110	2116	Roll
2120	2129	Attitude
2500	2515	Gear
2520	2546	Map
2580	2595	Update variables
8500	8810	Landing routine
9000	9020	Brakes
9500	9502	Head-up
9510	9511	Beacon
9520	9522	Out of control
9530	9545	Artificial horizon
9550	9560	Take-off set-up
9640	9644	Fuel
9650	9665	Initialising subroutine
9680	9682	Exit/messages
USR	23296	Clear monitor during landing
USR	23391	Update instruments
USR	23483	Print plane

the simulation, showing beacons and two runways. This chart is available on a CRT monitor in the cockpit during run time. Navigation is by means of the beacons, which provide two types of information. First, radial: this is your bearing from the beacon in use; and secondly, DME: distance from the beacon — Distance Measuring Equipment.

Beacons EDN and UWB must be used to approach the runways. Radial and DME are displayed on the central panel of the cockpit, to the right of which a head-up display indicates the direction of the beacon by a flashing cursor in relation to the plane's heading.

The CRT monitor mentioned serves three purposes: it defaults to an artificial horizon display, the plane being viewed from the rear over a horizon which swings in proportion to roll, attitude, lift. Secondly, map: this gives beacon positions, and that of the plane if within the boundaries of the display — a dot within a flashing square. The latter is not updated

Figure 4. Keyboard decoding.


Keypress	Function
B	Brakes on/off
C	Change beacon
D/U	Down/up
R/L	Right/left
J(-)/K(+)	Less/more flap
P	Power increase, stop decrease
O	Power decrease, stop increase
M	Map on/off
G	Gear up/down

while the map is accessed. Third, a view of the runway while landing.

Some final points about the cockpit. Warning lights are provided for brakes on, gear up when landing, emergency fuel, plane descending — Rate of Climb becomes Rate of Descent — and plane approaching out-of-control condition.

In connection with the last mentioned, remember to increase power/speed/flap, to

(continued on page 41)

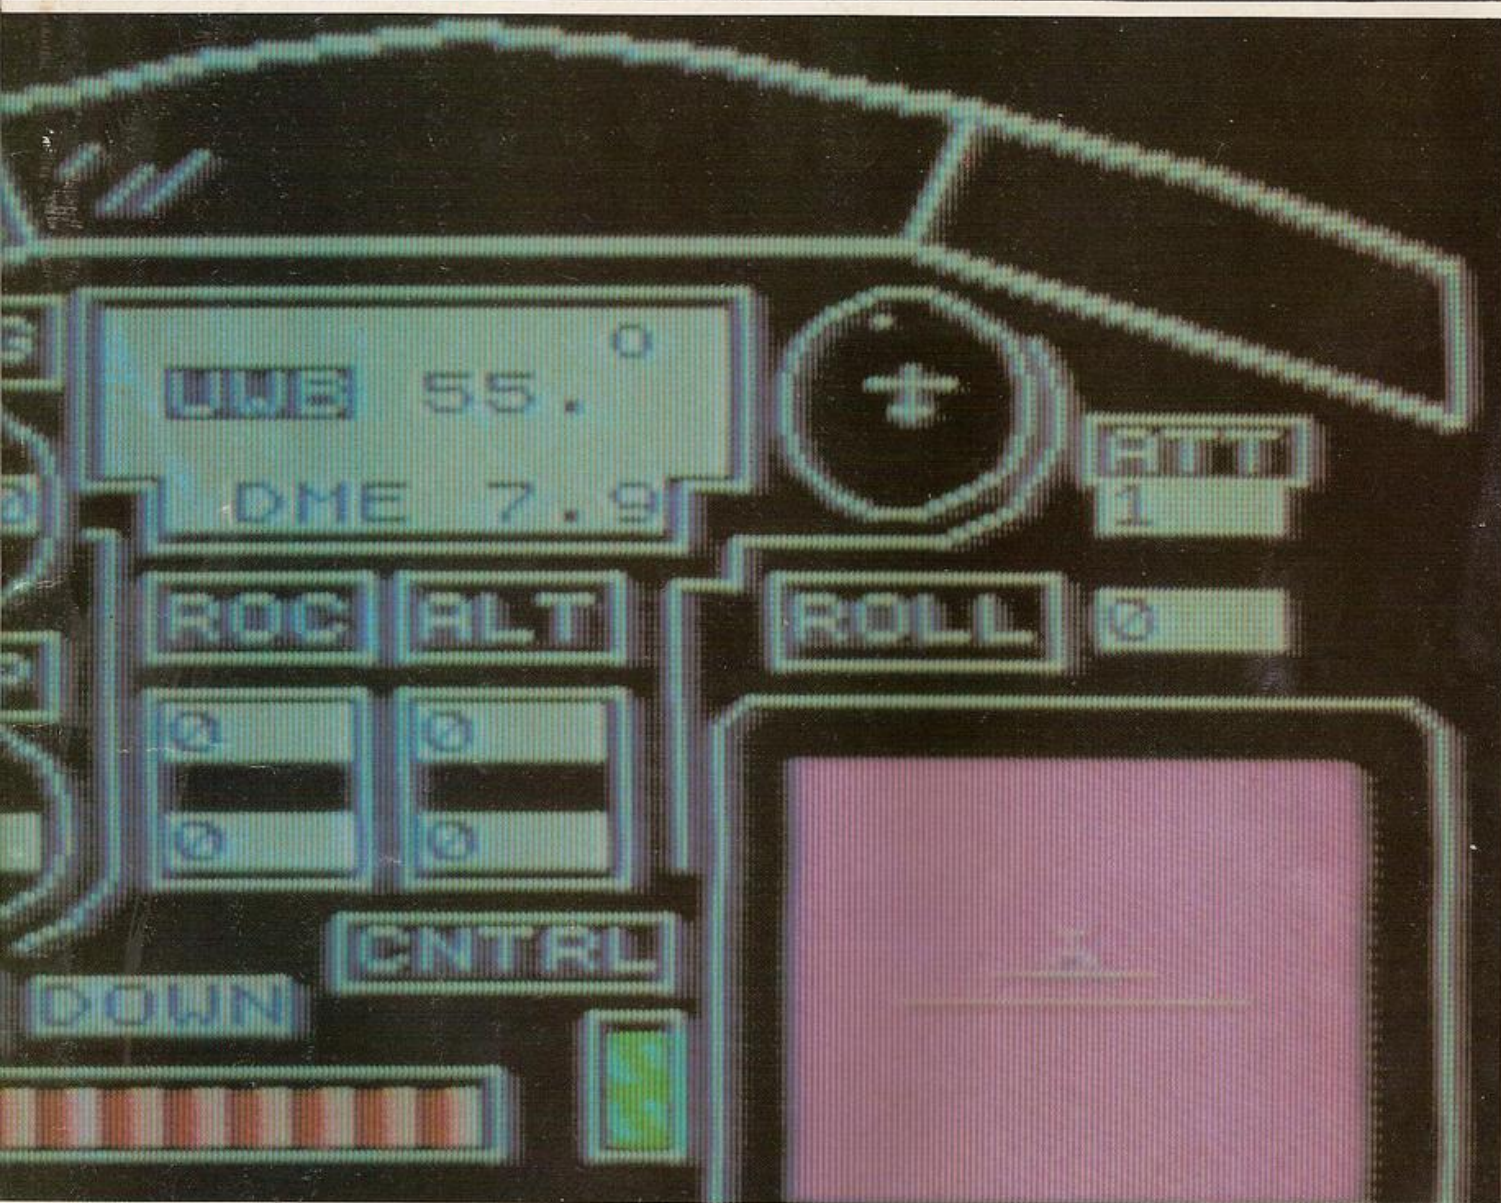

FLIGHT SIMULATOR

Figure 3. Screen construction.

```

1 REM BA 111 SCREENS
2 BORDER 0: PAPER 0: INK 9: CLS
3
4 PLOT 0,120: DRAW 70,25: DRAW 114,0: DRAW 71,-25: DRAW 0,23: DRAW -
5 127,32,3: DRAW -128,-32,3: DRAW 0,-23: PLOT 2,125: DRAW 0,16: DRAW
6 56,19,-2: DRAW 8,-13: DRAW -66,-24
7
8 PLOT 70,145: DRAW -10,18: PLOT 184,145: DRAW 10,18: PLOT 80,150: D
9 RAW 6,6: PLOT 84,150: DRAW 5,5: PLOT 75,155: DRAW 3,3
10
11 FOR n=5 TO 7: PRINT AT n,10: INVERSE 1:
12
13 TAB 11: INVERSE 1:
14
15 CIRCLE 20,60,16: CIRCLE 18,102,16: CIRCLE 58,62,16: CIRCLE 58,107,
16 16: CIRCLE 182,122,16
17
18 DATA 14,1,9,1,8,6,14,6,12,11,14,11,10,26,8,26,12,15,14,15
19
20 RESTORE 17: FOR n=1 TO 10: READ a,b: PRINT AT a,b: INVERSE 1:
21
22 NEXT n
23
24 DATA "0",19,18,"0",18,18,"GAS",20,4,"",19,4,"BR",18,1,
25 "PWR",12,1,"KNT",7,1,"HBD",6,6,"FLP",12,6,"GEAR",17,4,"RDC",10,11,"R
26 OLL",10,21,"ATT",7,26,"BCN",6,11,"CNTRL",17,14,"ALT",10,15
27
28 FOR N=1 TO 14: READ A$,A$: PRINT AT A$,A$: LET X= LEN A$:B=4: P
29 LOT (8-1)*B+6,(22-A)*B+1: DRAW X,0: DRAW 0,-10: DRAW -X,0: DRAW 0,10
30 : NEXT N
31
32 PLOT 85,81: GO SUB 100: PLOT 116,81: GO SUB 100
33
34 PLOT 158,4: DRAW 4,-4: DRAW 84,0: DRAW 4,4: DRAW 0,72: DRAW -4,4:
35 DRAW -84,0: DRAW -4,-4: DRAW 0,-72: FOR N=13 TO 20: PRINT AT N,21:
36 PAPER 3:
37 : NEXT N
38
39 PRINT INVERSE 1: AT 8,12:"DME": AT 5,18:"a": AT 17,9:""
40
41 PLOT 88,101: DRAW 87,0: DRAW 0,8: DRAW 9,0: DRAW 0,30: DRAW -84,0:
42 DRAW 0,-30: DRAW 8,0: DRAW 0,-8
43
44 DATA 1,1,255,1,1,1,7,1,0,0,254,0,0,0,192,0
45
46 RESTORE 36: FOR N=0 TO 7: READ A: POKE USR "K"+N,A: NEXT N: FOR N
47 =0 TO 7: READ A: POKE USR "L"+N,A: NEXT N: PRINT AT 6,22:"KL"
48
49 PLOT 78,103: DRAW 3,0: DRAW 0,-42: DRAW -14,-17,-1,2: PLOT 200,130
50 : DRAW -18,-29,-1,95: DRAW -24,0: DRAW 0,-8: DRAW -6,0: DRAW 0,-44
51
52 SAVE "BA111 SCREENS": STOP
53
54 DATA 29,0: DRAW 0,-28: DRAW -28,0: DRAW 0,28: RETURN

```

Figure 2. Machine code dump.

23296	175	33	129	92	54	1	33	20	79	6
23306	7	197	229	6	8	14	11	36	229	119
23316	35	13	32	251	225	16	244	225	17	32
23326	0	25	193	16	252	33	129	92	190	200
23336	119	6	3	33	180	71	24	219	32	33
23346	34	193	72	32	10	207	64	18	18	33
23356	72	32	15	139	72	22	12	203	72	22
23366	10	6	72	27	16	90	72	7	14	198
23376	72	27	10	143	72	18	12	207	72	18
23386	10	16	72	17	16	62	12	50	145	92
23396	6	11	42	75	92	17	8	0	25	221
23406	33	51	91	197	229	33	131	92	6	2
23416	221	126	0	221	35	35	119	221	126	0
23426	221	35	35	119	35	35	16	238	225	6
23436	3	126	221	229	229	197	215	193	225	221
23446	225	35	16	243	193	16	212	175	50	145
23456	92	201	0	0	0	0	0	0	0	1
23466	255	16	124	16	16	124	198	69	255	0
23476	0	0	0	0	0	0	254	0	253	203
23486	2	134	33	163	90	34	54	92	33	24
23496	80	34	132	92	33	9	8	34	136	92
23506	1	3	0	17	48	91	205	60	32	33
23516	24	90	6	3	54	31	35	16	251	33
23526	0	60	34	54	92	201	0	0	0	0

THE REAL INVESTMENT

**NEW:
THE X-ROMCARD
FOR YOUR ZX81**



**WHAT IS SO
SPECIAL ABOUT
THE
SPECIAL RAMPACK?**

WHAT IS SO SPECIAL ABOUT AUDIO'S 16K SPECIAL RAM PACK?

THE SPECIAL RAM PACK (16K) is the latest design of its kind, following at least a dozen similar products. It has many of the good points of its predecessors, including packs manufactured by Sinclair Research, Memotech, Bygbyte and Econotech to cite a few of the best known.

With the experience we have gained with memories both for the ZX 81 and a wide range of other Micros, we are also able to offer some **exclusive new features**:

THE CASE: The SPECIAL RAM PACK has been designed to overcome the infamous 'wobbling' problem associated with many other packs, and does not resort to temporary solutions such as Velcro, Blutak, adhesive strip or a huge, unsightly case. It clamps positively to the ZX 81 by means of a special built in ridge aided by a resilient spring effect in the connection socket (see figure 1).

EXPANSIBILITY: The SPECIAL RAM PACK is not only compatible with all software and hardware produced for the ZX 81, such as the ZX printer, but it also has the edge over other packs with its **expansibility**. You will find it interesting that the keyboard sounder option is already included in the SPECIAL RAM PACK. It also has **expansion pins**, ready to receive — in the same case — the most advanced add-on ever designed for the ZX 81 — the X ROM CARD (see figure 2).

WHAT DOES THE X-ROM CARD OFFER?

1. The X-ROM CARD has a built in autostart ROM. Programs can be run automatically every time the ZX 81 is switched on. This will result in a huge increase factor for ROM based software, since all software houses are currently very aware of copyright piracy problems.

2. The X-ROM CARD has a built in printer interface, necessary if you wish to use a printer other than the ZX printer. This is invaluable for any serious applications, including word processing, where careful presentation is of the utmost importance.

3. The X-ROM CARD has a built in EPROM burner. This means that you can save Basic or Machine code programs onto silicon chips and play them back at any time.

4. You may of course buy the X-ROM CARD to use with other Ram Packs such as the Sinclair Ram Pack. However, when you purchase the X-ROM CARD with the SPECIAL RAM PACK, you will have the advantage of lower cost, greater reliability and neatness, since the whole system is nicely housed within a single case.

IN CONCLUSION, The SPECIAL RAM PACK, is the **best immediate investment** for your ZX 81. The availability of the X-ROM CARD opens the way to new software development such as **languages programming** and is the guarantee that your system will never be obsolete.

**THE BEST GUARANTEE
THAT YOUR ZX81 WON'T BE
OBSOLETE FOR ONLY:**

£ **19** .95

including VAT



fig. 1



fig. 2

TECHNICAL SPECIFICATIONS:

- **SPECIAL RAMPACK:**
 - Memory capacity: 16K bytes.
 - Maximum speed: 200 ns access time.
 - Power requirement: Use exclusively Sinclair PSU.
- **X-ROMCARD:**
 - Autostart ROM: 4K byte, exchange for 8K bytes and software switch possible. Displays memory size, checks for byte "00" (identifies ZX basic) @ 2000H. Loads program if found, checks for byte "C3" and jumps (2000H) if found. Checks for presence of ROM in socket n.3 and ROM catalog, displays catalog if found. Contains also machine code monitor and printer utility.
 - Preprogrammed ROM: Catalog available on request. Use only 2732 or 2764 ROM/EPROM.
 - Blank EPROM: Use only 2764 — 8K bytes per device — in socket n.3. 3 x 9V, PP3 size batteries are needed to burn EPROM.
 - Printer connection: 16 pin DIL output, use standard IDC ribbon cable. Outputs include DO to D7, Strobe, Reset, Inputs include No-fault and Busy.
 - Documentation: Schematic diagram included, full listings of Autostart ROM extra (only for X-ROMCARD user, £1.50 + large SAE)

AUDIO-COMPUTERS

87 BOURNEMOUTH PARK ROAD,
SOUTHEND ON SEA — ESSEX SS5 2JJ

THE REAL INVESTMENT
SOLIDISK TECHNOLOGY LIMITED

87 Bournemouth Park Road,
Southend-on-Sea, Essex. SS5 2JJ
*Please delete/complete
as applicable
*I enclose a cheque/
P.O. payable to:
SOLIDISK
TECHNOLOGY
LTD
for: £

Item	Qty	Price Inc VAT	Total
SPECIAL RAMPACK 16K		£19.95	
X-ROMCARD		£14.95	
Preprogrammed ROM		free	
BLANK EPROM 2764		£ 9.95	
Postage and packing		£ 1.00	
Please charge my Access, Barclay account:		TOTAL £	
NAME		ADDRESS	

(continued from page 38)

increase lift. Both ROC and ALT meters show thousands of feet in the top window, feet in the lower.

Take-off will not be achieved at speeds less than 100 knots, or with an altitude less than 10. For Landing, bearings are given on the chart. Try to approach on a glide path — insurance against engine trouble — losing height at around 6-800 feet a minute. The CRT will not

indicate permission to land, that is when the runway is shown, unless your angular approach is viable $\pm 10^\circ$ of ideal. Once committed to landing, the attempt must be seen through. To practise landing, define your location at the prompts with:

Beacon?="EDN"; Radial?= 70; Heading?= 250; DME?= 2. Increase flap angle to maintain lift as speed falls, and do not forget to brake fairly quickly after touchdown, when

the altimeter shows 10 feet, as the runway is not indefinitely long.

Figure 6 gives a breakdown of the components of the program.

For the interested who do not have the stamina or the time to type in the simulator themselves, a cassette of the complete program is available for £3 from the author, Rod Hopkins, at 116 Pilmuir Street, Dunfermline, Fife, Scotland.

Figure 1. The main program.

```

5 LOAD "" CODE : BORDER 0; PAPER 0; INK 7; CLEAR : LOAD "" SCREENS :
DIM S$(11,31): GO SUB 9550
6 INPUT "TAKE-OFF? (Y/N) ": I$: IF X$(I) THEN GO TO 9550
8 INPUT "OK, STARTING ALTITUDE? ": AL: LET AL=AL/P: INPUT "WIND DIR
ECTION? (W): LET WD=WD*PI/180: INPUT "WINDSPEED? (K): LET WS=WS/2.237
INPUT "DEFINE LOCATION(Y/N)": X$: IF X$ <> "Y" THEN GO TO D=
25 INPUT "BEACON? ": X$: FOR G=1 TO 7: IF X$(G) THEN GO TO 28
26 NEXT G: GO TO 25
28 LET B=0-T: LET B=B+7*(B=0): GO SUB 9510: INPUT "RADIAL? ": RD: LET
RD=RD*PI/180
30 INPUT "HEADING? ": HD: LET HD=HD*PI/180: INPUT "DME? ": DM: LET S=DM*
COS RD: LET W=DM* SIN RD
40 LET S=S+SF* COS HD+WS* COS WD: LET W=W+SF* SIN HD+WS* SIN WD: LET
DM=DM*(S+S*W*W): LET RD=ACS(S/DM): IF W<0 THEN LET RD=PI-RD
50 LET HD=HD+AL/(SF+1.564): IF HD>DEG/360 THEN LET HD=HD-Y*PI
55 IF HD<0 THEN LET HD=HD+Y*PI
60 IF C AND DM<6 THEN LET B=T: GO TO EX
65 LET G=G+(PR+20)/M1: IF G<500 THEN GO SUB 9544-M1
70 LET G=500: GO TO 100
80 IF C THEN LET AL=0: LET RC=0: LET E=P: LET KN=KN+E: GO TO 105
90 LET I=2E4/KN: IF J <> I AND NOT M THEN GO SUB 9530: LET J=I
102 LET RC=AT*KN/GO-ST*20: LET E=PR-(FL*KN/4E3)-(GR*KN/400)-RC/P: LET
KN=KN+E*2E3/KN*(KN/4E3 OR 500 E-1): IF KN<(1.5E3-FL*P) THEN GO SUB
9520: GO TO 108
103 LET ST=0: POKE 23054,7: GO TO 108
105 IF AT>B THEN LET C=0: GO TO 102
111 LET SF=KN/2E3: PRINT AT 10,0: PAPER Y:G: LET A1=0: LET AL=AL+RC
*3/Y: LET F=KN/2E4: GO SUB 2580
146 RANDOMIZE USR 23391: GO SUB 9500: IF TH THEN GO SUB 2095+TH*5
200 IF PEEK 23560<5 THEN GO TO 218
210 LET S1=PEEK 23560-84: IF S1>0 AND S1<22 THEN GO SUB S(S1)
215 POKE 23560,0
216 IF C THEN GO TO 40
228 IF AL<5 THEN LET B=Y: GO TO EX
230 IF B=Y OR ABS S1.4 OR ABS W1.4 THEN GO TO 40
236 IF B=T AND (HD<4.19 OR HD>4.54) THEN GO TO 40
238 IF B=Y AND (HD<1.05 OR HD>1.4) THEN GO TO 40
240 GO TO 8500
2500 IF FL<30 THEN LET FL=FL+5
2505 GO TO 2015
2610 IF FL>0 THEN LET FL=FL-5
2615 LET S(8)=STR$ FL: RETURN
2670 RETURN
2100 IF TH=Y THEN LET TH=0: RETURN
2102 IF PR<42 THEN LET PR=PR+D: LET TH=T: RETURN
2105 IF TH=T THEN LET TH=0: RETURN
2107 IF PR>20 THEN LET PR=PR-D: LET TH=Y: RETURN
2108 RETURN
2110 IF LA THEN LET C=C+Y: GO TO 2117
2111 IF NOT C THEN LET RL=RL+P*(RL<50)
2112 GO TO 2116
2113 IF LA THEN LET C=C-Y: GO TO 2117
2115 IF NOT C THEN LET RL=RL-P*(RL>50)
2116 GO SUB 9530: RETURN
2117 LET HD=HD+C/65
2120 IF CAT OR AT<0 THEN RETURN
2122 LET AT=T: GO TO 2127
2125 IF (KN<1E3 AND NOT LA) OR AT>10 THEN RETURN
2126 LET AT=AT+T
2127 PRINT AT 8,26: INVERSE T:AT+T: " : IF M OR LA THEN RETURN
2128 GO SUB 9530: RETURN
2500 IF OR AND NOT C THEN PRINT AT 17,P-T: INVERSE T:UP " : LET GR=
G: RETURN
2510 IF NOT GR AND (NOT C OR M=400) THEN PRINT AT 17,9: INVERSE T:
DOWN": POKE 23076,7: LET GR=T: RETURN
2515 RETURN
2520 IF M THEN GO TO 2545
2521 LET M=T: POKE 23560,0: RESTORE 9680: FOR A=0 TO 7: PRINT AT 13+A,
21: PAPER T: " NEXT A
2525 PRINT PAPER 1: AT 20,25: "TLA": AT 18,22: "FKK": AT 16,21: "UMB": AT
16,23: "EDN": AT 16,27: "SAB": AT 13,25: "PIL": AT 15,23: "DRT"
2530 LET G1=108: LET G2=40
2535 FOR A=0 TO 6: PLOT G1,G2
2537 IF B=T-G THEN LET P1=A1: LET P2=A2: LET P1=P1+M1/2: LET P2=P2+S/
1.2: IF P1<258 AND P2<78 AND P2-T AND P1>160 THEN PLOT FLASH T:1:
P2: LET P3=T
2540 READ M$(G+T),J,I: LET G1=G1-1/2: LET G2=G2-1/2: NEXT A: RETURN
2545 IF P3=T THEN LET P3=0: PLOT OVER T: FLASH O:P1,P2
2546 LET H=0: FOR A=0 TO 7: PRINT AT 13+G,21: PAPER 3: FLASH O: "
* : NEXT A: GO TO 9559
2580 LET AL=P: LET AL1=INT (AL/1E3)+T: SON AL=T: LET S(8)=STR$
AL1: LET AL1=INT (AL-AL1*1E3): LET S(P)=STR$ AL1: LET AL=AL+P
2583 LET S(3)=STR$ (KN/P)
2584 LET S(Y)=STR$ (DEG*RD)
2585 LET S(6)=STR$ (DEG*RD)
2586 LET S(7)=STR$ RL
2587 LET S(11)=STR$ DM
2588 LET S(T)=STR$ (PR+110)
2590 LET S(D)=STR$ (INT (RC/100)+T*(SON RC-T)): LET S(S)=STR$ (
INT (PARC-VAL S(D)*1E3))
2592 IF SON RC-T THEN LET S(S)=S(S,Y TO 3)+O": PRINT FLASH T: AT
P,13: "D": FLASH O: RETURN
2594 PRINT AT P,13: "C"
2595 RETURN
8500 LET G=T: PRINT AT P,15: "HGT: LET S(D)=" " : LET S(S)=" " :
LET LA=T: LET E=E
8505 LET S(Y)=8E3: LET S(3)=2070
8560 LET A=P/P: LET S=N: LET A=22E3: LET W=13E3: LET A=50: LET AL=AL/F
RND W
8570 LET C=(HD+DEG-250+180*(B=Y))*5
8610 LET Z=0: LET X=204: LET X=35: LET J=D+P: LET M=J/P: FOR G=0 TO 7:
PRINT AT 13+G,21: " : NEXT G: IF NOT OR THEN POKE 23076,1
84
8640 LET F=KN/35+A: LET E=E-F: LET W=W-F: LET S=C/P: LET M=C+200: IF
AL>B THEN LET AL=AL+DRT: GO TO 8645
8643 LET AL=0: PRINT AT P,13: "C": LET S(D)=" " : LET S(S)=" "
8645 IF KN<100 THEN LET KN=0
8650 LET M=M/M-C+X: LET L=M/M-U-C+X: LET V=M/M-E-C+X: LET I=M/M-E-C+X
: LET U=M/M-L-Y+AT+X: LET T1=M/M-L-E-Y+AT+X
8665 IF ABS (R-X)>J THEN LET R=SON R+J+X
8670 IF ABS (U-X)>J THEN LET U=SON U+J+X
8675 IF L<X-J THEN LET L=X-J
8676 IF L>X+J THEN LET L=X+J
8680 IF ABS (I-X)>J THEN LET I=SON I+J+X
8685 IF ABS (T1-X)>J THEN LET T1=SON T1+X+X
8690 IF ABS (U-X)>J THEN LET U=SON U+X+X
8695 IF U>35 AND M THEN LET U=3: LET T1=35
8710 RANDOMIZE USR 23286: PLOT 158,D: DRAW D,-D: DRAW 86,0: DRAW D,D
8715 PLOT R,U: DRAW L-R,0: PLOT L,U: DRAW I-L,T1-U: PLOT 1,T1: DRAW V-1
,D: PLOT V,T1: DRAW R-V,U-T1
8721 IF E1>2E3 THEN GO TO 8723
8722 IF NOT AL AND C-Y THEN PRINT AT 16,21: "Edn" (nine characters)


```

```

8724 IF NOT AL THEN LET RC=AL: GO TO 8730
8725 LET RC=Y+AT*KN/120: LET E1=PR-FL*KN/4E3-GR*KN/300-RC/P: LET KN=KN-
E1*2E3/KN
8730 IF AL>B THEN LET AL=AL+P: GO SUB 2580: LET AL=AL/P: GO TO 8734
8732 GO SUB 2582
8734 LET S(11)= " " : LET S(11)= " "
8735 RANDOMIZE USR 23391
8736 IF G=T THEN GO SUB 9510
8737 IF TH THEN GO SUB 2095+TH*5
8741 IF AL<20 THEN GO TO 8750
8742 IF KN<(1.5E3-FL*P) THEN GO SUB 9520: GO TO 8747
8745 POKE 23054,7: LET ST=0
8750 IF PEEK 23560<5 THEN GO TO 8780
8755 LET S1=PEEK 23560-84: IF S1>0 AND S1<22 THEN GO SUB S(S1)
8770 POKE 23560,0
8780 IF W<X THEN LET W=X: IF X<2E3 THEN GO TO 8830
8800 IF AL<20 AND NOT Z THEN GO TO 9570
8810 GO TO 180*AH: DRAW 45-A-Y: RETURN
8830 IF AL>P OR KN THEN LET B=T: GO TO EX
8840 LET B=D: GO TO EX
9000 LET G=G: POKE 23105,7+177*(G=T)
9010 IF AL>P THEN RETURN
9018 IF KN>100 THEN LET KN=KN-100: RETURN
9020 LET KN=0: RETURN
9300 LET P=RD*PI: LET A1=HD-T: PLOT OVER T: X3,Y1: DRAW OVER T:T,0
9502 LET X3=182-12* SIN A1: LET Y1=122+12* COS A1: PLOT X3,Y1: DRAW T,0
: RETURN
9510 LET S=S+A(8): LET W=W+B(8): LET B=B+T: IF B=B THEN LET B=T
9511 PRINT AT 6,11: M$(8): RETURN
9520 IF C OR AL<30 THEN RETURN
9521 LET ST=ST-T: POKE 23054,184: IF ST<20 THEN RETURN
9522 LET B=D+T: GO TO EX
9525 DATA "OUT OF RNMV...", "NOSE DIVE...", "NICE WORK CAP'N!", "OUT OF C
ONTROLL...", "IMPACT BEFORE RNMV", "CRASH R OF RNMV", "IMPACT L OF RNMV",
"UNDERCARRIAGE?", "LANDING TOO STEEP", "OUT OF FUEL..."
9530 IF M THEN RETURN

```

Figure 5.

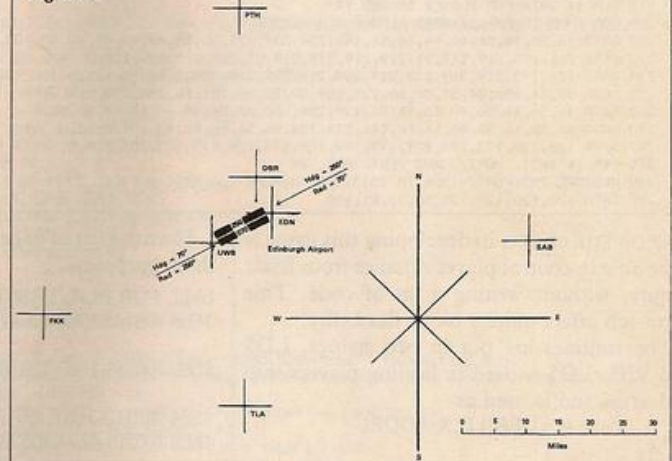

```

9531 PLOT OVER T:180,AM: DRAW OVER T:46,AY
9535 LET AH=28-I-AT-RL/2: LET AY=AL
9540 RANDOMIZE USR 23483
9542 IF AH<8 THEN LET AH=8
9545 PLOT 180,AM: DRAW 45-A-Y: RETURN
9550 GO SUB 9551: LET M=-B: LET S=0: LET FL=P: LET KN=T/P: LET
T=D: LET GR=T: LET AT=0: LET RL=AT
9551 PRINT AT 17,P-T: INVERSE T:"DOWN"
9552 LET PR=0: PRINT INVERSE T: AT 14,T: "
9553 LET WS=0: LET WD=0: LET B=T: GO SUB S(3)
9554 LET WD=250*RD: LET S=1E-10
9560 GO TO D=P
9570 IF E>8E3 THEN LET B=D+Y: GO TO EX
9575 IF N<20 THEN LET B=7: GO TO EX
9580 IF N>180 THEN LET B=D+D: GO TO EX
9585 IF NOT GR THEN LET B=9: GO TO EX
9590 IF AT<3 THEN LET B=P: GO TO EX
9625 LET Z=T: LET A=120: GO TO 8640
9640 LET G=12490: LET M=Y: PRINT AT 21,D: FLASH T:"F": RETURN
9644 LET B=P+T: GO TO EX
9650 LET P=10: DIM G(12): LET EX=9680: LET C=0: LET O=C: LET RT=C: LET
P3=C
9651 LET LA=0: LET FL=0: LET TH=0: LET M=0: LET ST=0: LET X3=0: LET Y1=
0: LET HD=80: RND 360
+ : LET J=Y+D: LET I=J: LET M1=0: LET GR=E: LET DEG=180/P: LET RA
D=1/DEG: LET G=12490: LET A="": POKE 2358,D+D: LET B=
INT (RND *E)+E
9652 LET T=E: LET SF=.05: LET KN=2500: LET S=RND *P: LET W=RND *P: L
ET HD=80: RND 360
9654 RESTORE 9680: DIM A(7): DIM B(7): DIM M(7,3): FOR G=1 TO 7: READ
M(G),A(G),B(G): NEXT G
9655 DIM S(21): FOR G=1 TO 21: LET S(G)=2070: NEXT G: LET S(3)=9510: L
ET S(D)=2120: LET S(7)=2500: LET S(P)=2010: LET S(P+T)=2E3: LET S(P+Y
)=2113: LET S(13)=2520: LET S(15)=2105
9658 LET S(18)=2100: LET S(18)=2110: LET S(21)=2125
9657 FOR G=0 TO D+D: PRINT AT 13+G,P+P+1
+ : DRAW D,-D: DRAW 86,0: DRAW D,D: FOR G=0 TO D+D-T: PRINT AT 13+G
,P+P+T: PAPER Y:T: "
* : NEXT G: PRINT AT P+P+T,O: "
9660 DATA "EDN",4.5,8.4,"UMB",-1.1,-50.2,"SAB",27.6,44.38,"TLA",-83.1,.8
,"PTH",48.30,8,"FKK",-22.4,-32.3,"DBR",5.1,-1.9
9681 GO SUB 9525: GO SUB S(3): GO SUB 2500
9682 PRINT AT 8,26: INVERSE T:1: " : IF NOT RT THEN RETURN
9685 LET RT=0: GO TO D=Y
9686 RESTORE 9525: FOR G=1 TO 8: READ X: NEXT G: PRINT AT P,15:"ALT":
AT 21,0: FLASH T:X: INPUT "ANOTHER GO? ": X$: IF X$="Y" THEN LET R
T=1: LET C=D: PLOT OVER T: X3,Y1: DRAW OVER T:T,0: POKE 23105,D+D-T
: POKE 23054,7: POKE 23076,7
9681 IF X$="Y" THEN LET P3=Y: GO TO 9651
9682 PRINT AT 21,0: INVERSE T:" ROGER AND OUT " : STOP

```



```

2 REM *****
4 REM ** CHICKEN **
6 REM ** S.O. 12-81 **
8 REM *****
10 OPEN #1,4,0,"K":DIM L$(20),S$(20),C$(20)
15 ? "INITIALIZING ..."
20 REM ** PAGE 6 ROUTINES AND DATA **
40 FOR I=1536 TO 1587:READ A:POKE I,A:NEXT I
41 REM ** VERTICAL BLANK ROUTINE **
42 DIM VB$(210):FOR I=1 TO 210:READ A:VB$(I)=CHR$(A):NEXT I
43 REM ** LOAD PLAYER ROUTINE **
44 DIM LD$(73):FOR I=1 TO 73:READ A:LD$(I)=CHR$(A):NEXT I
47 REM ** INSERT ADDRESS OF ROUT. IN PAGE 6 **
48 A=USR(VB$):B=INT(A/256):POKE 1540,B:POKE 1538,A-256*B
50 DATA 104,160,52,162,6,169,7,76,92,228,104,160,98,162,228,169,7,76,92,228
52 DATA 120,120,120,120,30,57,81,105,15,15,15,0,0,0,0,52,53,54,55,2,2,3,4,12,15,15,15,11,1
1,11
54 REM ** LINE 56 - CHANGE 24 TO 56 TO SKIP ORTHO. **
55 REM ** LINE 56 - CHANGE 28 TO 34 FOR CONT. MOV. **
56 DATA 72,138,72,152,72,162,0,189,120,2,29,44,6,160,15,24,176,32,201,15,240,28,201,14,208,2,160
13,201,13
57 DATA 208,2,160,14,201,11,208,2,160,7,201,7,208,2,160,11,192,15,240,6,61,48,6,157,28,6,152,61,
44,6,157,44,6
58 DATA 232,224,4,144,195
60 DATA 162,0,189,32,6,133,203,189,36,6,133,204,189,40,6,133,209,198,209,16,7,232,224,4
65 DATA 144,232,176,91,189,28,6,133,207
70 DATA 70,207,176,28,188,24,6,192,1,240,19,208,1,200,177
75 DATA 203,240,6,136,145,203,200,208,245,136,145,203,222,24,6,70,207,176,29,188,24,6,200,192,25
4,176,21
80 DATA 177,203,208,247,136,177,203,240,6,200,145,203,136,208,245,200,145,203,254,24,6,70,207,17
6,3,222,20
85 DATA 6,70,207,176,3,254,20,6,189,20,6,157,0,208
90 DATA 24,144,154,162,4,189,11,208,240,5,169,0,157,39,6,202,208,243,104,168,104,170,104,76,98,2
28
100 DATA 234,234,234,104,104,104,170,189,32,6,133,186,189,36,6,133,187,104,133,213,104,133,212
110 DATA 189,24,6,133,195,169,0,168,192,255,176,35,196,195,240,5,145,186,200,208,243,162,0,161,2
12,240,11
120 DATA 145,186,230,212,200,192,255,176,11,208,241,169,0,145,186,200,192,255,144,249,96,234,234
150 REM ** CAR COLOR DATA **
160 FOR I=1 TO 20:READ A:C$(I)=CHR$(A):NEXT I
170 DATA 24,60,218,68,90,186,70,150,54,232,74,168,88,154,21,252,200,76,228,28
190 REM ** DEFINE PM AREA - SINGLE LINE RESOL. **
200 A=PEEK(106)-16:POKE 54279,A:PM=256*A
205 REM ** PLAYER MISSILE POINTERS **
210 FOR I=4 TO 7:POKE 1568+I,A:I=NEXT I
212 FOR I=1568 TO 1571:POKE I,0:NEXT I
218 REM ** DATA FOR PLAYER IMAGES **
220 FOR I=PM TO PM+121:READ A:POKE I,A:NEXT I
230 DATA 16,56,16,56,40,16,16,16,146,254,254,124,56,56,40,40,40,40,108,0
232 DATA 126,195,219,219,91,219,219,219,219,91,219,219,195,126,0
234 DATA 126,195,219,219,218,219,219,219,219,218,219,219,195,126,0
236 DATA 33,34,150,84,57,30,60,123,159,30,52,86,151,36,194,193,0
238 DATA 16,56,16,56,40,16,16,56,124,254,186,56,56,40,40,40,44,32,96,0
240 DATA 16,56,16,56,40,16,16,146,214,124,56,56,40,40,40,104,8,12,0
242 DATA 126,255,173,173,239,199,199,199,199,199,239,173,173,255,126,0
270 REM ** INIT. HORIZ. AND VERT. POS. **
280 RESTORE 282:FOR I=1556 TO 1563:READ A:POKE I,A:NEXT I
282 DATA 120,120,120,120,30,57,81,105

```

ONE OF THE objects in developing this game is to be able to control player missiles from Basic simply, without writing a lot of code. This approach offers quite a bit of flexibility.

The routines are put in two strings, LD\$ and VB\$. LD\$ is used in loading players into PM areas and is used as

A=USR(LD,X,ADDR)

where

LD=ADDR(LD\$)

X is the player number, 0-3, and ADDR is the address where player data is located. Data must end with a 0. VB\$ is a routine inserted in the vertical blank routine. It is quite complicated and uses a number of locations in page 6. I will try to describe the approach used.

Each joystick is associated with one player. If you do not want to use the joystick to move a certain player, that player can be masked out. Individual directions of movement can also be masked. For example, a player can be made to respond only horizontally or only vertically to a joystick. Orthogonal movement — only vertical or horizontal — is also an option.

The orthogonal movement can be such that a player moves only when the joystick is pushed or the joystick can be used only to change directions of moving objects. Beyond movement by joystick, a continuous movement in a certain direction can be forced with or without joystick control on top of this background movement. Finally, the speed of the object can be controlled by Poking a single byte.

Here is a list of page 6 reserved locations and their purpose:

(ALL FOR PLAYERS 0 TO 3 IN ORDER)	
1556 (0614)-1559 (0617)	HORIZONTAL POSITIONS
1560 (0618)-1563 (061B)	VERTICAL POSITIONS
1564 (061C)-1567 (061F)	DIRECTION BYTES
1568 (0620)-1571 (0623)	LOW-BYTE PLAYER AREA POINTER
1572 (0624)-1575 (0627)	HIGH-BYTE PLAYER AREA POINTER
1576 (0628)-1579 (062B)	REPETITIONS (SPEED)
1580 (062C)-1583 (062F)	MASKS FOR JOYSTICKS
1584 (0630)-1587 (0633)	FORCED DIRECTIONS

Direction bytes are like those produced by the joysticks. They could be Poked directly into locations 1564-1567. Values other than 15 give motion in the direction indicated. Position is updated every vertical blank period so at the slowest speed a player will cross the screen in about three seconds. To move faster Poke increasing numbers in the speed bytes. Motion can also be stopped by Poking zero in the speed byte.

Masks are Ored with bytes from the joysticks. Since a 1 bit represents a No for a particular direction, a 15 — hexadecimal 0F — will cut out all directions, that is, eliminate that joystick. Other useful masks are:

12 — ONLY VERTICAL MOTION
3 — ONLY HORIZONTAL MOTION
0 — NO RESTRICTIONS ON MOTION



Directions are also Anded with forced-direction bytes. Zeros represent Yes directions, so a 15 has no effect, and other directions are as those produced by the joystick.

Orthogonal movement cannot be handled by masks alone so a routine is included for this option. Line 54 tells the change necessary to skip this option. Also, when in the orthogonal mode, you can choose continuous motion with the joystick used only to change directions. Line 55 has the change required.

Working with interrupts is tricky. To ensure no conflicts, our VBI routine should be taken out before doing machine language routines other than single Pokes. A routine to do this is located in page 6

A=USR(1546)

A=USR(1536) inserts our VBI routine again. For sake of speed, the load player routine contains these other two routines at the beginning and end. This means loading the player routine automatically inserts our VBI routine.

I found out the hard way that a Load of players has to follow initialisation of PM graphics. In PM, graphics (line 370) has to follow any graphics mode change.

When getting out of the program to Basic, use the Reset key to take out the VBI routine. If you use the break key and do anything else before hitting Reset the system will crash.

Necessary page 6 data — masks, speeds, pointers, etc — could be read in as in lines 45-55 but some of this will depend on size of

CHICKEN RUN

Why did the chicken cross the road? Play this game for the Atari written by Stan Ockers and you will find out. Be among the first to break into Atari Basic games-writing.



SPECIAL

memory and should be initialised separately as in lines 210-212. The pertinent sections — roughly lines 10-290 and 370-390 — can be Listed to cassette and Entered when starting a new program. If no player is required, it is still a good idea to clear the player area with

```
A=USR(LD,X,ADDR)
```

where ADDR points to a zero data byte.

Collision routines are meant to be placed at the end of our VBI routine. As it stands only a very simple routine is provided. More complex routines are in the works. The routine provided simply stops both players that collide by setting their speed to zero. Detection of collision — line 510 — and resetting of the collision register and speed bytes is done in Basic.

Enough of this heavy stuff — what about the game?

Why does a chicken cross the road? To score points of course! Just move him with joystick 0, watching out for passing cars. The car speed goes roughly with difficulty — DIF — and DIF will increase each time you get across. DIF will decrease each time you are hit.

You start with 50 points and that score is increased by 10 times the DIF value each time you cross the road. Each time you are hit your score decreases by 20 points. You have about two minutes to start — each count is about four seconds — and 40 seconds will be added for each 300 points you score. Be the first in your clique of Atari gamers to reach 10,000 chicken points!

```
288 REM ** INIT COLORS **
290 DIF=3:BONUS=300:POKE 704,40:CP=0:FOR I=1 TO 3:POKE 704+I,ASC(C$(CP+1)):NEXT I:CP=3:BPOS=5
295 REM ** DRAW ROADS - SET PRIORITY **
300 GRAPHICS 17:FOR I=1 TO 20:L$(I)="" :NEXT I
305 FOR I=2 TO 20 STEP 2:S$(I)="" :S$(I-1)="" :NEXT I
310 POSITION 0,2: ? #6;L$:POSITION 0,11: ? #6;L$:POSITION 0,13: ? #6;L$:POSITION 0,22: ? #6;L$
312 POSITION 0,5: ? #6;S$:POSITION 0,8: ? #6;S$:POSITION 0,16: ? #6;S$:POSITION 0,19: ? #6;S$:POKE 7
10,90
340 REM ** INIT. AND PRINT INFO. - RESET TIMER **
350 SCORE=50:POSITION 3,1: ? #6;"score" time " :POSITION 3,23: ? #6;"dif" high " ;
360 POSITION 3,0: ? #6;SCORE:POSITION 15,22: ? #6;HIGH:POKE 77,0:POKE 19,0:POKE 20,0
365 REM ** INIT. PM GR. - FLAGS **
370 POKE 559,62:POKE 53277,3:11=68:12=88:FL=11
375 REM ** LOAD PLAYERS - SET COLORS - PLAYER SIZES **
380 LD=ADR(LD$):A=USR(LD,0,PM):A=USR(LD,1,PM+21):A=USR(LD,2,PM+21):A=USR(LD,3,PM+21)
385 A=USR(1536):REM ** INSERT VBI ROUTINE **
390 POKE 53257,1:POKE 53258,1:POKE 53259,1:POKE 623,1
395 REM ** INIT. SPEEDS **
395 POKE 1576,2:FOR I=1577 TO 1579:POKE I,RND(0)*DIF+1:NEXT I
398 POSITION 4,22: ? #6;DIF
400 REM ** IF CARS OFF SCREEN, CHANGE LANES **
410 IF PEEK(1557)<15 AND PEEK(1561)=57 THEN POKE 1561,193:A=USR(LD,1,PM+36):POKE 1585,7:GOSUB 10
00:POKE 705,C
420 IF PEEK(1557)>240 AND PEEK(1561)=193 THEN POKE 1561,57:A=USR(LD,1,PM+21):POKE 1585,11:GOSUB
1000:POKE 705,C
430 IF PEEK(1558)<15 AND PEEK(1562)=81 THEN POKE 1562,169:A=USR(LD,2,PM+36):POKE 1586,7:GOSUB 10
00:POKE 706,C
440 IF PEEK(1558)>240 AND PEEK(1562)=169 THEN POKE 1562,81:A=USR(LD,2,PM+21):POKE 1586,11:GOSUB
1000:POKE 706,C
450 IF PEEK(1559)<15 AND PEEK(1563)=105 THEN POKE 1563,145:A=USR(LD,3,PM+36):POKE 1587,7:GOSUB 1
000:POKE 707,C
460 IF PEEK(1559)>240 AND PEEK(1563)=145 THEN POKE 1563,105:A=USR(LD,3,PM+21):POKE 1587,11:GOSUB
1000:POKE 707,C
465 REM ** PRINT TIME - CK. FOR TIME UP **
470 TIME=30-PEEK(19):POSITION 15,0: ? #6;TIME; " :IF TIME<=0 THEN 910
472 REM ** RESET SOUND - HORN ROUTINE **
473 SOUND 0,0,0,0
475 IF RND(0)>0.5 THEN SOUND 1,0,0,0
480 IF RND(0)<0.05 THEN SOUND 1,7,12,10
482 REM ** CHICKEN STOMP **
485 P=PEEK(1564):IF P>15 OR P<13 THEN 500
490 IF P=15 THEN A=USR(LD,0,PM):GOTO 500
492 IF FL=11 THEN FL=12:SOUND 0,16,6,8:GOTO 496
494 IF FL=12 THEN FL=11:SOUND 0,22,6,8
495 REM ** CK. FOR REACHING BOTTOM **
496 A=USR(LD,0,PM+FL)
500 IF PEEK(1560)>230 THEN 810
505 REM ** CK. FOR COLLISION **
510 IF PEEK(53260)=0 THEN 410
515 REM ** SPLAT **
520 A=USR(LD,0,PM+51):FOR J=1 TO 3:SOUND 0,RND(0)*255,8,8:SOUND 1,RND(0)*255,8,8
525 POKE 704,PEEK(704)+8:FOR I=1 TO 30:NEXT I:NEXT J:SOUND 0,0,0,0:SOUND 1,0,0,0:POKE 704,40
527 REM ** DECREASE SCORE - CK FOR 0 **
530 SCORE=SCORE-20:POSITION 3,0: ? #6;SCORE; " :IF SCORE<=0 THEN 702
533 REM ** MOVE UP - RELOAD BIRD - RESET COLL. **
535 POKE 1560,PEEK(1560)-24:A=USR(LD,0,PM):IF DIF>1 THEN DIF=DIF-1
590 POKE 53278,0:GOTO 395
700 REM ** SCORE = ZERO **
701 REM TYPE IN INVERSE VIDEO
702 POSITION 3,2: ? #6;"CHICKEN'S DEAD"
704 REM ** AMBULANCE **
705 C=1
706 IF PEEK(1576+C)=0 THEN C=C+1:GOTO 706
707 IF C>3 THEN C=1
713 POKE 1576+C,1:POKE 1560+C,PEEK(1560):POKE 1556+C,220:A=USR(LD,C,PM+107)
715 FOR J=1 TO 6:FOR P=60 TO 40 STEP -2:SOUND 0,P,10,8:FOR I=1 TO 6:NEXT I
716 NEXT P:FOR P=40 TO 60 STEP 2:SOUND 0,P,10,8:FOR I=1 TO 6:NEXT I:NEXT J:SOUND 0,0,0,0
718 REM ** NEW HIGH SCORE? **
720 A=USR(1546):IF SCORE>HIGH THEN HIGH=SCORE:POSITION 15,22: ? #6;HIGH
730 POSITION 2,6: ? #6;"press FIRE button":POSITION 4,7: ? #6;"to play again"
732 FOR I=53248 TO 53251:POKE I,0:NEXT I:SOUND 0,0,0,0:SOUND 1,0,0,0
735 REM ** WAIT FOR BUTTON **
740 IF STRIG(0)=1 THEN 740
745 REM ** PM GRAPHICS OFF **
750 POKE 53278,0:POKE 53277,0:A=USR(1546):GOTO 280
800 REM ** BK TO TOP - STOP MOVEMENT OF BIRD **
810 POKE 1560,30:A=USR(LD,0,PM):POKE 1576,0
815 REM ** SIGNAL AND INCREMENT SCORE **
820 FOR I=1 TO 5:FOR J=10 TO 5 STEP -1:SOUND 0,J,14,8:SOUND 1,J,2,8:NEXT J:SOUND 0,0,0,0:SOUND 1
,0,0,0
825 A=USR(LD,0,PM+68):FOR J=1 TO RND(0)*30:NEXT J:A=USR(LD,0,PM+88)
830 SCORE=SCORE+DIF*2:POSITION 3,0: ? #6;SCORE; " :NEXT I
840 IF DIF<9 THEN DIF=DIF+1
841 REM ** CK FOR BONUS **
842 IF SCORE<BONUS THEN 850
844 SOUND 0,25,10,10:BONUS=BONUS+300:P=PEEK(19):IF P<11 THEN POKE 19,0:GOTO 848
846 POKE 19,P-10
848 POSITION BPOS,13: ? #6;" :BPOS=BPOS+1
850 GOTO 390
900 REM ** TIME'S UP ROUTINE **
910 POSITION 5,2: ? #6;"TIME'S UP"
920 GOTO 720
990 REM ** CHANGE CAR COLOR SUB. **
1000 CP=CP+1:IF CP=20 THEN CP=1
1010 C=ASC(C$(CP)):RETURN
```


With Keith Brain's Dragon disaster game you can blithely relish all the catastrophes that plague the holiday motorist without even setting foot on the ferry.

CHRISTMAS IS traditionally the time when everyone starts to think about next year's summer holidays but not, perhaps, the pleasures of holiday motoring. This program will sharpen up your driving skills and remind you of the sad consequences of bad driving.

As you are driving along a road which winds at random through the countryside you are confronted by various obstacles which have different consequences on the outcome of your journey.

Your joystick allows you to steer to left and right, accelerate and brake, whilst the fire

button sounds the horn and may help you avoid a problem. With practice you will learn which obstacles must be avoided at all costs.

Your elapsed time and the distance to your destination are continuously displayed but can you get there before the ferry leaves? Did you remember to take those travel-sickness pills and check your tyres? Is it worth risking your driving licence when you already have two endorsements? How long must you wait for the traffic lights to change?

Try it out on your spouse — or your parents — and you might even persuade them that the holiday money is better spent on a new computer for the kids.

Here are some notes to explain the program construction and these will allow you to modify the program to include your own particular holiday terrors. Care must be taken when printing due to the automatic screen scroll on the Dragon. Remember to put the Print position back to where you want to print a new road section and that Poking does not

cause a Scroll.

If you really cannot win then you can always change the values of the variables.

Lines 10-40 provide an introduction to the game and set the internal timer and distance to travel. Line 50 prints a blank road for you to start on.

Line 60 prints a new road section at a random Tab on the screen, increments the timer, and decrements the distance left.

Line 70 prints elapsed time and distance to travel in the top right-hand corner, then returns the print position to the bottom of the screen.

Line 80 determines the random Tab for the next road section. Lines 90 and 100 check that the road will not overflow the screen. Line 110 tests for the end of the journey.


Line 120 Pokes black — 128 — into the current Print position to erase the car after each move.

Line 130 checks for the colour of the next Print position and, if it is not black, goes to the consequences subroutines.

Line 140 Pokes random colours in random positions on to the next road section. Line 150 Pokes the car on to the screen near the centre.



**Your hands will sweat. Your heart
Your oxygen might run out. And you're still**

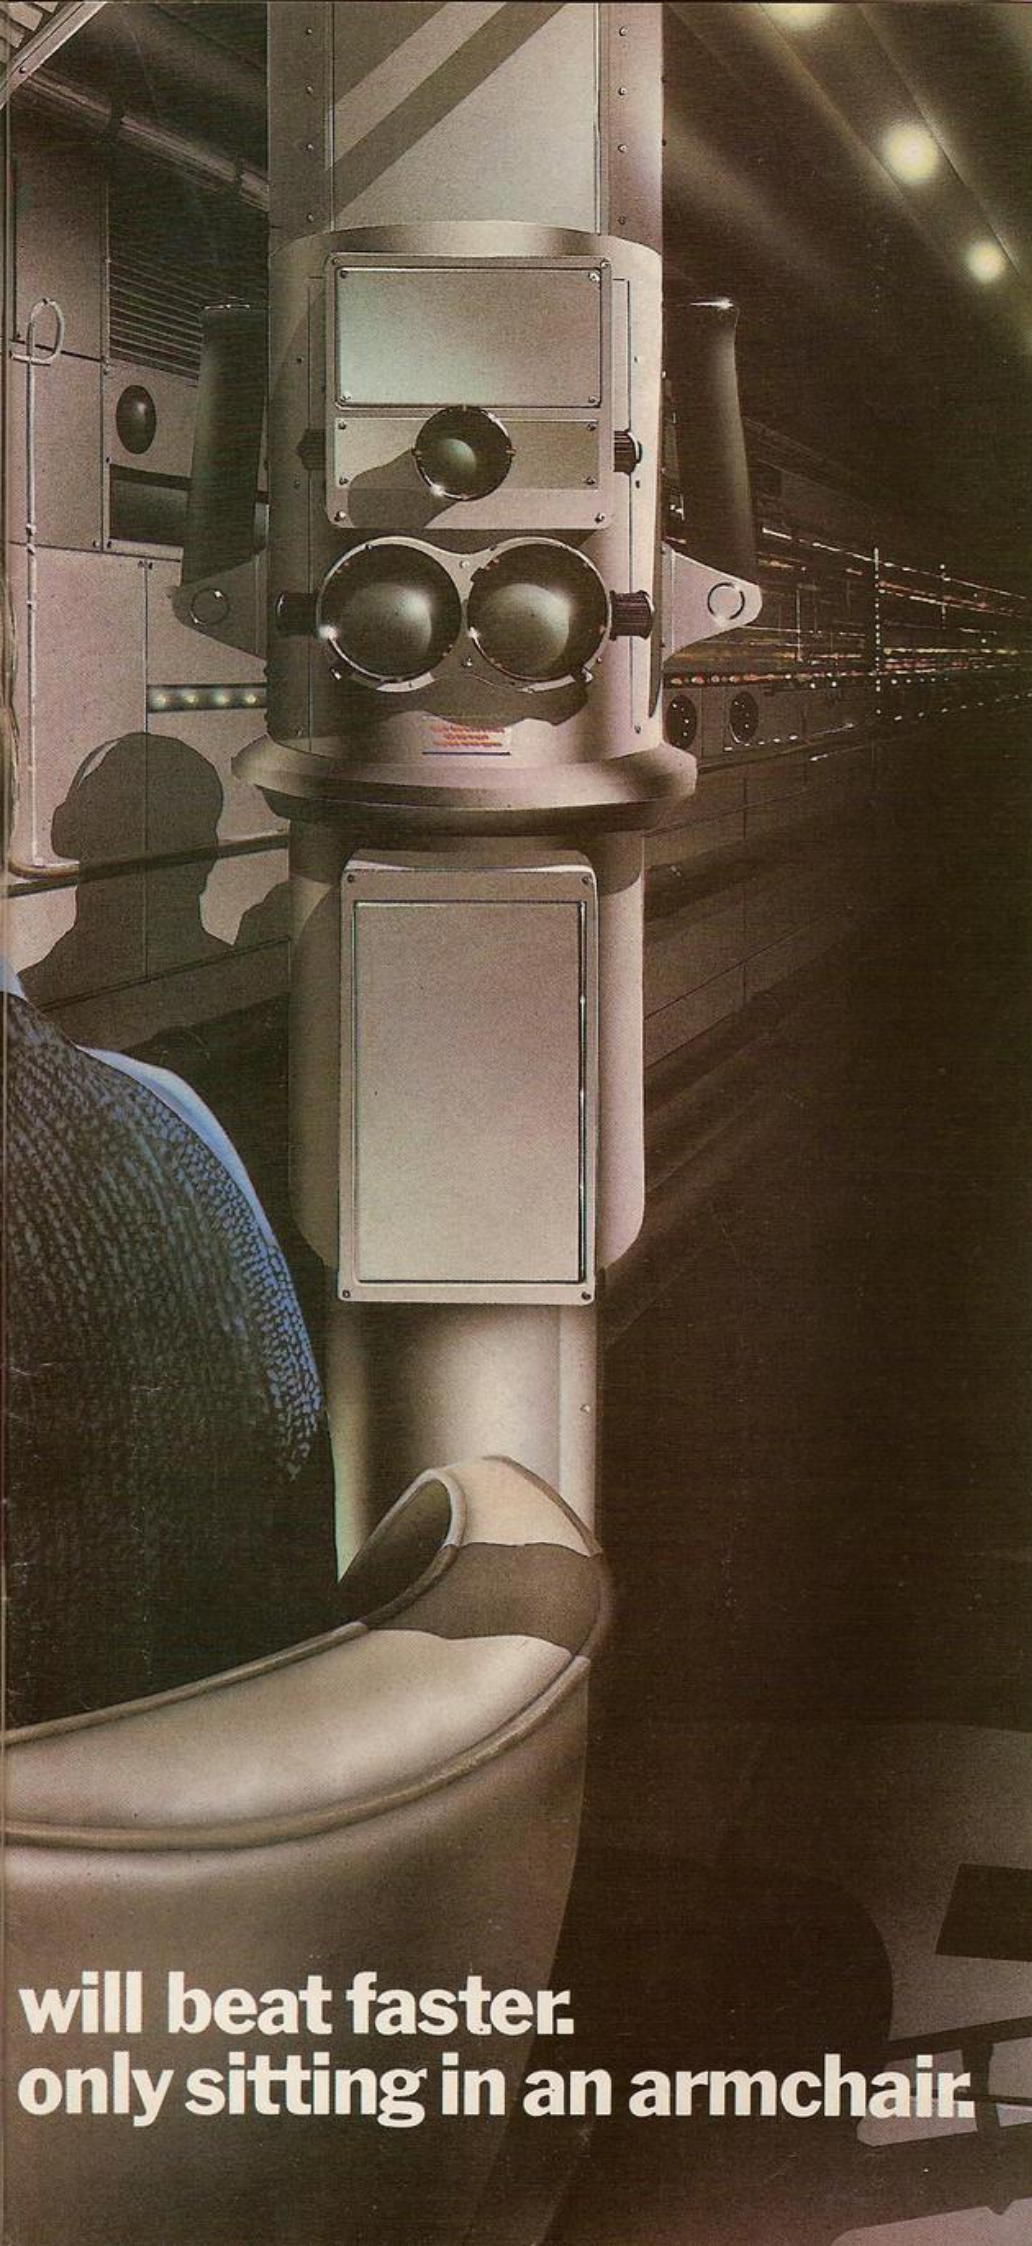

At seventy fathoms the only light comes from your Sonar, steadily tracking the advancing enemy fleet.

Suddenly they're above, dropping depth charges. You could dive. But how close is the sea bed? You could attack. But how many torpedos are left? And your oxygen. Isn't it dangerously low?



Submarine Commander. 12 K ROM. Cartridge. 3 screen modes: map, sonar and periscope. 9 skill levels. Controls: Fuel. Damage Indicators. Speed. Compass Bearing. Depth Gauge. Battery Charge. Oxygen. Hydrophone/Engine Noise. Attitude. Clock. Depth below keel. Torpedos. Tonnage Sunk.

'Submarine Commander' is one of 21 challenging new home computer games from THORN EMI, for use with Atari 400/800 or Commodore VIC 20. Like our 'Jumbo Jet Pilot' it's more a real-life simulator than a game.

But our programs aren't all work and no play. 'River Rescue', 'Kickback' and 'Soccer' are all-action games. 'Pool' and 'Darts' will suit armchair sportsmen.

And whilst budding Beethovens play the 'VIC Music Composer', would-be Chancellors can work on their budgets with 'Home Financial Management'. We also have educational puzzles for children that will puzzle adults at higher skill levels.

But there's one simple idea behind all our titles. They're designed for players who expect more of a challenge from a video game than creatures from outer-space can provide. Now, are you sitting comfortably?



The world's greatest TV games.



PROGRAMS FOR ATARI 400/800 (Trademark of Atari Inc. except where indicated).
*PROGRAMS FOR COMMODORE VIC 20 (Trademark of Commodore International).

Available from all branches of Laskys (Nationwide), Micro C at Currys, and all other leading Computer software outlets.

**will beat faster.
only sitting in an armchair.**

Seize power in your own banana republic with Boylen and Harvey's game of subversion for the Sharp.

EL SHAPIRO is an independent country situated somewhere in the Caribbean. The capital, Diaz, is the only city.

The country is run by an evil dictator, Dr Emmanuel Jesus Ratok who runs the country for his own benefit. Ratok grows richer and the country grows even poorer.

He rules with a fist of iron in a glove of steel; all opposition is crushed by his sadistic army and police.

As leader of the newly-formed El Shapiro Liberation Organisation — ELO — you have vowed to rid your homeland of this evil dictator and hold free elections for the first time ever.

As Dr Ratok has made himself president for life the only way to get rid of him is to stage a coup and depose him. To do this you must capture the army barracks and get a bazooka to knock out the only tank that guards his palace. To capture the barracks you must have automatic weapons and enough men to use them. The only place with the number of weapons you need is the police station. You must liberate the freedom fighters languishing in the state jail to get the number of men you need.

You can also capture the TV station and the bank. Until you capture the bank the president can use its funds to hire mercenaries. All these buildings are ringed by guard towers and it is very risky to attack the building without destroying its guard tower first.

To destroy the guard towers you need to buy some dynamite from your friendly, rich dealer in death and destruction, Adam Khagosschi.


The towers are randomly numbered and, with luck, you may just get a quick look at a secret map with locations on it. It may help you get some of your men out of prison if you have a boat. You can also free some of your captured lieutenants who are held in the top-security wing by buying a helicopter if you can afford it. If you attempt an escape by sea a rope may come in handy.

Kidnapping is another way to free your friends and increases the fighting fund. If your popularity, U.S. backing, ELO membership or number of lieutenants fall below one your coup d'état has failed.

The opposition consists of: Dr Ratok — the president; General Jung — the chief of staff; Lt Lapidus — chief interrogator; and Sgt Sadoul — the executioner. There may be other characters that may become involved — they may help you or they may help the enemy.

ELO membership is restricted to a maximum of 300 until you liberate your men from prison. You may not have more than 20 lieutenants. The maximum number of safe houses is 30. You may purchase hand-guns and rifles, but the minimum order is 300 — in order to get your discount. These will increase your attacking power. You may not visit the same location twice in a row — bad for security.


You and your men face a powerful and ever-vigilant enemy, the fight will be long and hard with little chance of success. We, the people, wish you luck.

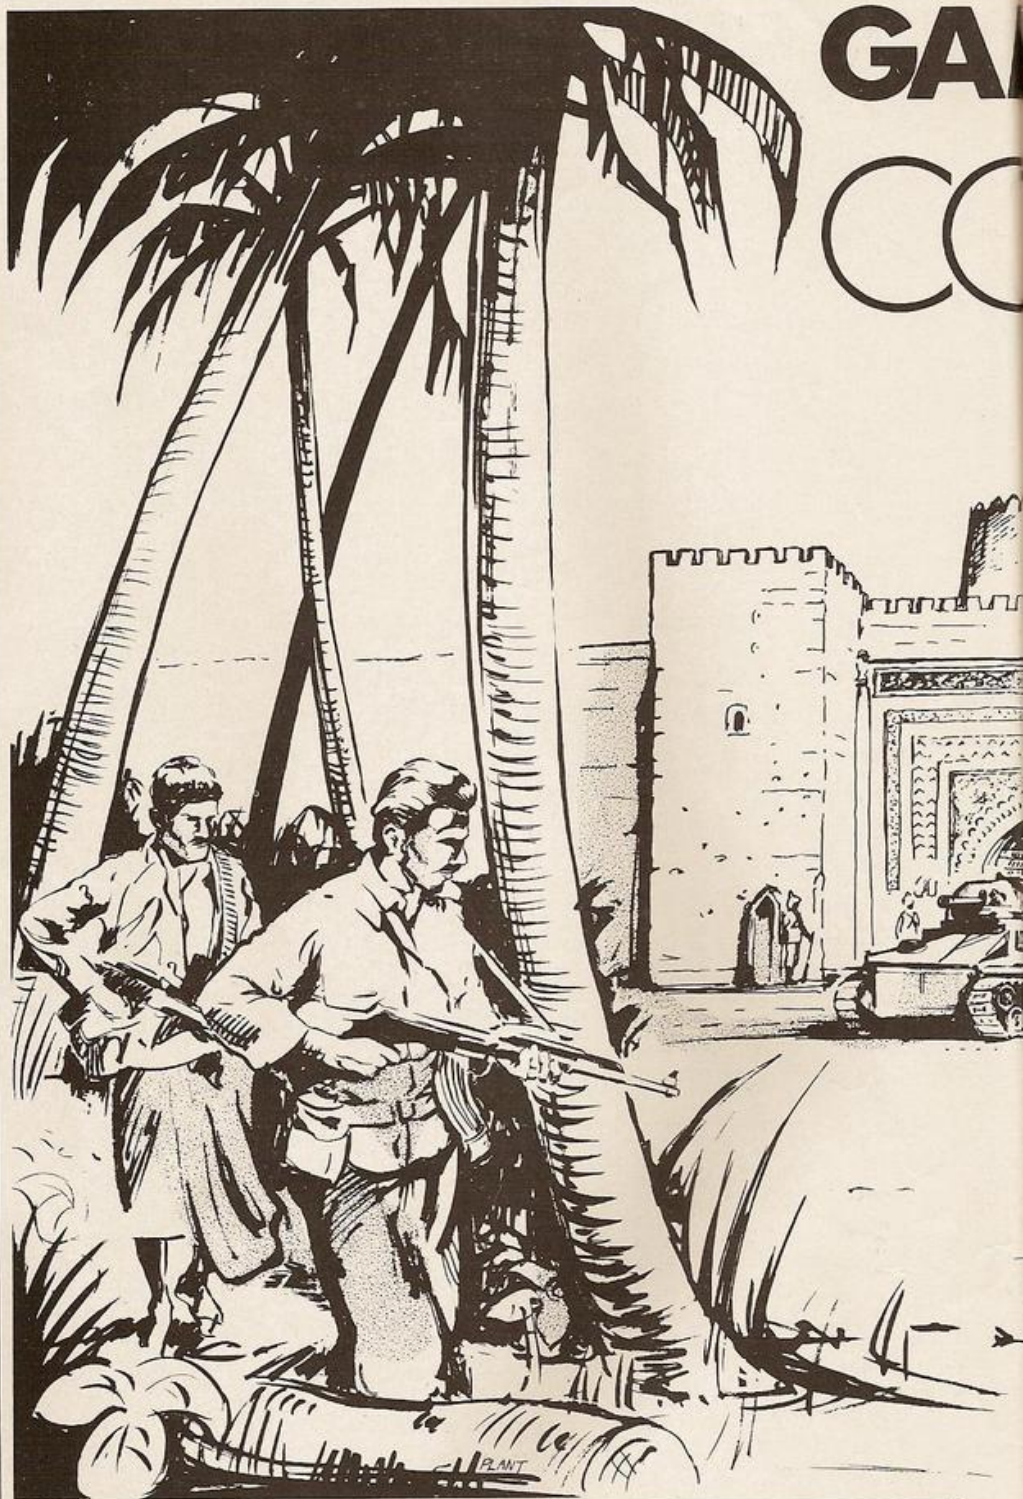

The main variables.

BZ	Bazooka	PR	Prison
BA	Bank	PS	Popular support
BT	Boat	MP	Map
DT	Dynamite	MO	Input move
DY	RND. Price of dynamite	MY	ELO fighting fund
EL	ELO membership	MV	Number of moves taken
ES	Enemy strength	NL	Number of lieutenants
FA	Failure flag	NS	Number of safe houses
FO	Food	NX	Saves number of last move
GA	Prison guards	RI	RND. Price of rifles
GB	Gold bars	RD	Radio station
HA	RND. Price of hand-guns	RP	Number of ropes
HD	Helicopter damage	RS	Ransom
HE	Helicopter	TK	Tank
HS	Hostages	TV	TV station
JP	Jeep	UF	United States friendship
LO	Location	VR	Video recorders
PH	Police station	Y	Poke to screen
PL	Police numbers	Z	Tabset then variable used to Poke screen address — introduction

AMES SPECIAL COUP D'ÉTAT

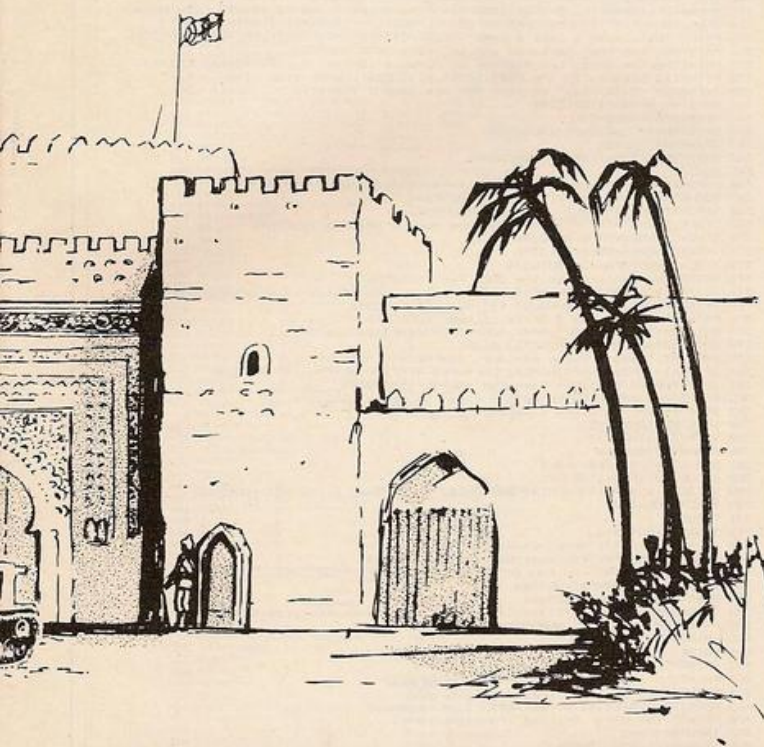

```

61 PRINT:PRINT " No. of Lieutenants: ";NL
62 PRINT:PRINT " Fighting Funds: ";MY; " Dollars"
63 PRINT:PRINT " No. of Safe Houses: ";NS
64 PRINT:PRINT " Type of Weapons: ";TW (W)
65 FORA=0T07000: NEXT
66 IF (NL<1)+(EL<1)+(PS<1)+(UF<1) THEN 747
67 IF (BT=0) * (EL<300) THEN EL=300
68 IF ES<0 THEN ES=0
69 IF UF<100 THEN UF=100
70 IF FL<0 THEN FL=0
71 IF PS<100 THEN PS=100
72 IF NL<20 THEN NL=20
73 PRINT "#####"
74 PRINT "#####"
75 PRINT "##### MOVE #####"
76 PRINT "#####"
77 PRINT "#####:PRINT "#####(0) Map"
78 PRINT "#####(1) Status (2) Ghetto"
79 PRINT "#####(3) Bank (4) Harbour"
80 PRINT "#####(5) Square (6) T.V. Station"
81 PRINT "#####(7) Police Station (8) Hotel"
82 PRINT "#####(9) Prison (10) Church"
83 PRINT "#####(11) Barracks (12) Palace:GOSUB 471
84 INPUT M: IF (M<N) * (M>1) THEN PRINT M: "has just been there":GOTO 84
85 IF M=0 THEN 472
86 IF M=1 THEN 51
87 NX=M: MV=MV+1: IF M=2 THEN 99
88 IF M=3 THEN 117
89 IF M=4 THEN 134
90 IF M=5 THEN 157
91 IF M=6 THEN 175
92 IF M=7 THEN 216
93 IF M=8 THEN 253
94 IF M=9 THEN 280
95 IF M=10 THEN 324
96 IF M=11 THEN 338
97 IF M=12 THEN 378
98 PRINT "Press the right Button EL=DUMB011":GOTO 84
99 GOSUB 636: A=FNA(6): DNAGOTO 102, 104, 107, 111, 112
100 IF TV=0 THEN GOSUB 424: PS=PS-FNA(8): 2:GOTO 396
101 GOTO 111
102 S=INT (FNA(3)*PS/10): PRINTS: "New Recruits ask to Join the E.L.D."
103 EL=EL+S:GOTO 396
104 S=FNA(40):GOSUB 800:PRINT M: "been Ambushed by the Army":EL=EL-S
105 GOTO 396
106 S=FNA(10)
107 IF D<0 THEN PRINT "Your People give Food to the Poor":PS=PS-S:GOTO 110
108 PRINT "The People are not too chuffed that You Haven't BROUGHT any FOOD"
109 PS=PS-S:GOTO 396
110 FD=FD-1:GOTO 396
111 S=FNA(14):PRINT "One of Your Men Robs A U.S. Reporter":UF=UF-S:GOTO 396
112 IF TR(13)=0 THEN 99
113 PRINT "Your Truck is Searched on the Bridge":Y=FNA(2)
114 IF Y=1 THEN PRINT "They Couldn't Find an ELEPHANT":GOTO 396
115 IF D<0 THEN PRINT "They Confiscate Your Food":FD=0:GOTO 396
116 PRINT "They Arrest the Drivers":EL=EL-S:GOTO 396
117 GOSUB 680: A=FNA(3): DNAGOTO 122, 123
118 K=FNA(7): IF (BA=0) * (K<3) * (ES<8) THEN PRINT "The Bank has Been RECAPTURED":K=9
119 IF K=9 THEN EL=EL-BA:BA=0:GOTO 396
120 IF K<3 THEN PRINT "You've Been Given Some Cash":MY=MY+FNA(4):PS:GOTO 396
121 PRINT M: "Still can't get a loan":GOTO 396
122 GOTO 797
123 S=INT (ES/6): EN=" Soldiers":GOSUB 466
124 IF S="N" THEN 396
125 LD=BA: N=4: LT=" Bank": RS=0: MS=FNA(1200): M=FNA(5): T=10
126 GOSUB 398: IF FA=1 THEN FA=0:GOTO 396
127 IF AC=2 THEN ES=ES-S:GOTO 396
128 IF AC=1 THEN BA=2:MY=MY+MS:GOTO 396
129 IF AC=3 THEN ES=ES-S:GOTO 396
130 IF AC=4 THEN 396
131 IF AC=5 THEN M=MS
132 PRINT "They Take":M; " Dollars, You Get":MS
133 MY=MY+MS-M:GOTO 396
134 GOSUB 556
135 A=FNA(6): DNAGOTO 151, 145, 143, 152, 154
136 K=FNA(7)
137 IF (K<4) * (ES>10) * ((TR(13)=1)+(TR(12)=1)) THEN 139
138 GOTO 140
139 GOSUB 800:PRINT M: "DIDN'T Get Past The Tower":NL=NL-1:GOTO 396
140 IF K=0 THEN PRINT "You've got A Contribution":MY=MY+FNA(4):PS:GOTO 396
141 IF (K=1) * (RD=0) THEN PRINT "Your Mans Found A Crate of Radics":RD=1:GOTO 396
142 PRINT "Water Looks Dirty":GOTO 396
143 IF TV=0 THEN GOSUB 424:GOTO 396
144 GOTO 135
145 IF B=1 THEN 135
146 PRINT M: "Sees A Motor Boat At The Quay"
147 PRINT "Would You like to BORROW it?":GOSUB 468
148 IF A="N" THEN 396
149 S=FNA(6): IF S=2 THEN PRINT "Nice Boat You've got there":RD=1:GOTO 396
150 PRINT "Unfortunately":M: "forgot he CAN'T TOW THE SWIM":NL=NL-1:GOTO 396
151 GOTO 434
152 IF TR(12)=1 THEN GOTO 797
153 PRINT "Not Much Doing":GOTO 396
154 PRINT M: "is Shot at":GOSUB 800: A=FNA(2)
155 IF A=1 THEN PRINT "THEY MISSED":GOTO 396
156 IF A=2 THEN PRINT "GOOD SHOT Unfortunately":NL=NL-1:GOTO 396
157 GOSUB 700
158 A=FNA(5): DNAGOTO 171, 159, 160, 168, 172
159 HD=FNA(PS/4): IF (SH(HD)=0) * (PS>55) THEN SH(HD)=1:GOTO 167
160 LD="The Square"
161 PRINT LD: "has Been SURROUNDED by Troops":GOSUB 801
162 PRINT M: "Must Go To A Safe House"
163 PRINT "Choose From 1-30":GOSUB 471: INPUT H
164 IF (HD<0) * (HD>30) THEN PRINT "I realise illiteracy is common here BUT":GOTO 163
165 IF SH(HD)=0 THEN PRINT "The House as Been BETRAYED":NL=NL-1:GOTO 396
166 PRINT "PHEW That was Close":GOTO 396
167 PRINT "You have GAINED A Safe House":NS=NS+1:GOTO 396
168 IF (HE=1) * (HD=1) THEN PRINT "A Box of Helicopter Spares have Fallen":GOTO 170
169 GOTO 158
170 PRINT "off the Back of A Lorry, NUDGE! NUDGE!":HD=0:GOTO 396
171 GOTO 434
172 PRINT M: "Meets A Shady Looking Trader"
173 IF (FD=0) * (RD=1) * (VR=1) * (GB=1) * (JP=1) THEN 455
174 PRINT "Who sells him some DIRTY Postcards":GOTO 396
175 GOSUB 19: A=FNA(5): DNAGOTO 182, 191, 194, 197
176 K=FNA(7)
177 IF (TV=0) * (K<3) * (PL=TV) THEN PRINT "The T.V. Station as Been RECAPTURED":K=9
178 IF K=9 THEN EL=EL-TV:TV=0:GOTO 396
179 IF K=1 * (VR=0) THEN PRINT M: "Finds Some VIDEO RECORDERS":VR=1:GOTO 396
180 PRINT M: "gets a part in SRATOK STREET":GOTO 396
181 S=INT (PL/4): EN=" Police":GOSUB 466
182 IF A="N" THEN GOTO 396
183 LD=TV: N=4: LT=" T.V. Station": RS=0: PS=FNA(5)+1: M=FNA(5): T=4
184 GOSUB 398: IF FA=1 THEN FA=0:GOTO 396
185 IF AC=2 THEN EL=EL-S:GOTO 396
186 IF AC=1 THEN Y=2:PS=100:GOTO 396
187 IF AC=3 THEN EL=EL-S:GOTO 396
188 IF AC=4 THEN PRINT "The Police Take":M; " Each and You Broadcast":PS=PS+P
189 MY=MY+MS:GOTO 396
190 Y=FNA(2):PRINT M: "has Been SHOT by Guards":GOSUB 800
191 IF (Y=1) * (TR(3)=1)+(TR(4)=1) THEN PRINT "Stone DEAD!":NL=NL-1:GOTO 396
192 PRINT "Only winged him":GOTO 396
193 S=FNA(2):PRINT M: "is Shot at by Soldiers":GOSUB 800
194 IF S=1 THEN PRINT "They Couldn't Hit A BUS":GOTO 396

```

(continued on next page)

COUP D'ÉTAT

YOUR COMPUTER, DECEMBER 1982

YOUR COMPUTER, DECEMBER 1982 51

GAMES SPECIAL

FIND

The object of this game is to fit seven keys in seven locks in as few goes as possible. How good a cracksman are you?

shown in figure 2. However, if all the keys are to be fitted, the correct key must be found for each lock.

The object of the game, therefore, is to fit each key into its correct lock. The game is initially set up on the screen like this. First, the keys are set out in sequence along the bottom of the screen and each one is numbered from 1 to 7. Next, the locks are shuffled by the computer, layed out across the centre of the screen, and then covered by a grid or shield so that the player cannot see the sequence. The beginner's game leaves the shield off.

A prompt — K? — appears at the bottom left-hand corner of the screen, asking for the number of the key to be played.

This is followed by a prompt asking which

Figure 1. Top line shows two of the keys, bottom line shows two of the locks.

PROBE is a game program for the ZX-81 with 16K RAM that requires equal measures of luck and skill for it to be completed in the minimum number of moves. The essence of the game is to fit seven keys, which are all different, into the correct locks in the minimum number of moves.

The game is original, and was first developed as a board game to rival the popular game of Mastermind. In its original form the keys consisted of a combination of pins mounted on a shaft, which were tried at various positions on the board to penetrate the locks which consisted of plates with holes in designed to fit specific keys. Its advantage over Mastermind is its self-scoring ability, that is, a passive opponent is not required to report the success or failure of each move.

A second version of the board game was also devised so that a second player could actively participate. This version had locks on the opponent's side of the board that were the reciprocal of the player's own locks. Unfortunately the screen size on the ZX-81 is too small for this second version of the game.

The basis of ZX-81 Probe is that a key with up to three pins on it, can have a possible seven combinations.

If we have seven keys we only need seven locks to complete the elements of a board game.

If it is imagined that the keys are pins and that the locks are holes, it will be seen that most keys will fit into more than one lock, as

- C(H) A counter used to locate the printing of copies of the key above the lock when it has fitted.
 - K(H) A counter used to locate the printing of copies of the key below the lock when it was tried and failed to fit.
 - F(P) Flag to indicate whether a particular key P has been placed on the board.
 - H(H) The number of the lock in position H.
 - P(H) The number of the key in position H.
 - L(P) The last location of key P.
 - H The lock position.
 - P The key position.
- Variables used.

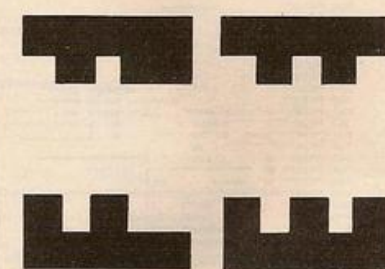


Figure 2. As you can see, some keys would fit more than one lock.

lock the key is to be tried in — L?. If the key fits — and remember it need not necessarily be the correct fit — the display will change as shown in figure 3.

If a key does not fit, the key stays put.

Several moves later you may conceivably get to the stage where, say, key 2 has been fitted into lock 1 and key 3 into lock 6. Key 4 has failed to fit in any of the remaining unoccupied locks.

To find a home for key 4 it is necessary to move one of the other keys which must be occupying key 4's proper lock. The best chance of fitting key 4 is to try locks 1 or 6. Let us therefore try it in lock 1. To do this we must first move key 2 somewhere else, say lock 7. Therefore input:

K? 2 L? 7

This fits and therefore leaves lock 1 free to try key 4 in it. Therefore input:

K? 4 L? 1

The game continues in this manner until all seven keys have been housed. When this point

```

0001 REM "PROBE"
0002 PRINT AT 10,10;"PROBE"
0003 PRINT AT 12,10;"BY B.R.LAW."
0004 PRINT AT 14,10;"22/1/82"
0005 PRINT AT 16,10;"DO YOU WANT"
0006 PRINT AT 18,10;"BEGINNERS GAME Y/N?"
0007 INPUT I$
0008 CLS
0009 FAST
0010 DIM H$(7,3)
0011 DIM F(7)
0012 DIM K(7)
0013 DIM C(7)
0014 DIM L(7)
0015 DIM H$(7)
0016 DIM P(7)
0017 DIM P$(7,3)
0018 DIM M$(7,4)
0019 LET P$=""
0020 LET P$="1"
0021 LET P$="2"
0022 LET P$="3"
0023 LET P$="4"
0024 LET P$="5"
0025 LET P$="6"
0026 LET P$="7"
0027 LET P$="8"
0028 LET P$="9"
0029 LET P$="0"
0030 LET P$="A"
0031 LET P$="B"
0032 LET P$="C"
0033 LET P$="D"
0034 LET P$="E"
0035 LET P$="F"
0036 LET P$="G"
0037 LET P$="H"
0038 LET P$="I"
0039 LET P$="J"
0040 LET P$="K"
0041 LET P$="L"
0042 LET P$="M"
0043 LET P$="N"
0044 LET P$="O"
0045 LET P$="P"
0046 LET P$="Q"
0047 LET P$="R"
0048 LET P$="S"
0049 LET P$="T"
0050 LET P$="U"
0051 LET P$="V"
0052 LET P$="W"
0053 LET P$="X"
0054 LET P$="Y"
0055 LET P$="Z"
0056 LET P$=" "
0057 LET P$="."
0058 LET P$=","
0059 LET P$=";"
0060 LET P$=":"
0061 LET P$="@"
0062 LET P$="#"
0063 LET P$="$"
0064 LET P$="%"
0065 LET P$="&"
0066 LET P$="*"
0067 LET P$="+"
0068 LET P$="-"
0069 LET P$="="
0070 LET P$="<"
0071 LET P$=">"
0072 LET P$="?"
0073 LET P$="!"
0074 LET P$="~"
0075 LET P$="`"
0076 LET P$="_"
0077 LET P$="|"
0078 LET P$="{"
0079 LET P$="}"
0080 LET P$="["
0081 LET P$="]"
0082 LET P$="\"
0083 LET P$="/"
0084 LET P$=":"
0085 LET P$=";"
0086 LET P$=","
0087 LET P$="."
0088 LET P$=" "
0089 LET P$="A"
0090 LET P$="B"
0091 LET P$="C"
0092 LET P$="D"
0093 LET P$="E"
0094 LET P$="F"
0095 LET P$="G"
0096 LET P$="H"
0097 LET P$="I"
0098 LET P$="J"
0099 LET P$="K"
0100 LET P$="L"
0101 LET P$="M"
0102 LET P$="N"
0103 LET P$="O"
0104 LET P$="P"
0105 LET P$="Q"
0106 LET P$="R"
0107 LET P$="S"
0108 LET P$="T"
0109 LET P$="U"
0110 LET P$="V"
0111 LET P$="W"
0112 LET P$="X"
0113 LET P$="Y"
0114 LET P$="Z"
0115 LET P$=" "
0116 LET P$="."
0117 LET P$=","
0118 LET P$=";"
0119 LET P$=":"
0120 LET P$="@"
0121 LET P$="#"
0122 LET P$="$"
0123 LET P$="%"
0124 LET P$="&"
0125 LET P$="*"
0126 LET P$="+"
0127 LET P$="-"
0128 LET P$="="
0129 LET P$="<"
0130 LET P$=">"
0131 LET P$="?"
0132 LET P$="!"
0133 LET P$="~"
0134 LET P$="`"
0135 LET P$="_"
0136 LET P$="|"
0137 LET P$="{"
0138 LET P$="}"
0139 LET P$="["
0140 LET P$="]"
0141 LET P$="\"
0142 LET P$="/"
0143 LET P$=":"
0144 LET P$=";"
0145 LET P$=","
0146 LET P$="."
0147 LET P$=" "
0148 LET P$="A"
0149 LET P$="B"
0150 LET P$="C"
0151 LET P$="D"
0152 LET P$="E"
0153 LET P$="F"
0154 LET P$="G"
0155 LET P$="H"
0156 LET P$="I"
0157 LET P$="J"
0158 LET P$="K"
0159 LET P$="L"
0160 LET P$="M"
0161 LET P$="N"
0162 LET P$="O"
0163 LET P$="P"
0164 LET P$="Q"
0165 LET P$="R"
0166 LET P$="S"
0167 LET P$="T"
0168 LET P$="U"
0169 LET P$="V"
0170 LET P$="W"
0171 LET P$="X"
0172 LET P$="Y"
0173 LET P$="Z"
0174 LET P$=" "
0175 LET P$="."
0176 LET P$=","
0177 LET P$=";"
0178 LET P$=":"
0179 LET P$="@"
0180 LET P$="#"
0181 LET P$="$"
0182 LET P$="%"
0183 LET P$="&"
0184 LET P$="*"
0185 LET P$="+"
0186 LET P$="-"
0187 LET P$="="
0188 LET P$="<"
0189 LET P$=">"
0190 LET P$="?"
0191 LET P$="!"
0192 LET P$="~"
0193 LET P$="`"
0194 LET P$="_"
0195 LET P$="|"
0196 LET P$="{"
0197 LET P$="}"
0198 LET P$="["
0199 LET P$="]"
0200 LET P$="\"
0201 LET P$="/"
0202 LET P$=":"
0203 LET P$=";"
0204 LET P$=","
0205 LET P$="."
0206 LET P$=" "
0207 LET P$="A"
0208 LET P$="B"
0209 LET P$="C"
0210 LET P$="D"
0211 LET P$="E"
0212 LET P$="F"
0213 LET P$="G"
0214 LET P$="H"
0215 LET P$="I"
0216 LET P$="J"
0217 LET P$="K"
0218 LET P$="L"
0219 LET P$="M"
0220 LET P$="N"
0221 LET P$="O"
0222 LET P$="P"
0223 LET P$="Q"
0224 LET P$="R"
0225 LET P$="S"
0226 LET P$="T"
0227 LET P$="U"
0228 LET P$="V"
0229 LET P$="W"
0230 LET P$="X"
0231 LET P$="Y"
0232 LET P$="Z"
0233 LET P$=" "
0234 LET P$="."
0235 LET P$=","
0236 LET P$=";"
0237 LET P$=":"
0238 LET P$="@"
0239 LET P$="#"
0240 LET P$="$"
0241 LET P$="%"
0242 LET P$="&"
0243 LET P$="*"
0244 LET P$="+"
0245 LET P$="-"
0246 LET P$="="
0247 LET P$="<"
0248 LET P$=">"
0249 LET P$="?"
0250 LET P$="!"
0251 LET P$="~"
0252 LET P$="`"
0253 LET P$="_"
0254 LET P$="|"
0255 LET P$="{"
0256 LET P$="}"
0257 LET P$="["
0258 LET P$="]"
0259 LET P$="\"
0260 LET P$="/"
0261 LET P$=":"
0262 LET P$=";"
0263 LET P$=","
0264 LET P$="."
0265 LET P$=" "
0266 LET P$="A"
0267 LET P$="B"
0268 LET P$="C"
0269 LET P$="D"
0270 LET P$="E"
0271 LET P$="F"
0272 LET P$="G"
0273 LET P$="H"
0274 LET P$="I"
0275 LET P$="J"
0276 LET P$="K"
0277 LET P$="L"
0278 LET P$="M"
0279 LET P$="N"
0280 LET P$="O"
0281 LET P$="P"
0282 LET P$="Q"
0283 LET P$="R"
0284 LET P$="S"
0285 LET P$="T"
0286 LET P$="U"
0287 LET P$="V"
0288 LET P$="W"
0289 LET P$="X"
0290 LET P$="Y"
0291 LET P$="Z"
0292 LET P$=" "
0293 LET P$="."
0294 LET P$=","
0295 LET P$=";"
0296 LET P$=":"
0297 LET P$="@"
0298 LET P$="#"
0299 LET P$="$"
0300 LET P$="%"
0301 LET P$="&"
0302 LET P$="*"
0303 LET P$="+"
0304 LET P$="-"
0305 LET P$="="
0306 LET P$="<"
0307 LET P$=">"
0308 LET P$="?"
0309 LET P$="!"
0310 LET P$="~"
0311 LET P$="`"
0312 LET P$="_"
0313 LET P$="|"
0314 LET P$="{"
0315 LET P$="}"
0316 LET P$="["
0317 LET P$="]"
0318 LET P$="\"
0319 LET P$="/"
0320 LET P$=":"
0321 LET P$=";"
0322 LET P$=","
0323 LET P$="."
0324 LET P$=" "
0325 LET P$="A"
0326 LET P$="B"
0327 LET P$="C"
0328 LET P$="D"
0329 LET P$="E"
0330 LET P$="F"
0331 LET P$="G"
0332 LET P$="H"
0333 LET P$="I"
0334 LET P$="J"
0335 LET P$="K"
0336 LET P$="L"
0337 LET P$="M"
0338 LET P$="N"
0339 LET P$="O"
0340 LET P$="P"
0341 LET P$="Q"
0342 LET P$="R"
0343 LET P$="S"
0344 LET P$="T"
0345 LET P$="U"
0346 LET P$="V"
0347 LET P$="W"
0348 LET P$="X"
0349 LET P$="Y"
0350 LET P$="Z"
0351 LET P$=" "
0352 LET P$="."
0353 LET P$=","
0354 LET P$=";"
0355 LET P$=":"
0356 LET P$="@"
0357 LET P$="#"
0358 LET P$="$"
0359 LET P$="%"
0360 LET P$="&"
0361 LET P$="*"
0362 LET P$="+"
0363 LET P$="-"
0364 LET P$="="
0365 LET P$="<"
0366 LET P$=">"
0367 LET P$="?"
0368 LET P$="!"
0369 LET P$="~"
0370 LET P$="`"
0371 LET P$="_"
0372 LET P$="|"
0373 LET P$="{"
0374 LET P$="}"
0375 LET P$="["
0376 LET P$="]"
0377 LET P$="\"
0378 LET P$="/"
0379 LET P$=":"
0380 LET P$=";"
0381 LET P$=","
0382 LET P$="."
0383 LET P$=" "
0384 LET P$="A"
0385 LET P$="B"
0386 LET P$="C"
0387 LET P$="D"
0388 LET P$="E"
0389 LET P$="F"
0390 LET P$="G"
0391 LET P$="H"
0392 LET P$="I"
0393 LET P$="J"
0394 LET P$="K"
0395 LET P$="L"
0396 LET P$="M"
0397 LET P$="N"
0398 LET P$="O"
0399 LET P$="P"
0400 LET P$="Q"
0401 LET P$="R"
0402 LET P$="S"
0403 LET P$="T"
0404 LET P$="U"
0405 LET P$="V"
0406 LET P$="W"
0407 LET P$="X"
0408 LET P$="Y"
0409 LET P$="Z"
0410 LET P$=" "
0411 LET P$="."
0412 LET P$=","
0413 LET P$=";"
0414 LET P$=":"
0415 LET P$="@"
0416 LET P$="#"
0417 LET P$="$"
0418 LET P$="%"
0419 LET P$="&"
0420 LET P$="*"
0421 LET P$="+"
0422 LET P$="-"
0423 LET P$="="
0424 LET P$="<"
0425 LET P$=">"
0426 LET P$="?"
0427 LET P$="!"
0428 LET P$="~"
0429 LET P$="`"
0430 LET P$="_"
0431 LET P$="|"
0432 LET P$="{"
0433 LET P$="}"
0434 LET P$="["
0435 LET P$="]"
0436 LET P$="\"
0437 LET P$="/"
0438 LET P$=":"
0439 LET P$=";"
0440 LET P$=","
0441 LET P$="."
0442 LET P$=" "
0443 LET P$="A"
0444 LET P$="B"
0445 LET P$="C"
0446 LET P$="D"
0447 LET P$="E"
0448 LET P$="F"
0449 LET P$="G"
0450 LET P$="H"
0451 LET P$="I"
0452 LET P$="J"
0453 LET P$="K"
0454 LET P$="L"
0455 LET P$="M"
0456 LET P$="N"
0457 LET P$="O"
0458 LET P$="P"
0459 LET P$="Q"
0460 LET P$="R"
0461 LET P$="S"
0462 LET P$="T"
0463 LET P$="U"
0464 LET P$="V"
0465 LET P$="W"
0466 LET P$="X"
0467 LET P$="Y"
0468 LET P$="Z"
0469 LET P$=" "
0470 LET P$="."
0471 LET P$=","
0472 LET P$=";"
0473 LET P$=":"
0474 LET P$="@"
0475 LET P$="#"
0476 LET P$="$"
0477 LET P$="%"
0478 LET P$="&"
0479 LET P$="*"
0480 LET P$="+"
0481 LET P$="-"
0482 LET P$="="
0483 LET P$="<"
0484 LET P$=">"
0485 LET P$="?"
0486 LET P$="!"
0487 LET P$="~"
0488 LET P$="`"
0489 LET P$="_"
0490 LET P$="|"
0491 LET P$="{"
0492 LET P$="}"
0493 LET P$="["
0494 LET P$="]"
0495 LET P$="\"
0496 LET P$="/"
0497 LET P$=":"
0498 LET P$=";"
0499 LET P$=","
0500 LET P$="."
0501 LET P$=" "
0502 LET P$="A"
0503 LET P$="B"
0504 LET P$="C"
0505 LET P$="D"
0506 LET P$="E"
0507 LET P$="F"
0508 LET P$="G"
0509 LET P$="H"
0510 LET P$="I"
0511 LET P$="J"
0512 LET P$="K"
0513 LET P$="L"
0514 LET P$="M"
0515 LET P$="N"
0516 LET P$="O"
0517 LET P$="P"
0518 LET P$="Q"
0519 LET P$="R"
0520 LET P$="S"
0521 LET P$="T"
0522 LET P$="U"
0523 LET P$="V"
0524 LET P$="W"
0525 LET P$="X"
0526 LET P$="Y"
0527 LET P$="Z"
0528 LET P$=" "
0529 LET P$="."
0530 LET P$=","
0531 LET P$=";"
0532 LET P$=":"
0533 LET P$="@"
0534 LET P$="#"
0535 LET P$="$"
0536 LET P$="%"
0537 LET P$="&"
0538 LET P$="*"
0539 LET P$="+"
0540 LET P$="-"
0541 LET P$="="
0542 LET P$="<"
0543 LET P$=">"
0544 LET P$="?"
0545 LET P$="!"
0546 LET P$="~"
0547 LET P$="`"
0548 LET P$="_"
0549 LET P$="|"
0550 LET P$="{"
0551 LET P$="}"
0552 LET P$="["
0553 LET P$="]"
0554 LET P$="\"
0555 LET P$="/"
0556 LET P$=":"
0557 LET P$=";"
0558 LET P$=","
0559 LET P$="."
0560 LET P$=" "
0561 LET P$="A"
0562 LET P$="B"
0563 LET P$="C"
0564 LET P$="D"
0565 LET P$="E"
0566 LET P$="F"
0567 LET P$="G"
0568 LET P$="H"
0569 LET P$="I"
0570 LET P$="J"
0571 LET P$="K"
0572 LET P$="L"
0573 LET P$="M"
0574 LET P$="N"
0575 LET P$="O"
0576 LET P$="P"
0577 LET P$="Q"
0578 LET P$="R"
0579 LET P$="S"
0580 LET P$="T"
0581 LET P$="U"
0582 LET P$="V"
0583 LET P$="W"
0584 LET P$="X"
0585 LET P$="Y"
0586 LET P$="Z"
0587 LET P$=" "
0588 LET P$="."
0589 LET P$=","
0590 LET P$=";"
0591 LET P$=":"
0592 LET P$="@"
0593 LET P$="#"
0594 LET P$="$"
0595 LET P$="%"
0596 LET P$="&"
0597 LET P$="*"
0598 LET P$="+"
0599 LET P$="-"
0600 LET P$="="
0601 LET P$="<"
0602 LET P$=">"
0603 LET P$="?"
0604 LET P$="!"
0605 LET P$="~"
0606 LET P$="`"
0607 LET P$="_"
0608 LET P$="|"
0609 LET P$="{"
0610 LET P$="}"
0611 LET P$="["
0612 LET P$="]"
0613 LET P$="\"
0614 LET P$="/"
0615 LET P$=":"
0616 LET P$=";"
0617 LET P$=","
0618 LET P$="."
0619 LET P$=" "
0620 LET P$="A"
0621 LET P$="B"
0622 LET P$="C"
0623 LET P$="D"
0624 LET P$="E"
0625 LET P$="F"
0626 LET P$="G"
0627 LET P$="H"
0628 LET P$="I"
0629 LET P$="J"
0630 LET P$="K"
0631 LET P$="L"
0632 LET P$="M"
0633 LET P$="N"
0634 LET P$="O"
0635 LET P$="P"
0636 LET P$="Q"
0637 LET P$="R"
0638 LET P$="S"
0639 LET P$="T"
0640 LET P$="U"
0641 LET P$="V"
0642 LET P$="W"
0643 LET P$="X"
0644 LET P$="Y"
0645 LET P$="Z"
0646 LET P$=" "
0647 LET P$="."
0648 LET P$=","
0649 LET P$=";"
0650 LET P$=":"
0651 LET P$="@"
0652 LET P$="#"
0653 LET P$="$"
0654 LET P$="%"
0655 LET P$="&"
0656 LET P$="*"
0657 LET P$="+"
0658 LET P$="-"
0659 LET P$="="
0660 LET P$="<"
0661 LET P$=">"
0662 LET P$="?"
0663 LET P$="!"
0664 LET P$="~"
0665 LET P$="`"
0666 LET P$="_"
0667 LET P$="|"
0668 LET P$="{"
0669 LET P$="}"
0670 LET P$="["
0671 LET P$="]"
0672 LET P$="\"
0673 LET P$="/"
0674 LET P$=":"
0675 LET P$=";"
0676 LET P$=","
0677 LET P$="."
0678 LET P$=" "
0679 LET P$="A"
0680 LET P$="B"
0681 LET P$="C"
0682 LET P$="D"
0683 LET P$="E"
0684 LET P$="F"
0685 LET P$="G"
0686 LET P$="H"
0687 LET P$="I"
0688 LET P$="J"
0689 LET P$="K"
0690 LET P$="L"
0691 LET P$="M"
0692 LET P$="N"
0693 LET P$="O"
0694 LET P$="P"
0695 LET P$="Q"
0696 LET P$="R"
0697 LET P$="S"
0698 LET P$="T"
0699 LET P$="U"
0700 LET P$="V"
0701 LET P$="W"
0702 LET P$="X"
0703 LET P$="Y"
0704 LET P$="Z"
0705 LET P$=" "
0706 LET P$="."
0707 LET P$=","
0708 LET P$=";"
0709 LET P$=":"
0710 LET P$="@"
0711 LET P$="#"
0712 LET P$="$"
0713 LET P$="%"
0714 LET P$="&"
0715 LET P$="*"
0716 LET P$="+"
0717 LET P$="-"
0718 LET P$="="
0719 LET P$="<"
0720 LET P$=">"
0721 LET P$="?"
0722 LET P$="!"
0723 LET P$="~"
0724 LET P$="`"
0725 LET P$="_"
0726 LET P$="|"
0727 LET P$="{"
0728 LET P$="}"
0729 LET P$="["
0730 LET P$="]"
0731 LET P$="\"
0732 LET P$="/"
0733 LET P$=":"
0734 LET P$=";"
0735 LET P$=","
0736 LET P$="."
0737 LET P$=" "
0738 LET P$="A"
0739 LET P$="B"
0740 LET P$="C"
0741 LET P$="D"
0742 LET P$="E"
0743 LET P$="F"
0744 LET P$="G"
0745 LET P$="H"
0746 LET P$="I"
0747 LET P$="J"
0748 LET P$="K"
0749 LET P$="L"
0750 LET P$="M"
0751 LET P$="N"
0752 LET P$="O"
0753 LET P$="P"
0754 LET P$="Q"
0755 LET P$="R"
0756 LET P$="S"
0757 LET P$="T"
0758 LET P$="U"
0759 LET P$="V"
0760 LET P$="W"
0761 LET P$="X"
0762 LET P$="Y"
0763 LET P$="Z"
0764 LET P$=" "
0765 LET P$="."
0766 LET P$=","
0767 LET P$=";"
0768 LET P$=":"
0769 LET P$="@"
0770 LET P$="#"
0771 LET P$="$"
0772 LET P$="%"
0773 LET P$="&"
0774 LET P$="*"
0775 LET P$="+"
0776 LET P$="-"
0777 LET P$="="
0778 LET P$="<"
0779 LET P$=">"
0780 LET P$="?"
0781 LET P$="!"
0782 LET P$="~"
0783 LET P$="`"
0784 LET P$="_"
0785 LET P$="|"
0786 LET P$="{"
0787 LET P$="}"
0788 LET P$="["
0789 LET P$="]"
0790 LET P$="\"
0791 LET P$="/"
0792 LET P$=":"
0793 LET P$=";"
0794 LET P$=","
0795 LET P$="."
0796 LET P$=" "
0797 LET P$="A"
0798 LET P$="B"
0799 LET P$="C"
0800 LET P$="D"
0801 LET P$="E"
0802 LET P$="F"
0803 LET P$="G"
0804 LET P$="H"
0805 LET P$="I"
0806 LET P$="J"
0807 LET P$="K"
0808 LET P$="L"
0809 LET P$="M"
0810 LET P$="N"
0811 LET P$="O"
0812 LET P$="P"
0813 LET P$="Q"
0814 LET P$="R"
0815 LET P$="S"
0816 LET P$="T"
0817 LET P$="U"
0818 LET P$="V"
0819 LET P$="W"
0820 LET P$="X"
0821 LET P$="Y"
0822 LET P$="Z"
0823 LET P$=" "
0824 LET P$="."
0825 LET P$=","
0826 LET P$=";"
0827 LET P$=":"
0828 LET P$="@"
0829 LET P$="#"
0830 LET P$="$"
0831 LET P$="%"
0832 LET P$="&"
0833 LET P$="*"
0834 LET P$="+"
0835 LET P$="-"
0836 LET P$="="
0837 LET P$="<"
0838 LET P$=">"
0839 LET P$="?"
0840 LET P$="!"
0841 LET P$="~"
0842 LET P$="`"
0843 LET P$="_"
0844 LET P$="|"
0845 LET P$="{"
0846 LET P$="}"
0847 LET P$="["
0848 LET P$="]"
0849 LET P$="\"
0850 LET P$="/"
0851 LET P$=":"
0852 LET P$=";"
0853 LET P$=","
0854 LET P$="."
0855 LET P$=" "
0856 LET P$="A"
0857 LET P$="B"
0858 LET P$="C"
0859 LET P$="D"
0860 LET P$="E"
0861 LET P$="F"
0862 LET P$="G"
0863 LET P$="H"
0864 LET P$="I"
0865 LET P$="J"
0866 LET P$="K"
0867 LET P$="L"
0868 LET P$="M"
0869 LET P$="N"
0870 LET P$="O"
0871 LET P$="P"
0872 LET P$="Q"
0873 LET P$="R"
0874 LET P$="S"
0875 LET P$="T"
0876 LET P$="U"
0877 LET P$="V"
0878 LET P$="W"
0879 LET P$="X"
0880 LET P$="Y"
0881 LET P$="Z"
0882 LET P$=" "
0883 LET P$="."
0884 LET P$=","
0885 LET P$=";"
0886 LET P$=":"
0887 LET P$="@"
0888 LET P$="#"
0889 LET P$="$"
0890 LET P$="%"
0891 LET P$="&"
0892 LET P$="*"
0893 LET P$="+"
0894 LET P$="-"
0895 LET P$="="
0896 LET P$="<"
0897 LET P$=">"
0898 LET P$="?"
0899 LET P$="!"
0900 LET P$="~"
0901 LET P$="`"
0902 LET P$="_"
0903 LET P$="|"
0904 LET P$="{"
0905 LET P$="}"
0906 LET P$="["
0907 LET P$="]"
0908 LET P$="\"
0909 LET P$="/"
0910 LET P$=":"
0911 LET P$=";"
0912 LET P$=","
0913 LET P$="."
0914 LET P$=" "
0915 LET P$="A"
0916 LET P$="B"
0917 LET P$="C"
0918 LET P$="D"
0919 LET P$="E"
0920 LET P$="F"
0921 LET P$="G"
0922 LET P$="H"
0923 LET P$="I"
0924 LET P$="J"
0925 LET P$="K"
0926 LET P$="L"
0927 LET P$="M"
0928 LET P$="N"
0929 LET P$="O"
0930 LET P$="P"
0931 LET P$="Q"
0932 LET P$="R"
0933 LET P$="S"
0934 LET P$="T"
0935 LET P$="U"
0936 LET P$="V"
0937 LET P$="W"
0938 LET P$="X"
0939 LET P$="Y"
0940 LET P$="Z"
0941 LET P$=" "
0942 LET P$="."
0943 LET P$=","
0944 LET P$=";"
0945 LET P$=":"
0946 LET P$="@"
0947 LET P$="#"
0948 LET P$="$"
0949 LET P$="%"
0950 LET P$="&"
0951 LET P$="*"
0952 LET P$="+"
0953 LET P$="-"
0954 LET P$="="
0955 LET P$="<"
0956 LET P$=">"
0957 LET P$="?"
0958 LET P$="!"
0959 LET P$="~"
0960 LET P$="`"
0961 LET P$="_"
0962 LET P$="|"
0963 LET P$="{"
0964 LET P$="}"
0965 LET P$="["
0966 LET P$="]"
0967 LET P$="\"
0968 LET P$="/"
0969 LET P$=":"
0970 LET P$=";"
0971 LET P$=","
0972 LET P$="."
0973 LET P$=" "
0974 LET P$="A"
0975 LET P$="B"
0976 LET P$="C"
0977 LET P$="D"
0978 LET P$="E"
0979 LET P$="F"
0980 LET P$="G"
0981 LET P$="H"
0982 LET P$="I"
0983 LET P$="J"
0984 LET P$="K"
0985 LET P$="L"
0986 LET P$="M"
0987 LET P$="N"
0988 LET P$
```


THE KEY TO ZX PROBE

is reached your score is printed at the top of screen; the lower score the better.

You cannot place a key into a lock that is already occupied. Keys always retain the number they are given at the start of the game, they do not adopt the number of the lock they are fitted into.

A key must always have a home either at the bottom of the board or in the board, it cannot be pulled out of a lock and left out, it must find a new lock to fit into before vacating its current position.

As for the program itself, lines 20 to 160 put the key, mask and lock shapes into their respective strings. Lines 170 to 190 allocate a position to each of the locks before they are shuffled by lines 200 to 250 into a random sequence. After shuffling they are sent off for the printing of the board, and all the keys, locks and key numbers.

Line 253 jumps the printing of the screen over the locks if the beginner's game is being played. Lines 500 to 520 ask you to enter the number of the key to be moved and the number of the lock it is to be tried in. Line 525 stops you trying to fit a key into a lock that is already occupied.

Lines 530 to 590 are a logic gate and judge the compatibility of key and lock. If they are compatible then you jump to line 620. Lines 600 and 610 are used, if the key and lock are not compatible in which case a counter K(H) is incremented by two so that the not-fit marker is printed in the correct position.

Line 620 increments the fit marker for printing. Line 630 checks the flag F(P) to see if the key P has previously been fitted. If it has, a different print routine has to be used. Line


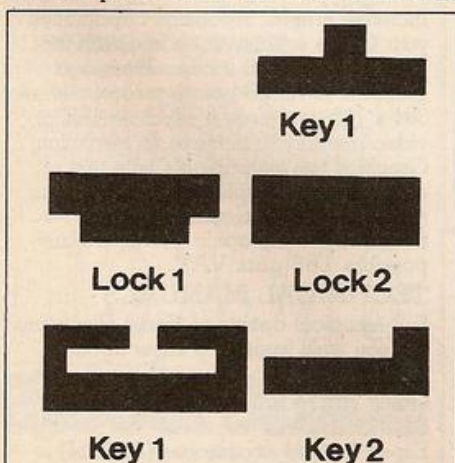


Figure 3. Key 1 is shown above lock 2 which is blanked off to show that a key has been fitted.

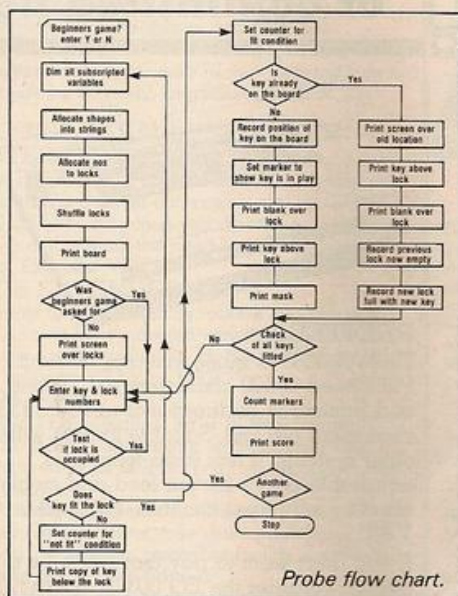

Probe flow chart.

640 sets the variable L(P) equal to the board position for key P.

Line 650 sets the flag F(P) equal to 1 for key P showing that from now on that key is in play. Lines 1010 to 1050 print the locks, keys and key numbers. Lines 1100 to 1125 are used when a key has been fitted. Line 1105 prints a solid blank over the lock to show that it is now occupied.

Line 1110 prints the key over the lock using counter C(H). Lines 1120 and 1125 print a mask in place of the key that was at the bottom of the board. Line 1130 sends off for checking to see if all the keys have been fitted.

Lines 1200 to 1220 are used when a key was tried and failed to fit, in this case line 1210 prints a copy of the key below the locks to show that it was tried and failed. Lines 1300 to 1337 are used when a key is moved and fits into another lock on the board. Line 1310 prints a screen over the vacated lock to show that it is now empty.

Line 1320 prints the key above the new lock. Line 1330 prints a solid blank over the new lock to show that it is occupied. Line 1335 sets the variable P(L(P)) to 0 indicating that no key is fitted in that location.

Line 1337 sets the variable L(P) to the value of key P. Line 1500 to 1515 tests to see if all the locks are occupied. Line 1502 is used to update P(H) with its new key. Lines 1505 to 1515 checks each lock in turn.

Lines 1517 onwards count the number of goes taken by adding up the counters C() and K() and dividing by two. Remember the counters are increased by two each time.

```


0
0550 IF K(H)=3 AND P=3 THEN GOTO 62
0
0560 IF K(H)=4 AND P=2 OR K(H)=4
AND P=3 OR K(H)=4 AND P=4 THEN
GOTO 620
0570 IF K(H)=5 AND P=1 OR K(H)=5
AND P=2 OR K(H)=5 AND P=5 THEN
GOTO 620
0580 IF K(H)=6 AND P=1 OR K(H)=6
AND P=3 OR K(H)=6 AND P=6 THEN
GOTO 620
0590 IF K(H)=7 THEN GOTO 620
0600 REM NO MORE KEYS
0610 LET K(H)=K(H)+2
0620 GOTO 1200
0630 REM NO MORE KEYS
0640 LET C(H)=C(H)+2
0650 IF F(P)=1 THEN GOTO 1300
0660 LET L(P)=H
0670 LET F(P)=1
0680 GOTO 1100
1000 REM INITIAL BOARD DISPLAY
1010 FOR X=1 TO 7
1020 PRINT AT 9,(X*4)-2;H$(H(X))
1030 PRINT AT 19,(X*4)-2;P$(X)
1040 PRINT AT 21,(X*4)-1;X
1050 NEXT X
1100 RETURN
1110 REM NEW-MOVED SUCCESS
1115 PRINT AT 9,(H*4)-2;""
1120 PRINT AT 9-C(H),(H*4)-2;P$(P)
1125 PRINT AT 19,-2+(P*4);N$(P)
1130 PRINT AT 20,-2+(P*4);""
1135 GOTO 1500
1200 REM NEW-FAILED UNOCCUPIED
1210 PRINT AT 9+K(H),(H*4)-2;P$(P)
1220 GOTO 500
1300 PRINT AT 9,(L(P)*4)-2;""
1310 PRINT AT 9-C(H),(H*4)-2;P$(P)
1320 PRINT AT 9,(H*4)-2;""
1335 LET P(L(P))=0
1337 LET L(P)=H
1340 GOTO 1500
1500 REM YES-TO SEE IF ALL
LOCATIONS ARE FILLED
1502 LET P(H)=P
1505 FOR H=1 TO 7
1510 IF P(H)<>H(K) THEN GOTO 500
1515 NEXT H
1517 REM ADD UP THE NUMBER OF GOES
TAKEN
1520 LET S=0
1530 FOR X=1 TO 7
1540 LET S=S+C(X)/2+K(X)/2
1550 NEXT X
1560 PRINT AT 0,0;"SCORE ";S;" ANOTH
ER GO Y/N?"
1570 INPUT G$
1575 LET I$="N"
1580 IF G$="Y" THEN GOTO 2
1590 STOP
2000 SAVE "PROBE"
2001 GOTO 1

```


Why not spend Christmas with the Genie Family!



Our ingenious range of small computers, accessories and software make ideal gifts for 1st time buyers or committed hobbyists!

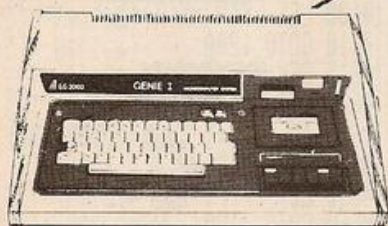

Genie I

Tried and trusted! - The Genie I is still one of Britain's best-selling small computers, with over 14,000 sold, and it's easy to see why! Software compatibility with Level 2 BASIC means there are literally 1000's of programs on the market ready to run on the Genie, including educational, leisure and small business applications. It's easy to expand, with a vast range of accessories to perform many functions - you only have to read this ad! Genie I is the ideal computer for the first time buyer, to use at home, at school or at work. The simple BASIC language enables you to write your own programs with ease, and the Microsoft Extended BASIC offers many powerful extra features. So, if you are not lucky enough to own a Genie I, or if you have a less powerful small computer and want to upgrade, go along to your local Genie dealer, or phone us for advice. It could be your first step into the enthralling world of microcomputers.




Genie II

Equally popular and totally reliable! - The Genie II is a breakthrough for small business computers. Harnessing all the advantages of the Genie I, including its low price, Genie II adapts perfectly to commercial functions with the addition of the following features:

★Numeric Keyboard ★Specific Business Commands ★Four User-Definable Function Keys ★Expandable via the same Genie peripherals ★Extension to BASIC.


Genie II is an ideal, first-entry, computer for the small business. Corner shops, professional practices and small manufacturers can all benefit from a Genie II business system. For further advice, see your local dealer, or contact us direct!

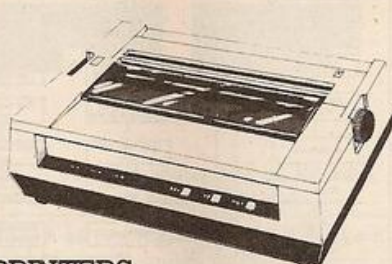

PRINTERS

The EG 3085 is quiet, fast and efficient. Printspeed is 100 characters per second and printing is bi-directional at 80 or 136 characters per line. Suitable for use with other systems, it has three typestyles, adjustable pin or friction feed and single sheet or roll paper facilities. £425 plus VAT.

If you don't want to pay that much for a printer, consider the EG 603. It doesn't match the EG 3085 in certain areas, but you will still get 100 c.p.s. bi-directional, a range of character styles, forward and reverse feed and pin/friction feed, with 96 characters and 64 graphic patterns. £235 plus VAT

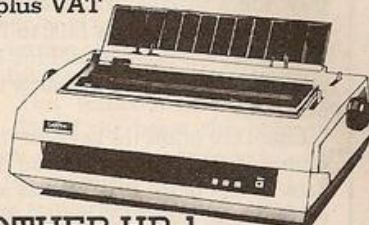

BROTHER HR-1 Daisywheel Printer

You can now buy a superior daisywheel printer for a price only previously associated with dot matrix models.

The Brother HR is an enticing addition to your system. It has a print speed of 16 cps, range of 8 typefaces, and a choice of two models with either parallel or RS232 interfaces.

Reliability, durability and attractive appearance make the Brother HR-1 probably the best printer buy this Christmas!

£650 - VAT

EQUIPMENT COVERS

Beat the dirt, coffee spills and sticky fingers when your computer and monitor are not in use with these top quality black leather covers.

Genie CV1 £5 plus VAT.

12" monitors CV6 £6.20 plus VAT.

9" monitors CV3 £4.20 plus VAT.




GENIE MONITORS

Two good performance, low priced 12" monitors, either to match your Genie or compatible with a wide range of other systems. Good resolution and band width and, of course, they free your television set for the other type of programmes you like to watch!

The EG 100 12" in black & white costs £69 plus VAT.

The EG 101 12" with green phosphor is £79 plus VAT.



A.V.T. MONITORS

Available in 9" and 12" sizes, with white, green or amber display, Lowe A.V.T. monitors are sturdy, attractive, easy to operate and feature an easy view screen with smoked anti-glare display filter. Compatible with most popular micros on the market. From £75 plus VAT.

HIGH RESOLUTION GRAPHICS

Increase graphic resolution capabilities on your Genie seventy-three fold with the LE18 HI-RES unit. It offers bit image graphics of 73,728 points, a resolution of 384 x 192, and uses a separate 16K of video memory to achieve its resolution. Graphics are intermixable with text or existing pixel graphics, and animation, reverse video displays and use of programmable graphic characters are possible. £86 plus VAT.

TECHNICAL MANUALS


Full technical details of Genie Hardware (all you ever wanted to know about Genie).

Genie I/II Technical Manual

£10 - No VAT.

Expander and accessories (EG3014)


£10 - No VAT.

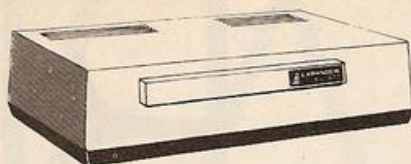

EXPANDER BOX

The updated EG 3014 expander box allows for up to four disk drives with optional double density. It connects to a printer, or RS 232 interface, or S100 cards. Not bad value at **£190 plus VAT** (16K version) or **£200 plus VAT** (32K version)

*The EG 3014 will work with TRS 80 by using the EG 3023 Tandy Adaptor.

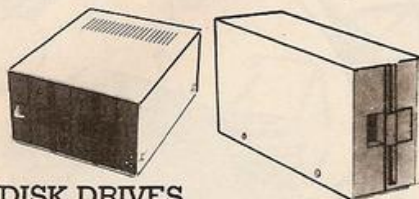

DISK DRIVES

If you want fast, reliable program storage, true random access file handling and access to many computer languages, we can meet your needs. The EG 400T provides storage of up to 184320 bytes per floppy disk and comes complete and tested, in a stylish colour matched cabinet. **£220 plus VAT.**

The EG 401 AT offers dual disk drive with 368640 bytes of useable storage and comes complete with a power supply ready to connect to an expander box. **£365 plus VAT.**

DOUBLE DENSITY ADAPTOR

Allows the use of standard minidisk drives in double density, with virtually double the storage capacity. The EG 3021 is equally at home in the Genie or TRS-80 expander boxes.

A double density disk operating system will be needed, such as smallDOS provides. **£72 plus VAT.**

smallDOS

Powerful, yet reasonably priced, the Genie smallDOS contains 21 library commands, 7 utilities, LBASIC, disk basic and bags of information, including a reference manual and 40 page beginners guide to disk usage. **£35 plus VAT.**

BUSINESS SOFTWARE

Specifically written for the Genie II computer, with disks and a suite of packages from the renowned house TRIDATA. The suite includes SALES LEDGER, PURCHASE LEDGER, PAYROLL and STOCK CONTROL. Each package is a very reasonable **£175 plus VAT.** Full details on request.

EG 3203 TANDY-BASHER

If you are a TANDY user, read on! The EG 3203 is bus converted to allow Genie peripherals to be used with Tandy Model I computers. **£18.40 plus VAT.** (Just in case there might be a few strange souls who want to convert in the opposite direction, there is the 50/40 converter which generates a Tandy compatible 40 way bus from a Genie.) **£34 plus VAT.**

FRED MUSIC SYNTHESISER

Beethoven might well roll over at this stereo music synthesiser, it can produce six simultaneous notes over the whole audio range and provide sound effects. FRED comes complete with a software compiler, full instructions and a demo tune. It is simply plugged onto the Genie 50 way bus and has two outputs for an audio amplifier. **£51 plus VAT.**

EG 3016 PARALLEL PRINTER INTERFACE

The EG 3016 is a simpler interface allowing a Centronics parallel compatible printer (EG 603, EG 3085) to be connected directly to the Genie keyboard without the need for an expander box. **£38 plus VAT.**

BUS EXTENDER

A most useful accessory, allows two bus using devices to be connected simultaneously to the Genie - when using the Hi Res and expander for instance. **£21 plus VAT.**

EP1, EP3

Genie I and Genie II have ROMs offering 13.5K BASIC are custom written extensions contained in EPROMs. You can change these as follows:

EP1 Adds all Genie I software facilities to other Genies, lower case driver, machine language monitor, renumber facility, keyboard repeat and screen print.

EP3 Has HI-RES driver software with 10 extra HI-RES commands which prevent need to load HI-RES software from tape. All at **£12 plus VAT.**

For Video Genie Systems, the LE-19 connects direct to the Genie bus and allows one of these EPROMs to be fitted externally. **£26.50 plus VAT.**

SYSTEMS DESK

Even a compact modular computer system like the Genie benefits from being used on a custom designed system desk. The SD1 system desk is designed to accommodate a complete Genie System and has a special upper shelf to support the display monitor at the best level. The desk is flat packed for easy delivery and finished in attractive teak and charcoal colours. **£81.40 plus VAT.**



SPECIAL TECHNICAL GENIE

HOT - LINE ON 0629 4995

for all your technical advice and service back-up on any aspect of the Genie system direct from the experts!



Colour Genie is the latest piece of personal computer magic from Lowe Electronics. Remarkably compact in design, Colour Genie is a powerful piece of new technology which combines all the best features of the popular Genie I; 16K RAM, 16K BASIC ROM, and full size typewriter keyboard, with the addition of vivid colour, high resolution graphics, 3 channel sound and 40 x 24 screen format - a new dimension in home computing!

Put one in your living room, connect it to a standard colour T.V., and you will be amazed at the worlds that open up for you and your family!

For children and adults, Colour Genie provides an ideal introduction to computer programming. If you fancy a spot of intergalactic travel, or a battle for the planets, Genie will lay on the transport. When you get tired of the kids beating you at Space Invaders, you can always turn their attention to schoolwork. Genie makes that fun too! You can learn typing, a foreign language, or simply keep your household accounts in order.

Of course, Colour Genie is only one of a number of home computers you could consider buying; however, the £199 price tag gets rid of some of the opposition, as do the 64 present and 128 programmable graphic characters! 8 exciting colours leave a few more standing, and four function keys with a built in power supply put Colour Genie way out in front!

ACCESSORIES

Colour Genie can be supplemented by a large range of optional extras. There is an attractive matching cassette recorder on which to store your own programs, or play pre-recorded software. Joysticks are available for popular video games, and a position-detecting light pen to heighten your colour-graphic creations. If you want to put your machine to work in your business, it can be expanded by a 16K RAM card, and connected to a quality matrix printer via the printer interface and cable.

SOFTWARE

Colour Genie uses a Z80 central processing unit, and is fully programmable in Microsoft colour BASIC, the most popular home computer language in the Western World!

MUSIC

Colour Genie contains a FULL MUSIC SYNTHESISER, which will generate a remarkable range of musical sounds through your T.V. speaker, in a variety of pre-settable tempos.

LOWE electronics

Chesterfield Rd., Matlock,
Derbyshire DE4 5LE.
Tel: 0629 4995 Telex: 377482 Lowlec G

Please send me details of my nearest
Genie dealer ☐ OR The following items:

I enclose 30p p & p for Genie Colour Brochure ☐

Name _____
Address _____

Tel: _____



YC.12.82

IN THIS VERSION of Breakout, a machine-code subroutine has been used to move the bat. The mnemonics for the machine code are included so that if anybody wants to convert the game, they should be able to. Peeks and Pokes are all explained in this program.

The screen starts at location 7680 and finishes at 8185. The top right corner is 7701, and the bottom left corner is 8164. The colour memory map starts at 38400 and goes on to 38906. The top right location is 38421 and the bottom left location is 38884.

If any other Vic owners have memory expansion above the 3K RAM from Commodore, then they will know that the screen relocates to 4096. This means that using the character generator is not possible. To overcome this you must type the following:

```
POKE 648,30:POKE 642,32:POKE 36869,240:
POKE 36866,150:POKE 0,108:POKE 1,0:
POKE 2,192:SYS(0)
```

This relocates the screen to 7680, and Basic starts above it. This leaves the space from 4096 to 7679 free for the character generator. SYS58276 resets all variables including the memory pointers without altering the program.

In line 1, Gosub 4200 initialises the machine code: 0 and 1, the free locations in the zero page, contain the value of the key pressed. Location 673 contains a routine which checks for all the bricks gone. At 674 is the last position of the bat. The 675, 676 Pokes indicate the key pressed — 675 for Z key, 676 for C key. Peek (197) returns value of key pressed.

In line 2, R1 to R4 are screen control registers. The S3 designates voice number 3, V is for volume. In line 5, V + 1 sets screen and border colour to orange and red. The sixth line's T(I) colours the layers of bricks: it can be altered for random colours. Goto 2000: this is the start of instructions.

In line 10, Y gives the vertical position of the ball; DY gives direction, that is, -1 is up, 1 is down, SC is score and HI is high score. In line 11, SC is reset. The level prompt indicates the number of bats; level 1 is one bat and level 4 is four bats. A null input sets the level to 4. At line 12, C is the counter for the number of bats used. The top left-hand corner of the screen is 7680. Character 224 is a reversed space, that is 96 + 128. The border around the screen is dealt with in 13. A reverse graphic is indicated by 208. A% is used for random colour. Location 38400 is the first colour location on the screen. Graphic 207 is a reverse space.


In line 15, 8164 is the bottom left-hand location of the screen. The corresponding colour memory map is given by 38884. In line 19, the loop I determines how many layers of bricks and their position; in this case five layers starting four lines down from the top of the screen. The loop J determines how many bricks in each line, in this case 20. At line 30, the graphic character 204 is a reversed space. In line 75, X is the horizontal position of the ball — graphic 81 — and Y is the vertical position. The Y value is multiplied by 22, because the screen is 22 characters wide.

In line 110, SYS 680 calls the machine-code subroutine to check which key, if any, has been pressed, and if so, move the bat. Line 180 rubs out the ball. The lines from 190 to 220

GAMES SPECIAL

You have to stay on the ball if you want to break through to higher scores in John Cullen's Vic-20 version of the famous arcade game.

BR

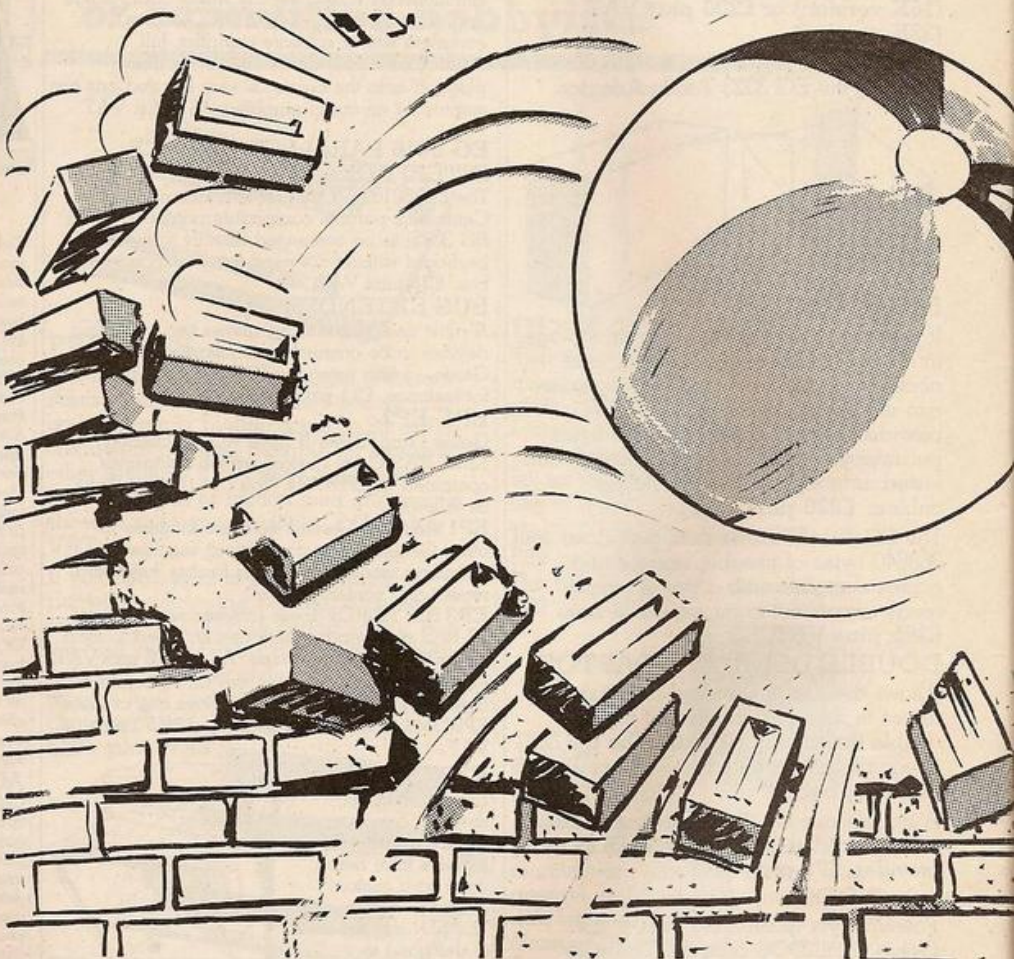

work out the new position of the ball; line 200 checks if the ball is at either side of the screen, and if so, reverses direction. Line 220 checks whether or not you have missed the ball. Line 230 checks new position to see if it is occupied by a brick. Line 240 checks if the ball has hit the bat or got to the top of the screen. Line 250 turns off the sound. Line 255 checks to see if

all the bricks have gone with SYS 736, the second machine-code routine. If all the bricks have gone, then location 673 will contain 1, otherwise a 0. Line 260 calls machine code to move the bat. The speed of the bat is controlled by the number of SYS 680 commands between lines 75 and 260. Line 300 controls sound effects if the ball is missed.

```
LDY# $02A2
LDA# 32
STA($1FCD),Y
STA($1FCE),Y
STA($1FCF),Y
LDX# 00
LDA(I),X
CMP$0A3
BNE A
CPY# 02
BEQ A
```

```
DEY
LDA(I),X
CMP$02A4
BNE B
CPY# 19
BEQ B
INY
LDA# 224
STA($1FCD),Y
STA($1FCE),Y
STA($1FCF),Y
```

```
STY$02A2
RTS
```

```
LDX# 00
LDA($1E00),X
CMP# 204
BEQ A
INX
CPX# 255
BNE B
LDA# 01
STA$02A1
RTS
```

NB: Numbers after the hash are decimal
Mnemonics for the machine code.

BREAKOUT



Line 310 takes one off the counter and if you still have a bat, Resets direction counters Y and DY, X and DX. Line 320 gives control to line 465, when all the bats are gone. Lines 400 to 418 control the display if you get all the bricks. The registers R1 to R4 are used here, to give a display. P% is the extra bonus you get, depending on level and final score. Line 470 clears the input buffer — 198 — and lines 471 and 472 check your answer to the prompt.

Line 1000 generates random X and DX values. If DX equals -1, ball goes left, if DX equals 1, the ball goes right. The instructions are at lines 2000 to 2085. Line 3000 calculates the score per brick and can be altered to give different values as wanted. Data containing machine-code routines in hexadecimal are contained in lines 4000 to 4015. Lines 4200 to 4265 are the Basic loader for machine code. Machine code is stored in free memory locations from 680 to 755. Locations 673 to 767 can be used to hold short machine-code routines.

```

1 GOSUB4200:POKE0,197:POKE1,0:POKE673,0:POKE674,10:POKE675,33:POKE676,34
2 XX$="0000000000000000":R1=36864:R2=R1+1:R3=R2+1:R4=R3+1:S3=36876:V=S3+2:S2=S3-1
5 PRINT"J":POKEV+1,138
6 FORI=3T07:T(I)=I:NEXT:GOTO2000
10 POKEV+1,138:POKEV,15:V=20:DV=-1:GOSUB1000:PRINT"J":IFSC>HITHEHNI=SC
11 SC=0:INPUT"LEVEL";L:IFL<1ORL>4THENL=4
12 C=L:PRINT"J":FORI=7680+22*2T07680+22*2+21:POKEI,224:NEXT
13 FORI=3T022:POKE7680+22*I,208:R2=RND(1)*7+1:POKE38400+22*I,R2:POKE7701+22*I,2
07
14 POKE38421+I*22,R2:NEXT
15 FORI=0T021:POKE8164+I,207:R2=RND(1)*7+1:POKE38884+I,R2:NEXT
19 FORI=3T07:FORJ=1T020
30 POKE7680+22*I+J,204:POKE38400+22*I+J,T(I):NEXTJ,I
75 POKE7680+X+22*Y,81
80 PRINT"J":SCORE:"SC:PRINT"J":HI:"J":CHANCES"C
110 SYS680
180 POKE7680+X+22*Y,32
190 X=X+DX
200 IFX<20R>19THENDX=-DX:POKE3,220
210 Y=Y+DY
220 IFY=22THEN300
230 IFPEEK(7658+X+22*Y)=204THENDY=1:POKE3,230:POKE7658+X+22*Y,32:GOSUB3000
240 IFPEEK(7702+X+22*Y)=224ORPEEK(7658+X+22*Y)=224THENDY=-DY:POKE3,240
250 POKE3,0
255 IFSC>190THENSYS736:IFPEEK(673)=1THEN400
260 SYS680:GOTO75
300 POKEV,15:FORI=230T0160STEP-.15:POKE2-1,I:NEXT:POKE2-1,0
310 C=C-1:IFC>0THENV=20:DV=-1:GOSUB1000:GOTO75
320 GOTO465
400 PRINT"J":POKEV+1,27:FORI=160T0240STEP.5:POKE3,I:R2=RND(1)*505+1
405 POKE7680+R2,160:POKE38400+R2,INT(RND(1)*7)+1
410 NEXT:POKE3,0:P%=(SC/L*3)+.5:I=0:J=0
412 J=J+1:FORI=0T022:POKE1,12+I:POKE2,38+I:POKE3,150-I:POKE4,174-I*2:POKE3
,220+I
413 NEXT
414 FORI=22T00STEP-1:POKE1,12+I:POKE2,38+I:POKE3,150-I:POKE4,174-I*2:POKE3
,220+I
415 NEXT:IFJ<5THEN412
417 POKE3,0:PRINT"J":YOU GET A BONUS OF"P%":SO YOUR SCORE IS"SC+P%":SC=SC+P%
418 FORI=0T0400:NEXT
450 PRINT"J":CONGRATULATIONS YOU'VE MADE IT.YOUR SCORE WAS"SC".
452 IFSC>HITHEHNI:YOUR SCORE IS THE BEST SO FAR.WELL DONE!!!"
455 GOTO470
465 PRINT"J":CHANCES"C:POKE3,0:POKE2,0
470 POKE198,0:PRINTXX$:" ANOTHER GO(Y,N)":
471 INPUTA$:IFLEFT$(A$,1)<>"Y"ANDLEFT$(A$,1)<>"N"THEN500
472 IFLEFT$(A$,1)="Y"THEN10
474 PRINT"J":BYE FOR NOW THEN!!!!!!":END
500 PRINT" J SAID Y OR N..... OR ARE YOU BLIND?!!?"
505 FORTT=1T0400:NEXT
507 GOTO471
1000 X=INT(RND(1)*20)+1:IFX<20R>19THEN1000
1010 DX=INT(RND(1)*3)-1:IFDX=0THEN1010
1030 RETURN
2000 PRINT" THIS IS BREAKOUT BY JOHN CULLEN.TO PLAY YOU MUST ";
2010 PRINT"KNOW ALL THE BRICKS FROM THE WALL.EACH LAYER OF BRICKS "
2020 PRINT"SCORES MORE POINTS THAN THE LAST."
2030 PRINT" HIT ANY KEY"
2031 GETA$:IFA$=""THEN2031
2032 PRINT" THE SCORING SYSTEM IS AS FOLLOWS: "
2035 PRINT" EACH LAYER OF BRICKS SCORES POINTS "
2036 PRINT" LAYER 1:- 2 POINTS - LAYER 3:- 4 POINTS LAYER 5:- 6 POINTS"
2038 PRINT" LAYER 1:- 2 POINTS - LAYER 3:- 4 POINTS LAYER 5:- 6 POINTS"
2058 PRINT" HIT ANY KEY"
2060 GETA$:IFA$=""THEN2060
2070 PRINT" BEFORE YOU START YOU WILL BE ASKED WHICH LEVEL YOU WANT."
2071 PRINT" THE LEVEL INDICATES THE NUMBER OF BATS YOU GET:-"
2072 PRINT" LEVEL 1- ONE BAT..... LEVEL 2- TWO BATS..... ETC."
2075 PRINT" HIT ANY KEY TO START"
2080 GETA$:IFA$=""THEN2080
2085 GOTO10
3000 SC=SC+(10-Y):RETURN
4000 DATA C,A2,02,A9,20,99,CD,1F,99,CE,1F,99,CF,1F,A2,00,A1,00,CD,A3,02,D0,07
4005 DATA C,02,F0,03,88,A1,00,CD,A4,02,D0,05,C0,13,F0,01,C8,A9,E0,99,CD,1F,99
4010 DATA CE,1F,99,CF,1F,8C,A2,02,60,YY,A2,00,BD,00,1E,C9,CC,F0,0A,E8,E0,FF,D0,F
4,A9,01
4015 DATA D,A1,02,60,YY
4200 I=I+1:READA$:IFA$=""THENI=0:GOTO4250
4205 A=ASC(A$)-48:B=ASC(RIGHT$(A$,1))-48:IFA>16THENA=A-7
4210 IFB>16THENB=B-7
4215 POKE679+I,A#16+B:GOTO4200
4250 I=I+1:READA$:A=ASC(A$)-48:B=ASC(RIGHT$(A$,1))-48:IFA>16THENA=A-7
4255 IFB>16THENB=B-7
4260 IFA$=""THENRETURN
4265 POKE735+I,A#16+B:GOTO4250

```


GAMES SPECIAL

```

9 DIMGX(6),GY(6),DG(6),SC(20,32):HSC=0:H#="NOBODY"
10 ENVELOPE1,1,1,-1,5,5,25,127,-4,0,-2,127,60:ENVELOPE2,1,10,20,-30,10,5,1
5,127,-2,0,-1,127,100:MODE 7:PROCINSTR:MODE 2:VDU 23:8202;0;0;0;SC1%=0:LX=1:SC
%=0:MAN%=0:SHEET%=1
11 LIFE%=3:NGX=1:DBGX=0:DBGY=0:PROCMAZE:PROCSETUP
12 PROCMEN
13 COLOUR2:PRINTTAB(0,0):"SHEET ";SHEETX:COLOUR7:PRINTTAB(0,1):"SCORE ";SC%;
14 *FX 11 8
15 *FX 12 1
16 FORV%=0TONGX:FORN%=1TO12-SHEETX:PROCMAZE:IFMAN%=1PROCSPURT
17 NEXT:PROCMAZE:IFLIFE%=0GOTO82
18 GOTO16
19 DEFPROCSETUP
20 FLAX=0:GHX=254:DX=0:DY=0:FOR V%=0 TO NGX:GX(V%)=12-V%:GY(V%)=12:DG(V
%)=247:NEXT:GX(NGX+1)=12:GY(NGY+1)=12
21 VDU 23,254,60,126,15,7,7,15,126,60,23,253,60,126,240,224,240,126,60,2
3,252,0,66,195,195,231,255,126,60,23,251,60,126,255,231,195,195,66,0,23,245,56,
124,254,146,218,254,254,146
22 X%=2:Y%=3
23 ENDPROC
24 DEFPROCMAZE:IFLIFE%=0ENDPROC
25 SC%(X%,Y%)=" ":A#="INKEY$(0)
26 *FX 15 0
27 IFA#="N"DX%=-1:GHX=254
28 IFA#="M"DX%=1:GHX=253
29 IFA#="A"DY%=-1:GHX=252
30 IFA#="Z"DY%=1:GHX=251
31 IFDX%+X%<0THEN39
32 TT%=ASC(SC%((X%+DX%),(Y%+DY%)))
33 IFTT%=246THEN45
34 IFTT%=245THENPROCEND:ENDPROC
35 IFTT%=247SOUND1,1,ASC(A#),1
36 IFTT%=ASC("M")MAN%=1:SOUND3,2,10,100:VDU19,4,7,0,0,0:FORDELX=1TO100:NEXT:
VDU19,4,COLOUR,0,0,0:IFSHEETXDIV5=SHEETX/SFLAX=1:TIME=0:VDU19,4,4,0,0,0
37 IFFLAX=1ANDTIME=500FLAX=0:VDU19,4,0,0,0,0
38 IFTT%=247ORTT%=ASC("M")ND%=NDX-1:IFND%=0THENPROCSHEET:ENDPROC
39 IFDX%<>0ORDY%<>0PRINTTAB(X%,Y%):" "
40 X%=X%+DX%:Y%=Y%+DY%
41 IFY%<2Y%=29
42 IFY%>29Y%=2
43 IFX%<0X%=19
44 IFX%>19X%=0
45 DX%=0:DY%=0:COLOUR3
46 PRINTTAB(X%,Y%):CHR$(GHX):S%=(10*(TT%=247))-(100*(TT%=ASC("M"))):SC%=SC%
+S%:SC1%=SC1%+S%:COLOURND(7):PRINTTAB(6,1):SC%;
47 ENDPROC
48 DEFPROCMAZE
49 IFLIFE%=0ENDPROC
50 SOUND2,1,10,1
51 IFV%>NGXENDPROC
52 SC%(GX(V%),GY(V%))=CHR$(DG(V%)):PROCMAZE:COLOUR1:IFDG(V%)=246COLOUR4
53 PRINTTAB(GX(V%),GY(V%)):CHR$(DG(V%)):IFGX(V%)+DBGX=X%ANDGY(V%)+DBGY=
Y%THENPROCEND:ENDPROC
54 GX(V%)=GX(V%)+DBGX:GY(V%)=GY(V%)+DBGY:DG(V%)=ASC(SC%(GX(V%),GY(V%))
):COLOURV%+9:PRINTTAB(GX(V%),GY(V%)):CHR$(245):SC%(GX(V%),GY(V%))=CHR$(245
):ENDPROC
55 DEFPROCMAZE
56 VDU23,247,0,0,0,24,24,0,0,23,246,255,255,255,255,255,255,255:COLOUR
2:FORV%=0TO29:FORX%=0TO19:SC%(X%,Y%)=CHR$(247):NEXT:PRINTTAB(0,Y%):STRING$
(20,CHR$(247)):NEXT:COLOUR4:IFSHEETXDIV5=SHEETX/SFLAX=0
57 VDU19,4,COLOUR,0,0,0:COLOUR4:RESTORE:FORZ=1TO66:READX,Y:GOSUB63:Y%=31-Y
%:GOSUB63:NEXT
58 DATA0,2,1,2,2,2,3,2,4,2,5,2,6,2,7,2,8,2,0,3,0,4,0,5,0,6,0,7,0,8,0,9,0,10,
0,11,0,12,0,13,0,14,2,4,3,4,4,4,6,4,8,3,8,4,8,5,2,5,3,5,4,5,6,5,1,14,2,14,2,7,3
,7,4,2,9,2,10,2,11,2,12,6,7,7,7,8,7,9,7,9,8,9,9,4,8,4,9,4,10,4,12,4,13,4,14
59 DATA4,15,5,10,7,9,7,15,9,13,7,11,6,12,8,14,8,15,9,14,9,15,7,14,8,11
60 ND%=291:COLOUR14:FORAB=1TO4:READX,Y:PRINTTAB(X,Y):"X":TAB(0,0):SC%(X,Y)="
X":NEXT
61 DATA1,4,18,4,1,27,18,27
62 ENDPROC
63 GOSUB64:X%=19-X%
64 PRINTTAB(X%,Y%):CHR$(246):SC%(X%,Y%)=CHR$(246):RETURN
65 DEFPROCX:DBGX=(X%+GX(V%))-(X%+GX(V%)):ENDPROC
66 DEFPROCY:DBGY=(Y%+GY(V%))-(Y%+GY(V%)):ENDPROC
67 DEFPROCLOOK:TT%=ASC(SC%(GX(V%)+DBGX,GY(V%)+DBGY)):ENDPROC
68 DEFPROCMOVE:DBGX=0:DBGY=0
69 PROCX:PROCLOOK:IFTT%=245DBGX=0
70 PROCY:PROCLOOK:IFTT%=245DBGY=0
71 ENDPROC
72 DEFPROCEND:SOUND 0,-15,4,10:PROCCOL:CLS:IF SC1%>10000 LIFE%=LIFE%+1:SC1%=
SC1%-10000
73 V%=0:LIFE%=LIFE%-1:IFLIFE%=0ENDPROC
74 SHEETX=SHEETX+1:PROCMAZE:PROCSETUP:PROCMAZE:COLOUR2:PRINTTAB(0,0):
"SHEET ";SHEETX:COLOUR7:PRINTTAB(0,1):"SCORE ";SC%;ENDPROC
75 DEFPROCSCHEET:IFSC1%>10000LIFE%=LIFE%+1:SC1%=SC1%-10000
76 V%=0:CLS:SHEETX=SHEETX+1:SCX=SCX+(1000*(SHEETX-1)):SC1%=SC1%+(1000*(SHEET
X-1)):COLOUR8:PRINTTAB(7,10):"BONUS":COLOUR15:PRINTTAB(6,12):SHEETX-1:" X 1000"
:FORA=1TO10000:NEXT
77 PROCMAZE:PROCSETUP:PROCMAZE:COLOUR2:PRINTTAB(0,0):"SHEET ";SHEETX:
COLOUR7:PRINTTAB(0,1):"SCORE ";SC%;ENDPROC
78 DEFPROCMAZE:IFLIFE%=0ENDPROC
79 COLOUR3:FORA=2TOLIFE%:PRINTTAB(A%,30):CHR$(254):TAB(0,0):NEXT:ENDPROC
80 DEFPROCCOL:FORC=0TO15:FORN=1TO100:NEXT:VDU 19,4,C,0,0,0:NEXT:VDU 19,4,4,0

```



THE GAME in this article is a very enjoyable, and addictive, game for the 32K BBC Model B. It is slightly different from the arcade implementation in that there are only two ghosts who can go through walls and the function of the power pills is to stop the ghosts chasing the Muncher for a few seconds, giving him a chance to eat more dots and so get to the higher sheets. The player gets bonuses by totally clearing a sheet.

Every fifth maze is an invisible one, but the player must remember the pathways, in order to follow them. When playing such a sheet, the maze is made visible for about 10 seconds, when a power pill, or thunderbuster, is eaten. The following keys are used to move: A to go up, Z to go down, N to go left and M to go right. 10 points are given for the dots that it eats all the time and 100 points are given for*, which are thunderbusters.

A bonus of the value 1,000 multiplied by the number of sheets is given every time a sheet is totally eaten, thus 1,000 points are awarded for clearing the first maze and 13,000 points for clearing maze number 13.

An extra Muncher is given every time you score 10,000 points: you have three lives to begin with.

To begin with, you may think that the game is very easy, as the ghosts move very slowly, but they get faster every sheet, until they become half your speed on sheet 11, from then on their speed remains constant. Here are a



HERE COMES THE MAZE MUNCH

A deceptively easy game to start with, this BBC version of a well known arcade game written by David Griffin is definitely worth getting your teeth into.

few hints. It is a good idea to clear as much of the maze as you can without using the thunderbusts. On the lower sheets move straight to the middle of the maze, and clear that area first, as it is the most difficult.

When the ghosts are moving the fastest, clear the outer regions of the maze first, reserving the thunderbusts to help in clearing the centre. Try not to leave individual dots, but clear large areas of the maze at once. Don't hesitate or panic, it is quite easy to get out of most situations.

If you want to change the number of ghosts, change the value of NG% in line 11. I would advise against conversion to other computers because this program uses many special functions of the BBC. But in case anyone wants to try here is a list of some of the BBC peculiarities used in this implementation.

Envelope defines the envelope used in the Sound command — this can be ignored. Mode changes the display mode, Mode 7 is a teletext display 40x25, Mode 2 is a high-resolution display, with characters on a 20x32 grid.

VDU 23 defines characters on an eight-by-eight grid. The first parameter is the character number, the following eight define the shape row by row, with the decimal equivalent of the binary number representing the character row. The VDU in line 10 stops the cursor flashing.

Proc calls a procedure defined by DefProc; this should be replaced by a Gosub command on other computers.

Colour sets the current text colour. Print Tab (X,Y) positions the cursor at position X,Y on the screen. All the *FX commands can be ignored.

VDU 19 X1, C2, 0, 0, 0 sets colour C1 to colour C2; this is used in making the maze invisible.

RND gives a random integer between 1 and the number inside the brackets. Sound A, B, C, D plays a note on channel A, of volume B, of pitch C, for duration D. Div signifies integer division.

The command Get\$ waits for a key to be

pressed and puts the string value of that key in the suitable variable.

Inkey\$(n) waits for n cycles of the clock or until a key has been pressed, and puts the string value of that key in the suitable variable. The program puts the whole screen into array SC\$ and can use this array to see if the man is trying to go into a wall, or has eaten something.

The highest score so far attained is 10,154,250 — achieved after playing continuously for several hours, and reaching sheet 999.

```

0,0:ENDPROC
81 DEFPROCSPURT:FORSP%=1TO(RND(100)+20):PROCMAN:NEXT:MAN%=0:ENDPROC
82 MODE7
83 *FX 15 0
84 *FX 11 0
85 PRINTTAB(10,5);CHR$(141);CHR$(136);"YOU'RE DEAD!!";TAB(10,6);CHR$(141);CHR
R$(136);"YOU'RE DEAD!!"
86 PRINTTAB(8,10);"YOU SCORED ";SC%
87 IFSC%>HSC%:PRINTTAB(8,12);"THE HIGHEST SO FAR"ELSEPRINTTAB(4,12);"THE BEST
WAS ";HSC%:" BY ";H%
88 IFSC%>HSC%:INPUT"" YOUR NAME "H":HSC%=SC%
89 PRINTTAB(5,22);CHR$(129);CHR$(141);"ANOTHER GAME ?";TAB(5,23);CHR$(129);C
HR$(141);"ANOTHER GAME ?"
90 REPEAT$=GET$:UNTIL$="Y"ORA$="N"
91 IFA$="Y"THEN10
92 END
93 DEFPROCINSTR
94 PRINTTAB(2,0);"MUNCHER(C) David Griffin 26:6:82"
95 PRINT" In this game you must move a man around a maze, eating dots
as you do so.He is being pursued by two evil ghosts who can only be stopped b
y eating a flashing thunderbuster, and even then for a short while only!"
96 PRINT" After clearing the maze of dots and thunderbusters, a new one i
s given. Every fifth maze is invisible, just to add extra interest and dif
ficulty."
97 PRINT" An extra man is given every 10,000 points." To move use
the following keys : "-", " " 'A' to go UP", " " 'Z' to go DOWN", " "
'N' to go LEFT", " " 'M' to go RIGHT"
98 PRINT"" PRESS ANY KEY TO PLAY... " :REPEAT$=GET$:UNTIL$<>
99 ENDPROC

```


**IF THE CLOUDBOPPERS,
WASPS, SPIDERS, METEORS,
OR SATELLITES DON'T
BEAT YOU...**

**...RENAISSANCE
WILL**



CLOUDBURST
meteor run
Renaissance
SPIDERS OF MARS
satellites
and meteorites

**5 More great
VIC Cartridge games from Audiogenic**

Available from all VIC dealers or direct from Audiogenic Ltd. PO Box 88, Reading, Berks. (0734 586334) Credit cards accepted. Meteor Run, Renaissance, Spiders of Mars, Satellites and Meteorites £24.99, Cloudburst: £19.99 (inclusive of VAT and p&p). All titles copyright UMI, INC represented in Europe by Audiogenic. Send for full catalogue.

SOFTWARE FOR ALL

SOFTWARE FOR ALL presents programs for the people! Our list of original programs for the BBC, DRAGON, and SPECTRUM is growing every day! Reasonably priced. Ingenious use of programming. Excellent entertainment. These are the hallmarks of SOFTWARE FOR ALL.

Order now for fast delivery or visit one of our dealers. There's big things happening for all computer users... That's why we're called SOFTWARE FOR ALL!

BBC MICRO

GALACTIC INTRUDER

Fast arcade-type action game with Hi-Res colour and sound. Machine Code. 32K

£6.95

J.R.

Two player game, features include exploration, drilling, employment and Price Wars. 32K

BBC MICRO

£6.95

PAIRS

A computerised version of the original card game with Hi-Res graphics.

£6.45

DRAGON 32

AREA RADAR CONTROLLER

You're in the control tower at Heathrow and it's your job to control up to 79 aircraft, taking off, landing, or just passing through. VERY ADDICTIVE — HIGHLY FRUSTRATING!

DRAGON 32

£7.95

BBC MICRO

POLAR BEAR

Educational game for 8-12-year-olds incorp. simple maths tables.

32K

£7.45

BBC MICRO

ROW OF FOUR

Try to outwit your computer opponent in this game of skill. Great graphics. BASIC and machine code. 32K

£6.45

ZXSPECTRUM

PHARAOH'S TOMB

3D Maze Game and Adventure rolled into one! 48K

£6.95

BBC MICRO

SPACE KINGDOM

Battle your way around the Planets to become ruler of the Galaxy! Excellent use of graphics and sound. 32K

£7.95

BBC MICRO

TIME TRAVELLER

Travel through over 100 rooms in different times, and find the key back to your own time. 32K

£6.95

BBC MICRO

Utility Pack 1

Envelope program, variable print-text scanner and memory dump. 32K

£7.45

BBC MICRO

CAR WARS/ALIEN PLANET

Two addictive graphics games both BASIC and Machine Code.

32K

£6.95

DRAGON 32

DANGER ISLAND

An adventure game in which you fight your way through many obstacles to escape.

£6.95

BBC MICRO

Utility Pack 2

Disassembler, program crunch and text editor. 32K

£7.45

BBC MICRO

ZOMBIE ISLAND

Fight for survival on an island inhabited by hungry, dangerous cannibals. BASIC and machine code program.

32K

£7.95

BBC MICRO

BEEBTREK

Real time advanced Star trek Game. Extra facilities include probe satellites, damage reports & on-board computer.

16/32K

£7.95

SEND TODAY! Post to SOFTWARE FOR ALL, Dept YC, 72 North Street, Romford, Essex or Phone: (0708) 60725.

Name:

Address:

Please send me:

£
£
£
£
£
£
Please add £1.00 P&P per order. £ 1.00.
Total:

Please bill my Access/Barclaycard/Amex No:

I enclose Cheque/P.O. made payable to SOFTWARE FOR ALL.

**SOFTWARE
FOR ALL**

"Programs for the people"


```

2A=0
6dD=90;K=0;V=0;M=0;@=3;I=0;L=0;S=1;W=0;C=0;B=0
15J=£9500;H=£8400;£23=£9100;P=£2800
20DIMCC(11),BB(105),DD(15)
25 P.#12
30?18=£82;G.e
70hF.F=0T0760;J7(F)=0;N.;CC11=0
75F.F=1T010;CC(F)=0
80D=(F*4+(R.*3))*10;J7(D+8)=F
90C=(F*7+(R.*3))*10;J7(C+9)=F
95E=C;N.F;G.p
100oP." " "OPTIONS-" " IFV>0P."bRIBE,"
101IFI=10RW=10RX?8=30RX?8=10P."tAKE,"
102IFW=1P."cAST SPELL,"
104P.$BB101;Y=(10-X?9)*20
105JF=0;DOLI.DDO;WAIT;F=F+1;U.?£80<>320RF=Y
106Q=7£80;IFF=Y IFX?9<11 IFX?9>0 IFX?9*4Q>D.G.a
107IFF=Y.G.j
110P." " IFQ=65P."YOU ATTACK";G.a
120IFQ=66IFV>0P."BRIBE " ;G.b
125IFQ=67P."SPELL";G.w
130IFQ=76P."12"LOOK";R=0;G.f
140IFQ=84IFW=10RI=10RX?8=3 0RX?8=10P."12"TAKE";G.t
150IFQ=78P."NORTH";N=2;G.c
160IFQ=83P."SOUTH";N=3;G.c
170IFQ=87P."WEST";N=5;G.c
180IFQ=69P."EAST";N=4;G.c
190IFQ=85P."UP";N=6;G.c
210IFQ=68P."DOWN";N=7;G.c
220IFQ=77P.$BB102;G.j
230IP." " "OUCH!" " $BB105;D=D-10;G.o
240E IFX?N=1 G.l
245IFK=10RB=16.m
250IFX?N>9IFK=0P." " "YOU CAN'T IT'S LOCKED";G.o
260mIFN=6IFD<100P." " "YOU CAN'T YOU ARE TOO WEAK";G.o
270IFN=2L=L-50;G.p
280IFN=3L=L+50;G.p
290IFN=4L=L+10;G.p
300IFN=5L=L-10;G.p
310IFN=6L=L-250;G.p
320IFN=7L=L+250;G.p
500wIFW=1B=1;P." " "SPELLED";IFD<200D=200
510IFX?9<100IFX?9>0G.s
520G.o
1000P.F=1T099;WAIT;N.;@=3;?£E1=0;CLEARO;P.$30
1004iX=J+L
1005P=L-250; IFD<200D=D+10
1006IFL<250X?6=1;P=L
1007IFL>490X?7=1;P=L-500
1010IFP<50X?2=1
1030IFP>190X?3=1
1040IFP?50=40X?4=1
1050IFP?50=0X?5=1
1080Z=1000;?X=L/10;F=1
1085kN=X?F;IFF>7G.q
1090IFN=0N=S;S=S+1;IFS>12S=1
1100IFF>5IFN>7N=1
1110qX?F=N;Z=Z+200
1120IFN<>0G.(Z)
1125rF=F+1;IFF<10G.k
1130IFX?9=10IFW=0G.s
1135IFCC11=11IFD>80D=D-50;IFL=0G.7400
1140B=0;G.o
1200IFL=0P." " $BB95,$BB(N+2)" IF "$BB80" $BB54;G.r
1210P." " $BB2,$BB(N+2)" ;G.r
1400IF(L-50)>0IFX?-47=0X?-47=N
1405P." " $BB15,$BB(15+N);G.r
1600IF(L+50)<750IFX?52=0X?52=N
1605P." " $BB28,$BB(N+15);G.r
1800IF(L+10)<750IFX?15=0X?15=N
1805P." " $BB29,$BB(15+N);G.r
2000IF(L-10)>0IFX?-6=0X?-6=N
2005P." " $BB30,$BB(15+N);G.r
2200IF(L-250)>0IFX?-243=0X?-243=N
2205IFN>6N=1
2210IFN>1P." " $BB(29+N)
2220G.r
2400IF(L+250)<750IFX?256=0X?256=N
2405IFN=7G.x
2410IFN>1P." " $BB(34+N)
2420G.r
2470xIFL>490ORI=10RW=1G.r
2475LI.DD1
2480P." " $BB41;L=L+250;D=D-50;J?(L+6)=1;J?(L+7)=1;S=1;G.i
2600IFI=10RW=10RX?8=30RX?8=10RX?8=1G.u
2601G.r
2605uR=(A.R.*7+1)*10;P." " $BB42
2610IFX?8=1G.v
2620IFX?8=6P.R
2630P.$BB(43+N);G.r
2690vP.$BB43;S=1;IFW=1G.r
2695P." " $BB44;L=(A.R.*70)+5)*10;LI.DD5;G.p
2800P." " $BB55
2802IFN>100P."DEAD " ;P.$BB(N-45);G.o
2805P.$BB(55+N);IFN>20>D;IFN<>10 G.a
2810IFW=0IFN=10G.s
2820G.r
3610sR=(L+(R.*5*10));IFJ?(R+9)<>00RR>7400RR<0G.s
3612LI.DD5
3615P." " "THE " $BB(55+X?9),$BB66
3620IFV=0IFJ?(R+8)=0J?(R+8)=5
3622IFJ?(R+8)=0J?(R+8)=6
3625IFX?9=10;E=R;J?(R+8)=6
3630J?(R+9)=X?9;X?9=0;G.o
4000aIFN=0 P." " "WHAT";G.o
4001G=(A.R.*10+1)-(D/50)+N+(M/3))*10;IFB>100B=100

```

(listing continued on page 65)



GAMES SPECIAL

ATOM QUEST

Beyond the drooling ghouls you'll find economy and complexity in Colin Comber's Atom labyrinth as you seek the chalice.

QUEST IS AN Adventure/Labyrinth game. The object of the game is to become strong enough to find and overcome an evil sorcerer, recover the magic chalice and return to the starting position. There are items scattered through the cells which may help in the Quest. Moves are made by typing the initial letter of the selected option. With luck the number of options will increase.

A magic wand is visible, but a lamp must be found before the other items can be seen. The keyboard scan is associated with a countdown which permits you to move, providing your reaction is faster than the reaction of the monster in that cell.

Using an article in *Your Computer* by Derek Haslam — Software File October 1981 — on storing strings in a string array enabled me to fit the game into the Atom's memory.

Strings can be stored in the upper text space using line numbers. To access the upper text space type

?18 = # 82

The string start locations are read into array BB, which is also stored in the upper text space. !21 = # 9100 — line 15 — moves all arrays from Top where arrays are normally stored to where you decide to store them.

In this case it is # 9100, a safe distance above the last string.

Routine 950-995 reads the first character of string \$?H into array BB. To identify the strings take the line number, divide by 10

and take way 100. Here are two examples:
\$BB1 = line 1010

and

\$BB105 = line 2050

The data for the cells in the Labyrinth is arranged in a 75 by 10 matrix. A conventional word array would consume too much memory, but it is possible to store the data in a byte vector since all the values are smaller than 255 and can be stored in single bytes. This matrix is represented using a one-dimensional array, and the position of an array variable is then calculated by J?n.

The Labyrinth array J?0 to J?749 is also stored in the upper text space J = # 9500 — line 15.

A move north, east, west, south, up or down modifies variable L, J?L=X, and the nine features of a cell are stored thus:

X?0 = Cell number = L/10	
X?1 = Cell description	\$BB 3-14
X?2 = North exit	\$BB16-26
X?3 = South exit	\$BB16-26
X?4 = East exit	\$BB16-26
X?5 = West exit	\$BB16-26
X?6 = Up exit	\$BB31-35
X?7 = Down exit	\$BB36-41
X?8 = Object in cell	\$BB43-54
X?9 = Character in cell	\$BB56-65

Initially all the cell features are zeroed — line 70. As a cell is explored, routine 1005-1050 checks for external walls and inserts stone walls to prevent the Adventurer falling out of the Labyrinth and being struck down by a Space Invader.

The internal walls, exits and stairs are generated by the routine 1085-1110, which takes a number from the sequence 1-12. This means cell features are determined by the Adventurer's exploration so, although the Labyrinth remains stable and retraceable, each Quest can be unique.

The variables.

A	Adventurer count
B	Spell flag
C	Character seed
D	Defence factor
E	Sorcerer's location
F	For-Next counter
G	Pseudo On-Goto variable
H	String counter H = # 8400
I	Lamp flag
J	Start of byte vector J = # 9500
K	Key flag
L	Location variable
M	Monster counter
N	Dummy variable in p routine
O	Object seed
P	Dummy variable in p routine
Q	?# 80

R	Random number
S	Seed for pseudo-randomise in p routine
T	Take counter in t routine
U	
V	Gold pieces
W	Wand flag
X	X = J?L
Y	Keyboard scan counter
Z	1000+ in p pseudo On-Goto

Outline of the program.

2-95	Set variables zero array s J-J?749 and CC Seed objects
	Character seed
100 o	Options keyboard scan
105 j	If character present, countdown, Goto a — attack routines
1000 p	Describe cell
	Describe object
2820	Describe character
3600 s	Character magically disappears
4000 a	Attack routine
5000 t	Take object
5200 f	List objects, display strength
5300	Drop-object option
6000	Sorcerer defeated: find chalice
7000 b	Bribe option
7060	Bribe for sorcerer's location
7400	Chalice safe: quest successful
?18 = # 82	
890	Keyboard scan, assembler source code
910	Sound effects, assembler source code
940	If strings have been read once
	Goto 1.text p
950	Read string starts into array BB
1000	Goto 1.text p
1010	First string
2050	Last string

The memory map is as follows:

# 2800	Keyboard scan
	Sound effects
# 2900	Main program
# 3C00	Main program
# 8200	Assembler source program
	assembled to # 2800
	String-reading routine
	String data
# 8E00	String data
# 9100	Arrays BB,CC,DD
# 9500	Byte array J?0
# 97EE	to J?749

To test the program without continually getting killed off, Run the program. When the first cell has been described, press Escape, and then type

K = 1;W = 1;D = 1000;G.p;RETURN.ESCAPE,G.p which is quite a useful way of cheating. Until the program has been cleared of typing errors, Save the program as two separate files with different names.

When the program is running it can be saved as one complete file. It is possible to load this 8K program in one go using the *FLoad command.

*SAVE"QUEST"2900 3D00

When it has completed, rewind and *Cat until 3B00 is displayed; allow this entire memory block to pass the recording head of your cassette recorder, listening for the brief carrier tone between memory blocks and stop the recorder before the header of 3C00 is displayed. Now Break, Old and *Save"Quest" 8200 8E00 and record, erasing the dummy memory block and replacing it with the upper text data. This fools the Atom into loading similarly named files to separate loading addresses.

ABACUS CONTROLLER



Developed to eliminate tedious swapping of plugs when LOADING or SAVING programs on cassette.

ZX SPECTRUM CONTROLLER: Single switch selection of SAVE, LOAD & AMP modes. Built in amplifier and loud-speaker boosts Spectrum sound output. Price **£14.95**

ZX81 CONTROLLER: Single switch selection of TALK, SAVE, CUE & LOAD modes. Built in microphone/speaker for fast and reliable program naming and cueing. Price **£9.95**

All items in this advertisement can be viewed before buying at the Buffer Micro Shop, London, and Jay Dee Communications, Water Street, Port Talbot.

AVENGER



AVENGER: This all action arcade-style game written in MACHINE CODE for the ZX Spectrum is fantastic! You are flying over a mountainous planet terrain. Your mission is to attack, using lasers and bombs, launch pads, buildings and missile silos. Alien craft attack you with missiles; guided missiles launched from the ground hunt you out. But what ever you do don't hit the atomic power stations!! Continuous display of time, score, shields and laser temperature. Five levels of play and high scores.

Price **£4.95** inc. Also available for the ZX-81 (16K) at **£4.95** inc.

SPECTRUM GAMES PACK 1

DESTROYER: Listen to the beeps of the sonar to locate and destroy the submarines before they sink the merchant ships.



All four on one cassette at the incredible price of **£4.95** inc.

ICEBERG: Steer your icebreaker through thickening pack ice to pick up survivors.



BATTLE: Destroy missile sites while avoiding mines and the computerised enemy tanks that are out to get you.



ANDROID: Rescue the miners before they are trapped in the flooding mines.



**186 St. Helens Ave,
Swansea, W. Glam.
Tel: (0792) 50282**

SPECIAL CHRISTMAS ZX MICROFAIR!

If you're interested
in exhibiting please
contact Mike Johnston



**Saturday 18th December at the
New Horticultural Hall,
Greycoat Street, London SW1.
One day - 10am to 6pm.**

Thinking of buying your
Christmas computer?
Looking for ZX hardware or software?
Want to meet local user-groups and ZX
enthusiasts?

Or just want an interesting day out?

Then call along on Saturday, 18th December for the **Christmas
Special MICROFAIR!**

It's full of Christmas Cheer — everything for the ZX81, ZX80 and
ZX SPECTRUM under one roof!

Meet a wide range of manufacturers of all types — talk to
interesting people — get advice — buy that last minute present.

There's plenty of room, there's a Bar if you get thirsty and a Buffet
if you're famished!

There's even a bring and buy sale so you'll be able to pick up a
bargain, and of course a complete showguide available on the day.

Make a note of the date or
write for advanced tickets to
Mike Johnston, 71 Park Lane,
London N17 0HG (enclosing
a S.A.E.).

Admission charges are 75p
for adults or 50p for kids
(under 14). Please make
cheque, P.O. payable to ZX
Microfair.

Do it now and make sure of
a very happy ZXMAS!



(listing continued from page 62)

```

4002F.F=1T050;WAIT;N.;IFG<106=10
4004IFN>100P."CORPSE MUTILATOR";G.o
4005P."THE ",$BB(N+55)" "$BB67
4006P."$BB68
4007P."THE ",$BB(N+55)" ";G.(G+4000)
4010P.$BB69;D=D+20;M=M+1
4011IFN=10 G.6000
4012YR=(A.R.X70+2)*10;IFJ?(R+9)<>0G.y
4013J?(R+9)=X79
4015X79=(X79)+100;N=X79;G.o
4020R=(A.R.X79+1)*10;P.$BB70,R,$BB49" AND ";CC6=6;V=V+R;G.s
4030IFV>0P.$BB71;D=D+50;V=0;CC6=0;CC5=0;G.s
4040P.$BB72;D=D+30;G.a
4050P.$BB73;D=D+20;G.a
4060P.$BB74;D=D-10;G.a
4070P.$BB75;D=D-20;G.a
4080P.$BB76;D=D-10;G.o
4090P.$BB77;D=D/2;G.o
4100IFD>10IFW=1IFN<>10G.4090
4105F.F=1T099;WAIT;N.
4110P.$12"THE "$BB(N+55)" "$BB78";LI.DD5;G.7500
5000t=X78;IFT<2 P."$BB79;G.o
50103=2;CC(T)=T;X78=0;G.(T*10+5000)
5020K=1;G.f
5030I=1;G.f
5040D=D-200;G.f
5050V=V+999;D=D-300;CC6=6;G.f
5060V=V+R;R=(A.R.X75+1)*10;J?(R+8)=6;G.f
5070G.f
5080D=D+200;G.f
5090D=D+300;G.f
5100W=1;G.f
5110IFCC10=10 CC10=0;W=0;B=1;LI.DD5;P."THE MAGIC WAND "$BB66
5200fP."$BB80;R=V;T=0
5210F.F=2T011
5220IFF=6IFF=CC(F)P.R" "
5230IFF=CC(F)P.$BB(43+F)" ";T=1
5235N.;IFT=0P." "$BB81
5240G=D/100;IFG>68=6
5250IFG<18=1
5255IFFC7=7P."$BB96,J?L
5260P."YOU ARE "$BB(82+G);IFT=0G.i
5300P."$BB99"ANYTHING"$BB100'
5310 DO LI.DD0;U.?E80<>32
5315 IF?E80<>89 G.i
5320F.F=2T011;IFCC(F)<>F G.n
5330P.$BB99$BB(CC(F)+43)'$BB100'
5340 DO LI.DD0;U.?E80<>32
5345 IF?E80<>89 G.n
5350IFX78=0G.5390
5360R=(A.R.X72+2)*10;IFJ?(R+8)<>0G.5360
5370J?(R+8)=X78
5380P."THE "$BB(43+J?(R+8))$BB66
5390X78=CC(F);CC(F)=0
5400IFF=2K=0
5410IFF=3I=0
5420IFF=4D=D+200
5430IFF=5V=0;CC6=0;D=D+200
5440IFF=6V=0;CC5=0;D=D+200
5450IFF=8D=D-200
5460IFF=9D=D-300
5470IFF=10W=0
5480N.;G.i
6000X79=0;X78=11;P."$BB42'$BB54'$BB82;G.o
7000bIFX79=0P."BRIBE WHO?";G.o
7005IFX79>11 P."DEAD "$BB(X79-45)"?";G.o
7010P."$BB80 V,$BB49
7020 P."FOR",X79*10" "$BB49" THE "$BB(X79+55)'$BB89'
7040P."AGREED?"$BB100
7041DOLI.DD0;Q=?E80;U.Q<>32
7042IFQ<>89ORV<(X79*10)G.a
7045P."$BB90;V=V-(X79*10)
7050IFX79>40RCC7<>76.7090
7060P."FOR",X79*10" "$BB49" THE "$BB(X79+55)
7070P."$BB103" THE "$BB65
7080P."AGREED?"$BB100
7081DOLI.DD0;Q=?E80;U.Q<>32
7082IFQ<>89ORV<(X79*10)G.a
7085V=V-(X79*10);P."THE "$BB65$BB104,E/10
7090M=M+1
7100P."THE "$BB(X79+55)'$BB66;X79=0;G.o
7400 LI.DD1;LI.DD1;P.$12
7402P.$BB54" IS SAFE"
7405IFV>0P."AND YOU FOUND"V,$BB49
7410P."$BB97";IFV>0P.$BB98
7415G.7515
7500P."$BB91
7510A=A+1
7515P."$BB92,M'$BB93,A'$BB94';LI.EFFE3;G.d
7520 END
718=E82
890eP.$21;F.F=1T02
895 F.F=1T02
900E:DD0 JSR EFE71;TYA;ADC @32;STA E90;RTS
910:DD1 LDA @1;STA E81
920:DD2 LDY @10;DD3 LDA E8002;EOR @4;STA E8002;LDX E81
930:DD4 INX;BNE DD4;DEY;BNE DD3;INC E81;BNE DD2;RTS
931:DD5 LDA @191;STA E82
932:DD6 LDY @64
933:DD7 LDX E82
934 LDA E8002;EOR @4;STA E8002
935:DD8 DEX;BNE DD8
936 DEY;BNE DD7;LDY E82
937:DD9 NOP;DEY;BNE DD9
938 LDA E82;SEC;SBC @E3;BCC DD10;STA E82;JMP DD6
939:DD10 RTS
940J;N.;P.$6;IF?BB1=89 G.g
950 DOH=H+1;U.?H=13ANDH?3=100
960 F.F=1T0105
970DOH=H+1;U.H?4=13
980BB(F)=H
990IFF=1LI.DD5;P.$BB1
995N.
1000g718=E29;G.h
1010dYOU ARE BEING TRANSPORTED TO A MYSTERIOUS PLACE
1020 YOU ARE IN A
1030 COLD CELLAR
1040 DARK PANELED ROOM
1050 MISTY CAVE
1060 DARK ECHOING SPACE
1070 SMALL CHAMBER
1080 CRAMPED ANTEROOM
1090 DARK VAULT
1100 LOW CHAMBER
1110 HIGH VAULTED HALL
1120 DUSTY ROOM
1130 COLD DAMP ROOM
1140 COLD MISTY CHAMBER
1150 NORTHWARDS IS A
1160 STONE WALL
1170 DARK CURTAIN
1180 NARROW DOORWAY
1190 DARK ENTRANCE
1200 DARK ARCHWAY
1210 DARK DOORWAY
1220 DOOR
1230 LOW ARCH
1240 GLOOMY PORTAL
1250 THICK DOOR
1260 WOODEN DOOR
1270 RUSTY IRON GATE
1280 SOUTHWARDS IS A
1290 TO THE EAST IS A
1300 WESTWARDS IS A
1310 A STAIRCASE LEADS UPWARDS
1320 A LADDER LEADS UPWARDS
1330 A ROPE IS HANGING FROM ABOVE
1340 STEPS LEAD UP
1350 SPIRAL STAIRS WIND UPWARDS
1360 A STAIRCASE LEADS DOWN
1370 A LADDER LEADS DOWN
1380 A ROPE HANGS DOWNWARDS
1390 STEPS LEAD DOWN
1400 SPIRAL STAIRS WIND DOWN
1410 OOF!!YOU HAVE FALLEN DOWN A HOLE
1420 ON THE FLOOR YOU CAN SEE
1430 YOU'VE TRODDEN IN THE MAGIC TURD
1440 WHICH TRANSPORTED YOU
1450 A BUNCH OF KEYS
1460 AN OLD BRASS LAMP
1470 A SMALL SCARLET FISH
1480 A HEAVY CASKET
1490 GOLD PIECES
1500 A SCRAP OF PAPER
1510 A MAGIC SHIELD
1520 A MAGIC SWORD
1530 A THIN IRON ROD
1540 THE$magic$chalice$
1550 BEHIND YOU IS A
1560 GOBLIN
1570 MALIGNANT DWARF
1580 WRAITH
1590 TROLL
1600 THRAGG
1610 DROOLING GHOUL
1620 KOBOLD
1630 GERYON
1640 PIT FIEND
1650 SORCERER WITH THE chalice YOU SEEK
1660 MAGICALLY DISAPPEARS
1670 SMITES YOU MIGHTILY
1680 YOU STRIKE BACK BRAVELY
1690 EXPIRES MESSILY
1700 SCREAMS,THROWS
9902 SNATCHES YOUR GOLD AND
1720 SMITES YOU LIGHTLY
1730 IS STUNNED
1740 INJURES YOU
1750 STUNS YOU , YOU FALL BACK
1760 INJURES YOU SEVERELY
1770 SMITES YOU MIGHTILY
1780 KILLS YOU
1790 PICK UP WHAT?
1800 YOU ARE CARRYING
1810 NOTHING
1820 TAKE THE chalice AND FLEE
1830 WEAK
1840 NOT VERY STRONG
1850 STRONG
1860 QUITE STRONG
1870 VERY STRONG
1880 ALMOST INVINCIBLE
1890 WILL LEAVE YOU IN PEACE
1900 THAT WILL DO NICELY
1910 YOU DIDN'T MAKE IT-TOUGH
1920 HUMANS
1930 MONSTERS AND THINGS
1940 IF YOU'D LIKE TO TRY AGAIN PRESSRETURN
1950 YOU CAN ONLY RETURN TO THE REAL WORLD THROUGH THIS
1960 THE MAP SHOWS YOU'RE IN ROOM
1970 WHAT A BRAVE ADVENTURER
1980 YOU WON YOU CAN KEEP THE GOLD
1990 DO YOU WANT TO DROP
2000 (YES/NO)
2010 LOOK,ATTACK OR MOVE ?
2020 DIRECTION-nORTH,sOUTH,wEST,eAST,uP OR dOWN ?
2030 WILL TELL YOU WHERE TO FIND THE
2040 IS IN ROOM
2050 NO EXIT IN THAT DIRECTION DUMMY!

```


ZX KEY

Our new cased keyboard has 52 keys, 12 of these are used for the numeric pad. The numeric pad offers some useful features; you can cursor with one hand and it will be a boon for anyone who enters a lot of numeric data. The case measures 15 x 9 x 2½. The computer (ZX81 or



spectrum) fits neatly inside. Also fitted inside the case is a mother board (81 model only) which allows 16K, 32K and 64K to be fitted in the case. All the connections are at the rear of the case i.e. Power Mic, Ear, T.V. and the expansion port. The power supply could also be fitted inside. This means you have a very smart self-contained unit.

NOTE

The keyboard is connected to your computer by a ribbon cable and this has connectors fitted which simply push into the Sinclair connectors. It is a simple two minute job and requires no electronic skills or any soldering.

ZX81 ARCADE SOFTWARE
THE FOLLOWING EXCITING MACHINE CODE
ARCADE ACTION GAMES ARE AVAILABLE
FOR THE 16K ZX81 ★ CENTIPEDE ★ METEOR
STORM @ £4.95 each

Fully cased with numeric pad £45

Uncased with numeric pad £30

Case £15

- ★ 16K Ram Massive Add On Memory Fully assembled and tested £19.95
- ★ 64K Memory Expansion £49.95
- ★ 4K Tool kit full of utilities to aid the programmer in constructing and de-bugging

dk'ronics

BOARD

4K GRAPHICS ROM £29.95

The DK Graphic module is our latest ZX81 accessory. This module unlike most other accessories fits neatly inside your computer under the keyboard.

The module comes ready built, fully tested and complete with a 4K graphic ROM. This will give you an unbelievable 448 extra pre-programmed graphics, your normal graphic set contains only 64. This means that you now have 512 graphics and with their inverse 1024. This now turns the 81 into a very powerful computer with a graphic set rarely found on larger more expensive machines. In the ROM are lower case letters, bombs, bullets, rockets, tanks, a complete set of invaders graphics and that only accounts for about 50 of them, there are still about 400 left (that may give you an idea as to the scope of the new ROM). However, the module does not finish there, it also has a spare holder on the board which will accept a further 4K of ROM/RAM. This holder can be fitted with a 1K/2K/RAM and can be used for user definable graphics so you can create your own custom character sets.

THE FOLLOWING SOFTWARE IS AVAILABLE FOR USE WITH THE GRAPHIC ROM @ £4.95 each

★ ASTEROIDS ★ CENTIPEDE ★ DEFENDER
★ SPACE INVADERS ★ METEOR STORM

E.Prom version for use with graphics Rom £9.96

Cassette Version £6.95

★ Flexible ribbon connector £10

★ Spectrum Memory Upgrade to 48K £35

SEND S.A.E. FOR INFORMATION
PACKED CATALOGUE

23 Sussex Road,
Gorleston,
Great Yarmouth,
Norfolk.
(0493) 602453

Send off the coupon today or telephone Gt. Yarmouth for our answering service (available 24 hrs. a day 7 days a week) quoting Barclaycard or Access number).

Please add on £1.25 for P/P



WHY WAIT?

ORDER TODAY FOR FAST DELIVERY

Please state type of machine which ROM/memory size quantity and price when ordering

Please send me @£

Please send me @£

Please send me @£

Please send me @£

Please send me @£

Please add on £1.25 for P/P. I enclose £

Name

Address

Cheque/P.O. payable to DK Tronics

PROGRAM 1 WILL enable two people to play chess on an unexpanded ZX-81. The program, which uses Slow mode and Sinclair ROM routines, is not suitable for the ZX-80 or a new ROM Z-80.

This part deals with the general details of the production of the board. The program, which was part of a technical exercise to see how much could be squeezed into the Sinclair pint-pot, ended up with a playing 1K game of chess.

Follow the instructions carefully; with a machine-code program an error will cause the system to crash and you may need to switch the machine off and on to regain control, before reloading the program from tape. Always Save prior to running any new version of a machine-code program for the first time.

Figure 1 shows the playing board. It gives a nice, easily-read display. The first problem is to produce a Rem line containing 574 spaces. It is best to make one Rem statement and edit the line number to give Rems 1 to 5. You will have to type clear before you edit the lines.

Do not forget to use Fast mode. Next type in Rem 6, see figure 3. If this has been done correctly then Peek 17087 will give 32 and Peek 17088 will give 118. Now type in lines 9

CHESS

to 15. Next type list 1 Newline and now: POKE 16510,0 prevents you from editing first line POKE 16511,64 POKE 16512,2

Then Save 1. As the production of a Rem statement of the correct length appears to be a major problem, let me explain what happens in a bit more detail.

The way Sinclair presents each Rem line is as follows: two bytes contain the line number, two bytes contain the subsequent number of bytes in the line, one byte stores the code for the keyword Rem, 100 is the number of bytes in line, one byte contains the line end. This gives $2+2+1+100+1$ and provides 100 bytes of free space, but any subsequent Rem statement to be combined will be able to use all the

bytes for data, thus $2+2+1+100+1 = 106$ bytes.

We only need one line end, one number of bytes in a line and one line number, thus in our case we have:

1st	Rem Statement	100 bytes usable
2nd	106
3rd	106
4th	106
5th	106
6th	50
		574

Now if we want 574 bytes in a line, plus one Rem code and one end-of-line code — that adds up to a total of 576 — we change the

Figure 7.

16514	55 51 39 48 54 39 51 55	PIECE TABLES	CALL NN	205 173 64	
	183 179 167 176 182 167 179 183		LD B N	6 4	SPACES
16530	PUSH BC	197	POP HL	225	
	PUSH AF	245	INC H	36	
	CALL NN	205 245 8	PUSH HL	229	
	POP AF	241	PUSH BC	197	
	RST 16	215	XOR A	175	
	POP BC	193	CALL NN	205 173 64	
	INC A	60	POP BC	193	
	RET	201	POP HL	225	
16540	CALL DP2	205 140 65	DJNZ DIS	16 245	
	LD B N	6 90	INC H	36	BLACK PAWNS
	LD A (HL)	126	PUSH HL	229	
	CP N	254 0	LD A N	62 181	
	JP NZ DIS	32 2	CALL NN	205 173 64	
	LD (HL) N	54 128	POP HL	225	
	INC HL	35	INC H	36	BLACK PIECES
	INC HL	35	LD B H	68	
	DJNZ DIS	16 245	LD C L	77	
	RET	201	CALL NN	205 245 8	
	PUSH AF	245	LD DE NN	17 138 64	
	PUSH HL	229	LD BC NN	1 8 0	
	POP BC	193	CALL NN	205 107 11	
	CALL NN	205 245 8	LD A N	62 38	LETTERS
	LD B N	6 8	LD BC NN	1 9 14	
	POP AF	241	CALL NN	205 146 64	
	RST 16	215	INC C	13	
	DJNZ DIS	16 253	CP N	254 46	
	RET	201	JP NZ DIS	32 248	
16570	LD BC NN	1 0 2	LD A N	62 29	NUMBERS
	PUSH BC	197	LD BC NN	1 12 4	
	CALL NN	205 245 8	CALL NN	205 146 64	
	LD A N	62 8	INC B	4	
	LD B N	6 14	CP N	254 37	
	RST 16	215	JP NZ DIS	32 248	
	DJNZ DIS	16 253	CALL B/W	205 156 64	
	POP BC	193	RET	201	
	INC B	4			DISPLAY POINTERS
	LD A N	62 15			DP2
	CP B	184	LD C N	14 34	
	JP NZ DIS	32 238	JR DIS	24 10	
	LD BC NN	1 2 4	LD C N	14 15	DP1
	CALL NN	205 245 8	JR DIS	24 6	
	LD DE NN	17 130 64	LD C N	14 180	DP4
	LD BC NN	1 8 0	JR DIS	24 2	
	CALL NN	205 107 11	LD C N	14 195	DP5
	LD HL NN	33 2 5	LD B N	6 0	
	PUSH HL	229	LD HL (NN)	42 12 64	
	LD A N	62 53	ADD HL BC	9	
			RET	201	


```

10 REM%ACCOUNT1*
20 REM%Copyright N.HAUGHTON August 1982*
30 X=31*4;Y=25*4
40 F=#8200;G=F+Y;H=G+Y;I=H+Y;J=I+X;Q=J+X;C=Q+Y
50 F.N=OTO Y*4 S.4;C=C+11;Q1N=C;SQ1N="";N.
60 F.N=OTO Y S.4;F1N=0;C1N=0;R1N=0;N.
70 F.N=OTO X S.4;I1N=0;J1N=0;N.
80 D=C+11;E=D+9;U=E+9;V=U+26;W=V+9;B=W+21;L=B+11
90 $D="";$E="";$U="";$V="";$W="";$B="";
100 $B=" " ;$L="-----"
110 DIM O41,Z5
120 $O="ABCDEFCHJKLMNPOQRSTUVWXYZ0123456789./:!"
130 $Z="cder""
150 DIM LL8,RR5;F.N=OTO8;LIN=-1;N.;F.N=OTO5;RRN=-1;N.
155 P.$21;F.N=1TO2;DIM P-1
160 [:LL0 LDA@#40;LDY@0
170 :LL1 STA(@#6),Y,INY
180 CPT@#9A;BNE LL1;RTS
190 :RR0 LDY@0
195 :RR1 JSR#FE3;CMP@CH"8";BNE RR2
200 JSR LLO;LDA@#80;STA@#0
205 LDA@#7;JSR#FFF4;JMP RR0
210 :RR2 LDX@254
215 :RR3 INX;CPX@L.0;BEQ RR4
220 CMP O,X;BNE RR3
225 STA U,Y;JSR #FFF4
230 INY;JMP RR1
235 :RR4 LDX@254
240 :RR5 INX;CPX@L.X;BEQ RR1
245 CMP Z,X;BNE RR5
250 STA U,Y;LDA@13;INY
260 STA U,Y;RTS
310 :LL2 LDY@32;LDX@0
320 :LL3 LDA(@#90),Y;STA(@#0,X)
330 CLC
340 LDA@#90;ADC@1;STA@#90
350 LDA@#91;ADC@0;STA@#91
360 LDA@#90;CMP@#92;BNE LL2
370 LDA@#91;CMP@#93;BNE LL2
380 JSR LLO;RTS
381 :LL4 LDA@#80;STA @#90;STA @#91
382 LDA@#5F;STA @#92;LDA@#81;STA @#93
383 LDX@0;LDY@32
384 :LL5 LDA(@#92,X);STA (@#92),Y
385 LDA @#92;CMP @#90;BNE LL6
386 LDA @#93;CMP @#91;BNE LL6;JSR LLO;RTS
387 :LL6 SEC
388 LDA @#92;SBC @1;STA @#92;BCS LL5
389 LDA @#93;SBC @0;STA @#93;JMP LL5
390 :LL7 JSR#FE3;CMP@CH"r";BEQ LL8;CMP@CH"e";BNE LL7
391 :LL8 STA U;RTS;]
392 N.;P.$6
393 P.$12;?#E1=0;P.$B"bank"$255"account"$255'"$B$1+4
395 R=64
400 GOS.f;?#E1=0
410 GOS.a
420 DO !#DE=#81A0;?#9A=26;?#96=#81A6;?#80=6
430 P."entry?";!L.LLO;LI.RR0
435 IF $U="";IF R;GOS.1;U.0
436 IF R=0 OR R=32;R=96;GOS.1
440 IF$U="e" G.b
450 IF$U="r" GOS.g;GOS.a;U.0
460 K=L.U;Y=U*(K-1);IFY<CH"c"IFY<CH"d" P.$7; U.0
470 GOS.b
480 U.0
490 $E=$0;GOS.e
500 END
510 aP.$12;?#E1=0;?#E0=9;?#E00=#40;P."statement"$255"date"
SD" "

```

```

520 P. ""DATE          CREDITS DEBITS BALNCE""$LSL
530 @=7
540 F.X=68T0965.4
550 P.$QIX;?#E0=11;P.FIX,CIX,RIX
560 N.
570 P.$LSL
580 GOS.v
590 R.

600bc=-1;A=C;$w=""
610:DO C=C+1;U.U7C=CH","OR C=K
620 DO A=A+1;U.(U7A)CH""9"AND U7A<CH""[""]OR A=X
630 IF C=0;$U=$U+1;K=K-1;GOS.r;R.
640 IF C<K $V=$U+C+1;$U+C="" ;IF A<C;IF A;$W=$U+A;$U+A=""
650 IF C<K;IF A=0;$W=$U;$U=$U
660 IF C<K$D=$U;M=M+V.D;N=M+V.E;IF A=0;IF A<C;N=N-4

```

[illegible]

STANDING ORDERS		
DATE: TRANSFERS: S. ORDERS		
10	0	21893
22	0	975
24	0	899
25	45000	9016

The terminating code ^C or ^D signals that the value is to be treated as a transfer credit or standing order debit respectively. Note that although entered in pounds, all amounts are displayed in pence. For example, to replace

ACCOUNT

STATEMENT DATE 10/9

DATE	CREDITS	DEBITS	BALANCE
31/8:501	0	3000	29524
2/9:502	0	2000	27524
4/9:503	0	1240	26284
4/9:S*CARD	0	1500	24784
8/9:504	0	2000	22784
10 S.D	0	24186	-1402
10/9:505	0	568	-1970
10/9:CDRR	2303	0	333

ENTRY?

REVIEW S.O'S END SESSION

Figure 3. Statement page.

STATEMENT DATE 10/9

DATE	CREDITS	DEBITS	BALANCE
31/8:501	0	3000	29524
2/9:502	0	2000	27524
4/9:503	0	1240	26284
4/9:S*CARD	0	1500	24784
8/9:504	0	2000	22784
10 S.D	0	24186	-1402
10/9:505	0	568	-1970
10/9:CDRR	2303	0	333

ENTRY 26/9 SUZY, 5.10

REVIEW S.O'S END SESSION

Figure 4. Suzy's cheque.

the amount credited on the 10th of the month with £10.50, type

[10,10.5^N^C]

To increase the amount debited on the 23rd of the month by £15.25, type

[23,15.26 D]

To overcome an error, type <@> and re-do the entire entry. The erroneous entry will be ignored.

To review the table of standing orders and transfers at any time, type ^E, as figure 2. Type ^R again to resume entering SOs and transfers. When all standing orders and transfers have been entered to your satisfaction, type ^E repeatedly until the statement page is once again displayed on the screen.

Answer the initial prompt Play Tape by starting playback of the appropriate data tape and immediately pressing an alphanumeric key. After a few moments the statement page previously saved will be displayed as in figure 3. Note again that all amounts are displayed in pence. New entries may now be typed in — note that entries must be in chronological order as the month number is not significant, and no sorting of the day numbers is done. For example, if an entry for 20/3 is typed in after an entry for 21/3, the 20/3 will be taken to refer to the following month and any standing orders or transfers between the 21st and the following 20th will be inserted in the statement.

Entries are made in the formats.
{Day of month/{Month number}{Note}[amount in pounds]}[C or D]
or
[amount in pounds][C or ^D]
No <return> is necessary.

If the optional date is omitted, the current statement date at the top RHS of the statement, which is also the date of the last entry made, will be adopted as the new date. This format should be used when a number of transactions are to be entered with the same date. The date and note together are truncated to 11 characters in total — allowing five or six characters for the note. If the optional date and note are both omitted, the second format should be used.

The terminating codes ^C or ^D signal whether the amount is a credit or a debit respectively.

For example, if you paid Suzy a cheque for £5.10 on July 26, type;

[26/7 SUZY, 5.1^D]

as in figure 4. Or if you do not wish others to know about Suzy, type

[26/7, 5.1^D]

If the previous entry was already dated the 26/7, type

[SUZY, 5.1^D]

or

[5.1, ^D]

respectively, instead.

Typing a <@> character signals that the entry typed so far contains an error and is to be ignored. A beep will sound and the entry will be erased — retype the entry from the beginning. If you complete an entry containing a syntactical error it will either be trapped and ignored — a beep will sound and the entry erased — or the entry will be entered on to the statement as a dummy zero amount with no effect on the balance.

Any standing orders or transfers encountered on the SO table between the previous and new entry dates will be inserted on the statement page before the entry just made.

You may review and revise the table of standing orders and transfers at your leisure by following the prompts at the bottom of the screen.

The screen window may be scrolled up the imaginary statement in blocks of eight entries at a time, by typing ^ . This is cyclic — that is, the window will be scrolled past the earliest entry on the statement back to the latest entry and then back to where you started from. A beep will sound to remind you that you are once again viewing the working page. If a new entry is made while an earlier portion of the statement is in the window, the screen will automatically revert to the working page before dealing with the new entry.

When the last entry has been made, type ^E to save the displayed statement and the table of standing orders and transfers on tape.

In answer to the prompt Record Tape, start the tape at the point where you wish to save the data and press an alphanumeric key. The values associated with the statement page and standing orders table will be recorded on tape and the message Statement Page Saved printed at the foot of the statement on the screen. ■

```

670 IF C<K;IF A;GOS 4
680 IF C<KSV=>SU;SD=>SD
690 !#DE=#8017;P.SDSB+3
700 $Q100=>SU;$Q100+LEN(Q100)=>W;$Q100+11=""
710 Y=V(L.V-1);XV=100+V.V
720 IF Y=CH"e"Q100=0;F100=XV;H100=H196+F100
730 IF Y=CH"d"Q100=0;G100=XV;H100=H196+G100
740 F.X=4T096S.4;T=X+4;$Q1X=>QIT;F1X=F1T;G1X=G1T;H1X=H1T;N.
760 !#90=#8080;!#92=#8160;!#96=#92;!#9A=11;!#80=6
770 WAIT;LI.LL2
780 !#DE=#8160;P.$Q196;!#80=11;P.F196;G196;H196
790 R.
800 P.$12;!#E1=0;P.SB+2"standing"$255"orders"
810 P.$15L
820 DO
830 P."DATE,AMOUNT<d/c>?";!#80=1#DE;GOS u;!#DE=1#80
840 !#96=1#DE+17;!#9A=15;!#80=17;LI.LL0;IF$U="e";G.J
850 C=0;DO C=C+1;U.UIC=CH";"OR C=L.U
860 IF C=L.U;U.O
870 $V=>SU+C+1;SU+C=""
880 N=4*V.U;V=L.V-1
890 IF V1Y=CH"d"11N=11N*(V1Y-1)<CH"n")>+1(100+V.V)
900 IF V1Y=CH"e"11N=11N*(V1Y-1)<CH"n")>+1(100+V.V)
910 J.U.$U="e"
920 P.$12;!#E1=0;P.SB+2"STANDING ORDERS""$B+4"DATE:TRANS-
    FERS:"
930 P." S.ORDERS""
940 P.$15L
950 @=>10;F.N=4T0124S.4;IF 11N OR J1N;P.'N/4,J1N,11N
960 N.;P.'$15L
970 GOS x
980 LI.LL7
990 IF$U=CH"e"U.G.C
1000 GOS x
1010 R.
1020 DO
1030 DO N=N+4;IF N/4>31 N=4
1040 U.11N OR J1N OR (N=N);IF 11N=0 AND J1N=0 G.K
1050 F.X=4T096S.4;T=X+4;$Q1X=>QIT;F1X=F1T;G1X=G1T;H1X=H1T;N.
1070 G196=11N;F196=J1N;H196=H192-11N+J1N
1080 STR N/4,Q196;$Q196+2="">;IF N<10;$Q196+1=""
1090 IF J1N;$Q196+L.(Q196)="" TFR"
1100 IF 11N;$Q196+L.(Q196)="" S.O"
1110 !#90=#8080;!#92=#8160;!#96=#92;!#9A=11
1120 WAIT;LI.LL2
1130 !#DE=1#92;P.$Q196;!#80=11;P.F196;G196;H196
1140 KU.N=N;SE=SD
1150 R.
1160 GOS.s;!#DE=#80081A0
1170 S=FO.""
1180 SP.S.D;F.N=4T0124S.4;PUT S,11N;PUT S,J1N;N.
1190 F.N=4T096S.4;SP.S.Q1N;PUT S,F1N;PUT S,G1N;PUT S,H1N;N.
1200 P.$11"statement"$255"page"$255"saved";R.
1210 E!#DE=#80080AB;!#8036=#40
1230 S=F.""
1240 S.S.E;F.N=4T0124S.4;11N=G.S;J1N=G.S;N.
1250 F.N=4T096S.4;S.S.Q1N;F1N=G.S;G1N=G.S;H1N=G.S;N.
1260 IF V.E=0 DOSE=9(E+1);U.V.E
1270 $D=>SE
1280 R.
1290 E!#DE=#81E0;P."REVIEW S.O'S"$255+2;R.
1300 E!#DE=#81E0;P."REVIEW S.O'S" END SESSION";R.
1310 E!#DE=#81E0;P."REVISE S.O'S" END S.O'S";R.
1320 E!#96=#81A0;!#9A=96;WAIT;LI.LL0;R.
1400 I@=7;!#9A=11;!#96=#8080
1410 F.N=R TO R-28 S.-4
1420 !#DE=#8080;LI.LL4
1430 P.$Q1X;!#80=11;P.F1X,G1X,H1X
1440 N.
1450 R=R;R.

```


INTEREST FREE

on Atari, VIC20, Commodore 64 and

If your order contains over £120 worth of computer hardware apply now for interest free credit by telephoning: Mail-order: (0702) 552911. London Shop: 01-748 0926. Birmingham Shop: 021-356 7292. Southend Shop: 0702 554000 or write to P.O. Box 3, Rayleigh, Essex SS6 8LR.

You pay 10% down, then 10% per month for a further nine months (to nearest penny). Example: VIC20 Colour Computer. Cash Price £169.99. Credit terms: £16.99 down then £17 per month for nine months: Total £169.99. Credit quotations on request.

THE NEW COMMODORE 64

The incredible new computer from Commodore comes with 64K RAM fitted! Plus 16 colours, hi-res graphics, 320 x 200 pixels, 40 columns by 25 lines, Z80 micro processor can be added — that means you can run CP/M software, 8 independently movable Sprites with collision detection, and a sound generator with 3 voices, 4 wave-forms, envelope and filter to rival some dedicated music synthesisers. And all this at the most incredible price ever. (AF56L) Only £339.00

DRAGON 32



The amazing new British computer with a full-travel standard keyboard, a 16-bit microprocessor, 32K RAM fitted (expandable to 64K and later to 256K!), 9 colours, hi-res graphics and Microsoft extended colour BASIC (the very best BASIC to learn with). It can be used with virtually any ordinary cassette recorder, it has a printer interface (Centronics-type), joysticks are available and it's incredible value for money. (AF57M) Only £199.50

THE AMAZING ATARI COMPUTERS

4 Consoles Available:

Atari 400 with 16K RAM (AF36P)	£249.95
Atari 400 with 48K RAM (AF37S)	£319.00
Atari 800 with 16K RAM (AF02C)	£499.00
Atari 800 with 48K RAM (AF55K)	£590.00

★ All above with BASIC & handbooks

Other hardware:	
Cassette Recorder	(AF28F) £50.00
Disk Drive	(AF06G) £299.95
Thermal Printer	(AF04E) £265.00
Epson MX80T Mk III	(AF38R) £399.95
Epson MX80F/T Mk III	(AF40T) £447.35
Printer Interface for 400	(AF41U) £59.95
Printer Interface for 800	(AF42V) £59.95
Interface Module	(AF29G) £135.00
Versawriter	(AF43W) £199.95
16K RAM Module	(AF08J) £55.00
48K RAM Module for 400	(AF44X) £125.35
48K Upgrade for 400	(AF45Y) £75.00
Floppy Disk	(YX87U) £2.50
Le Stick	(AC45Y) £24.95
Joystick Controllers (Pair)	(AC37S) £13.95
Paddle Controllers (Pair)	(AC30H) £13.95

For full details ask for our hardware leaflet (XH54J) SAE appreciated

JOIN THE U.K. ATARI COMPUTER OWNERS' CLUB

An independent users' group. Four issues of the club magazine for only £3.00! Address your subscription to Ron. Issue 1 of the club magazine featured a tutorial on character set redefinition and contained a collection of demonstration and games programs and lots more. Issue 2 featured a tutorial on player/missile graphics, an article about graphics on computers, a selection of members' contributions to the program library and much more.





THE FINEST SELECTION OF ATARI SOFTWARE

Teach Yourself Programs Conversational French -5C-16K-YG44X £39.95 Conversational German -5C-16K-YG45Y £39.95 Conversational Spanish -5C-16K-YG46A £39.95 Conversational Italian -5C-16K-YG47B £39.95 Touch Typing -2C-16K-YG49D £15.95 States & Capitals -1C-16K-YG58L £9.95 Kids 1 (3 Programs) -1C-16K-BG00A £9.95 Kids 1 (3 Programs) -1C-24K-BG01B £9.95 Kids 2 (3 Programs) -1C-16K-BG02C £9.95 Kids 2 (3 Programs) -1D-24K-BG03D £9.95	Business Programs Viscalc -1D-32K-YL39N £119.95 Atari Word Processor -1C&3D-48K-YG42V £99.95 Text Wizard -1D-32K-BQ99H £69.95 Mini Word Processor -1C-32K-BG08J £11.95 Mini Word Processor -1D-32K-BG09K £11.95 Calculator -1D-24K-YG50E £16.95 Graph-It -2C-16K-YG51F £13.95 Statistics -1C-16K-YG52G £13.95 Personal Financial Management -3D-32K-BQ65V £49.00 Mortgage & Loan Analysis -1C-16K-BQ66W £13.95 Bob's Business -1C-32K-BG11M £9.95 Bob's Business -1D-32K-BG12N £9.95	Adventure Games Galactic Empire -1C-32K-BQ14Q £14.95 Rescue At Rigel -1C-32K-BQ21X £22.45	Rescue At Rigel Dates of Ryn -1D-32K-BQ22Y £14.95 Dates of Ryn -1D-32K-BQ23Z £14.95 Star Warrior -1C-32K-BQ24B £28.95 Star Warrior -1D-32K-BQ25C £28.95 Invasion Orion -1C-24K-BQ23A £18.95 Star Trek 3.5 -1D-32K-BQ15R £14.95 Star Trek 3.5 -1D-40K-BQ26D £18.95 Crush, Crumble & Chomp -1C-32K-BQ83E £22.45 Crush, Crumble & Chomp -1D-32K-BQ84F £22.45 Mission: Asteroid -1D-40K-BQ91Y £17.19 Wizard & The Princess -1D-40K-BQ25C £21.79 Ulysses & The Golden Fleece -2D-40K-BQ92A £20.64 Zork I -1D-32K-BQ94C £29.95 Zork II -1D-32K-BQ95D £29.95 Ali Baba & The 40 Thieves -1D-32K-BQ78K £27.95 Temple Of Apshai (Part 1) -1C-32K-BQ85G £28.95 Temple Of Apshai (Part 2) -1D-32K-BQ86T £28.95 Upper Reaches Of Apshai (Part 1) -1C-32K-BQ87U £14.95 Upper Reaches Of Apshai (Part 2) -1D-32K-BQ88V £14.95 Curse Of Ra (Part 3) -1C-32K-BQ89W £14.95	Curse Of Ra (Part 3) Analog Adventure -1D-32K-BQ33L £16.95 Adventure Land -1C-24K-BQ00A £14.95 Pirates Adventure -1C-24K-BQ01B £14.95 Mission Impossible -1C-24K-BQ02C £14.95 Voodoo Castle -1C-24K-BQ03D £14.95 The Count -1C-24K-BQ04E £14.95 Strange Odyssey -1C-24K-BQ05F £14.95 Mystery Fun House -1C-24K-BQ06G £14.95 Pyramid Of Doom -1C-24K-BQ07H £14.95 Ghost Town -1C-24K-BQ08J £14.95 Savage Island I -1C-24K-BQ09K £14.95 Savage Island II -1C-24K-BQ10L £14.95 Golden Voyage -1D-40K-BQ33B £20.64 Softporn Adventure -2D-32K-BQ96E £34.95 Deadline -1D-48K-BQ98G £29.95 The Shattered Alliance -1C-40K-BQ63T £29.95 The Battle Of Shiloh -1D-40K-BQ97F £29.95 The Battle Of Shiloh -1C-16K-YG53H £9.95 Energy Czar -1C-8K-YG55K £9.95 Kingdom -1D-32K-BG65V £19.95 Space Shuttle Module 1 -1E-8K-YG66W £29.95	Arcade Games Star Raiders -1E-8K-YG66W £29.95
--	---	--	---	--	---

CREDIT

Dragon 32 computer hardware

(Subject to approval
which can take up to 48
hours) (APR = 0%)

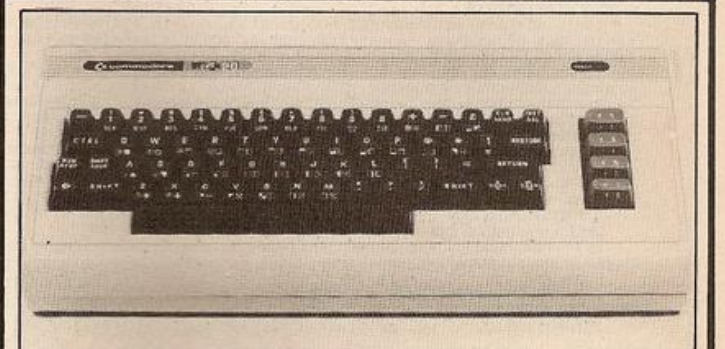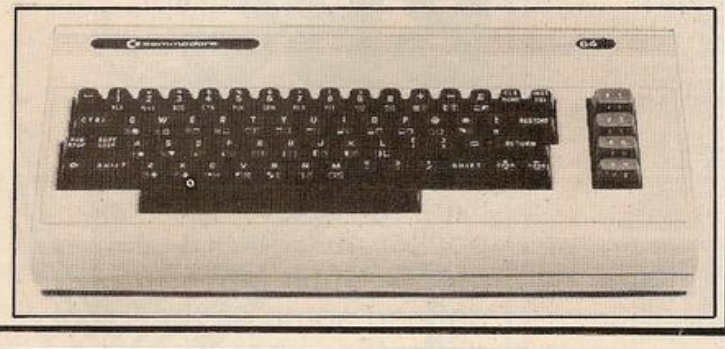

ATARI SOFTWARE continued

Asteroids	-1E-8K-YG60Q £29.95	Blackjack	-1C-8K-YG62S £9.95
Space Invaders	-1E-8K-YG70M £29.95	Hangman	-1C-8K-YG54J £9.95
Missile Command	-1E-8K-YG64U £29.95	Super Cubes & Tilt	-1C-16K-BQ48C £14.95
Caverns of Mars	-1D-16K-BQ69A £24.50	Humpty Dumpty & Jack & Jill	-1C-16K-BQ38R £19.95
K-Razy Shoot Out	-1E-8K-BQ63T £29.95	Hickory Dickory Dock & Baa Baa Black Sheep	-1C-16K-BQ39N £19.95
K-Razy Kritters	-1E-8K-BG51F £29.95	British Heritage Jigsaw Puzzles	-1C-16K-BQ40T £19.95
K-Star Patrol	-1E-8K-BG52G £29.95	European Scene Jigsaw Puzzles	-1C-16K-BQ41U £19.95
Pathfinder	-1D-32K-BG33L £27.95	Video Easel	-1E-8K-BQ72P £24.50
Crossfire	-1C-16K-BG22Y £20.64	Micro Painter	-1D-48K-BG56L £29.95
Crossfire	-1D-32K-BG23A £20.64		
Protector	-1C-32K-BG24B £21.80	Music Programs	
Protector	-1D-32K-BG25C £21.80	Music Composer	-1E-8K-YG48C £35.95
Threshold	-1D-40K-BG18U £27.54	Movie Themes	-1C-8K-BQ34M £9.95
Deluxe Invaders	-1D-16K-BG34M £29.95	Computer Languages	
Galactic Chase	-1C-16K-BQ62S £16.95	Assembler	-1C-16K-YL32K £19.95
Galactic Chase	-1D-16K-BQ61R £19.95	Assembler Editor	-1E-8K-YG68Y £39.95
Race In Space	-1C-16K-BQ35Q £14.95	Macro Assembler	-1D-32K-BQ73Q £59.95
Race In Space	-1D-16K-BQ20V £16.95	Basic A+	-1D-48K-BQ31J £49.95
Space Chase	-1C-16K-BG42V £10.95	Basic A+ & Operating System A+	-1D-48K-BQ32K £99.50
Space Chase	-1D-16K-BG43W £12.95		
Centipede	-1E-16K-BQ70M £29.95	Microsoft Basic	-1D-32K-BQ74R £59.95
Angle Worms	-1C-8K-BG50E £10.95	Pilot (Educator)	-1E & 2C-16K-BQ75S £79.95
Lunar Lander	-1C-24K-BQ16S £10.95	Pilot (Consumer)	-1E-8K-YG69A £54.00
Lunar Lander	-1D-24K-BQ49D £14.95	OS Forth	-1D-24K-YL29G £49.95
Jumbo Jet Lander		Timy-C	-1D-48K-BG62S £64.95
Submarine Commander		Inter-Lisp/65	-1D-48K-BG61R £87.00
Rasterblaster	-1D-32K-BG35Q £22.95	Utilities	
Shooting Gallery	-1C-16K-BQ36P £14.95	Programming Aids Package 1	
Shooting Gallery	-1D-16K-BG19V £16.95	6502 Disassembler	-1C-16K-BG60Q £ 9.95
Shooting Arcade	-1C-16K-BG15R £24.95	6502 Disassembler	-1D-8K-YL31J £12.95
Shooting Arcade	-1D-16K-BG16S £24.95	Atari World	-1D-40K-BQ27E £43.95
Super Breakout	-1E-8K-YG67X £24.50	3D Supergraphics	-1C-40K-BQ29G £29.95
Dodge Racer	-1C-16K-BG23G £19.95	3D Supergraphics	-1C-40K-BQ28F £29.95
Dodge Racer	-1D-24K-BQ30H £19.95	File-It 2	-1D-48K-BG10L £34.95
Matchracer	-1C-16K-BG31J £23.95	Filemanager 800	-1D-40K-BG59P £72.80
Matchracer	-1D-16K-BG32K £23.95	K-DOS	-1D-32K-BQ76H £49.95
Mousekattack	-1D-32K-BQ77J £22.95	Disk Manager	-1D-32K-BG57M £24.95
Jawbreaker	-1C-16K-BG17T £20.64	Disk Detective	-1D-32K-BQ30H £49.95
Jawbreaker	-1D-32K-BQ26D £20.64	Operating System A+	-1E-8K-YG59P £21.50
Ghost Hunter	-1C-16K-BQ64U £19.95	Telelink	-1D-32K-BG64U £27.54
Pac-Man	-1E-8K-BQ71N £29.95	The Next Step	
Pacific Coast Highway	-1C-16K-BG13P £24.95	Books	
Pacific Coast Highway	-1D-16K-BG14Q £24.95	Master Memory Map	-XH57M £4.00
Chicken	-1C-16K-BG27E £21.80	De Re Atari	-WG56L £16.95
Chicken	-1D-16K-BG28F £21.80	Operating System User's Manual & Hardware Manual	-WA46A £16.95
Tumble Bugs	-1D-24K-BG46A £24.95	Atari Basic-Learning By Using Games For The Atari	-WA47B £4.45
Bug Attack	-1C-24K-BG36P £23.95	Atari Basic	-WG05F £6.80
Bug Attack	-1D-40K-BG37S £23.95	Atari Sound & Graphics	-WA39N £8.25
Canyon Climber	-1C-16K-BG44X £24.95	Your Atari Computer	-WA40T £13.45
Canyon Climber	-1D-16K-BG45Y £24.95	6502 Assembly Language Subroutines	-WA05F £12.45
Mountain Shoot	-1C-16K-BQ12N £10.95	Advanced 6502 Interfacing	-WA41U £11.45
Haunted Hill	-1C-16K-BG38R £16.95	Beyond Games (6502)	-WA45Y £13.00
Haunted Hill	-1D-16K-BG39N £19.95	Computers For People	-WA00A £8.25
Time Bomb	-1C-16K-BG40T £10.95	Analogue: The Magazine For Atari (6 issues) Annual Subscription	-GG24B £9.00
Time Bomb	-1D-24K-BG41U £12.95		
Tank Trap	-1C-16K-YL34M £9.95		
Tank Trap	-1D-32K-YL35Q £12.95		
Thunder Island	-1C-16K-BQ37S £10.95		

Home Game Programs

Scram	-1C-16/24K-YG58M £17.50
Basketball	-1E-8K-YG61R £24.50
Cypher Bowl	-1C-16K-BQ20W £29.50
Sunday Golf	-1C-16K-BQ13P £10.95
Darts	-1C-16K-BQ42V £19.95
Tournament & 8-Ball Pool	-1C-16K-BQ45Y £19.95
Snooker & Billiards	-1C-16K-BQ44X £19.95
Ricochet	-1C-16K-BG47B £14.95
Ricochet	-1D-32K-BG48C £14.95
Computer Chess	-1E-8K-YG63T £24.50
Fast Gammon	-1C-8K-YL33L £16.95
Gomoku	-1C-16K-BQ18U £14.95
Gomoku	-1D-16K-BG55K £19.95
Reversi	-1C-16K-BQ19V £14.95
Reversi	-1D-16K-BG54J £19.95
Cribbage & Dominoes	-1C-16K-BQ43W £14.95
Poker Solitaire	-1C-16K-BQ17T £10.95
Poker Solitaire	-1D-16K-BG53H £14.95

VIC20 COLOUR COMPUTER

Hardware			
VIC20 Console	(AF47B) £169.99	Simplex Cassette (+16K)	(AC93B) £19.95
C2N Cassette Unit	(AF48C) £44.95	VIC Stock Control Cassette (+8K)	(AC94C) £19.95
VIC Printer	(AF49D) £230.00	VIC File Disk (+16K)	(AC95D) £24.95
VIC Disk Drive	(AF50E) £396.00	VIC Writer Disk (+8K)	(AC96E) £24.95
3K RAM Cartridge	(AF51F) £29.95	VIC Writer Cassette (+8K)	(AC97F) £19.95
8K RAM Cartridge	(AF52G) £44.95		
16K RAM Cartridge	(AF53H) £74.95		
Joysticks and Paddles			
Single Joystick	(AC53H) £7.50	English Language	(AC98G) £9.99
Pair of Joysticks	(AC37S) £13.95	Mathematics 1	(AC99H) £9.99
Le Stick	(AC45Y) £24.95	Mathematics 2	(BC00A) £9.99
Pair of Paddles	(AC30H) £13.95	Biology	(BC01B) £9.99
Programming Aid Cartridges		Chemistry	(BC02C) £9.99
Super Expander 3K RAM and Hi-res graphics	(AC54J) £34.95	Physics	(BC03D) £9.99
Programming Aid Additional commands, function Key programming etc.	(AC55K) £34.95	Computer Studies	(BC04E) £9.99
Machine Code Monitor	(AC56L) £34.95	Geography	(BC05F) £9.99
Software (all 3K unless stated)		History	(BC06G) £9.99
Introduction to BASIC Cassettes		Arithmetic for 9 to 11 year olds	(BC07H) £9.99
Part 1	(AC57M) £14.95	Reading for 9 to 11 year olds	(BC08J) £9.99
Part 2	(AC58N) £14.95	General Knowledge for 9 to 11 year olds	(BC09K) £9.99
Game Programs		Spelling for 9 to 11 year olds	(BC10L) £9.99
Avenger Cartridge	(AC59P) £19.95	Home Programs	
Star Battle Cartridge	(AC60Q) £19.95	All cassette based and require at least 8K expansion memory	
Super Slot Cartridge	(AC61R) £19.95	Quizmaster	(BC11M) £9.99
Jelly Monsters Cartridge	(AC62S) £19.95	Know Your Own IQ	(BC12N) £9.99
Alien Cartridge	(AC63T) £19.95	Junior IQ	(BC13P) £9.99
Super Lander Cartridge	(AC64U) £19.95	Know Your Own Personality	(BC14Q) £9.99
Road Race Cartridge	(AC65V) £19.95	The Robert Carrier Family Menu Planner	
Rat Race Cartridge	(AC66W) £19.95	VIC Money Manager	(BC15R) £9.99
Blitz Cartridge	(AC67X) £4.99	VIC Road User & Highway Code	(BC16S) £9.99
Mole Attack Cartridge	(AC68G) £24.95	Garden Planner	(BC17T) £9.99
Adventureland Cartridge	(AC68T) £24.95	Interior Designer	(BC18U) £9.99
Pirate Cove Cartridge	(AC68F) £24.95	BBC "Ask The Family"	(BC19V) £9.99
Mission Impossible Cartridge	(AC68U) £24.95	BBC "Mastermind"	(BC20W) £9.99
Voodoo Castle Cartridge	(AC68V) £24.95	BBC "Mastermind" additional General Knowledge	
The Count Cartridge	(AC68W) £24.95	Data 1	(BC22Y) £2.50
Sargon 2 Chess Cartridge	(AC67J) £24.95	Data 2	(BC23A) £2.50
Golf Cartridge	(AC69X) £24.95	Data 3	(BC24B) £2.50
Omega Race Cartridge	(AC91Y) £24.95	Data 4	(BC25C) £2.50
Another VIC in The Wall Cassette		"Mastermind" additional Specialist Knowledge	
VIC Panic Cassette	(AC78K) £7.00	Wine & Food	(BC26D) £2.50
Cosmids Cassette	(AC79L) £7.00	Music	(BC27E) £2.50
Backgammon Cassette (+3K)	(AC80B) £7.00	Sport & Games	(BC28F) £2.50
VIC Men Cassette	(AC81C) £7.00	Films & TV	(BC29G) £2.50
VIC Asteroids Cassette	(AC82D) £7.00		
	(AC83E) £7.00		
Business Programs			
Simplex Disk (+16K)	(AC92A) £24.95	Books About VIC	
		Learn Programming on the VIC	(WA31J) £2.50
		VIC Revealed	(WA32K) £10.00
		VIC Programmers Reference Guide	(WA33L) £9.95
		VIC Graphics	(WA48C) £10.00



Maplin Electronic Supplies Ltd., P.O. Box 3, Rayleigh, Essex. Tel: Southend (0702) 552911/554155.
Demonstrations at our shops NOW. See the computers in action at
159-161 King St., Hammersmith W6. Tel: 01-748 0926
284 London Road, Westcliff-on-Sea, Essex. Tel: (0702) 554000
Lynton Square, Perry Barr, Birmingham. Tel: (021) 356 7292.


```

1 ON ERROR GOTO149
2*TV255
3MODE7:PROCINITIALISE:PROCINST:PROCPICTURE
4PROCUCSOR
5ON 0X-48 GOTO 7,9,14,29,37,45,48,52,67,78
6REM ** ENTER KEY ROUTINE **
7SOUND0,-10,2,4:PROC SHADEKEY (KEY%,146):NX=N%+1:N% (NX)=LOWCX+(OCTAVE%*12-13+K
EY%)
8PROCINFO:PROCWAIT (50):GOTO4
9REM ** DELETE KEY ROUTINE **
10IF NX=0 SOUND0,-10,1,4:PRINTTAB (0,21):VDU141,136:PRINT "No key to delete":IT
AB (0,22):VDU141,136:PRINT "No key to delete":PROCWAIT (400):PROCWIPE:GOTO4
10SOUND0,-10,2,4:N% =NX-1:FORIX=10 TO 18:PRINTTAB (30,1X):SPC9:NEXT:PROCINFO
11PRINTTAB (0,21):VDU141,136,131:PRINT "Last entered key has been deleted":TAB
(0,22):VDU141,136,131:PRINT "Last entered key has been deleted":X=INKEY (300)
12PROCWIPE:GOTO4
13REM ** COPY A SECTION ROUTINE **
14IF NX=0 SOUND0,-10,1,4:PRINTTAB (0,21):VDU141,136:PRINT "No notes to copy":IT
AB (0,22):VDU141,136:PRINT "No notes to copy":PROCWAIT (400):PROCWIPE:GOTO4
15SOUND0,-10,2,4:PRINTTAB (0,21):"You can now copy a section of previously ente
red notes onto your current position by specifying the nos. of the bounding note
s":X=INKEY (400)
16PROCWIPE
17INPUTTAB (0,22)"NO. OF FIRST NOTE (INCLUSIVE) ?":DX:IFDX>NX OR DX<1 PROCWIPE
:GOTO17
18INPUTTAB (0,22)"NO. OF SECOND NOTE (INCLUSIVE) ?":EX:IFEX>NX OR EX<1 OR EX<D
% PROCWIPE:GOTO18
19 IF NX+EX-BX+1>MAXNOTES% PROCWIPE:SOUND0,-10,1,4:PRINTTAB (0,21):VDU141,136
:PRINT "Out of storage range":TAB (0,22):VDU141,136:PRINT "Out of storage range":P
ROCWAIT (400):PROCWIPE:GOTO4
20PROCWIPE:SOUND0,-10,2,4:PRINTTAB (0,21):VDU141,136:PRINT "COPYING":TAB (0,22)
:VDU141,136:PRINT "COPYING"
21FORIX=DX TO EX:CKEY%=(NX (IX)-LOWCX) MOD 48 DIV 4+1:COCTAVE%=(NX (IX)-LOWCX) DIV 4+1
22PROC SHADEOCTAVE (COCTAVE%,130,131):PROC SHADEKEY (CKEY%,146)
23SOUND1,-15,150,2:PROCWAIT (30)
24IFCKEY%=2 OR CKEY%=4 OR CKEY%=7 OR CKEY%=9 OR CKEY%=11 PROC SHADEKEY (CKEY%,148)
ELSE PROC SHADEKEY (CKEY%,150)
25PROC SHADEOCTAVE (COCTAVE%,134,134)
26NX=N%+1:N% (NX)=NX (IX):PROCINFO:NEXTIX
27PROCWIPE:GOTO4
28REM ** BLOCK DELETE ROUTINE **
29IF NX=0 SOUND1,-15,30,4:PRINTTAB (0,21):VDU141,136:PRINT "No notes to delete
":TAB (0,22):VDU141,136:PRINT "No notes to delete":PROCWAIT (400):PROCWIPE:GOTO4
30SOUND1,-15,100,4:PRINTTAB (0,21):"You can now delete a block of previously en
tered notes. Specify the two bounding notes by their numbers.":X=INKEY (500)
31PROCWIPE
32INPUTTAB (0,22)"NO. OF FIRST NOTE (INCLUSIVE) ?":DX:IFDX>NX OR DX<1 PROCWIPE
:GOTO31
33INPUTTAB (0,22)"NO. OF SECOND NOTE (INCLUSIVE) ?":EX:IFEX>NX OR EX<1 OR EX<D
% PROCWIPE:GOTO33
34IF EX=N% NX=DX-1 ELSE FOR IX=EX+1 TO NX:N% (DX+IX-EX-1)=N% (IX):NEXT:N% =NX-EX+
DX-1
35FORIX=10 TO 18:PRINTTAB (30,1X):SPC9:NEXT:PROCWIPE:PROCINFO:GOTO4
36REM ** SOUND LAST NOTE **
37IF NX=0 SOUND0,-10,1,4:PRINTTAB (0,21):VDU141,136:PRINT "No last note to sou
nd":TAB (0,22):VDU141,136:PRINT "No last note to sound":PROCWAIT (400):PROCWIPE:G
OTO4
38PRINTTAB (0,21):VDU141,136,131:PRINT "Sounding last note":TAB (0,22):VDU141,
136,131:PRINT "Sounding last note"
39CKEY%=(NX (NX)-LOWCX) MOD 48 DIV 4+1:COCTAVE%=(NX (NX)-LOWCX) DIV 4+1
40PROC SHADEOCTAVE (COCTAVE%,130,131):PROC SHADEKEY (CKEY%,146)
41SOUND1,-15,N% (NX),20:PROCWAIT (200)
42IFCKEY%=2 OR CKEY%=4 OR CKEY%=7 OR CKEY%=9 OR CKEY%=11 PROC SHADEKEY (CKEY%,148)
ELSE PROC SHADEKEY (CKEY%,150):PROC SHADEOCTAVE (COCTAVE%,134,134)
43PROCWIPE:GOTO4
44REM ** SOUND CURSOR NOTE **
45PRINTTAB (0,21):VDU141,136,131:PRINT "Sounding cursor":TAB (0,22):VDU141,136
,131:PRINT "Sounding cursor"
46SOUND1,-15,LOWCX+(OCTAVE%-1)*48+(KEY%-1)*4,20:PROCWAIT (120):PRINTTAB (0,21):
SPC80:GOTO4
47 REM ** SELECT SOUND OPTION**
48PRINTTAB (0,21):"Hit C if you want the cursor to produce a beep every note-c
hange, or S to ensure its silence unless you use F5":
49REPEAT:F=GET$:UNTIL F="S" OR F="C"
50PRINTTAB (0,21):SPC (120):GOTO4
51REM ** REVIEW ROUTINE**
52IF NX=0 SOUND1,-15,30,4:PRINTTAB (0,21):VDU141,136:PRINT "No notes to review
":TAB (0,22):VDU141,136:PRINT "No notes to review":PROCWAIT (400):PROCWIPE:GOTO4
53SOUND1,-15,100,4:PRINTTAB (0,21):"REVIEW FUNCTION-hit one of the followingF,
M,S-Fast,Medium or Slow run through of notes,with accompanying sound R-
you tap the Rhythm on RETURN key":FX15,0
54REPEATG=GET$:UNTILG="F" OR G="M" OR G="S" OR G="R"
55IFG="F" H% =0 ELSE IF G="M" H% =50 ELSE IF G="S" H% =100 ELSE H% =-74
56PROCWIPE:PRINTTAB (0,21):"Hit V for visual only" S for sound only"
B for both" Note that V or B will be more sluggish"
57REPEAT:H=GET$:UNTIL H="S" OR H="B" OR H="V"
58PROCWIPE:PRINTTAB (0,21):CHR$131:CHR$141:CHR$137:"Reviewing notes":TAB (0,22)
:CHR$131:CHR$141:CHR$137:"Reviewing notes"
59FORIX=10 TO NX:IFH="S" GOTO61 ELSE CKEY%=(NX (IX)-LOWCX) MOD 48 DIV 4+1:COCTAVE%=(N
X (IX)-LOWCX) DIV 4+1
60PROC SHADEOCTAVE (COCTAVE%,130,131):PROC SHADEKEY (CKEY%,146)
61PROCINFO:IF H<>"V" SOUND1,-15,N% (IX),10
62REPEAT:X=INKEY (H%):UNTILX<>0
63IFH="S" GOTO65 ELSE IF CKEY%=2 OR CKEY%=4 OR CKEY%=7 OR CKEY%=9 OR CKEY%=11 PROC
SHADEKEY (CKEY%,148) ELSE PROC SHADEKEY (CKEY%,150)
64PROC SHADEOCTAVE (COCTAVE%,134,134)
65NEXT:PRINTTAB (0,21):SPC80:PROCWAIT (100):GOTO4
66 REM** INSERT ROUTINE **
67IF NX=0 SOUND0,-10,1,4:PRINTTAB (0,21):VDU141,136:PRINT "Nowhere to insert":
TAB (0,22):VDU141,136:PRINT "Nowhere to insert":PROCWAIT (400):PROCWIPE:GOTO4
68SOUND0,-10,2,4:PRINTTAB (0,21):"INSERT MODE :- you may now insert notes into
those already entered.":X=INKEY (300):NN% =NX
69PROCWIPE:PRINTTAB (0,21):"Enter the note after which you want to insert mor
e notes (give its position in the sequence)":INPUTDX:IF DX>NX OR DX<0 GOTO69
70PROCWIPE:INPUTTAB (0,21)"Enter position within octave of new note (1-12, or 0
to finish inserting)":NKEY%:IFNKEY%<0 OR NKEY%>12 GOTO70
71IFNKEY%=0 PROCWIPE:PRINTTAB (0,20):SPC38:PROCINFO:GOTO4
72INPUTTAB (0,23)"Enter octave of new note ":NOCTAVE%:IFNOCTAVE%<0 OR NOCTAVE%>
5 GOTO72
73IFNOCTAVE%=0 PROCWIPE:PRINTTAB (0,20):SPC38:PROCINFO:GOTO4
74FORIX=NX TO DX+1 STEP=1:N% (IX+1)=N% (IX):NEXT:N% =NX+1:N% (DX+1)=LOWCX+(NOCTAVE%
-1)*48+(NKEY%-1)*4
75PRINTTAB (0,20):CHR$134:"Next one in at":CHR$131:DX+1:TAB (22,20):CHR$134:"N
o. inserted":CHR$131:N% -NX%:
76PROCINFO:DX=DX+1:GOTO70
77 REM ** TUNE-UP ROUTINE **
78SOUND0,-10,2,4:PRINTTAB (0,20):"TUNE-UP :":CHR$135:"You can tune the compute
r by changing the pitch produced by the left-most note,C (1). This is initially
set at 5 units (this produces middle-c at C (2)). (KEY TO GO ON...)":
79X=GET
80PRINTTAB (0,20):SPC198:TAB (0,20):"C (1) can be given an integer value of be
tween 0 and 17 (note that 4 units=one semitone). You can move the cursor and us
e F5 (Sound cursor) to compare a note to another instrument. (KEY....)":
81X=GET

```

MORE FROM BBC

Tired of composing symphonies on your pocket calculator? Last month Chris Melville defined some of the initial difficulties encountered in turning the BBC into a musical instrument. This month, his program takes the tedium out of tickling the keys.



NEARLY EVERYONE has seen a pocket calculator-cum-keyboard which allows the user to enter a tune and play it back at various speeds. Of course, to get the BBC Micro to play a tune the process would be much more laborious. First you have to define an envelope if required then each musical note must be changed to a corresponding integer for use in the pitch part of the sound statement. Next, each musical note must be given a duration parameter, as well as some number telling the computer when to sound it. All of these numbers need to be keyed-in by hand. The computer also needs a routine to sound the correct note at the correct time.

This is all very boring, repetitious and error-prone since the BBC Micro has no musical keyboard and all notes have to be entered as numerical data. To produce a tune-playing

MUSIC THE



computer without all of these problems, I have written the program Keyboard included in this article. The instructions are again separate. The user can enter the notes comprising the tune by means of a cursor which can be moved up and down a musical keyboard drawn in colour on a Mode 7 screen.

Once all of the notes have been entered, the user taps out the rhythm of the tune on function key. One can change the speed if required. This is useful for entering fast bits which would be hard to tap out correctly at the right speed. The computer matches up the notes to the rhythm and, at the touch of a button, plays the whole tune at the correct spacings and speed.

Because Keyboard uses Mode 7, thus only 1K video RAM, it will run on a Mode 1A,

(continued on page 77)

```



82PRINTTAB(0,20):SPC198:TAB(0,21):CHR$134"Current value of C (1):":CHR$131:LO
WCX
83INPRTTAB(0,23)" Choose new value " NLOWCX:IF NLOWCX>17 OR NLOWCX<0 GOTO82 E
LSE LOWCX=NLOWCX
84PROCWAIT(50):PRINTTAB(0,20):SPC198:GOTO4
85DEF PROC SHADEOCTAVE(OCTAVE%,A%,B%):PRINTTAB(OCTAVE%-1)*7+1,1):VDUA%,157,B
%:PRINTTAB(OCTAVE%-1)*7+1,2):VDUA%,157,B%:ENDPROC
86DEF PROCPICTURE:FORI=1 TO2:PRINTTAB(0,I):CHR$141
87 FORJ=1 TO29 STEP7:PRINTTAB(J,I):
88 VDU134,157,134,JXDIV7+49,JXDIV7+49,JXDIV7+49,158:NEXT:VDU158,156:NEXT
89FORI=5 TO13:PRINTTAB(0,I):
90VDU153,150,255,158,148,158,150,158,148,158,150,255,158,150,255,158,148,158,
150,158,148,158,150,158,148,158,150,255,255,159:NEXT
91FOR I=14 TO19:PRINTTAB(0,I):CHR$153:CHR$150:
92FOR J=2 TO26 STEP4:VDU255,255,150,150:NEXT:PRINTTAB(29,I):CHR$159:NEXT
93PRINTTAB(1,0):VDU130,157,136,135:PRINT"Present octave is:":SPC14:CHR$156
94PRINTTAB(2,4):CHR$(131):"C CED DE E F FEG GEA AE B"
95ENDPROC
96DEF PROCINITIALISE:LOCAL I%
97*KEY0 1
98*KEY1 2
99*KEY2 3
100*KEY3 4
101*KEY4 5
102*KEY5 6
103*KEY6 7
104*KEY7 8
105*KEY8 9
106*FX4 1
107OCTAVE%=1:KEY%=1:LOWCX=5:N%=0:MAXNOTES%=200:F%="C":RESTORE:DIM COLPOS%(12),
WNOTE$(12),NX(MAXNOTES%)
108FORI=1 TO12:READCOLPOS%(I),WNOTE$(I):NEXT
109DATA101,"C",400,C2,605,"D",800,D2,1009,"E",1313,"F",1600,F2,1817,"G",2
000,G2,2221,"A",2400,A2,2625,"B"
110VDU231:8202:0:0:0:ENDPROC
111DEF PROC SHADEKEY(KEY%,SHADE%):LOCAL I%
112FOR I=5 TO13:PRINTTAB(COLPOS%(KEY%):DIV100,I):CHR$(SHADE%):NEXT
113FOR I=14 TO19:IF COLPOS%(KEY%):MOD100 <>0 PRINTTAB(COLPOS%(KEY%):MOD100,I):
CHR$(SHADE%)
114NEXT:ENDPROC
115DEF PROC CURSOR
116PROC SHADEOCTAVE(OCTAVE%,129,131)
117LASTKEY%=KEY%:LASTOCTAVE%=OCTAVE%
118IF F%="C" SOUND%11,-10,LOWCX+(OCTAVE%*12-13+KEY%)*4,5:PROC SHADEKEY(KEY%,149
) ELSEPROC SHADEKEY(KEY%,149)
119REPEAT:FX15,1
120OZ=GET:UNTIL OZ=137 OR OZ=136 OR (OZ>48 AND OZ<59)
121IF OZ<59 ENDPROC
122IF OZ=136 GOTO125
123IF KEY%<>12 KEY%=KEY%+1 ELSE IF OCTAVE%=5 SOUND1,-15,30,3:GOTO119 ELSE KEY%
=1:OCTAVE%=OCTAVE%+1:SOUND1,-15,100,2:PROC SHADEOCTAVE(LASTOCTAVE%,134,134):PROC S
HADEOCTAVE(OCTAVE%,129,131)
124GOTO126
125IF KEY%<>1 KEY%=KEY%-1 ELSE IF OCTAVE%=1 SOUND1,-15,30,3:GOTO119 ELSE KEY%
=12:OCTAVE%=OCTAVE%-1:SOUND1,-15,100,2:PROC SHADEOCTAVE(LASTOCTAVE%,134,134):PROC S
HADEOCTAVE(OCTAVE%,129,131)
126IF LASTKEY%=2 ORLASTKEY%=4 ORLASTKEY%=7 ORLASTKEY%=9 ORLASTKEY%=11 PROC SHAD
EKEY(LASTKEY%,148) ELSEPROC SHADEKEY(LASTKEY%,150)
127 GOTO117
128DEF PROC INFO:LOCAL I%
129PRINTTAB(30,5):CHR$131:"NOTES NOW":TAB(30,6):CHR$131:"ENTERED:":TAB(32,7):
CHR$134:NZ%=""
130FOR I=N% TO NX-2 STEP-1
131 IF I=0 I=N%-2 ELSE PRINTTAB(30,10+(NX-I)*3):CHR$131:"NOTE ":I%:"":TAB(
32,11+(NX-I)*3):CHR$134:WNOTE$(NX(I)-LOWCX):MOD48:DIV4+1):" (" :NX(I)-LOWCX):DI
V48+1):"")
132 NEXT:ENDPROC
133DEF PROC WAIT(C%):TIME=0:REPEAT:UNTIL TIME=C%:ENDPROC
134DEF PROC WIPE:PRINTTAB(0,21):SPC158:ENDPROC
135DEF PROC INST
136PRINT
137CLS:PRINT"PLAYMUSIC program by Chris Melville '82 *****
*****"
138PRINT:CHR$131:"This program is in 2 parts,this is the":CHR$131:"first part
-which deals with setting up":CHR$131:"of an array containing (in order) the":C
HR$131:"notes to be played."":CHR$134:
139 PRINT"The next part,which deals with entering":CHR$134:"the rhythm of the
tune and playing it":CHR$134:"back,should be recorded on tape after":CHR$134:"th
is one since this one CHAINS it."
140PRINT:CHR$130:"Full instructions are in the article to":CHR$130:"save space
"
141PRINT:CHR$129:"Be sure you have finished entering all":CHR$129:"the notes
before going on to the next":CHR$129:"part (by pressing ESCAPE) since you ":CHR$
129:"cannot return to it intact."
142PRINT:CHR$133:CHR$136:" Hit a key to go on....":I=X:GET:CLS
143PRINT"The functions available are:"":CHR$131:"F0:-enters the note on which
the purple":CHR$131:" cursor is on as one to be played":CHR$134:"F1:-deletes
the last note entered":CHR$130:"F2:-repeats a section of notes"
144PRINTCHR$129:"F3:-deletes a block of notes":CHR$133:"F4:-sounds the last n
ote entered":CHR$132:"F5:-sounds the position of the cursor":CHR$131:"F6:-enab
les/disables the cursors beep":CHR$134:
145PRINT"F7:-audio/visual review of notes so far":CHR$130:"F8:-can insert note
s into list":CHR$129:"F9:-used to 're-tune' computer":CHR$136:"Hit a key to st
art....":I=X:GET:CLS
146PRINTTAB(10,21):VDU129,141,136:PRINT"Remember:":TAB(10,3):VDU129,141,136:F
RINT"Remember:":TAB(0,10):CHR$131:"At the moment you are only entering the":CHR$
131:"notes,the rhythm/tempo comes in part 2":
147PRINTTAB(0,17):CHR$134:"The purple key-cursor is moved by using":CHR$134:"t
he right + left cursor keys":PROC WAIT(800):CLS
148ENDPROC
149CLS:PRINTCHR$131:"Going on to next program":CHR$130:"Start your cas
sette player now":CHR$134:CHR$136:""
150HIMEM=HIMEM-N%:FOR I=1 TO NX:?(HIMEM+I-1)=NX(I%):NEXT:PROC WAIT(250)
151M%=MAXNOTES%:CHAIN""
>RUN
10 ON ERROR MODE7:END
11DIM NZ(M%),TX(M%),DX(M%),AX(6),PX(6):FOR I=1 TO NX:NZ(I%)=?:(HIMEM+I-1):NE
XT:I=0
12RESTORE:FORI=1 TO8:READ PX(I%):NEXT:FOR I=1 TO6:READ AX(I%):NEXT:IF PX(2)
=0 PX(1)=PX(1)+127
13DATA1,1,0,0,0,1,1,1,126,0,0,-20,126,126
14*KEY0 1 16*KEY2 3
15*KEY1 2 17*KEY3 4
18NEVELOPE1,PX(1),PX(3),PX(4),PX(5),PX(6),PX(7),PX(8),AX(1),AX(2),AX(3),AX(4)
,AX(5),AX(6)
19CLS:PRINT"CHR$136:" You can now use F0,F1,F2,F3....":CHR$131:"
F0) enter rhythm":CHR$133:" F1) auto playback":CHR$134:" F2)
choose voice for F1":CHR$129:" F3) change speed of F1"
20PROC WAIT(200):SOUND0,-12,2,4:*FX15,1
21PRINT"CHR$136:CHR$130:CHR$141:" C H O O S E N O W .....":CHR$136:C
HR$130:CHR$141:" C H O O S E N O W .....":*FX15,1
22REPEAT:OZ=GET-48:UNTIL OZ>0 ANDOZ<5:CLS:SOUND0,-15,2,4:ONDZ GOTO 23,32,36,6
(continued on page 77)

```


NEW

INSTANT IMAGE TRANSFER TO ZX SPECTRUM

RD DIGITAL TRACER £49.95

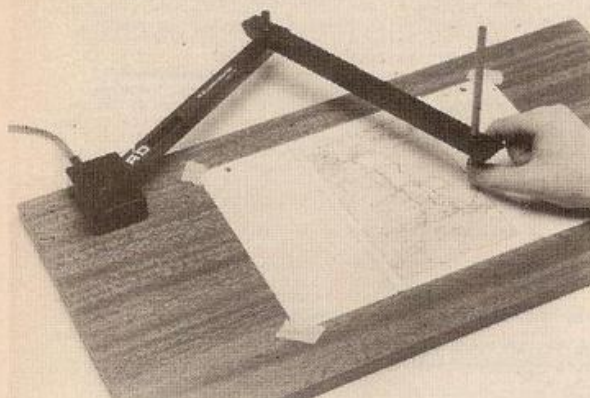

(unretouched printouts)

Please send me RD DIGITAL TRACER(S) at £49.95 each. I enclose payment of £

Name:

Address:

Send to: RD Laboratories, Dept. YCN, 5 Kennedy Road, Dane End, Ware, Herts. SG12 0LU

RD Laboratories' policy is to bring sophisticated computer techniques to low-cost computing. RD Laboratories therefore maintain the right to amend specifications at short notice. Please send stamp for further details of the RD DIGITAL TRACER, and the RD 8100 SYSTEM for automatic monitoring, test and control.

The high resolution colour graphics of The ZX Spectrum permit accurate presentation of complex or irregular images – maps, technical drawings, even personalities. But entering individual co-ordinates for unusual shapes can be tedious and time-consuming.

The new RD DIGITAL TRACER cuts out much tedious plotting. It provides instant transfer from original to display file – for screen display in colour, ZX printer printout, or retention on cassette.

The RD DIGITAL TRACER is of immense benefit in many fields – for geographers and weathermen, for engineers, architects and technicians, even for budding Leonardos! Designed for use with the ZX Spectrum, the RD DIGITAL TRACER as supplied is compatible with ZX 81, although high-resolution colour graphics cannot be obtained on this machine.

The RD DIGITAL TRACER is available only from RD Laboratories. The price of £49.95 includes P & P and VAT. Send your cheque now for delivery in 28 days. (Cheques payable to "RD Laboratories".) The RD DIGITAL TRACER is supplied with tracing sheet, software cassette, and full instructions on use.



R D Laboratories

5 Kennedy Road, Dane End, Ware, Herts. SG12 0LU
(0920) 84380



FLOPPY DISC DRIVES

SINGLE AND DUAL DISC DRIVES
40 OR 80 TRACK FOR BBC MICRO

Includes utility disc and Dos Manual Phone for prices:-


BBC MICRO

BBC COMPUTER MODEL 'A' £262.00 + VAT
BBC COMPUTER MODEL 'B' £349.00 + VAT
BBC COMPUTER WITH DISC £410.00 + VAT

MONITORS

High resolution 18 MHZ 12"
Green Phosphor Monitor

£99.00 + VAT
Includes Cable




OTHER ITEMS AVAILABLE FOR THE BBC MICRO

Books, Cables, Joy Sticks, Cassette Decks, Dust Covers, Teletext Adaptor, Speech Upgrade.

SEND FOR PRICE LIST

SEIKOSHA GP-100A

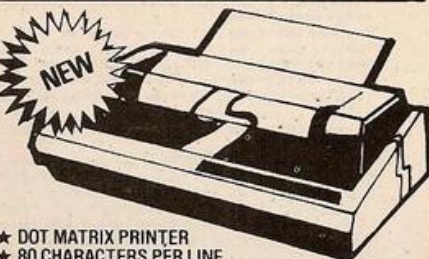

- ★ DOT MATRIX PRINTER
- ★ 80 CHARACTERS PER LINE
- ★ 30 CHARS/SEC
- ★ FREE HI-RESOLUTION 'DUMP OUT' LISTING

£179 + VAT. Carr £6

BBC Printer Cable £16 + VAT

BBC MICRO

WORD PROCESSOR
ROM £46.00

CHES £11.50
ASTERIODS £ 8.95
GLAXIAN £ 8.95
BILLIARDS £ 8.50
FROGGER £10.00
GOLF £ 8.00



BBC MICRO MICRO UPGRADES

RAM KITS: Upgrades the Model 'A' to 32K RAM
Supplied with full fitting instructions. £29.90 + VAT
ANALOGUE KITS: Suitable for adding joysticks,
controllers etc. £15.00 + VAT
PRINTER INTERFACE & I/O PORT: Enables a
Centronic Interface printer to be attached £16.00 + VAT

MODEL 'A' TO MODEL 'B' UPGRADE £89.00 + VAT (fitted)

DISC EXPANSION £80.00 + VAT
DISC DRIVES from £179.00 + VAT
COLOUR MONITORS from £229.00 + VAT
Send for details on other items, cables, cassettes, plugs,
software etc.

WHY NOT SEND YOUR MACHINE TO US FOR
UPGRADING?

PRINTERS

EPSON MX80 F/T3 – The printer recommended for the
BBC Microcomputer.

- ★ Dot Matrix Printer
- ★ 80 Cps
- ★ Hi-Resolution Graphics
- ★ Bi-directional Printing



**SPECIAL
PRICE**
£329 plus VAT
Printer Cable
£16 + VAT

Q-TEK Systems

Telephone STD (0438) 65385
2 Daltry Close, Old Town, Stevenage.

BBC
Service &
Information Centre.

(continued from page 75)

although it cannot store as many notes as a Mode 1B. Note that Keyboard is in two parts, the first of which Chains the second — they must thus be recorded consecutively on tape.

Although the BBC's Envelope and Sound statements allow it to produce a wide variety of sound, the tonal quality of these sounds is not rich. This is because the sound chip fitted, SN76489, produces only square waves. These are the fundamental working signals inside your computer.

I have used my micro to produce sawtooth, sine, triangular waves. This involves a little bit of electronics. Roughly speaking, the problem is to create a voltage, external to the computer, which varies in a wave-form the same as that which we want to hear and, since the user port gives eight-bit digital output, all that is needed is an eight-bit digital-to-analogue converter (DAC) connected to the eight PB lines of the user port.

The user port is memory-mapped at location &FE60 so if we place the correct numbers here, then the digital-to-analogue converter will produce the voltage wave-forms needed to drive a speaker circuit. So the overall method is as follows: first work out the values that are to be fed to the user port and use byte in direction to store them consecutively in a spare page of memory. This can be done in Basic since speed is not important and functions such as sine can be used. Next use a machine-code routine to cycle through the relevant page of memory byte by byte, outputting to &FE60 as it goes. Then, the eight-bit DAC and the odd OA will do the rest and the resultant wave-form will be heard.

Program Keyboard for 16 or 32K provides the BBC Micro with a facility which enables it to learn a tune as a series of notes with their correct rhythm, and then play it back at a selected speed — all at the touch of one key.

The program is in two parts. The first, which deals with entering the notes, should be typed in and then Saved on tape. The second part should then be Saved after it, since it calls the second part using a Chain command. Stop the tape machine after loading the first program, if it does not have computer control.

The program functions in three parts: first, enter all notes — this is a routine, with useful editing features, which sets up an array containing the codes of all of the notes to be sounded, and in the correct order. The method of entry is to move a cursor up and down a musical keyboard on the Mode 7 screen and use the function keys to perform miscellaneous operations to make the job easier. This is contained in the first listing.

Next, enter rhythm — the user now merely taps out the tune using key F0 and/or F1 and the computer matches up each note with its position and timing information in real time.

The third part, auto-sound, enables selection of a voice and the computer plays the tune in that voice.

The tune is restricted to one note at a time, no chords. The use of the function keys is as follows:

Program 1

- F0 Enter note Enters the note currently covered by the cursor on to the list of notes to be played.
- F1 Delete note Deletes the last note to be entered from the list.
- F2 Repeat over Enables a block of notes already in the list to be repeated again at the end of the list.
- F3 Block Delete Enables a block of notes already entered to be deleted.
- F4 Echo Echoes the last note to have been entered.
- F6 CSR Beep Enables/disables the cursor

- F7 Review from echoing its position at every move. Will show and/or sound all notes thus far entered.
- F8 Insert Enables notes to be inserted between others already in the list.
- F9 Re-tune Used to tune the BBC to a different instrument.
- Escape Key Sends you on to the next recorded program.

Program 2

- F0 Enter Rhythm; F0 and F1 then become input keys.
- F1 Commence auto playback.
- F2 Select voice F3 — adjust duration of tune.

The maximum number of notes possible is set by the variable Maxnotes % in line 110. You can adjust this value in accordance with the amount of RAM you have.

(continued from page 75)

```

2
23RZ=-1:PRINT CHR$129:CHR$141:" Rhythm entering":CHR$129:CHR$141:"
Rhythm entering":CHR$148:" :STRING$(16,CHR$124):"
24 PRINTCHR$134:"You must now tap out the tune on F0/F1:CHR$134:"The compute
r will match the taps with":CHR$134:"the notes you have already entered.In":CHR$
134:"the interests of accurate timing,the":CHR$134:"computer will not pause to":
25PRINT "sound out":CHR$134:"the notes corresponding to your taps."CHR$134:"
You will have to hum them in your head":CHR$134:"as you go !!!!!":CHR$136:CHR$1
33:" T A P A W A Y ! ! !....."
26IX=1:FX11,0
27 TX(1)=0:FX15,0
28REPEAT:UNTIL INKEY(-33) ORINKEY(-114):TIME=0:REPEAT:UNTIL NOTINKEY(-33) AND
NOTINKEY(-114):DX(1)=TIME
29REPEAT:IX=IX+1:REPEAT:UNTIL INKEY(-33) ORINKEY(-114):TX(IX)=TIME:REPEAT:UNT
ILNOTINKEY(-33) AND NOTINKEY(-114):DX(IX)=TIME-TX(IX):UNTIL IX=NZ
30FORIX=1 TO NZ:DX(IX)=INT(DX(IX)/5+.5):IFDX(IX)/254 DX(IX)=255:NEXT ELSEIFDX(
IX)=0 DX(IX)=1:NEXT ELSE NEXT
31PRINT "CHR$131:CHR$141:" NOTE LIST ENDED":CHR$131:CHR$141:" N
OTE LIST ENDED":SOUND1,-10,100,4:X=INKEY(400):GOTO19
32IF FNNORHYTHM GOTO19 ELSEPRINTCHR$133:CHR$141:" Auto-playback":CHR$
133:CHR$141:" Auto-playback":CHR$145:" :STRING$(13,CHR$96):"CHR$131:"
HR$131:"Hit RETURN to start the auto-playing of":CHR$131:"your tune."
33IX=0: REPEAT:UNTIL INKEY(-74):TIME=0
34REPEAT:IX=IX+1:REPEAT:UNTILTIME=TX(IX):SOUND2,1,NZ(IX),DX(IX):UNTILIX=NZ
35GOTO19
36PRINT "CHR$133:CHR$141:" Select voice":CHR$133:CHR$141:" Se
lect voice":CHR$145:" :STRING$(12,CHR$96):"CHR$131:"You may now choos
e (by number) either":CHR$131:"predefined pitch and amplitude sounds":CHR$131:"
37 PRINT"or define your own."CHR$131:"The pitch section comes first,select
by":CHR$131:"typing the appropriate number""CHR$130:"HIT A KEY TO START....":X
=GET
38CLS:PRINT "CHR$133:CHR$141:CHR$136:" Amplitude selection.....":CHR$133:CHR$136:
HR$141:CHR$136:" Amplitude selection.....":CHR$148:CHR$136:" :STRING$(20,CHR$
96):"CHR$131:"Select (by number) one of these:"
39PRINTCHR$130:"0) sharp attack / gentle decay":CHR$129:"1) sharp attack / sh
arp decay":CHR$132:"2) gentle attack / sharp decay":CHR$133:"3) gentle attack /
gentle decay":CHR$134:"4) gentle attack / no decay"
40PRINTCHR$131:"5) sharp attack / no decay"" 6) define own amplitude section
":CHR$130:"7) keep present amplitude section""CHR$136:" waiting.....
"
41REPEAT:XX=GET-47:UNTIL XX>0 AND XX<9:IF XX=8 GOTO48
42 IF XX<7 GOTO46 ELSE CLS:PRINT"CHR$131:"Enter the six amplitude paramete
rs in":CHR$131:"the order: "" 1) amp./step for attack (0-126)"" 2) amp./step f
or decay (-126 to 126)"" 3) amp./step for sustain (0 to -126)""
43PRINT "4) amp./step for release (0 to -126)"" 5) target level for attack (
0-126)"" 6) target level for decay (0-126)""
44FOR IX=1 TO 6:REPEAT:PRINTTAB(0,10+IX*2):SPC58:TAB(0,10+IX*2):CHR$(128+IX):"
Enter parameter ":IX:CHR$(135-IX):INPUTX(IX)
45UNTIL ((IX=5 ORIX=6)AND(AZ(IX)=0 AND AZ(IX)<127) OR (IX=4 OR IX=3)AND(AZ(IX)
<1 AND AZ(IX)>127) OR (IX=2 AND AZ(IX)<127 AND AZ(IX)>127) OR (IX=1 AND AZ(IX)
>0 AND AZ(IX)<127)):NEXT:GOTO48
46RESTORE47:FORIX=1 TO 6:FOR JX=1 TO 4:READAX(JX):NEXT:JX=1
47DATA120,-1,-1,-2,120,119,120,-1,0,-126,120,119,2,2,0,-126,50,120,2,2,-1,-1,
50,120,2,0,0,50,120,20,20,0,0,60,120
48CLS:PRINT"CHR$133:CHR$141:CHR$136:" Pitch selection.....":CHR$133:CHR$14
1:CHR$136:" Pitch selection.....":CHR$148:CHR$136:" :STRING$(16,CHR$96):"CHR$131:"
R$134:"Select (by letter) one of these:"
49PRINTCHR$130:" A) warble":CHR$129:" B) plain":CHR$132:" C) plain with fast,
heavy vibrato":CHR$133:" D) plain with slow,heavy vibrato":CHR$134:" E) plain wi
th medium vibrato":CHR$131:" F) slide effect"" G) sci-fi (1)"
50PRINTCHR$130:" H) sci-fi (2)":CHR$129:" I) sci-fi (3)":CHR$132:" J) sci-fi
(4)":CHR$133:" K) define own pitch envelope":CHR$134:" L) leave pitch envelope u
nchanged"
51REPEAT:XX=GET-64:UNTIL XX>0 AND XX<13:IF XX=11 GOTO55 ELSE IF XX=12 GOTO60
52RESTORE53:FORIX=1 TO X:FOR JX=1 TO 8:READPJX(JX):NEXT:JX=1
53DATA1,1,1,-1,1,1,1,1,0,0,0,0,0,3,1,2,-2,2,1,2,1,6,1,2,-2,2,1,2,1,4,1,
1,-1,1,2,1,1,0,0,1,-1,20,15,15,1,48,48,48,2,2,2,3,1,48,48,2,3,4,1,1,48,48
,48,2,3,4,1,1,49,-47,51,10,10,10
54GOTO60
55CLS:PRINT"CHR$131:"Enter the seven pitch parameters in":CHR$131:"the order
:""" 1) length of a "step" (1

```

```

"" 3) pitch/step for stage1 (-127 to 127)""
56PRINT "4) pitch/step for stage2 (-127 to 127)"" 5) pitch/step for stage3 (
-127 to 127)"" 6) no. of steps in stage1 (0 to 255)"" 7) no. of steps in stage
2 (0 to 255)"" 8) no. of steps in stage3 (0 to 255)""
57FOR IX=1 TO 3:REPEAT:PRINTTAB(0,12+IX*2):SPC58:TAB(0,12+IX*2):CHR$(129+IXMOD7):"
Enter parameter ":IX:CHR$(135-IXMOD7):INPUTX(IX)
58UNTIL (IX=1 AND PX(IX)>0 AND PX(IX)<128) OR (IX=2 AND PX(IX)=0 OR PX(IX)=1
) OR (IX=3 AND PX(IX)>0 AND ABS(PX(IX))<127) OR (IX=5 AND IX=9 AND PX(IX)=0 AND PX
(IX)<256):NEXT
59IF PX(2)=0 PX(1)=PX(1)+127
60ENVELOPE,FX(1),PX(3),PX(4),PX(5),PX(6),PX(7),PX(8),AX(1),AX(2),AX(3),AX(4)
,AX(5),AX(6):SOUND1,-10,100,4:PROCWAIT(100):GOTO19
61DEFPWAIT(X):TIME=0:REPEAT:UNTIL TIME=GX:ENDPROC
62IF FNNORHYTHM GOTO19 ELSEPRINTCHR$134:CHR$136:CHR$141:" Alter timing
of tune....":CHR$134:CHR$136:CHR$141:" Alter timing of tune....":CHR$146:CHR$
136:SPC7:STRING$(20,CHR$96)
63PRINT"CHR$133:"You can alter the speed at which the":CHR$133:"tune is play

```

```

ed back by altering the":CHR$133:"time taken for it to be completely":CHR$133:"p
layed back.This time interval is":CHR$133:"given by you pressing RETURN twice"
64PRINTCHR$133:"the time in between your two presses":CHR$133:"being the new
length of the tune.So":CHR$133:"the first press of RETURN corresponds":CHR$133:"
to the first note in the tune and the":CHR$133:"second press corresponds to the"
"
65PRINT"last":CHR$129:"SO PRESS RETURN TO START TIMING..":FX15,0
66REPEAT:UNTIL GET=13:TIME=0:PRINT"CHR$134:CHR$136:"NOW AWAITING SECOND RETUR
N":FX15,0
67 REPEAT:UNTIL GET=13:LX=TIME
68 DLZ/(TX-NZ):TX(1)
69FORIX=1 TO NZ:TX(IX)=INT(TX(IX)+D+.5):DX(IX)=INT(DX(IX)+D+.5):IF DX(IX)=0 DX
(IX)=1
70IF DX(IX)>254 DX(IX)=255:NEXT:ELSE NEXT
71 GOTO19
72 IF FNNORHYTHM:IF RX=-1 THEN =0 ELSEPRINT"YOU HAVE NOT DONE THE RHYTHM":P
ROCDWAIT(200):=-1

```


Program 1.

```

16775 3E 80      LD A, 80
      06 20      LD B, 20
      D7         RST 10
      10 FD      DJNZ -3
      2A 0C 40   LD HL(D/F) 16396/7
      06 20      LD B, 20
      23         INC HL
      36 17      LD(HL), 17
      36 80      LD(HL), 80
      10 F9      DJNZ -7
      C9         RET

```

10 RAND USR 16775.

CHR \$ 128
Set up top row with 32 black squares

Get start of D-File
Add 1 to D-F address

Print CHR\$ 23
Erase it.
Move to next position and repeat until B = 0
Return to Basic.

Program 3.

```

16775 3E 1C      LD A, 1C
      06 20      LD B, 20
      D7         RST 10
      3C         INC A
      10 FC      DJNZ -4
      2A 0C 40   LD HL(D/F)
      23         INC HL
      7E         LD A(HL)
      FE 76      CP 76
      C8         RETZ
      F5         PUSH AF
      36 80      LD(HL),80
      11 00 10   LD DE 1000
      1B         DEC DE
      7A         LD A, D
      B3         OR E
      20 FB      JRNZ -5
      F1         POP AF
      77         LD(HL),A
      18 EC      JR -20

```

10 RAND USR 16775

Print top row of characters 0 to 9, A to V.

Get start of D-File add 1 to point to 0,0;

Check for end of line character 118

RET TO BASIC, end of line
Store value
Print square.
Delay

Retrieve value and print over black Chr.

Program 4.

```

16775 3E 1C      LD A, 1C
      06 20      LD B, 20
      D7         RST 10
      3C         INC A
      10 FC      DJNZ -4
      0E 20      LD C, 20
      2A 0C 40   LD HL(D/F)
      23         INC HL
      7E         LD A,(HL)
      F5         PUSH AF
      06 1F      LD B, 31
      23         INC HL

      7E         LD A,(HL)
      2B         DEC HL
      77         LD(HL) A
      23         INC HL
      10 F9      DJNZ -7
      F1         POP AF
      77         LD(HL) A
      11 00 10   LD DE 10 00
      1B         DEC DE
      7A         LD A, D
      B3         OR E
      20 FB      JRNZ -5
      OD         DEC C

      20 E4      JRNZ -28
      C9         RET

```

10 RAND USR 16775

Print top row 0 to V

Roll left 32 times
Get start of D-F, move to position 0,0

Get first CHR and store it

Get next character in line and put it into
display file one place left

Move back to original position
Repeat 31 times
Get stored CHR and put on end of line

Delay Loop

Reduce C by 1 and if not zero then repeat
Roll

Ret to Basic

Program 5.

```

16775 AF         X or A


      D7         RST 10
      06 06      LD B, 06

```

AF loads A with 0 and resets carry flag in
1 byte
Print a space
Print six 9s

(listing continued opposite)

GAMES V HAPPY

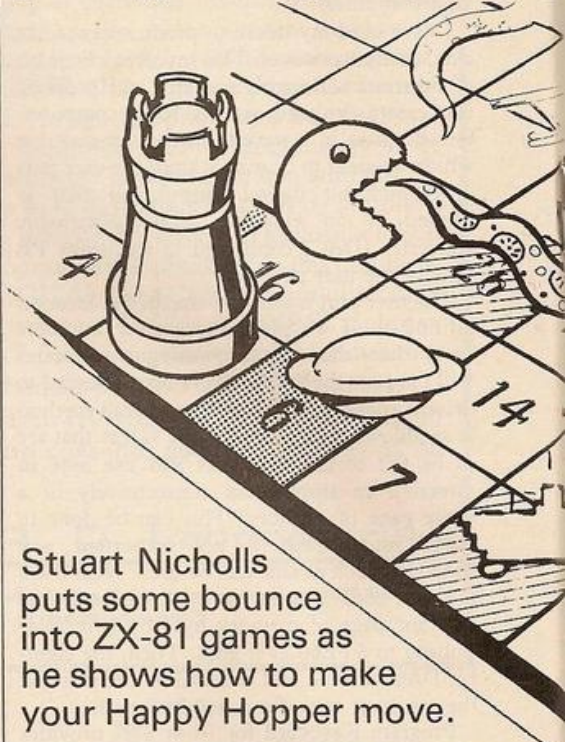

Stuart Nicholls
puts some bounce
into ZX-81 games as
he shows how to make
your Happy Hopper move.

LAST MONTH'S article left you with the Frogger display on the screen but how do you make it move?

First of all, the simple problem of moving a character one square at a time along the top row of the display: program 1 shows how this can be done.

If you have saved on tape the program from last month's issue then reload and use it to Poke the program into the line 2 REM statement. To run each of the demonstration programs change line 10 to

RAND USR 16775

and delete lines 20 to 90.

If you now Run program 1 you will realise how fast machine code really is. Did you see the asterisk move along the top row? You will now see that we need something to slow the computer down. The easiest way to do this is to tell it to count down from a high number to zero, which will take a second or two. This is similar to a For/Next loop in Basic. A high

Program 2.

To vary the speed of movement the value held in DE is changed.

```

16775 3E 80      LD A, 80
      06 20      LD B, 20
      D7         RST 10
      10 FD      DJNZ -3
      2A 0C 40   LD HL,(D/F)
      06 20      LD B,20
      23         INC HL
      36 17      LD(HL), 17

```


DOWNSWAY

ELECTRONICS (UK) LTD.

MORE MEMORY FOR YOUR ZX81 OR SPECTRUM!

NEW!

32K RAM FOR SPECTRUM



A full 48K of memory for the 16K Spectrum — simple D.I.Y. installation by just undoing 5 screws and plugging in! "State of the art" technology — advanced design using fewer ICs for high performance, reliability and economy.

ONLY £42.50 plus p & p.



MEMORIES FOR THE ZX81

The Downsway 64K Memory* slots directly on to the computer, without needing an additional power supply, or adding any extra load to the internal 5v regulator. Trade in your old 16K RAM Pack (any make, any age, any condition) for £12.50 against a Downsway 64K Memory to bring the price down to only **£47.45** plus p & p. Without trade-in, it costs just **£59.95** plus p & p — still incredible value!

If you only want 16K of memory for your ZX81, the Downsway 16K RAM Pack offers the same benefits of high quality and low price at only **£24.95** plus p & p.

Both memories measure only 2½ x 1½ x 1in. and are supplied with a foam cushion strip to provide added mechanical stability.

* Reviewed in ZX Computing Aug/Sept 1982 and Popular Computing Weekly 22/7/82.

Naturally Downsway add-on memories are fully tested and guaranteed, but should you be dissatisfied for any reason, just return the memory within 14 days for a full refund (and your old 16K RAM pack, where appropriate).

Please allow up to 28 days for delivery.

To: Downsway Electronics (UK) Ltd
Dept. M, Downsway House, Epsom Road,
Ashted, Surrey.

Please send me:

Qty.	Item	Price	Total
	32K RAM for Spectrum	£42.50	
	64K Memory for ZX81 at trade-in price (my old 16K RAM Pack is enclosed)	£47.45	
	64K Memory for ZX81 at normal price without trade-in	£59.95	
	16K RAM Pack for ZX81	£24.95	
	Post and Packing		£2.00
	Total		£

My cheque/P.O./Money Order is enclosed

NAME: _____

ADDRESS: _____

YC12

MAJOR FINANCIAL GAMES

for

SPECTRUM — BBC — ZX81

Remember those marvellous old board games you used to play? Hours of enjoyment are GUARANTEED with FINANCIAL GAMES

No. 1 INHERITANCE: A 2 Part game. Prove your financial acumen in PART 1 by investing wisely at the STOCK and METAL MARKETS; (If desperate you can try the CASINO or the HORSE RACES). If you are successful you will enter the world of BIG BUSINESS in PART 2. Find the SECRET FORMULA for PARADISE COLA; manufacture and market the drink; cope with STRIKES, FIRES, FRAUDS, CASH SHORTAGES, ETC. Your ultimate aim is to become a MILLIONAIRE!

A MAMMOTH GAME PACKED FULL OF FEATURES

No. 2 GREAT BRITAIN LIMITED: You are PM and Chancellor of "GREAT BRITAIN". You must select the Party you wish to represent and your AIM is to stay in office for as long as possible. You must control INFLATION and UNEMPLOYMENT, maintain the EXCHANGE RATE, introduce SOCIAL REFORMS and stay POPULAR. The game is split into SECTORS: COUNTRY PROFILE, SHOPPING BASKET, BUDGET DAY, REFORM OPPORTUNITIES, MANIFESTO, and most important ELECTION NIGHT (a telling time).

A COMPLEX GAME THAT YOU WILL NOT TIRE OF IN A HURRY

All Games are on quality cassettes with full instructions

SPECTRUM 48K — BBC 32K — ZX81 16K —
£5.95 ea. — £5.95 ea. — £4.95 ea. —

SPECIAL OFFER: Deduct £1.50 from total cost if you buy 2 games.

SIMON W. HESSEL (Dept. YO)

15, Lytham Court, Cardwell Crescent,
Sunninghill, Berks. Tel: Ascot 25179

All orders despatched
within 24 hours.

One year guarantee
Money-back if not satisfied.

VIC 20 £299.00
VIC 64 £127.50
VIC CASSETTE PLAYER £34.00

DRAGON 32 £173.00

BBC MODEL A £299.00
BBC MODEL B £399.00

TEXAS TI99/4A £173.00
SPECIAL OFFER: GET £50 BACK
WHEN YOU BUY A TI99/4A AT OUR PRICE

ATARI 400 £198.95
ATARI 800 £499.10

SHARP MZ80A £477.39
SPECIAL OFFER: FREE SOFTWARE
WORTH £75 WITH EACH MZ80A

ZX81 £43.43
16K RAMPACK £26.04
PRINTER £52.13

P A S E

we also supply a huge range
of software, printers, add-ons,
expansion units etc.

order now for fast delivery
(usually within 14 days)

simply send a cheque (made
out to 'PASE' for the
appropriate amount + 15%
VAT + £5 post

phone CATH on:
061 366 5935
for details, advice, latest
prices and availability

P A S E

SHOP OPEN MON-SAT 9AM-5PM

213/ 215 Market Street, Hyde, Cheshire SK14 1HF.

BASIC DICTIONARY

This dictionary, compiled by Tony Edwards, will explain the function of common Basic words as used in popular machines, enabling you to work out your own machine's equivalent. A useful complement to our recent series on Basic dialect translation.

BASIC DICTIONARY

ENDPROC A BBC statement denoting the end of a procedure, see PROC. It causes all local variables to be restored and returns control to the line after the calling statement.

ENVELOPE A BBC Basic statement from the extended set. It has 14 parameters which are used as individual machine-code bytes by the operating system to control the sound generator.

EOF A function to test for the end of a file. The argument is the file channel-number and the function returns logical true, -, if the file has ended, otherwise 0.

EOR A logical operator producing the bit-wise integer logical exclusive OR between two 32-bit integers. It appears in BBC Basic's extensions.

EQ An equivalent of the = sign.

ERL A function which returns the line number in which an error occurs once it has occurred. It retains the line number value until the next error occurs. Its normal use is during debugging.

ERR A Microsoft Basic function which returns the Error code of the last error which occurred. Its normal use is in debugging.

ERROR This word can be used as a statement or a command. It has the effect of simulating an error. The specific type of error simulated is controlled by the argument following the statement. It is usually used during debugging to check error-trapping routines, but can also be used within a program to print out uncalled-for error messages.

EVAL This is a statement which applies the interpreter's expression-evaluation routine to the characters held in the string indicated by the argument. Its use is to allow a program user to input a function into a program by simply inputting a suitable string.

EXAM The function used by some computers to read the contents of a memory location specified by the argument. It is the equivalent of PEEK.

EXP A function returning e to the power of the argument. It is the inverse of the LOG function.

EXT A function returning the length, in bytes, of a file whose channel number is the argument.

F

F. An abbreviation for FOR used by Microsoft Level 1, and Palo Alto Tiny Basic.

FALSE A BBC function which returns the logical false that is, 0.

FETCH A function used by some computers to read the contents of a memory location specified by the argument. It is the equivalent of PEEK.

FILL A function which places its second argument in the memory location identified by its first argument. It is equivalent to PEEK.

FIX A function which removes the decimal part of a variable's value. With positive numbers this rounding down is identical to the INT function. However, with negative numbers it rounds them up by making them less negative.

FLASH A statement used in Apple-II Basic to cause the VDU display to flash.

FN The reserved letters to be placed at the start of a function name. It must first be defined following a DEF statement. Then it can be invoked as can any of the machine's built-in functions.

FOR The initialising statement of a For...To (NEXT) statement which is used universally to assign a range of numbers between two specified values to the specified variable. The loop is terminated by the NEXT statement. An ANSI standard word.

FRE A function which returns the number of bytes of unused string space available within the computer's reserved memory stack. The argument is a dummy with no significance. The same word is used on some other computers to return the total amount of unused memory available.

FREE(0) A function used to report the total amount of file memory available. Equivalent to the MEM function.

G

G. An abbreviation for GOTO used by Microsoft Level 1 Basic.

GCOLOR A statement used in BBC Basic to set the graphics foreground and background colours.

GE The TI-99 equivalent of the "greater than or equal to" sign.

GET A function which inputs a key input without requiring a Newline or Enter. On some machines execution will stop, awaiting a key depression, for example Apple, but on others the execution continues, unless a key is pressed.

GET# A function used in Pet and Atari Basic to read a character from a data tape.

GOS. Used as an abbreviation of GOSUB on Atom, and Microsoft Level 1 machines.

GOSUB The ANSI standard statement to cause a branch to a subroutine.

BASIC DICTIONARY

GOT A PDP-8E abbreviation of GOTO.

GOTO The ANSI standard statement to cause a jump to another part of the program. Also used in the form GO TO.

GOTO...OF A multiple-branching GOTO. The control will be passed to the line number following the OF which is in the numerical position of the argument, that is:

GOTO X OF 10,20,30

will branch to 10, 20 or 30 if X has the values of 1, 2 or 3. Some computers expect a space between GO and TO.

GR A function or statement in Apple II Basic which switches the screen display between different modes.

GT The equivalent of a "greater than" sign.

H

HCOLOR An Apple II command which, following HGR, identifies which colour is to be used.

HGR The Apple II command which sets the screen for hi-resolution graphics mode.

HIMEM A pseudo-variable which holds the address of the highest-numbered memory location available for use by the interpreter. Higher numbered addresses are effectively non-existent, as far as Basic is concerned, but can be filled with data or machine code which can be jumped to from Basic. Similar to MEM SIZE? and READY?

HLIN...AT An Apple II graphics command which draws a horizontal line from the first argument to the second, at the vertical position indicated by the third argument.

HOME A command which clears the screen and returns the cursor to the upper left corner of the screen. Identical to CLS.

HPlot This command sets a high-resolution graphic block on the Apple II.

HTAB The command in the Apple II set which moves the next print position horizontally. Identical to TAB.

I

I Used in TRS-80 Level 1 and Palo Alto Tiny Basic as an abbreviation for INT.

IF Part of a multiple branching statement. For details of full statements see below. An ANSI standard statement.

IF...G Used in TRS-80 Level 1 and Palo Alto Tiny Basic as an abbreviation for IF...GOTO.

IF...GOS Used in TRS-80 Level 1 and Palo Alto Tiny Basic as an abbreviation for IF...GOSUB.

AMSOFT

ANNOUNCE

A NEW RANGE OF ZX81 AND SPECTRUM SOFTWARE PRODUCTS FOR THE DISCERNING USER

Amersham Software Ltd exists to provide software for those users who wish to develop the full potential of their ZX81 and Spectrum computers in the simplest and most effective way, without costly and unreliable hardware changes.

All **AMSOFT** products are designed to work using standard Sinclair equipment, but can be used to generate software for any other devices as well. The range will include assemblers, relocating loaders, compilers, etc. running under a standard monitor system, as well as file handling software to allow Basic users to handle data files.

The first two products are available now:

AM-ZXMON a superb machine code Monitor for the ZX81 allows entry, alteration, movement, verification and execution of machine code programs. The contents of any location or block of locations can be displayed on the screen or printer and user programs can contain breakpoints which allow examination or alteration of the Z80 registers and memory. A special feature allows individual program sections to be saved and loaded on cassettes, and merged together, providing machine code software library facilities. All **AMSOFT** compilers, etc. will be compatible with **AM-ZXMON**.

Superb value at £5.75 inc. VAT

AM-ZXFILE allows the Basic user to create and read back data files to and from cassettes. Users can specify the number of records per block written, the block sizes, and the length of the inter-block gaps. Records can be fixed or variable in length and are created in or transferred to a Basic string array.

Provides the facilities of a large machine at £3.50 inc. VAT

TO: **AMERSHAM SOFTWARE LTD, LONG ROOF, HERVINES ROAD,
AMERSHAM, BUCKS. HP6 5MS.**

Please send me ☐ **AM-ZXMON**
and ☐ **AM-ZXFILE**

I enclose my cheque/postal order for £..... made payable to Amersham Software Ltd.

NAME.....

ADDRESS.....

YC12

MICRO POWER GIVE A GREAT DEAL MORE

- ** SPACIOUS
SHOWROOM OPEN MON. to SAT.**
*** FRIENDLY AND HELPFUL STAFF**
*** EXPERT ASSISTANCE ALWAYS ON HAND**
*** GOOD RANGE OF COMPUTER BOOKS**
*** AFTER SALES TECHNICAL
BACK-UP and SUPPORT**

NEW FROM MICRO POWER

DRAGON 32

THE FAMILY COMPUTER TO FIRE
YOUR IMAGINATION

Easy to Learn! Easy to Use!
Colourful! Graphic! Musical!
Well-made and Designed to Grow!

KEY FEATURES

- ** 32K RAM as Standard, Expandable to 64K**
- ** Display:**
9 colours available.
5 different resolutions from 16 x 32 to 256 x 192.
- ** Extended MICROSOFT Colour Basic as Standard.**
Advanced graphics commands—set, line, draw,
circle, paint, print using:
Advanced Sound
Full Editing—insert, delete, amend.
- ** Professional Typewriter Keyboard**
(Guaranteed for 20 million key depressions).
- ** FREE 160 page 'BASIC' training manual.**
- ** Simple 'plug-in' Connections for Joysticks, Printer,
Games, Cartridges and 'auto-controlled' cassette.**
- ** Software on Cartridge and Cassette already
available (send for details).**

PRICE ONLY £199.50 incl. V.A.T.

MAIL ORDER — £7 Carriage
but FREE on cash/cheque orders.

**THINK DRAGON !!
THINK MICRO POWER!!**

**FREE DRAW
WIN £100**
Order a DRAGON from MICRO
POWER before 31st DECEMBER
1982, and get FREE ENTRY into
our CHRISTMAS DRAW!!
FIRST PRIZE £100 cash. TWO
PRIZES for RUNNERS UP
of a FREE PROGRAM
CASSETTE.

ACORN ATOM

SPECIAL OFFER (While stocks last)

Built & Tested ATOMS	£117.50
Basic (8K Rom + 2K Ram)	£142.50
Expanded (8K Rom + 12K Ram)	£299.00
Disk Packs (inc. FREE Buffer Kit)	£34.00
ATOM CALC ROM	£26
WORD PROCESSOR ROM	£20
FLOATING POINT ROM	£19.50
ROM SELECTOR BOARD	
BBC BASIC (phone for availability)	
Full Range ACORN SOFT programs	

BOOKS	
Getting Acquainted with your Acorn Atom	** £6.45
39 Tested Programs for the Acorn Atom	£6.45
Atom Magic Book	£5.50

BBC MICRO

MODEL A	£283
MODEL A (32K)	£311
MODEL B	£347
DISKS & INTERFACES (phone for availability)	
14 Inch Colour Monitor	£269
20 Inch Colour Monitor	£299
BOOKS BBC Micro Revealed	£7.50
Basic Programming on the BBC Micro	£5.95
Let Your BBC Micro teach you to Program	£6.45
NEC '30 Hour BASIC'	£5.50
Practical Programs for the BBC Micro and Acorn Atom	£5.95
ACORN SOFT programs for the BBC MICRO	

PRINTERS	
— EPSON MX80 F/T III	£359
— EPSON MX80 T III	£315
— SEIKOSHA GP 100A	£199
Printer Leads (BBC/ATOM/NASCOM)	£18.50



MICRO POWER LTD.
8/8a REGENT STREET,
CHAPEL ALLERTON,
LEEDS LS7 4PE.
Tel: (0532) 683186

Please Add
15% VAT to all
items except books.
Post & Packing 55p/order.
Large Hardware Items £7.00 Carriage

This is a Forth simulation by R C Ranson for the ZX-81 enabling you to try out this structured language.

FORTH DIMENSION

ESSENTIALLY, FORTH is a high-level language which retains much of the flexibility associated with assembly language. Program development time is short because of its interactive, modular construction and very simple program text arrangements.

In execution, Forth is fast because individual program elements are semi-compiled on entry and then linked together by a very fast address

interpreter routine. However, unlike other compiled languages, for example Pascal, a Forth system is very compact — a complete Z-80-based system with compiler and dictionary could reside in 8K of ROM.

This article describes a ZX-81 Basic program designed to simulate some features of Forth so that you can try it out on a terminal. It illustrates the unconventional Forth syntax and the

principle involved in the semi-compiled code operation. But do not mistake this for the real thing. Because it operates in Basic it is relatively slow and does not have the same flexibility as a dedicated Forth implementation.

Forth is a structured language in which the elementary programming units are words separated by spaces. Each word is defined in the system in a list — called the dictionary — by combining the operation of previously-defined words. Programs are developed in a top-down fashion writing words to do individual tasks, then words which combine these tasks and so on until the whole program is just one word.

At each stage the interactive nature of Forth allows words to be tested and debugged.

During execution the Forth system calls each address in turn, thus performing the desired task in terms of previous tasks. In principle there is no limit to the depth of this task subdivision process. The Forth system keeps track of each level of nested words by means of a return address stack just like calling subroutines within subroutines in Basic. Thus, words are defined in terms of other words within the dictionary, until words are encountered which actually perform machine-coded instructions. These lowest-level words are called primitives and a typical Forth system containing 400 words could have as few as 50 primitives.

All this nesting and stack work is performed by the address interpreter which in Z-80 code is only 20 bytes long and so very fast in operation.

The other main feature of Forth is the parameter stack which is used for data communication between words. For example, Forth words do not have formal parameter lists; each word operates on stack data, so the syntax follows reverse-polish notation popularised by Hewlett-Packard calculators. There is what is also known as postfix notation, for example $2+2$ becomes $2\ 2\ +$ where the spaces are significant as they define the end of each entry. In this example the word $+$ takes two items off the stack.

The stack orientation is very flexible and means that very few named variables are defined; values are merely Pushed on to the stack by one word and Popped off by the next. It is however essential to keep track of the stack entries in order to ensure that the right values are passed on. In practice all this stack use is highly efficient in machine terms and also easy to use as Forth includes many powerful stack operators.

In the simulation program the Basic text is equivalent to the machine-code system, including primitives, and the line numbers are equivalent to addresses.

It contains three distinct blocks of code which roughly correspond to features in a real Forth system. Lines 10 to 450 contain the text interpreter which scans the input string IS , picks out individual words and executes them in sequence.

```

0010 REM *****
0020 REM *FORTH SIMULATION IN*
0030 REM *ZX81 BASIC, R. RANSON*
0040 REM *****
0050 PRINT "BASIC FORTH V.2"
0060 DIM P(10)
0070 DIM Q(10)
0080 DIM R(10)
0090 DIM S(10)
0100 LET Z=300
0110 REM INITIALISE
0120 PRINT
0130 GOTO 200
0140 PRINT "A$=?";
0150 GOTO 200
0160 PRINT "OK"
0170 GOTO 220
0180 PRINT "STACK EMPTY AT 145"
0190 LET S(1)=0
0200 LET M=1
0210 LET N=1
0220 LET K=1
0230 LET I=""
0240 INPUT IS
0250 LET L=0
0260 LET Q(K)=L
0270 LET P(K)=LEN IS
0280 LET L=P(K)
0290 LET N=N+1
0300 IF N<1 THEN GOTO 180
0310 LET Q(K)=Q(K)-1
0320 IF Q(K)>P(K) THEN GOTO 410
0330 LET B$=IS(Q(K) TO Q(K))
0340 IF B$="" THEN GOTO 310
0350 LET A$=B$
0360 LET Q(K)=Q(K)+1
0370 IF Q(K)>P(K) THEN GOTO 460
0380 LET B$=IS(Q(K) TO Q(K))
0390 IF B$="" THEN GOTO 460
0400 LET A$=A$+B$
0410 GOTO 310
0420 IF K=2 THEN GOTO 160
0430 LET K=1
0440 LET I$=IS(K TO P(K))
0450 LET P(K)=P(K)
0460 GOTO 310
0470 REM USER DEFINED DICTIONARY
0480 IF A$<>"ABS" THEN GOTO 600
0490 LET I$=I$+A$+","
0500 LET I$=I$+","
0510 LET K=K+1
0520 GOTO 270
0530 IF A$<>"COUNT" THEN GOTO 700
0540 LET I$=I$+A$+","
0550 LET K=K+1
0560 GOTO 270
0570 IF A$<>"POLY1" THEN GOTO 800
0580 LET I$=I$+A$+","
0590 LET K=K+1
0600 GOTO 270
0610 IF A$<>"POLY2" THEN GOTO 900
0620 GOSUB 830
0630 GOTO 270
0640 GOSUB 830
0650 GOTO 270
0660 GOSUB 830
0670 GOTO 270
0680 GOSUB 830
0690 GOTO 270
0700 GOSUB 830
0710 GOTO 270
0720 GOSUB 830
0730 GOTO 270
0740 GOSUB 830
0750 GOTO 270
0760 IF A$<>"POLY2" THEN GOTO 900
0770 GOSUB 830
0780 GOTO 270
0790 GOSUB 830
0800 GOTO 270
0810 GOSUB 830
0820 GOTO 270
0830 GOSUB 830
0840 GOTO 270
0850 GOSUB 830
0860 GOTO 270
0870 GOSUB 830
0880 GOTO 270
0890 GOSUB 830
0900 GOTO 270
0910 GOSUB 830
0920 GOTO 270
0930 GOSUB 830
0940 GOTO 270
0950 GOSUB 830
0960 GOTO 270
0970 GOSUB 830
0980 GOTO 270
0990 GOSUB 830
1000 REM SYSTEM DICTIONARY
1010 IF A$<>"." THEN GOTO 1200
1110 GOSUB 1130
1120 GOTO 2
1130 PRINT S(N);
1140 LET N=N+1
1150 RETURN
1160 IF A$<>"?" THEN GOTO 1300
1170 GOSUB 1230
1180 GOTO 2
1190 FOR Y=0 TO N-1
1200 PRINT S(N-Y);
1210 NEXT Y
1220 RETURN
1230 IF A$<>"EMIT" THEN GOTO 1400
1240 GOSUB 1330
1250 GOTO 2
1260 PRINT CHR$(S(N));
1270 LET N=N+1
1280 RETURN
1290 IF A$<>"SPACE" THEN GOTO 1500
1300 GOSUB 1430
1310 GOTO 2
1320 LET N=N+1
1330 PRINT " ";
1340 RETURN
1350 IF A$<>"OR" THEN GOTO 1600
1360 GOSUB 1530
1370 GOTO 2
1380 PRINT
1390 RETURN
1400 REM STACK INSTRUCTIONS
1410 IF A$<>"DUP" THEN GOTO 2100
1420 GOSUB 2030
1430 GOTO 2
1440 LET N=N+1
1450 LET S(N)=S(N-1)
1460 RETURN
1470 IF A$<>"DROP" THEN GOTO 2200
1480 GOSUB 2130
1490 GOTO 2
1500 LET N=N+1
1510 LET S(N)=S(N-1)
1520 RETURN
1530 IF A$<>"SWAP" THEN GOTO 2300
1540 GOSUB 2230
1550 GOTO 2
1560 LET S(N+1)=S(N-1)
1570 LET S(N-1)=S(N)
1580 LET S(N)=S(N-1)
1590 RETURN
1600 IF A$<>"OVER" THEN GOTO 2400
1610 GOSUB 2330
1620 GOTO 2
1630 LET N=N+1
1640 LET S(N)=S(N-2)
1650 RETURN
1660 IF A$<>"1" THEN GOTO 2500
1670 GOSUB 2430
1680 GOTO 2
1690 LET N=N+1
1700 LET S(N)=R(M)
1710 RETURN
1720 REM ARITHMETIC AND LOGIC
1730 IF A$<>"+" THEN GOTO 3100
1740 GOSUB 3030
1750 GOTO 2
1760 LET N=N+1
1770 LET S(N)=S(N-1)+S(N-2)
1780 RETURN
1790 IF A$<>"-" THEN GOTO 3200
1800 GOSUB 3130
1810 GOTO 2
1820 LET N=N+1
1830 LET S(N)=S(N-1)-S(N-2)
1840 RETURN
1850 IF A$<>"*" THEN GOTO 3300
1860 GOSUB 3230
1870 GOTO 2
1880 LET N=N+1
1890 LET S(N)=S(N-1)*S(N-2)
1900 RETURN
1910 STOP
1920 REM CONVERT TO A NUMBER
1930 LET Y=CODE A$
1940 IF Y<22 AND (Y<27 OR Y>37) THEN
1950 GOTO 140
1960 GOSUB 960
1970 GOTO 2
1980 LET N=N+1
1990 LET S(N)=VAL A$
2000 RETURN
2010 GOTO 300

```

Listing 1.

85

Buy from us with confidence
Full money-back guarantee on all our products

"Thank you once again for your prompt service; yours must be the most user-friendly company in the business!"
G.S. Yorks

"I must congratulate you not only on the quality of your goods but also on your excellent service." G.W. Solihull

Quality software ZX 81 Spectrum BBC Vic-20

GAMES CASSETTES

ZX81 (16K) SUPER INVADERS £4.95
On-screen league tables, animated instructions. Game in machine code — "excellent" one of the two best... deservedly popular! (Pop. Comp. Weekly) "Great game!" S.F. Glas.
ZX81 (16K) LYNCHMOB £4.95
Exciting word game. 2-6 players. Excellent for the family. Great fun, educational tool. Animation, on-screen scoring. Superb Xmas present.
Spectrum (16K) LYNCHMOB £6.50
As for ZX81 but with added excitement of colour, sound and hi-res animation.
VIC-20 (unexpanded) INVADERS £6.90
Machine code, colour, eight sound effects.
BBC ("B") BRIDGEMAN £7.90
The popular gobble game. Hi-res, colour, sound.

APPLICATIONS SOFTWARE

ZX81 (1K) GRAPHICS STARTER PACK £4.50
Four 1K Graphics programs on cassette with 12 pp. explanatory manual.
ZX81 (16K) MULTIGRAPHICS £6.90
A user-friendly package of procedures giving you full control of the ZX81 graphics functions to compose designs, drawings, adverts etc. Incorporates advanced sketchpad, 3 sizes of text (including power case), animation, printer output, SAVE displays etc. Businessmen use it to advertise at point-of-sale. 20 pp Manual.
Spectrum (48K) SPECTROGRAPHICS Send s.a.e. for details
Another superb user-friendly graphics program — hi-res and lo-res sketchpads, multisize text, etc.
ZX81 1K STATISTICS £4.00
Mean, SD, variance, correlation, regression, t and F tests. 8 pp Manual includes listings, test data etc.
Spectrum (48K) STATISTICS (price includes maintenance) £9.90
Mean, SD, variance, correlation, regression, t tests. Hi-res graphic displays, data manipulation procedures.
EPHEMERIS ZX81 (16K) £6.90 **Spectrum (16K, 48K)** £7.90
Interested in heavenly bodies? Input date, time and your position. Ephemeris computes altitude, azimuth, phase etc. etc. for sun, moon and planets.

16K RAM pack made by Memotech **£28.50**

Send s.a.e. for details of our products
All-inclusive prices. First Class return-of-post mail in U.K.
European customers add 30p per item; 70p Worldwide (Air Mail)
Available by mail order or from leading computer stores. Trade enquiries welcome.

Dept. YC, 36 Fernwood, Marple Bridge,
STOCKPORT, Cheshire SK6 5BE, ENGLAND.

Bridge
Software

HULL JUNIOR CHAMBER OF COMMERCE & SHIPPING

VISIT HULL AND THE HUMBERSIDE MICROFAIR AND ZX VILLAGE



**Home and Personal Microcomputers,
Software, Books and Video Games to
fill the £5 to £500 Xmas Stocking.**

**The ZX Village — a separate area for
Sinclair ZX81 and Spectrum users.**

The Venue — Central Methodist Hall,
Prospect St., Hull.

The Day — Saturday, 4th December, 1982.

The Time — From 10.00 a.m. until 5.30 p.m.

The Price — Adults 80p, Children 40p.

VIC 20   **sinclair BBC**

ZX81 16K RAMPACKS

WHY NOT buy now, one of the super new RAM PACKS from GROUND CONTROL? The standard version gives 16K of user ram, while the (S) version is fitted with a keyboard sounder enabling much faster entry of programs and less eyestrain due to audible feedback every time a key is pressed. The well engineered case ensures a snug fit to the ZX81.



NOW
WITH



PRICES. (All inclusive for U.K.)

16K RAM PACK (S) £24.95 Euro
STANDARD RAM PACK £19.95 post
add £2.00

Availability is usually by return for credit cards, 5 days for cheques. There is a 14 day money back guarantee if not satisfied. Please send SAE or IRCs with all enquiries.

Make cheques/P.O.s. payable to GROUND CONTROL and send to: GROUND CONTROL, Alfreda Avenue, Hull-bridge, Essex SS5 6LT.

Tel: 0702-230324. (Mon-Fri 9-5)

*Access/Barclaycard no.
*Cheque/P.O./Cash.

*Delete if not applicable

Please send me: no.

*STANDARD RAM PACK/
16K RAM PACK (S)

NAME

ADDRESS

Postcode

Salamander Software

PRESENTS

Software from the south for the DRAGON and BBC Model B microcomputers.

WIZARD WAR

The mighty mages of the Tri-suns strive for supremacy in a fearsome battle of skill and strategy!

DRAGON RIDER

Can you destroy the enemies from the sky before your fiery steed runs out of puff

STAR TREK

A full version of this classic game, for the Dragon; features Faery Queen, hyperprobe, time travel, tractor beams and more!

VULCAN NOUGHTS AND CROSSES

Pit your wits against the Dragon or your friends in this three-dimensional game of logic!

TANKS!

Variable wind and terrain make this exciting two-player game a challenge for everyone!

GAMES COMPENDIUM

A selection of games for all the family, including Blackjack, Donkey Derby, Kingdom, Noughts & Crosses, Lunar Lander and Hunt the Wumpus!

All games £6.95 inc p&p.

RING NOW TO ORDER DIRECT!

27 Ditchling Rise, Brighton, E. Sussex. BN1 4QL.
Tel: 0273 686454

Discount for bulk orders and retail: send SAE for catalogue.

All games guaranteed.



NOW YOU'VE GOT YOUR SPECTRUM, WE'VE GOT THE VERY BEST PROGRAMS SOFTWARE SUPERMARKET

As soon as our Spectrum arrived, we set about playing all the available programs. And evaluating them. Did they work? Did they use the colour and graphics well? Were they programs that we enjoyed and wanted to play again and again? Were they worth the money?

We've chosen, from dozens, just eleven. Too many programs we tried made little or no use of the sound feature. Too many used the colour and graphics features indiscriminately. The eleven we've chosen will make your Spectrum work, will make you glad you've got it. The programs are exciting to look at and make intelligent use of the Spectrum features. To get the very best programs around, simply complete the coupon below. We're testing new programs all the time, and if anything exceptional turns up, we'll send you details with your order. Our selection service costs you nothing. And it can save you £££s. Instead of writing to lots of different people, write to us. We'll send you all the tapes you want, usually within 48 hours of receiving your order.

Now... for the very best Spectrum programs, read on.

ZX SPECTRUM

S1. GROUND ATTACK Arcade game thrills based on 'Scramble'. Pilot your spaceship through up to 26 zones while destroying missiles and fuel dumps. As you get better, it gets harder. Staying power and quick reactions have kept us alive for 10 zones. M/C, sound and colour. 16/48K. Silversoft. £5.95.

S2. METEOR STORM Two different types of flying saucer and a bombardment of meteors in this Spectrum version of asteroids. The game has thrust and fire features - and it talks to you! "One of the best arcade simulations on offer" - PCW. 16/48K. Quicksilver. £4.95.

S3. GULPMAN "...is the one cassette that I would buy...an exceptional program" - PCW. In this all-machine code version you can choose from 9 speeds and 15 different mazes - each requiring a different strategy. Laser defence to help against the nasties and a demo run of any maze. 16/48K. Campbell Systems. £5.95.

S4. INTRUDERS "High quality invaders" - Your Computer. "Fun to play" - PCW. This version of invaders has good graphics, is very fast, has a hold feature and enters initials of highest-scoring player. 16/48K. Quicksilver. £4.95.

S5. LYNCHMOB This version of Hangman makes good use of spectrum colour and graphics. Great fun, educational, and a wonderful hanging! 16/48K. Bridge. £6.50.

S6. MAZE OF GOLD Amazing 3D perspective views as you search the maze for gold. Machine-coded for speed. Can you find the exit while still solvent? Good value. 16/48K. Gilsoft. £5.95.

S7. SPECTRUM ARCADE PACK Fantastic value. 8 really good games on one cassette, using good colour and graphics. City Bomber, Subhunt, Missile Commander, Lunar Lander + 4 other great games. 16/48K. C-Tech. £5.00.

S8. ESCAPE From the author of 3D Monster Maze and 3D Defender, Escape is a maze program - with a difference. The maze is inhabited by 5 very realistic dinosaurs and a Pteranodon that soars over the maze and swoops down on you. Different skill levels - the hardest is very fast indeed! 16/48K. New Generation. £4.95.

S9. VENTURE Great value this one - 7 linked games on one cassette. Can you survive all 7 sections and collect the gold? Good use of colour and graphics. 16/48K. Bobker. £6.00.

S10. GREAT BRITAIN LIMITED You are Prime Minister of Great Britain - choose your party and run the country from your armchair! Can you control inflation and unemployment, or will you have rioting in the streets? Watch the results come in on election night. **48K only.** Hessell. £5.95.

S11. SPECCHES Clever graphics produce beautiful chessmen. From Artic, who gave you the best chess program for the ZX81, Specchess has 7 play levels, all legal moves, position analysis for solving chess problems and recommended move option. **48K only.** Artic. £9.45.

ZX81 TOP OF THE PROGS

All programs require a ZX81 16K Ram

ZX1. TRADER Travel around 6 planets as an intergalactic trader. 3 x 16K chapters. Outstanding graphics. Pixel. £10.50.

ZX2. ASTEROIDS Good M/C version of the original arcade game. 10 play levels, great swivel action. Silversoft. £5.95.

ZX3. ZX CHESS II Simply the best chess game for the ZX81. 7 play levels, all legal moves. Artic. £9.95.

ZX4. OTHELLO A superb opponent. The best and latest version. 9 play levels. M of I. £6.95.

ZX5. SUBSPACE STRIKER You are captain of the spaceship Swordfish. Splendid graphics. Pixel. £5.50.

ZX6. VENTURE 7 linked games make this good value. Can you survive all 7 sections and collect gold? Bobker. £5.00.

ZX7. FROGGER Enchanting graphic frogs must survive moving cars, logs, diving turtles and alligators! DJL. £5.95.

ZX8. ZUCKMAN The first and still the best ZX81 version. High-score Hall of Fame. DJL. £5.95.

ZX9. PILOT Test your skill on this brilliant flight simulation program, written by a pilot with helpful demo mode. Hewson. £5.95.

ZX10. THE ZX ARCADE PACK A brilliant collection of fast-moving machine-code arcade games. C-Tech. £4.95.

Please post to: SOFTWARE SUPERMARKET,
87 Howard's Lane, London SW15 6NZ.

Please send me the following.....(No.) programs for my
ZX81 16K/Spectrum 16K/Spectrum 48K. I enclose my cheque/PO for
£..... made payable to Software Supermarket.

Name
Address
..... post code

Please complete carefully in block capitals. If we can't read it, you
won't get it. For 1 program, please add 20p p&p. 2 or more programs
p&p free. Foreign orders please add 20p per tape.

Prog. No.	Program Name	Computer	Price	Total

Add 20p p&p if order is only one tape

Total Order

(YC3)

SOFTWARE SUPERMARKET

THE MICRO-PROFESSOR must be one of the machines offering the best value for money in single-board computers available in this country at present. For less than £90 you can acquire a Z-80-based computer with keyboard and display on one board, a powerful monitor program, space to wire additional circuits on the main card and as much expandability as you can handle.

Before I received the Micro-Professor for review I had read only one previous article in which the author moaned continually about the inappropriateness of teaching computing at machine-code level. He said that what the younger generation needed was a broad appreciation of computing based, where necessary, on the use of high-level languages and that machine code was irrelevant except to a very few systems engineers.

This black-box approach to computers and their application is adequate — so far as it goes. If the machine you use runs much faster than you need and if you have the resources to purchase all the modules that you need, and if you never need to stretch the high-level language you use, then all will be well. If, on the other hand, you want to explore, and if you want to use a computer for a new purpose, something beyond other people's experience, then you must understand more about how the black box is constructed and how it functions. You may not use machine code in your new application, but you are more likely to be successful if you understand something of the highways and byways of microprocessors.

The construction of a program in machine code is strictly comparable to using an ordinary Microsoft Basic. Both languages have facilities for taking information into the computer, processing data using conditional jumps, calls to subroutines, comparison and mathematical operators, and displaying the results in a form that is intelligible to the user.

The Micro-Professor computer is 6.2in. wide, 8.8in. deep from front to back, and just under 0.75in. thick. A 2.25in. loudspeaker is mounted on the board with the diaphragm at the rear. There are 36 hard plastic keys on the keyboard and the keys travel about 2mm. when they are depressed. The keyboard appears to be well-made and is pleasant to use with adequate inter-key spacing.

Information display

Information is displayed on six 0.5in. seven-segment Light Emitting Diode — LED — displays and the character set that can be achieved using seven segments is shown in figure 1. At the rear, right side of the board are two 3.5mm. jack sockets for connection to a cassette-tape recorder and a power-input socket.

A 7805 IC regulator is fitted on a heatsink and the manual says that the input voltage may be between 7 and 24V. A 230V mains power supply unit — PSU — is provided with generous leads about 6ft. long, and this provides 9V DC at about 500 mA.

The PSU was supplied with a 13A plug already connected. The PSU became cool-to-warm when the machine ran for several hours in the course of the review while the 7805 regulator heatsink became too hot to touch. The manual states that this will happen and

explains that it is not a matter for concern.

In front of the power regulator is a bread-board area that may be used to hand-wire your own circuits. There is room for approximately eight 16-pin ICs or a mixture of the wider 24-pin packages with some 14- or 16-pin ICs and discrete components. 5V and ground rails are distributed throughout the breadboard area with convenient holes for a smoothing capacitor.

The Z-80 Central Processor Unit — CPU — is located at the rear left side of the Micro-Professor board and there are three 24-pin sockets for the Erasable Programmable Read Only Memory — EPROM — containing the fundamental operating program — the monitor, the RAM supplied with the machine, and one socket that may be used for either additional RAM or another EPROM.

Like the Apple computer, a number of jumper connections are available on the board. These must be either cut, or connected to alter the configuration to suit each of the various chips that may be plugged into the spare socket.

Unlike many other cheap — and not so

CONTROL MPF-1

cheap — computers, there is no need to fiddle about trying to connect wires to odd pins of other components — the options on the Micro-Professor board have been well thought out.

An 8255 Programmable Peripheral Interface — PPI — chip is used to drive the LED display and the keyboard. Two sockets are provided for a Parallel Input/Output — PI/O — chip and a Counter Timer Circuit — CTC — IC. Finally, and very important they are too, there are two standard, properly-designed, sockets on the extreme left of the board that carry all the connections to the Z-80 CPU and the signal lines from the PI/O and CTC chips.

The connections to the Z-80 form a bus that will, in theory, allow you to expand the Micro-Professor computer to a full 64K, twin floppy-disc, business-orientated system.

If you want to expand the computer, however, you will have to increase the drive capacity of the Z-80 bus. The data and address lines are not buffered on the main board. System buffering is carried out on the EPROM programmer board.

The printed-circuit board is well made with gold-plated connections, a green solder-resist on both sides and the component locations, and values silk-screened on to the top surface.

Two versions of the Micro-Professor computer have been marketed in this country. The original computer — MPF-1 — had a 2K monitor only and this was extended in the MPF-1B to include a 2K Tiny Basic. The MPF-1B is now the only version that is avail-

able and this costs £75 plus VAT. The 20 monitor commands represent a reasonably comprehensive set of facilities for entering, examining, running and correcting machine-code programs. In addition to the ability to enter data into a particular memory address you may load the Z-80 registers, and the alternative register set, with data before starting to run a program.


The SBR and CBR commands Set and Clear a single break-point to allow you to stop a program at a specified address to examine the status of the Z-80 CPU. The Move command is intelligent in the sense that the monitor calculates for itself in which direction data should be moved to avoid corrupting the memory. Other monitors of my acquaintance are not so smart.


Relative jumps

The Delete and Insert commands will move the data in the memory down or up one byte. The delete command removes the data at the address for which the command was entered and the Insert command enters a no-operation instruction — 00 Hex — at the address from which the instruction was entered.

Relative jumps can be calculated using the Rela command. The monitor assumes that the current address is the start of the jump, unless you enter a different number, and then asks

Even if by pest control you mean programming robot mice, the MPF-1 should fit the bill
John Dawson
reviews.

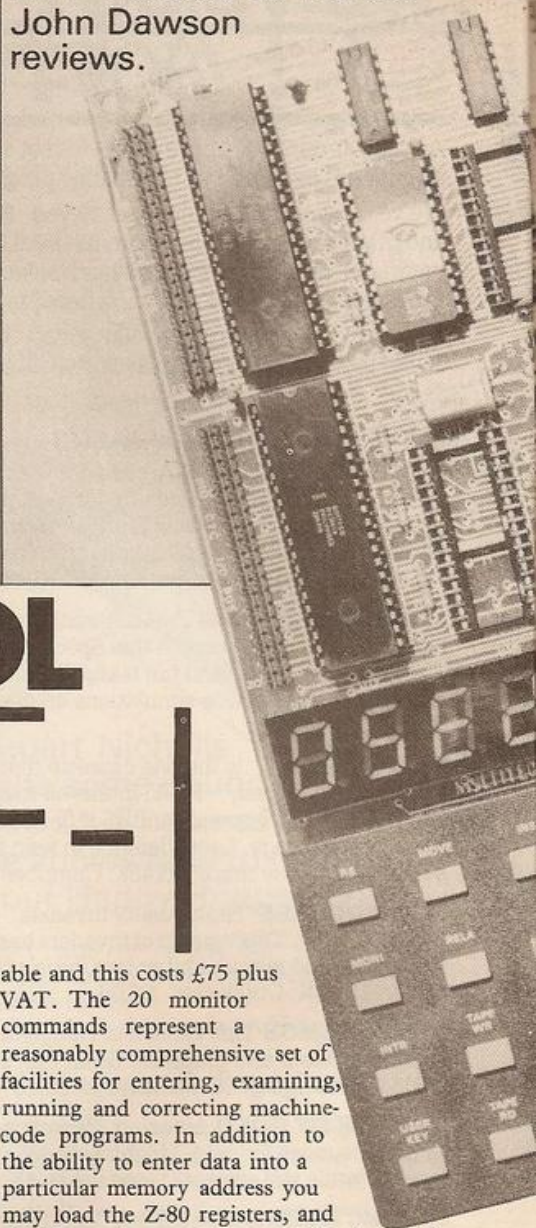

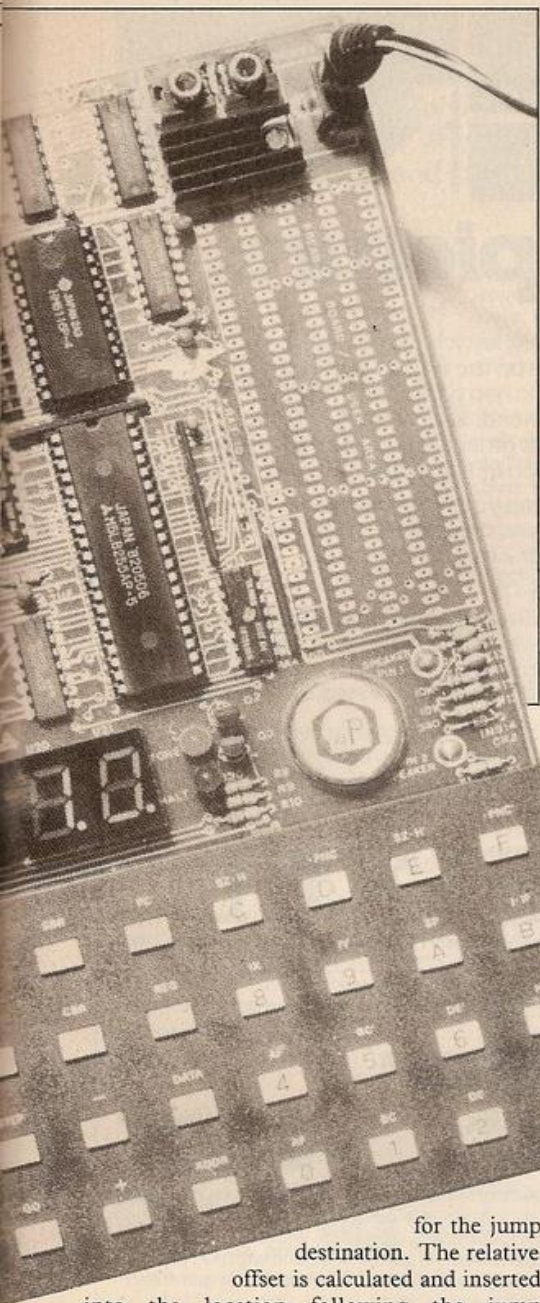

for the jump destination. The relative offset is calculated and inserted into the location following the jump instruction. If the jump is outside the range that the Z-80 can handle an error message is displayed. There is no consistent way of recovering from errors except to reset the computer; this is acceptable in the Micro-Professor as the Reset key does not destroy existing programs or data.

The tape Read and Write commands are easy to use and the method of setting the start and end addresses for the block you wish to save is consistent with other block commands in the monitor.

The level control for the tape recorder is excellent; there is either sufficient signal from the tape recorder or not enough. When the output level from the tape recorder is high enough, a Schmitt trigger in the computer operates and the input signal can be heard on the loudspeaker. When the volume is low, the trigger does not operate and there is no sound and no input to the computer memory.


Programs that you save on tape may have file names consisting of a number between 0 and 255, and the monitor will search through a tape until it finds the correct program. When

you have loaded a tape file you simply press Go and the computer executes the program.

The monitor is easy to use and allows good access to the Z-80 flags and registers. For example, most of the other computers I have used print the CPU flag register as a hexadecimal value — E5 would be typical.

The Micro-Professor presents information about the flags in exactly the form you want it — in binary — 01100010, so that you can tell whether a flag is Set or Reset.

The Basic is pretty basic. I understand that it was added to the monitor EPROM in order

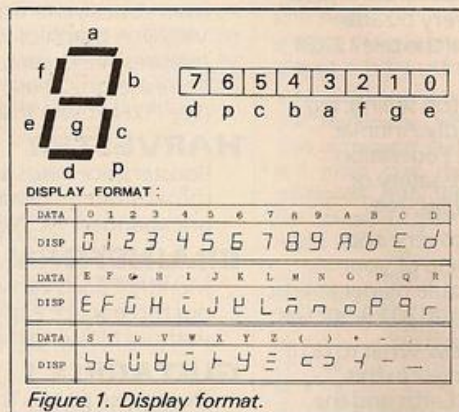

to counter criticism about machine-code programming for young people. Well, it does that and it has two instructions that make it very useful for controlling the PIO and CTC chips.

Two variables are reserved to access the Z-80 ports and RAM locations:

LET M 3477 = 750

stores the value 750 at the decimal address 3477. The instruction works the other way in this form:

LET A3 = M 3991

which will get the value stored at RAM location 3991 decimal and store it in variable A3.

There are similar instructions for the P variable which relate to the Z-80 port addresses. The Micro-Professor instruction is only a convenient Deek and Doke alternative but the P instruction is an original and useful idea.

When you are programming in Basic the machine takes a single keystroke as the input for a whole instruction. The keywords are printed on to a template which slips over the original keyboard.

There are three manuals for the Micro-Professor computer and a fourth which describes the Tiny Basic. The Micro-Professor manuals total 300 pages of information about the hardware, the software, and a series of experiments and other programs. What is there left to say about Oriental English?

The Micro-Professor manuals are no worse than many others and it is usually possible to figure out what the author intended to say. They are unsuitable for a first-time user who needs the constant reassurance of accurate documentation if she or he is to cope with unfamiliar and complex concepts.

The monitor listing is a fully-commented source listing and it would be very easy to modify the monitor by changing bytes here and there before "blowing" it into another EPROM.

The listing takes 51 pages for 2K and most

of the useful subroutines start with a description of the function of the routine, a note of the input that is required, the output in various conditions, which of the Z-80 registers are corrupted and which other subroutines are called. The monitor and its documentation is up to the standard of one of the original Intel evaluation kits — very good.

The Experiment Manual covers the software and hardware and includes a full description of the CTC chip and its use. The Japanese English is much less severe in this book and I think that large sections have been written for native English speakers. The Users' Manual includes a full set of circuit diagrams for the computer and an adequate and reasonably well set-out explanation for each of the monitor commands.

One of the options for the Micro-Professor computer is an EPROM programmer board. The board is constructed to the same high standards as the main computer. A 40-way flat cable connects the EPROM board to the Micro-Professor and there is an extension socket on the second board to allow the Z-80 bus, now fully buffered, to be connected to additional equipment. The EPROM programmer will handle six types of EPROM and changes to the pin functions are made by the software — there are no "customising" plugs to lose. Clearly, once you have written and debugged your program, you can fix it in an EPROM and plug that into the spare socket on the main board. The programmer has a separate PSU for both the ordinary 5V supply and the 25V used for programming the EPROM chip.

CONCLUSIONS





■ The Micro-Professor hardware is excellent, provided you can manage with the single-location, six-character display.

■ The Z-80 CPU is a good micro-processor to program in machine code as the high-level instructions for Block Move and Compare operations, and the 16-bit register operations, allow more productive programming than the 6502.

■ The plug connecting the 5V supply to the board became intermittent a couple of times and I would want to replace that with something more solid. With that exception I have nothing but praise for the hardware.

■ Someone must be writing a Tiny Forth for the Micro-Professor. Rather than attempt to fit a limited and elementary Basic into the remaining space in the monitor I would like a series of useful subroutines — delays, PI/O control, printer interface, interrupt-driven timers working in the CTC, simple maths operators using RPN, and so on — which could be linked to form more complex modules within a user's programs.

■ The Micro-Professor is both a serious tool and a lot of fun for anyone with an interest in low-level, real computing. I hope to buy a Micro-Professor and use it, battery-operated, on my commuter train. ■

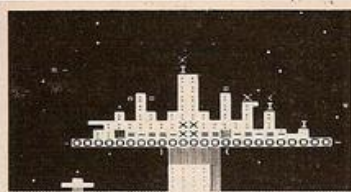

And now for the big picture.

TRADER A trilogy of 16K programmes that combine to give an epic 48K graphic adventure. As a galactic trader, you deal with some very bizarre customers indeed. Will you live to tell the tale? ZX81 £10.50. VIC20 £18.50 (tape or disc).

SUBSPACE STRIKER Our top selling, big screen graphic game. With your deadly Antimat torpedoes, you unleash havoc in the Federation spacelanes and try to dive back to the safety of subspace, fast. ZX81 £5.50. VIC20 £9.50. 16K.

STARQUEST A voyage of discovery and adventure in the cosmos. With the help of your onboard computer, you seek a habitable planet amidst the perils of deep space. ZX81 £5.50. VIC20 £9.50. 16K.

ENCOUNTER Would you know what to do if you encountered extra-terrestrial beings? In this adventure, you are snatched off the Earth and the space invaders play YOU! ZX81 £5.50. VIC20 £9.50. 16K.

ZOR Battle of the robots. Fight for survival in this action-packed strategy game. Megajoules of destructive energy in a futuristic duel. ZX81 £5.50. VIC20 £9.50. 16K.

PIXEL POWER At last it is easy to create your own custom characters on the 8K plus expanded VIC20. A graphics workshop packed with useful features like Create, Amend, Save, View Set. £9.50. Refreshes the pixels that other programmes can't reach. (See Pixel Power in action in Trader and Subspace Striker)

HARVESTER Reap your reward in the Boosterspace fields around the planet Delta. A cut-throat strategy game for 2 to 4 players for the unexpanded VIC20. £4.50.

BRAINSTORM The telepathic emissions of the friendly Psions can wreck a human brain. Can you get our three space explorers across a river of nasty goo without blowing their minds. Unexpanded VIC20. £4.50.

GUITARPIX 1 For the VIC20 owner who wants to play the guitar. The first of a series that shows how to tune the guitar and demonstrates some elementary chords. Unexpanded VIC20. £4.50.

Send SAE
for more details.

PIXEL

Pixel Productions 39 Ripley Gdns. London SW14 8HF

NEW! ATOM NEW! ALL ACTION PACKED M/CODE ARCADE GAMES



PROTECTOR £7

The most realistic version of this amazing Arcade game available for the Atom. Defend your humanoids from mutation and destroy the Aliens in this hyper fast, action packed game. Moving planetary surface, repeating lasers and smart bombs, thrust, space, increasing Attack Waves, 8 types of Aliens, Sound Effects. Top score and excellent mode 4 graphics are some of the features in this exciting game.

CENTIPEDE £6

The first and only version of this popular Arcade game for the Atom. Shoot down the splitting centipede as it swirls through the mushroom field. Also inhabiting the game are Spiders, Bugs and Scalls. The action increases until only skill and quick thinking can save you. Excellent high speed mode 4 graphics, Sound Effects and Top score.




OMEGA MISSION £7

The first and only version of the superb Scramble Arcade game. Moving landscape fly over mountains, through caves and tunnels. 3 different stages, Ground to Air Missiles, Fire Balls, Space Craft, Mutants and the narrow twisting Tunnel. Movement in 8 directions, laser cannon. Excellent COLOUR graphics (give Black & White on monochrome T.V.) mode 3a, Sound Effects, Top score.

PUCKMAN £5

One of the best versions of this popular Arcade maze chaser game. Eat all the dots in the maze but watch out for the hungry ghosts! Eat an Energy Blob and the chase reverses. Each maze cleared brings a new one with faster ghosts. Excellent high speed mode 4 graphics, Sound Effects and Top score.



ALL 12K RAM
PRICES INCLUDE P&P. FAST 2 DAY DESPATCH!
micromania
14 LOWER HILL RD. EPSOM. SURREY.

Spectrum

Fast Action Games
in Machine Code

ZX81

TREASURE HUNT (Spectrum) Explore one of the 29 mazes in search of treasure and grab as much as you can before the time limit. This game can be played with or without moving obstacles; with one player, two players in opposition, or two players in partnership; and with part or all of the maze visible. There are 144 variations of this fascinating game and even the game selector is fun to use.

HUNT (16K ZX81) A ZX81 version of Treasure Hunt with 48 variations.

X-MEN (16K ZX81) The only Puckman type game with all these features: true gobbling action, bonuses, arcade type maze, 3 lives, graphic display of lives left, 4 monsters, a den, booster buns, high score, continuous on-screen scoring.

UFO (16K ZX81) A fast moving space game in which you must defend the Earth by destroying all the UFOs and spy satellites while your moving force field gradually gets worn away by the alien bombs.

TRAP (16K ZX81) You control a moving wall and try to surround your opponent (computer or human) before he surrounds you. There are 3 speeds and games can be played with a border or wrap around screen.

£4.95 PER GAME ON CASSETTE

AMBA
SOFTWARE

FREEPOST
(no stamp required)
CAMBRIDGE CB3 7BR

Tick games required ☐ X-MEN
☐ TREASURE HUNT ☐ UFO
☐ HUNT ☐ TRAP

NAME
ADDRESS
.....
.....

RESPONSE FRAME

Do you have a problem? Your manual is incomprehensible or you just cannot get the hang of that programming trick you tried — whatever it is, Tim Hartnell will do his best to answer your queries. Please include only one question per letter and mark them "Response Frame".

ATOM UPGRADE

■ I am the owner of an Acorn Atom, and I am thinking of upgrading it to BBC Basic. If I did this, what could be done about the great difference in the keyboard?

Would the upgraded Atom then be able to use BBC software, and above all, how much does it cost and is it worthwhile?

Andrew Barlow,
Wardle,
Leicestershire.

THE FIRST THING to remember is that adding a BBC Basic ROM to your Atom will not turn it into a BBC Microcomputer. The ROM will not allow your Atom to load BBC software, and is not compatible with BBC graphics and sound. It costs around £50, and whether it is worth it or not depends on if you wish to use the computer primarily for things like games, where sound and graphics are important, or if your interests are more in the line of things which will be catered for by BBC Basic. The upgrade ROM does not demand a BBC keyboard, but is designed to use the standard Atom keyboard.

HARD TIME

■ I have been trying to work out a program for my ZX-81 to determine the time difference between two times such as 9.17 am and 3.34 pm, to work out which is earlier or later. I would be pleased if you could suggest an approach.

Malcolm Young,
Dunedin, New Zealand.

IT IS IMPORTANT to remember, in any program in which you are comparing quantities which are made up of units with different values such as pints and gallons, or hours and minutes, that the values to be compared must be rendered down to a single unit. You must also establish a common input format, so the computer knows what to expect. This can be done fairly easily with the ZX-81, because of its simple string handling. My suggested program follows. It needs input in the form 09.37 am or 12.04 pm. It then — line 40 — works out the value — as a number with a decimal point — of the time, adds 12 to the whole number to the left of the decimal point if the seventh element of the input string is a P, and then converts the number into minutes, comparing the two minutes' totals. The original strings are then used to

print out the final information. A similar approach can be used when comparing quantities made up from units which are not exact multiples of 10 of each other. You will see that this program also allows you to work out the difference in minutes between two times, simply by subtracting one A(Z) from the other, and taking the ABS of the difference. Here is the program:

```
10 DIM A$(2,8)
15 DIM A(2)
20 FOR Z=1 TO 2
30 INPUT A$(Z)
40 LET A(Z)=VAL(A$(Z) TO 50)
50 IF A$(Z,7)="P" THEN LET A(Z)=A(Z)+12
60 LET B=INT(A(Z))
70 LET A(Z)=60*B+100*A(Z)
80 NEXT Z
90 IF A(1)>A(2) THEN PRINT
  A$(1); " IS LATER THAN ";
  A$(2)
100 IF A(1)<A(2) THEN PRINT A$(1); " IS EARLIER THAN "; A$(2)
```

LOOSE PLUG

■ In the August 1982 Response Frame, a letter was published from P Bradbery of Kent who wanted to know what to do about the loose 9V dc input plug on his Sinclair ZX-81. I have encountered this problem before, and solved it by opening up the computer and bending the metal strips on the input socket, so that the plug will fit into the socket. This repair will need to be carried out every few months, but is much quicker than buying a new socket as was suggested. I would also recommend that the plug should only be pulled out of the socket when necessary, because the more the plug is removed, the more often this repair will need to be carried out.

David Bluxton,
Lesbury, Alnwick.

THANKS FOR THE suggestion, which we are pleased to pass on to other readers who may be facing the loose input plug problem. But remember, this may infringe your guarantee.

PET TO ZX-81

■ I am trying to convert a program written for the Pet to run on my ZX-81. However, I have come across the following problem with a multi-line statement:

```
240 IF T=1 GOTO 270: L2 L*PC:
  LET L1=MB2
```

How would this be translated

into ZX-81 Basic, taking into consideration the possibility that the answer may be true or false. What happens?

Martyn Brinton,
Harwich, Essex.

IF THE FIRST statement — the If — is found to be false, the computer moves automatically to the next line, so the rest of that line is not executed. You can solve this by either having a string of If/Thens, repeating the condition before each one, or by inverting the statement, so it reads:

```
IF T<>1 THEN LET L2=L*PC
IF T<>1 THEN LET L1=MB2
```

You could also follow through the line, working out what each element does in response to the first If/Then, and jump over the non-operative statements with the first If/Then. For example, your Pet program might read:

```
20 IF T=1 THEN Z=4: X=5
30 Y=2*Z+X
The ZX-81 version could be:
20 IF T<>1 THEN 25
21 Z=4
22 X=5
25 Y=2*Z+X
```

NO JOY

■ I bought a Commodore joystick to use with my Vic-20, but to my disappointment, there was no information on how to use it with the stick. I went back to the dealer, but he was not able to help me. How do I rewrite my programs to use the joystick? I am unable to break into commercial software programs to see how they do it.

Andrew Cunningham,
Coundon, Coventry.

COMMODORE HAS recently released a book, the *Programmer's Reference Guide* which explains on pages 246, 247 how the joystick works. It also gives a seven-line routine which reads the joystick, converting its output into numbers which you can add to Poke locations to move things on the screen. The book, which costs around £10, includes a wealth of other information, and would be a worthwhile purchase for anyone who is interested in serious programming on the Vic.

ADVENTUROUS

■ Would you please recommend a book on writing Adventure games. I would also like to know if the ZX Spectrum, which I intend to buy, would be suitable for this type of game, and if it is really suitable for a first-time user?

Gerard Hayes,
Finglas East, Dublin.

I DO NOT KNOW about any books primarily on writing Adventure games, although *Your Computer* runs articles on associated topics from

time to time. However, there is one recently-published book *Dicing with Dragons* which explains the mechanics of role-playing games very well, and will give you many tips which you can convert to computer games. Other useful sources of ideas include the Puffin book *The Warlock of Firetop Mountain*, and the specialist magazines *The Gamer* and *The War Machine*. The latter is not a glossy magazine like *Your Computer*, but is photocopied each month, and you can get details from Emjay, 17 Langbank Avenue, Rise Park, Nottingham, NG5 5BU. The Spectrum 48K machine enables quite elaborate Adventure games to be constructed. The computer is suitable for a first-time user, so long as he or she is willing to take things slowly for the first few hours in finding his way around the keyboard.

VIEWDATA QUERY

■ I have recently ordered a ZX Spectrum and would like to know if I can receive Oracle and Ceefax on it. If so, how much would it cost?

A J Bolam,
Ryton, Tyne and Wear.

YOU CANNOT GET the BBC and ITV services that are transmitted along with the picture, via an external computer, without an extremely complex, and therefore unreliable and expensive, arrangement. There is little chance that anyone would bother trying to produce such a device, as you first need to receive the broadcast signal, interrupt it to extract and decode the Ceefax information, then feed it back into your television set. If, however, you are interested in Prestel, which is Ceefax-like information sent from a computer over the telephone lines, then the answer is "Yes, shortly". A number of firms, including Sinclair, are working on Prestel units.

COMBAT DURATION

■ Could you please tell me how to access the timer on the ZX-81, so it can be used in games to work out how long, for example, a player has managed to fight off the aliens?

John Maddock,
Holsworth, Devon.

THE FOLLOWING PROGRAM will emulate a stopwatch, and print the minutes and seconds elapsed. You can use parts of the program wherever needed. Note that the first two lines reset it, and must be included.

```
10 POKE 16436,255
20 POKE 16437,255
30 LET TIME=(65536-PEEK 16436-256)*PEEK 16437/50
40 PRINT AT 11,12:INT(TIME/60);
  ":",INT(TIME-INT(TIME/60)*60);
  "60";
50 GOTO 30
```


ZX SPECTRUM POCKET BOOK

160pp **£6.50**

Trevor Toms, best selling author of the ZX81 Pocket Book and the Sinclair Learning Lab, turns his attention to the ZX Spectrum — the book you have been waiting for! All the material in the book is totally new.

Programs

- Castle walls; boiling oil and lovely slurping noises
- Great Fire of London; try and change the course of history
- Chase; outwit the pursuing robots and lead them to their doom
- Truly amazing; generate a new maze puzzle every go
- Reversi; the classic oriental strategy game with board screen display
- 3D Maze; race against time and three dimensions to escape.

Also Available ZX81 Pocket Book 138pp £5.95
 ZX80 Pocket Book 128pp £4.95
 Atom Business 110pp £7.50

Hints & Tips

Discover new ways of using PRINT; INSTR functions, VAL, PRINT USING, hexadecimal conversion, upper case conversion, load and save arrays. BEEP with sliding tones, automatic scroll and how to use all the machine features within machine code.

Machine Code

All the tools you need to write machine code effectively. Graphics tool kit — debug monitor — symbol assembler (with labels, all ED commands, ORG statements, forward and relative jumps) — disassembler (with label assignment); now you can really dig into the Sinclair ROM! This section alone would be stupendous value for money!

Cassettes Spectrum games as opposite £5.00
 Spectrum machine code as above £5.00
for ZX81 Nowotnik Puzzle, Demolition & Tenpin £5.00
 3 Adventures: Greedy Gulch,
 Magic Mountain, Pharaohs Tomb £5.00
Prices include VAT ZX81 Pocket Book Cassette £5.00

PHIPPS ASSOCIATES

Dept A FREEPOST EM463 (No stamp required)
 99, East St, Epsom, Surrey KT17 1BR.
 Telephone 03727-21215. 24hr phone service.

Prices include postage but for air mail delivery in Europe add 90p (outside Europe add £2.20) per item.



MICRO-PROFESSOR

YOUR GUIDE TO THE WORLD OF MICROPROCESSORS

A low cost tool for learning, teaching & prototyping.

Micro-Professor is a low-cost Z80 based microcomputer which provides you with an interesting and inexpensive way to understand the world of microprocessors and utilise their unlimited potential.

Micro-Professor is a complete hardware and software system whose extensive manual gives you detailed schematics and examples of programme code. A superb learning development tool for students, hobbyists and microprocessor engineers, as well as an excellent teaching aid for instructors of electrical engineering and computer science courses.

Technical specification

Z80 CPU, 2K RAM, 2K monitor, 24 I/O lines, LED display, cassette interface, CTC/PIO facility, 2.25" speaker, three manuals, 36 keyboard. Options include: EPROM board, speech board and printer board.

Please send or telephone for full details.

£79.95 + p&p

Now includes 2K BASIC

FLIGHT ELECTRONICS LTD. Flight House, Quayside Rd, Southampton, Hants SO2 4AD. Tel: (0703) 34003/27721. Telex: 477793.

Mail order only • Trade enquiries welcome • Bulk order discounts • Prices include VAT



(by phone or post)

Complete the coupon today!

Please allow 28 days for delivery.

Please send me:	Price	Qty	p&p
Micro-Professor	£79.95		£2.95
SSB-MPF board	£69.95		£2.95
EPB-MPF board	£84.95		£2.95
PRT-MPF board	£74.75		£2.95
			Total

I enclose cheque/P.O. for £.....

Name

Address

FINGERTIPS

Fingertips is our regular calculator column covering calculator news, programming hints and examples of unusual applications. The column is written and compiled by calculator enthusiast David Pringle who is glad to hear of any of your ideas. *Your Computer* pays £6 for each of your contributions published.

method of finding the general solution to a diophantine equation $ax + by = c$, but that is another story.

An intriguing calendar program has been written for the Casio 602 by D Cass of Stockport. The user operates the program by pressing P0. A prompt "Year?" is displayed and the user enters the year

required. Pressing EXE sets the ball rolling and you are advised to go and have a cup of tea as printing takes about nine minutes.

The program works like the calendars found on watches. A fixed format, as shown in figure 1, is used and the days of the week adjusted accordingly. The 31, 30 or 29 on the

(continued on next page)

LAST MONTH saw the first large scale meeting of the newly-formed U.K. branch of the Hewlett-Packard PPC users' club. As many of you know, the PPC users' club has been very active in the States for quite a few years. It seems appropriate that HP-nuts now have an avenue for venting their energy. I hope to report some titbits from the day-long meeting in the next issue. But, be warned: the conversation became very esoteric at points.

Until then, if you are interested in the club and its newsletter, the man to contact is: D M Birch, Astage, Rectory Lane, Windlesham GU20 6BW.

My request for a larger variety of programs getting away from the war games idea has caused a welcome flood of more novel approaches. Long may it continue.

Firstly, canny scot Andrew Simpson from Perth feels that the program we published in the October issue was a bit naive. This was an attempt to approximate any irrational number by a series of more and more accurate fractions of rationals.

The following TI-58 program generates successive convergents of the development of $R = a/b$ as a continued fraction, according to Euclid. To run it, enter R, press RST R/S.

For each convergent, the program displays the actual error E. To see a and b, press RCL 04 RCL 05. To see q, the next element of the continued fraction, press RCL 07. To continue, press R/S.

Note that R represents Real. In this respect, Roy Sirl's program is, of course, a misnomer. Whatever the value of the input number, it is by definition a rational number — even the Cray 2 can handle only rational approximations to irrational numbers — and it may well be equally important to know, for example, that:

$R = a/b = 21649/513239 = 3/71$ with an error of $7.2393/10^5$.

Note: $a.b = (10^{11} - 1)/9$. So, the idea that, in computer terms, irrationals are somehow different, is erroneous and generally misleading.

Incidentally, the Euclidean algorithm is ideal for finding the HCF of two integers a,b; the following program uses only one register. To run it, enter a, press RST R/S, enter b, press R/S (a and b may be entered in any order):

```
LOC
000 STO 1 2/CP ISBR
004 ( CE - ( CE ÷ RCL 1 )
      2/INT × RCL 1 )
018 2/X = T 0 26 2/EXC 1 GTO 0 04
026 RCL 1 R/S RST
```

For example, (958 581 817, 543 065 519) → HCF = 47293, 12 seconds. It is also the basis of a

Source: The Universal Encyclopedia of Mathematics (Pan)

Euclid's Algorithm: Every rational number a/b can be developed as a continued fraction:

$$a/b = q_0 + \frac{1}{q_1 + \frac{1}{q_2 + \frac{1}{\dots + \frac{1}{q_{n-1} + \frac{1}{q_n}}}}}$$

$$\begin{aligned} \text{where: } a &= q_0 \cdot b = r_1 \\ b &= q_1 \cdot r_1 = r_2 \\ r_1 &= q_2 \cdot r_2 = r_3 \\ r_{n-2} &= q_{n-1} \cdot r_{n-1} = r_n \\ r_{n-1} &= q_n \cdot r_n = 0. \end{aligned}$$

i.e. for all rational numbers — and all rational approximations to irrational numbers — the remainder tends to 0.

The Program:

Part 1 (000-015) initialises the variables:

$$\begin{aligned} R_{00} &= R ; R_{01} = a_{n-2} = 0 ; R_{04} = a_{n-1} = 1 \\ R_{02} &= b_{n-2} = 1 ; R_{05} = b_{n-1} = 0 \\ R_{03} &= r_{n-2} = R ; R_{06} = r_{n-1} = 1 ; R_{07} = q_{n-1} \end{aligned}$$

Part 2 (016-035) evaluates the nth term of Euclid's algorithm:

$$r_n = r_{n-2} - q_{n-1} \cdot r_{n-1} \quad \text{where: } q_{n-1} = \text{INT}(r_{n-2}/r_{n-1})$$

Part 3 (036-064) evaluates the elements of the nth convergent:

$$a_n = a_{n-2} + q_{n-1} \cdot a_{n-1} ; b_n = b_{n-2} + q_{n-1} \cdot b_{n-1}$$

Part 4 (065-end) calculates and displays the actual error of the nth convergent:

$$E_n = (a_n/b_n) - R.$$

The generations are updated during processing, i.e. a_n and b_n are in R_{04} and R_{05} , r_n is in R_{06} . The nth term of the continued fraction, q_{n-1} is in R_{07} .

Note that if $R < 1$, $q_0 = 0$.

and that $b > r_1 > r_2 > r_3 > \dots > r_n > 0$

TI-58 Euclidean convergence program by A M Simpson.

(Evaluates successive convergents a_n/b_n for Real number R)

KEY	LOC	CODE	KEY	LOC	CODE
STO	000	42	(036	53
0	001	00	RCL	037	43
STO	002	42	1	038	01
3	003	03	+	039	85
CLR	004	25	RCL	040	43
STO	005	42	4	041	04
1	006	01	STO	042	42
STO	007	42	1	043	01
05	008	05	×	044	65
1	009	01	RCL	045	43
STO	010	42	7	046	07
2	011	02)	047	54
STO	012	42	STO	048	42
4	013	04	4	049	04
STO	014	42	÷	050	55
6	015	06	(051	53
RCL	016	43	RCL	052	43
3	017	03	2	053	02
-	018	75	+	054	85
(019	53	RCL	055	43
CE	020	24	5	056	05
÷	021	55	STO	057	42
RCL	022	43	2	058	02
6	023	06	×	059	65
)	024	54	RCL	060	43
2nd INT	025	59	7	061	07
STO	026	42)	062	54
7	027	07	STO	063	42
×	028	65	5	064	05
RCL	029	43	-	065	75
6	030	06	RCL	066	43
=	031	95	0	067	00
2nd EXC	032	48	=	068	95
6	033	06	R/S	069	91
STO	034	42	GTO	070	61
3	035	03	0	071	00
			16	072	16

FINGERTIPS

(continued from previous page)

rightmost column are removed according to the month being printed and whether the year is a leap year or not.

1.	08	15	22	29
2.	09	16	23	30
3.	10	17	24	31
4.	11	18	25	
5.	12	19	26	
6.	13	20	27	
7.	14	21	28	

Figure 1.

Zeller's Congruence is used to find the day of January 1, knowing the year. Knowing this P9 prints out the name of the day. The data for the printing of the actual month itself is held in memories 10-16. Each memory holds the information to print one row; there are seven rows in all — see figure 1.

The data is decoded by masking the integer part of the number, printing it, removing it from the original number, then multiplying by 100 to reveal the next number. For example, the first row is held in memory 10, that is, M10 = 1.08152229. Removing the integer part gives 1, subtracting from the original number leaves 0.08152229. The 1 is printed, and the remainder multiplied by 100, giving 8.152229. The process is repeated until zero is reached, and the next day and row dealt with. P2 takes care of the removal of the 29, 30 and 31 from memories 14, 15 and 16 respectively — depending on the month. Copies of memories 14, 15 and 16 are held in 17, 18 and 19 so the original contents can be replaced at the start of printing each new month. P6 and P7 takes care of printing the names of each month. P0 handles all the dirty work.

Finally, Albert Bale of Warrington appears relieved that we have programs for the more modest CBM PR-100.

This normal distribution program computes the area under a normal distribution curve from k to infinity, where k can take any value above or equal to the mean of the distribution. Since the curve is symmetrical about μ , and since the total area is 1, any area can be found.

If the distribution of interest has a mean and standard deviation, and the value from which the area is required is k as above, then load the program and calculate manually

$\left(\frac{k-\mu}{\sigma}\right) \times \frac{331}{2} + 165$ Enter the fractional part in M1 and the integer part in M2. Enter 4.3756634×10^{-2} in M3. This is $\frac{C_{166}}{2331}$ the distribution using $(\frac{1}{2} + \frac{1}{2})^{331}$ — the values chosen to give the best accuracy without overflowing the machine capacity.

Run from 00. The required area is displayed when the program stops. If the required area was that up to k from -00 then subtract the result

```

PROGRAM LIST
M00-19,F-1F 512steps

*** P0
0 Min09
"YEAR ?"
HLT
" CALENDER :#"
GSBP4
÷ 2 10% = Min03 INT
Min04 M-03
MR03 × 2 10% = Min03
- ( MR03 ÷ 4 ) INT ×
4 = x=0 GOT03
MR04 - ( MR04 ÷ 4 )
INT × 4 = x=0 GOT03
1 Min1F GOT04
LBL3
0 Min1F
LBL4
1 M-03
29 + MR03 + ( MR03 ÷
4 ) INT + ( MR04 ÷ 4
) INT - 2 × MR04 =
Min00 - ( MR00 ÷ 7 )
INT × 7 = Min01
1 Min02
LBL5
GSBP6
MR09 +
GSBP1
GSBP2
10 Min00
LBL6
GSBP9
IND MR00 Min06
LBL7
INT
" :## "
M-06
MR06 × 2 10% = Min06
x=0 GOT08
GOT07
LBL8
" : "
GSBP4
1 M+00 M+01
GSBP1
MR00 - 17 = x=0
GOT09
GOT06
LBL9
1 M+02
MR02 - 13 = x=0
GOT00
GOT05
LBL0
...176steps

*** P1
MR01 = ÷ 7 = FRAC x
7 = Min01
...011steps

*** P2
3 Min09
MR17 Min10
MR18 Min11
MR19 Min12
MR02 - 2 = x=0 GOT04
MR03 - 31 = x=0 GOT05
GOT03
LBL5
3 Min09 GOT01
LBL4
MR1F x=0 GOT02
1 M-09
2.9 EXP 7 +/- M-10
LBL2
1 M-09
3 EXP 7 +/- M-11
LBL3
1 M-09
3.1 EXP 7 +/- M-12
LBL1
...059steps

*** P4
SAVE invEXE
...003steps

*** P6
" "
GSBP4
" "
10 MinF
MR02 x=0 GOT00
IND GOT02
LBL1
...054steps

" :January"
31 MinF GOT00
LBL2
" :February"
28 MinF GOT00
LBL3
" :March"
31 MinF GOT00
LBL4
" :April"
30 MinF GOT00
LBL5
" :May"
31 MinF GOT00
LBL6
" :June"
30 MinF GOT00
LBL7
" :July"
31 MinF GOT00
LBL8
" :August"
31 MinF GOT00
LBL9
" :September"
30 MinF
MR02 x=0 F
GSBP7
" : "
GSBP4
" : "
GSBP4
...154steps

*** P7
9 M-02 IND GOT02
LBL1
" :October"
31 MinF GOT00
LBL2
" :November"
30 MinF GOT00
LBL3
" :December"
31 MinF
LBL0
9 M+02
...054steps

*** P9
140 GOT01
LBL0
"Sun"
GOT09
LBL1
"Mon"
GOT09
LBL2
"Tue"
GOT09
LBL3
"Wed"
GOT09
LBL4
"Thu"
GOT09
LBL5
"Fri"
GOT09
LBL6
"Sat"
GOT09
LBL9
...052steps

MEMORY LIST
M00-19,F-1F 512steps
M00= 17.
M01= 3.
M02= 13.
M03= 81.
M04= 19.
M05= 3.141592654
M06= 0.
M07= 3.141592654
M08= 3.141592654
M09= 3.
M0F= 31.
M10= 1.08152229
M11= 2.0916233
M12= 3.10172431
M13= 4.111825
M14= 5.121926
M15= 6.132027
M16= 7.142128
M17= 1.08152229
M18= 2.0916233
M19= 3.10172431
M1F= 1.

```

D. Cass of Stockport's calendar program.

from 1. For a standard normal distribution $\mu=0$ and $\sigma=1$ so $\frac{k-\mu}{\sigma} = k$

The program is generally accurate to four places of decimals.

A population of manufactured items has weights which are normally distributed about a mean of 100gm., with a standard deviation of 10gm.

Find the proportion of items which have weights between 70gm. and 80gm.

Now the program only computes areas for values above the mean, but since normal distributions are symmetrical, a similar area lies between 120 and 130gm. So we compute the areas from 120gm. to 00 and from 130gm. to 00, and the required area is the difference between these areas.

For the first value, 120gm., $k = 120$, so computing

$$\left(\frac{k-\mu}{\sigma} \times \frac{\sqrt{331}}{2} + 165\right)$$

gives 183.1934. The fractional part goes in M1 and the integer part in M2. A useful key sequence is M1 F INT M2 MR 1 F FRAC M1 Store 4.3756634×10^{-2} in M3 and run from 00. An area of 0.02277 is given. Repeating for 130gm. — no need to reload M3 or Goto 00 manually, the program does this — gives an area of 0.00134. Values far from the mean take a long time to run. Hence the required area is 0.0214, that is, a proportion of 2.14 percent.

Albert Bale's normal distribution program.

	0-	1-	2-	3-	4-	5-	6-	7-
-0	1	6	2	F	6	MR	0	9
-1	6	MR	÷	M-	6	3	MR	
-2	5	1	(2	=	-	9	
-3	-	X	MR	=	SKIP	.	GOTO	
-4	MR	(2	M	GOTO	5	1	
-5	2	3	+	9	6	=	3	
-6	=	3	1	MR	1	±	MR	
-7	SKIP	1	=	2	MR	R/S	1	
-8	GOTO	-	+	-	9	GOTO	GOTO	
-9	6	MR	1	1	X	0	4	

PORTABLE COMPUTERS

SHARP MEANS BUSINESS

PC-1500 COLOUR COMPUTER

Probably the most powerful pocket computer on earth



THE HARDWARE

The PC-1500 approaches the personal computer in ability, with 16K of ROM extended BASIC language and 3.5K RAM user memory, expandable to 11.5K, all maintained during power off and battery change. Up to 36 separate programs are immediately accessible and there are advanced programming capabilities with PEEK, POKE, CALL etc., 1 & 2 dimensional arrays and variable strings. There is a full range of text manipulation and the QWERTY typewriter-style keyboard offers upper and lower case letters on the 26 character LCD which doubles as a 1,092 point mini-graphic display with BASIC program control. A tone generator and clock, calendar, alarm and stopwatch functions are built-in and, under BASIC control, can be incorporated in programs.

The CE-150 is a high resolution (500 x 200), 4-colour printer/plotter, with 8K bytes Graphics BASIC. The 9 type sizes allow a variable line length from 4 to 36 characters. The CE-150 can print virtually any drawing with full control of up, down, left and right printing. There are two cassette interfaces (for saving/loading) with remote control, allowing bulk storage.

The PC-1500 has a 50 hour battery life, with EA-150 mains adaptor option and the CE-150 has a built-in rechargeable battery and comes with EA-150.

PRICES (including VAT and FREE software voucher)

PC-1500 Computer plus £20 software voucher	£169.95
CE-150 Colour Printer/Interface plus £20 voucher	£149.95
CE-155 8K RAM Expansion module plus £10 voucher	£79.95
CE-150 8K RAM/ROM with battery back-up plus £10 voucher	£89.95
CE-152 Custom Cassette Recorder plus £5 voucher	£39.95
CE-153 140-key Software Board plus £10 voucher	£79.95
CE-158 RS-232C Interface plus £20 voucher	£149.95

Vouchers on request with order only

THE SOFTWARE

Sharp CE-15A Applications Program Tape. £14.95
MICROL 1500 EXECUTIVE OS/1 Ready-to-run, full feature Database, with a wide range of customising features enabling you to create your own business applications programs (eg: stock control, mailing lists) in minutes

MICROL 1500 PROCOS Solve all kinds of number-based problems in just minutes, even if you have never programmed a computer before. Handling up to 256 items of data simultaneously, 'Visicalc-type' features help you examine the effects of changes in data, analyse trends and answer 'what if'.

MICROL 1500 STATIX Statistics for the 1500. Automatic calculation of mean, standard deviation and linear regression. £9.95
BC SOFTWARE 1500 PROPAC 1 A set of easy-to-use routines for programs development with: Renummer, Reorganise, Delete, Analyse and Invert Screen. £9.95

Brochure on request

BASIC FOR BEGINNERS

CASIO PB100 £69.95

Learn as you go



LEARN with the beginners manual "An easy-to-follow introduction to the Personal Computer". FOLLOW the step by step examples and USE the programs supplied, or develop your own, for business or home use, including exciting games.

QWERTY keyboard, upper and lower case dot matrix display. Up to 544 program steps/94 memories, expandable to 1,568 steps/222 memories, all protected. A truly pocketable 9.8 x 71mm. Weight, 116g. 360 hours battery life.

OR-1 1K RAM expansion module £11.95. FA-3 Cassette Interface £22.95.

MICROL SOFTWARE for your SPECTRUM

USE AND LEARN Vol. 1. 25 BASIC PROGRAMS on cassette + 100 PAGE BOOK. Professionally written, packed with practical idea, hints and tips £9.95

USE AND LEARN Vol. 2. 30 MACHINE CODE ROUTINES for high speed graphics, games and serious programs. On tape + 50 PAGE BOOK. £9.95

THE DATABASE PRACTICAL, POWERFUL, RELIABLE. Written in machine code and BASIC. Automatic sorting. 'Free Form' with one-key search. Capacity: Inside 48K. 30,000 characters = 1,000 screen lines = 45 full screens. With C-90 tape: Over 900 full screens of information, or over 7,000 names & addresses. Fully MENU DRIVEN with full HELP £9.95
THE SPREADSHEET Visicalc for £107 Not Quite — has all the main Visicalc capabilities and some improvements. Available November, 1982. £9.95
Database and Spreadsheet require 48K Spectrums. Add-on options for the Sinclair Microdrive will be available early 1983.

MICROL 14 day money back guarantee

TEMPUS

Dept YC 38 Burleigh Street,
Cambridge, CB1 1DG. Tel: 0223 312866

CASIO — THE SCIENTIFIC ANSWER


The future has arrived with the

CASIO FX-801P £349



High speed computer with integral micro-cassette data control and hard copy printer monitoring.

Everything you need, in an area smaller than this page. This truly portable, complete system needs no peripherals on lengths of cable. Batteries last 250 hours (only display), or 5,000 lines (display and printing). Typewriter style QWERTY keyboard, plus all the advanced features of the FX-702P.



With FREE MICROL Professional Programming Pack worth £9.95

The widest range of math, science and statistics functions (55 in all, including Regression and Correlation). BASIC programming. Up to 1,680 program steps, up to 226 data memories, up to 10 program areas, all protected. Subroutines: Up to 10 levels. FOR/NEXT looping: Up to 8 levels. Edit, Debug and Trace modes. 240 hours battery life. Dims: 17 x 165 x 82mm. Wt: 176g.

Peripherals

FA-2 Remote control cassette interface/adaptor £19.95
FP-10 Permanent hard copy printer. Mains or battery powered £44.95
MICROL 702 PROCOS

Professional computing solutions on tape. Save up to 90% of programming time with this electronic equivalent of pen and paper. This 'Visicalc-type' system answers 'what if...' questions and analyses trends £24.95
FREE when you purchase the FX-702P, FA-2 and FP-10 package from us.

CASIO FX-700P £79.95



BASIC programming on a QWERTY typewriter-style keyboard. Up to 10 program areas, up to 1,568 program steps, up to 222 memories, all protected.

Upper and lower case dot matrix display. Powerful editing functions. 25 scientific functions. Subroutines: Up to 8 levels. FOR/NEXT loops: Up to 4 levels. Numerical values — 6 levels. Calculation elements — 12 levels. Exclusive character variable stores up to 30 characters.

Dims: 9.8 x 165 x 71mm. Weight 118g. 300 hour battery life approx.

FA-3 Cassette interface £22.95. FP-12 Printer (December 1982) £49.95.

PROGRAMMABLE CALCULATORS

CASIO FX-602P

10 program areas, up to 512 program steps, up to 88 memories. Alpha/numeric dot matrix display, 10 + 2 digits. 50 scientific functions, including Standard Deviations and R/P & P/R conversions. 33 parentheses £69.95

CASIO FX-3600P

2 program areas, 38 steps, 7 memories. 10 + 2 digits. 50 scientific functions, including Integrals and Regression. Standard deviations, R/P & P/R conversions, 18 levels of parentheses £22.95

PRICES include VAT, post & packing. SAME DAY DESPATCH, subject to availability. Send cheques, PO, or cash (registered), or telephone your ACCESS/VISA, or BARCLAYCARD number to the Portable Computer Specialists:—

IF YOU SEE A BETTER OFFER WE WILL BEAT IT

TEMPUS, 38 Burleigh Street, Cambridge CB1 1DG

Please supply/send details of.....

Total £..... enclosed, or debit my ACCESS/VISA/B/CARD

Number.....

Name.....

Address.....

YC

(continued from previous page)

```

1260 IF RND>0.7 THEN PAPER 4: LE
T GUN1=0: LET ORND=RND*20+5: PR
INT AT 0,ORND,9$(1): PAPER 7: G
O TO 1500
1265 PAPER 4: LET ORND=RND*20+5
: PRINT AT 20,ORND,9$(2): LET 9
UN1=8: PAPER 7
1270 GO TO 1600
1275 IF GUN1>0 THEN LET RND=RND
*5+10: PRINT AT RND,ORND,9$(1)
1277 IF GUN1>0 THEN LET RND=RND
*5+13: PRINT AT RND,ORND,9$(2)
1279 GO TO 1500
1280 INK 4: PRINT AT 3,ORND,9$(1)
: PRINT AT 20,ORND,9$(2): INK 0
1300 IF GUN1=0 THEN FOR N=1 TO 5
: PRINT AT N*9,ORND,9$(1): NEXT N
: LET GUN1=-1: INK 4: PRINT AT 3
,ORND,9$(1): INK 0
1310 IF GUN1=0 THEN FOR N=1 TO 5
: PRINT AT 12+N,ORND,9$(1): NEXT
N: LET GUN1=-1: INK 4: PRINT AT
20,ORND,9$(2): INK 0
1505 IF BOOM=0 THEN IF RND>0.75
THEN LET BOOM=10: GO TO 1520
1510 GO TO 1550
1520 LET BM=RND*200+40: LET BM1=
RND*40+10
1530 LET DIR=RND
1535 IF DIR>0.5 THEN PLOT BM,25:
DRAW 0,BM1: GO TO 1600
1540 PLOT BM,95: DRAW 0,-BM1
1545 GO TO 1990
1550 IF BOOM=0 THEN GO TO 1570
1555 GO TO 1990
1570 IF DIR>0.5 THEN PLOT BM,25:
DRAW 0,BM1: OVER 1: PLOT BM,25:
DRAW 0,BM1: OVER 0: GO TO 1600
1580 PLOT BM,95: DRAW 0,-BM1: O
VER 1: PLOT BM,95: DRAW 0,-BM1: O
VER 0
1600 FLASH 0: PRINT AT 2,14,"
": PRINT AT 3,14,"
1610 IF GUN1=0 THEN FLASH 1: PR
INT AT 2,16,9$(1)
1620 IF GUN1>0 THEN FLASH 1: PR

```

```

INT AT 2,16,9$(2)
1630 IF BOOM=0 THEN FLASH 1: PR
INT AT 3,16,9$(2)
1700 IF R<37 OR R>83 THEN GO TO
1720
1710 GO TO 1990
1720 LET U=RND: IF U>0.5 AND U<0
THEN GO TO 4500
1990 FLASH 0: INK 0: LET T=0: LE
T TOS=TOS+15
1992 IF VAL F$<1 THEN GO TO 3500
1993 IF H>10 THEN GO TO 4000
1995 IF XTOS=1 THEN LET FUEL=(VA
L F$)+FUEL: LET F$=STR$ FUEL: LE
T XTOS=0: LET FUEL=0
1999 GO TO 1010
3000 BEEP 5,12
3005 LET U=U+1
3007 PRINT AT 2,14,"
3010 FLASH 1: PRINT AT 2,16," C
RASH!"
3020 IF V<5 THEN PRINT AT 3,16,"
FUEL LOST: LET FUEL=20
3030 IF V<5 THEN PRINT AT 3,16,"
SUB SUNK!": GO TO 3530
3035 FOR F=1 TO 200: NEXT F
3036 FLASH 0
3037 PRINT AT 2,14,"
": PRINT AT 3,14,"
3040 PRINT AT 21,0,"LIVES LEFT="
:5-V: GO TO 1015
3500 BEEP 5,12
3510 PRINT AT 2,14,"
": PRINT AT 3,14,"
3520 FLASH 1: PRINT AT 2,18,"NO
FUEL": FLASH 0: PRINT AT 3,18,"
F
LASH 1"
3530 PRINT AT 9,6," GAME OVER
": FLASH 0
3535 FOR N=24 TO 12 STEP -0.5: B
EEP 0.1N: NEXT N: FOR N=1 TO 30
0: NEXT N: CLS: GO TO 100
3540 FOR F=1 TO 300: NEXT F
4000 FOR N=1 TO 24: BEEP 0.005,N
: NEXT N
4010 INK 4: PAPER 1: FLASH 1: PR
INT AT 9,6,"MISSION ACCOMPLISHED
"
4020 BEEP 5,24
4030 FLASH 0: PAPER 7: INK 0: PR

```

```

INT AT 11,4," YOU ARE PROMOTE
D- TO ANOTHER MISSI
ON!"
4035 FOR N=1 TO 200: NEXT N"
4040 RUN
4500 BEEP 0.5,24
4510 PRINT AT 2,14,"
": PRINT AT 3,14,"
4520 FLASH 1: PRINT AT 2,16,"RUN
AGROUND"
4530 PRINT AT 3,16," LOSE FUEL
"
4535 LET FUEL=FUEL-20
4536 FOR N=1 TO 200: NEXT N
4537 FLASH 0: PRINT AT 2,14,"
": PRINT AT 3,14,"
4540 GO TO 1990
5000 BORDER 1: CLS
5010 LET D$=" SELLIN SOFTWARE
PRESENTS:"
5020 FOR F=29 TO 1 STEP -1
5030 LET E$=D$(F TO 29)
5040 INK 3: PRINT AT 10,0,E$
5045 FOR G=1 TO 10: NEXT G
5050 NEXT F
5060 FOR F=10 TO 2 STEP -1
5065 PRINT AT F,0,E$
5070 PRINT AT F+1,0,"
5075 PAUSE 10: NEXT F
5080 LET D$=" SUBMARINE ATTA
CK"
5085 FOR F=1 TO 29
5090 LET E$=D$(1 TO F)
5100 INK 2: PRINT AT 10,32-F,E$
5110 NEXT F
5120 FOR N=12 TO 21
5125 PAPER 5: PRINT AT N,0,"
5130 NEXT N
5140 INK 7
5150 PLOT 30,20: DRAW 175,0: DR
AW 2,2: DRAW 0,11: DRAW -60,5: DR
AW -30,0: DRAW 0,15: DRAW -1,1:
DRAW -3,0: DRAW -1,-1: DRAW 0,-1
5: DRAW -25,0: DRAW -60,-5: DR
AW 0,-11: DRAW 2,10: PLOT 115,54:
DRAW 0,5: DRAW 1,0
5160 PAPER 7: INK 0
5170 FOR N=1 TO 400: NEXT N
5300 GO TO 100

```

Sorcerer's castle

Stuart Sly,
Walsall,
West Midlands.

BBC

THIS PROGRAM is a fairly simple but impressive demonstration of some of the sound and graphics capabilities of the BBC Micro.

The program draws a castle on a hill which,

by use of the VDU19 command, is made to appear instantly. There is first a thunderstorm which illuminates the castle with lightning. At midnight the old clock chimes out the hours disturbing a bat which flies out of one of the towers.

Finally ProcEnd gives a dramatic sonic and graphic finale to the program but if you have enough memory you could extend the program.

Lines 40-110 draw out the castle but by setting all the colours to blue in line 30 this

cannot be seen. Line 120 sets the normal colours and the castle appears as if by magic.

The VDU19 command is used again for the effects during the lightning. Line 160 uses sound channel 0 to give the thunder. Line 170 sounds the clock's chimes using the envelope defined in line 10.

Lines 180-290 give the logic for the bat's flight. Lines 300-360 are subroutines for the bat, the flashing light and the lightning. Both programs were written on a BBC Model A but should run easily on a Model B.

```

10ENVELOPE4,4,0,0,0,0
,0,0,126,-5,-3,-1,126,11
0
20MODE5:L=0:A=409:B=6
40:BAT=1
30VDU19,0,4,0,0,0,19,
3,4,0,0,0,19,2,4,0,0,0,1
9,1,4,0,0,0:GCOL0,3
40MOVE100,0: DRAW1150,
0:PLOT85,330,400:PLOT85,
900,400:MOVE1000,200:DR
AW1040,240:PLOT85,1080,80
50MOVE1060,80: DRAW200
,280:PLOT85,220,200:GCOL
0,3:MOVE370,590: DRAW330,
400:PLOT85,510,590:PLOT8
5,600,400
60MOVE870,590: DRAW900
,400:PLOT85,730,590:PLOT
85,600,400: DRAW720,560:P
LOT85,520,560:MOVE390,59
0
70DRAW490,590:PLOT85,
440,760: DRAW440,800:MOVE
750,590: DRAW850,590:PLOT
85,800,760: DRAW800,800

```

```

80MOVE680,560: DRAW580
,560:PLOT85,620,820: DRAW
620,870:GCOL0,2:MOVE420,
440
90DRAW420,500:PLOT85,
460,440:PLOT85,460,500:M
OVE780,440: DRAW780,500:P
LOT85,820,440:PLOT85,820
,500:MOVE790,620: DRAW790
,660:PLOT85,810,620
100PLOT85,810,660:MOVE
430,620: DRAW430,660:PLOT
85,450,620:PLOT85,450,66
0:MOVE620,700: DRAW620,73
0:PLOT85,630,700:PLOT85,
630,730
110MOVE620,460: DRAW620
,360:MOVE620,460: DRAW660
,420: DRAW660,360:MOVE620
,460: DRAW580,420: DRAW580
,360: DRAW660,360
120VDU19,1,3,0,0,0,19,
3,0,0,0,0,19,2,3,0,0,0:T
IME=0: REPEATUNTILTIME>20
0
130FOR K=0TO2
140FOR M=1 TO4
150GCOL0,1: PROCLIGHTNI

```

```

N5:VDU19,3,7,0,0,0,19,2,
0,0,0,0:GCOL0,0:PROCLIGH
TNI:VDU19,3,0,0,0,0,19
,2,3,0,0,0:NEXT M
160SOUND0,-15,6,30:FOR
S=-15 TO 0:SOUND 0,S,6,
2:NEXTS,K
170PRINTTAB(4,2);"MIDN
IGHT!!!":GCOL0,1:VDU19,1
,14,0,0,0:PROCLIGHTNI:FOR
L=1 TO 12:SOUND2,4,5,20
:TIME=0:REPEATUNTILTIME>
200:NEXT L
180GCOL0,3:SOUND1,-10,
RND(5)+245,5:IF BAT=0 GO
SUB300
190FORT=0TO300:NEXT
200GCOL0,0:GOSUB300
210GCOL0,3
220A=A-24:B=B-10:IF A=
-23 THEN PROCend
230IF BAT=1 GOSUB310
240FORT=0TO300:NEXT
250GCOL0,0:GOSUB310
260GCOL0,3:MOVE420,680
: DRAW390,590:PLOT85,420,
590:GCOL0,2:PROCLIGHTNI

```



```

270GCOL0,3
280A=A-24:B=B-10:IF A=
-23 THEN PROCend
290GOTO100
300MOVE A,B: DRAW(A+15)
,B:BAT=1: RETURN
310MOVEA,(B+12): DRAW(A
+7),B: DRAW(A+15),(B+12):
BAT=0: RETURN
320DEFPROCWINDOW: MOVE4

```

```

30,620: DRAW430,660: PLOT8
5,450,620: PLOT85,450,660
: ENDPROC
330DEFPROCend: VDU19,0,
19,0,0,0: FORS% = 1 TO 255: SO
UND1,-15,S%,2: SOUND2,-15
,S%+100,3: SOUND3,-15,255
-S%,4: NEXT: STOP: ENDPROC
340DEFPROCLIGHTNING
350MOVE1200,1000: DRAW1

```

```

020,900: DRAW860,730: MOVE
900,750: DRAW960,860: DRAW
920,570: MOVE930,800: DRAW
890,590
360MOVE1080,930: DRAW10
50,760: DRAW1080,690: MOVE
1060,800: DRAW1000,750: DR
AW980,700: MOVE1000,870: D
RAW810,820: MOVE830,820: D
RAW830,790: ENDPROC

```

Bomber

K A Mair,
Tattershall,
Lincolnshire.

VIC-20

THIS PROGRAM runs on unexpanded Vic-20 in about 2K. All instructions are included in the program, shown on the right.

The real world

Michael Johnson,
London N16.

ZX-81

EVER SINCE I bought my ZX-81 and 16K RAM earlier this year I have been interested in discovering ways of using it to help me with the routine calculations and figure work associated with my job.

I have found that a number of routines and programs have proved to be very useful indeed: carry-outs, cash-flow projections and sales analyses are all much less of a chore than they used to be.

This routine may be of use to those who are interested in real world applications for the ZX-81. This routine allows you to enter any quantity of data as part of a single string.

The bits of data are separated by commas, following the convention of Data statements found in other Basic dialects. The machine uses the commas to identify the bits of data ready for subsequent operations.

The input as a string seems to me to have two advantages: there is no need to wait for the cursor to reappear before inputting the next piece of data, and secondly, the string assignment allows direct inputting of an expression such as *7 or /25 which can be applied to the original data. Of course this routine is only one building block in what can be developed into a customised "Intelligent Calculator" program. One suggestion which I would make is to convert the broken-up bits of string into a dimensioned array for later re-use.

I should point out that this use of concatenated strings in the handling of numerical data does present certain pitfalls for the unwary. The routine I have mentioned is in fact derived from a mini-routine which can be used to explore and experiment with strings and numbers:

```

10 INPUT A$
20 INPUT B$
30 PRINT A$,B$
40 PRINT VAL (A$+B$)
50 RUN

```

Note that 2 followed by +2 gives 4. A\$ =

```

1 REM*BOMBER*
5 GOSUB2000
10 POKE36879,3:DEFN(X)=INT(RND(1)*X)+1:PRINT"Q"
19 REM*DRAW BUILDINGS*
20 FORR=8142TO8163:BD=102
30 FORRE=RTOR-FNA(X)*22STEP-22
40 POKERE,BD:NEXTRE,B
50 FORRF=8164TO8185:FORBQ=38884TO38905
60 POKERF,160:POKEBQ,6:NEXTBQ,BF
99 REM*A/C*
100 A=7680:AC=62:SP=32
110 POKER,AC:POKER,1,SP
115 IF FEK(A+1)=102THEN1500
116 IFA=8163THEN2500
119 REM*CHECK FOR BOMB*
120 GETR$:IFR$="F"THENGOSUB1000
130 A=A+1:FORW=1TO100:NEXTW:GOTO110
999 REM*DROP BOMB*
1000 C=A+22:CB=46
1010 POKER,AC:POKER,1,SP:POKEC,CB:POKEC-22,SP
1015 IFPEK(A+1)=102THEN1500
1020 A=A+1:C=C+2
1025 F RW=1TO100:NEXTW
1030 IFC8164THEN1010
1035 POKER,1,SP
1040 RETURN
1499 REM*CRASH*
1500 POKE36879,42:POKER,42:POKER+22,35:POKER-22,35
1510 POKE36877,220:FORL=15TO0STEP-1:POKE36879,L:FORM=1TO300:NEXTM,L:POKE 5677,0:
POKE36878,0
1515 POKE36879,27:PRINT"Q"
1520 PRINT"ANOTHER GAME(Y/N)?"
1530 GETR$:IFR$="Y"THEN1500
1540 IFR$="Y"THENS
1550 END
2000 REM*INTRODUCTION*
2005 POKE36879,11:PRINT"Q*****BOMBER"
2010 PRINT"*****":PRINT
2020 PRINT"THE OBJECT OF THE":PRINT"GAME IS TO CLEAR A"
2030 PRINT"LANDING STRIP FOR YOUR":PRINT"PLANE BY BOMBING THE"
2040 PRINT"BUILDINGS, PRESSING":PRINT"KEYS RELEASES YOUR":PRINT"BOMBS."
2050 PRINT:PRINT"ENTER YOUR SKILL LEVEL":PRINT
2060 PRINT"IN THE RANGE 5(EASY)":PRINT"TO 20(SUICIDAL)"
2070 INPUTSK:IFSK<5ORSK>20THEN2060
2075 X=SK
2080 PRINT"HIT ANY KEY TO START."
2090 (GOTO:IFC$=""THEN2090
2095 GOTO10
2499 REM*A/C LANDED*
2500 PRINT"*****CONGRATULATIONS":PRINT:PRINT"WANT TO TRY AGAIN(Y/N)"
2510 GETR$:IFR$="Y"THEN2510
2520 IFR$="Y"THENS
2530 END

```

"25", B\$ = "/2" gives 12.5. A\$ = "23+2", B\$ = "-5" gives 20. Care needs to be taken with priorities and with bracketing. For example, A\$ = "(4)", B\$ = "+4)/2" gives 4. As a point of interest, someone may care to ponder for a moment why A\$ = "2+3", B\$ = "3" results in 35 and A\$ = "7+1", B\$ = "4" results in 21.

```

10 REM INITIALISE DATA, M. JOHNSON
20 SCROLL
30 PRINT "INPUT DATA, SEPARATED BY
  COMMAS"
40 INPUT A$
50 SCROLL

```

```

60 PRINT A$
70 LET A$ = A$+",*"
80 LET B=1
90 LET C=1
100 SCROLL
110 PRINT "ENTER OPERATION AND
  EXPRESSION"
120 INPUT B$
130 CLS
140 PRINT AT 6,0;"DATA ";A$(TO LEN
  A$-2),, B$
150 PRINT
160 FOR N=1 TO LEN A$
170 IF A$(N) <> " " THEN GOTO 220
180 IF A$(N) = "*" THEN GOTO 230

```

(continued on page 101)



IMPACT SOFTWARE

From Scotland's Capital comes quality software for the

ZX Spectrum and VIC 20

The Quest (48K-Spectrum only)

(One of the most exciting adventure games currently available). Fight your way into the depths of the complex in your Quest for the Holy Grail. Discover Gold and Precious stones, buy weapons and Magic wares from a trader. Battle with one of the many Monsters. Up to 1500 locations may be searched in the course of a game. Full sound effects and save game facility. — Only £5.00

Starfighter (16K-Spectrum only)

All action, full-colour, graphic machine-code, Space-battle with devastating explosions. On screen scoring and high score kept. The longer you survive the more difficult it becomes. — Only £5.00

Orb (48K-Spectrum ; 16K-VIC 20)

Make your way through the underground labyrinth in your search for the dreaded Orb, which you must destroy. Encounter many Monsters, discover Treasure and try to remember your route so that you can get out again. Full sound effects and save game facility. — Only £5.00

Star Trek (16K-Spectrum; 8 K-VIC 20)

Save the Galaxy from the Klingons using your rapid-fire phasers and photon torpedos. Automatic short-range scan, Galaxy map and Star-bases. Full sound effects and 10 levels of difficulty! — Only £5.00

Games Pack (Unexpanded VIC 20)

Alien * Road Race *

The Island * Pontoon *

— Only £5.00

Dealers

Attractive Discounts & Exclusive Agencies available in most areas.



Please Supply:

The Quest (£5.00) ☐ Orb (£5.00) ☐

Starfighter (£5.00) ☐ Star Trek (£5.00) ☐

Games Pack (£5.00) ☐

Please state machine type: _____

I enclose a Cheque/P.O. for £.....

Name _____

Address _____

Post Code _____

All prices include P&P and VAT

IMPACT SOFTWARE

70, Redford Avenue,

EDINBURGH EH13 0BW

TEL. 031-441-4257

MICROWARE - UNIT 5, ST. PETERS LANE, LEICESTER. Tel: 0533 681812

NOTE OUR NEW ADDRESS

(Close to Clock Tower, Large Car Parks and Bus Station)

THE "FRIENDLY TO USER STORE" THE FIRST MIDLANDS REGION RETAIL SHOP SPECIALISING IN SINCLAIR COMPUTER ACCESSORIES

ZX81 NOW IN STOCK

£49.95

AND "WELCOME" THE NEW DRAGON 32 AVAILABLE NOW

£199.50

ALSO SUPPORTING SOFTWARE AND HARDWARE

Come and see our ever increasing range of Software · Hardware · Books · Magazines · Keyboards · Ram Packs · Graphic Roms · I/O Ports · etc.

Reliable Cassette Player - tested for loading/saving on ZX81, SPECTRUM, DRAGON, BBC ONLY £18.50 SOFTWARE & BOOKS FOR BBC and VIC 20.

IF THE PRODUCT IS GOOD AND THE PRICE IS RIGHT - THEN MICROWARE STOCK IT!

STOCKISTS OF DEAN ELECTRONICS and D.K. 'TRONICS SUPERB KEYBOARDS FOR ZX81 AND (SPECTRUM - D.K. 'TRONICS)

MICROWARE SOFTWARE

ALIEN COMMAND (16k) Testing Invaders style game making full use of Spectrum sound, colour and graphics £5.50 SPECTRUM

BACKGAMMON (16k) Play against your computer in this version of the popular board game £5.00 SPECTRUM

BOTH GAMES AVAILABLE FROM SHOP OR MAIL ORDER

SOFTWARE WRITERS!

GOOD SPECTRUM or DRAGON SOFTWARE WANTED - EXCELLENT ROYALTIES

We apologise for delay in sending out catalogues - we are currently re-printing due to much new stock.

TRADE ENQUIRIES WELCOME

OPEN 9.30 - 12 noon 12.30 - 5.30 pm
Closed Monday

SAE BRINGS CATALOGUE

SEE US AT THE NORTHERN COMPUTER FAIR - BELLE VUE, MANCHESTER, STAND V2 AND V3

MICROWARE

Leicester

SOFTWARE FILE

(continued from page 99)

```
190 LET C=N
200 PRINT VAL (A$(B TO C-1)+B$)
210 LET B=C+1
```

```
220 NEXT N
230 GOTO 80
```

To conserve memory, delete lines 20,50, and 100, and change line 140 to Print B\$.

The input for A\$ needs to read for example "20,456,783,12.5,3". The input for B\$ needs to be something like "*5" or "+200" or "/100*25".

Gripe cure

Julian Vincent,
Reading,
Berkshire.


SPECTRUM

I HAVE JUST solved a problem which has been plaguing me on my Spectrum. It occurred after editing lines which ended in the inverted video mode. Occasionally I would edit such a line only to find that the Spectrum belched as if it were full and refused to list any more of the program. Also the cursor was very sluggish.

The answer seems to be due to the way Inv Video and True Video act. Inv Video puts 20, 1 into two memory locations in the line, although of course there is nothing on the screen to show this. If you press either key several times you fill up that program line two locations at a time.

If you happen to end an inverse video line with two presses of the True Video control, that is, 20,0,20,0 in RAM and make a hash of editing it later, you can end up with 20,0,0, at the end of the line, which the Spectrum does not like.

It is easily corrected but caused me some problems until I sorted it out.

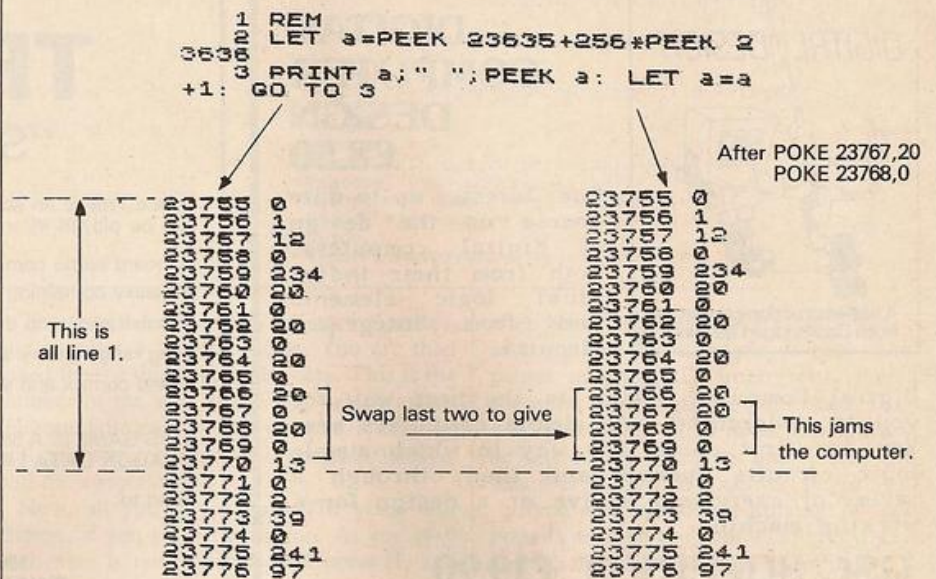

If you POKE 23767,0, everything works. You must have 20,0,0.

The hawk

Roy Pincott,
Mansfield.

ATOM

FLY AFTER the aliens, shoot them down and score 50 points. Try and beat the top score. Move left or right at the same time as you move up or down and fire.

Do not crash into the aliens or into the stratosphere. You have to land to be able to reload your laser guns. All the controls are explained in the program itself.

```
21F 0>610;0=0
31F 0<>0 G.10
50=0
106.1000
15DIM AA(10),Q(7)
20C=0;D=0;E=1;T=0;P=48
25M=110;L=100;S=£8000
306.100
48!Q=£2A26221C;Q!4=£1C2232;R.
49!Q=£08081808;Q!4=£1C0808;R.
50!Q=£1C02221C;Q!4=£3E2020;R.
51!Q=£0C02221C;Q!4=£1C2202;R.
52!Q=£3E140C04;Q!4=£040404;R.
53!Q=£023C203E;Q!4=£1C2202;R.
54!Q=£3C20201C;Q!4=£1C2222;R.
55!Q=£0804023E;Q!4=£202010;R.
56!Q=£1C22221C;Q!4=£1C2222;R.
57!Q=£1E22221C;Q!4=£1C0202;R.
100CLEAR4
110A=£B0DF;?A=£DF
120F.U=£B1E0 TO £B1FF;?U=£FF;N.U
140F.X=1T010
150R=A.R.£E15FF+£B200
160AA(X)=R
165IF ?AA(X)=£18;X=X-1;IF X<1;X=1
170?AA(X)=£18
180N.X
300F.B=1T05;?£B000=?£B000 &£F0 +B
310B?£7F=?£B001 &B;N.B
400IF ?£B0=0;L=L-12;IF L<0;L=0
410GDS.0
420F.Z=1T010
500IF L<1;G.520
510IF ?£B0=0;F.W=1T06;?£B002=?£B002;4;N.W;GDS.e
520IF ?£B1=0 GDS.d
530IF ?£B2=0 GDS.c
540IF ?£B3=0 E=1;?A=£DF;GDS.r
550IF ?£B4=0 E=2;?A=£FB;GDS.r
630N.A.R.£10+1
632IF E=1;G.640
634IF E=2;G.645
636G.650
640IF ?AA(N)=£18;?AA(N)=£00;AA(N)=AA(N)+£1;GDS.i;?AA(N)=£18
642G.650
645IF ?AA(N)=£18;?AA(N)=£00;AA(N)=AA(N)-£1;GDS.i;?AA(N)=£18
650N.Z
660M=M-1;GDS.p
```

```
670IF M=0;G.2000
999G.300
1000CLEAR0
1010P.£12'
1020P." the hawk"" BY roy pincott""
1100P."C FLY LEFT B FLY RIGHT""
1110P."E CLIMB D DESCEND"" F FIRE""
1120P." LAND TO RELOAD""
1130IF 0>-1;IF 0<610;P."TOP SCORE "0"
1200LINK £FFE3
1999G.15
2000CLEAR0;P.£12'
2020IF M>0;0=M
2030P."TOP SCORE "0"
2050P."SCORE "M""
2199E.
7100bX=A.R.£EFF
7120?A=£00;A=A+£20;?A=X
7130IF A=£97FF;G.2000
7140G.b
7200cIF ?A=£DF;?A=£00;A=A+£20
7205IF ?A=£FB;?A=£00;A=A+£20
7207IF A>£97FF;A=A-£20;L=L+10;GDS.k
7208IF L>600;L=600
7210GDS.8000
7215R.
7300dIF ?A=£DF;?A=£00;A=A-£20
7305IF ?A=£FB;?A=£00;A=A-£20
7307IF A<£B200;A=A+£20;G.b
7310GDS.8000
7315R.
7400eIF E=2;B=A;F.X=1T06;B=B+£1;GDS.f;?B=£FF;N.X
7430IF E=2;B=B-6 ;F.X=1T06 ;B=B+£1;?B=£00;N.X
7450IF E=1;B=A;F.X=1T06;B=B-£1;GDS.f;?B=£FF;N.X
7460IF E=1;B=B+6 ;F.X=1T06 ;B=B-£1;?B=£00;N.X
7499R.
7500fIF ?B=£18;F.W=1T0 90;?£B002=?£B002;4;N.W;M=M+50;GDS.g
7505IF D=10;G.2000
7510R.
7800iIF ?AA(N)=£18;G.7802
7801G.7805
7802IF ?A=£DF;AA(N)=AA(N)-1
7803IF ?A=£FB;AA(N)=AA(N)+1
7805IF ?AA(N)=£DF;G.b
7810IF ?AA(N)=£FB;G.b
7820IF AA(N)<£B200;AA(N)=£97FF
```

(continued on page 103)

CAMBRIDGE LEARNING

SELF-INSTRUCTION COURSES



★ **NEW!** ★

DIGITAL COMPUTER DESIGN £8.50

Our latest, up-to-date course on the design of digital computers, both from their individual logic elements and from integrated circuits.

Digital Computer Design is the best way for you to understand how simple computers are. You are first shown the way in which simple logic circuits operate and then, through a series of exercises, arrive at a design for a working machine.

GSC SUPERKIT £19.90

The original Cambridge Learning Superkit, a practical digital electronics kit for beginners, now re-written for the popular GSC EXP300 breadboard. The kit comes complete with an instruction manual, components, and breadboard to teach you all the basics of digital electronics.

DIGITAL COMPUTER LOGIC & ELECTRONICS £6.00

The theory course to support the practical Superkit, this 4-volume set covers basic computer logic; logical circuit elements; the design of circuits to carry out logical functions: flipflops and registers. No prior mathematical knowledge other than arithmetic is assumed.

GUARANTEE No risk to you. If you are not completely satisfied, your money will be refunded upon return of the item in good condition within 28 days of receipt.

CAMBRIDGE LEARNING LIMITED, UNIT 81 RIVERMILL SITE,
FREEPOST, ST IVES, CAMBS, PE17 4BR, ENGLAND.
TELEPHONE: ST IVES (0480) 67446. VAT No 313026022

All prices include worldwide postage (airmail is extra - please ask for prepayment invoice). Giro A/c No 2789159. Please allow 28 days for delivery in UK.

-SUPERKIT(S) @ £19.90
.....DIGITAL COMPUTER DESIGN(S) @ £8.50
.....DIGITAL COMPUTER LOGIC AND ELECTRONICS @ £6.00

I enclose a *cheque/PO payable to Cambridge Learning Ltd for £..... (*delete where applicable)

Please charge my:

*Access / American Express / Barclaycard / Diners Club
Eurocard / Visa / Mastercharge / Trustcard

Expiry Date..... Credit Card No

Signature.....

Telephone orders from card holders accepted on 0480 67446
Overseas customers (including Eire) should send a bank draft in sterling drawn on a London bank, or quote credit card number.

Name.....

Address.....

Cambridge Learning Limited, Unit 81 Rivermill Site, FREEPOST,
St Ives, Huntingdon, Cambs, PE17 4BR, England. (Registered
in England No 1328762).

DRAGON 32

NEW FROM

TROJAN

"SPACE TREK"

Space Trek is an absorbing space wars game in real time which can be played in any of four levels. Special features include:—

Onboard battle computer.

A galaxy containing 100 quadrants.

Impulse and warp drive speeds.

Long range galaxy scanning.

Shield control and status reports.

THIS GAME IS A MUST FOR DRAGON USERS. APPROVED BY
DRAGON DATA LIMITED.

Send to:

TROJAN PRODUCTS
Dept. YC
166 DERLWYN, DUNVANT,
SWANSEA, WEST GLAM SA2 7PF

Please send me "SPACE TREK" for my DRAGON 32. I enclose cheque/P.O. for £7.50 which includes P&P.

MR/MRS

ADDRESS

Planet Software

ZX81 16K RAMPACK

TWO EXCITING GAMES FOR CHRISTMAS
(As reviewed by *Your Computer Magazine*, November Issue)

THE AMAZING 3-D MAZE GAME. £4.99 inc. p&p.

The year is 2030. The world is over-run by computers. You are held captive at the centre of a computer-generated labyrinth. Your only hope of escape is to find a way through the bewildering complex series of passages... Exciting 3-D full screen display gives the impression of ACTUAL MOVEMENT, only possible due to the extensive use of Z80 MACHINE CODE. We believe this to be the best maze game on the market!

BLASTOUT. £3.99 inc. p&p.

A new version of the classic arcade game. Features:—
● Z80 MACHINE CODE to give fast moving graphics.
● 4 speeds (beginner to world champion).
● Large format continuous score display.
● Moving wall to add on the excitement.
● Hi score displayed on screen.

PLANET SOFTWARE

10 Norton Drive, Eaton, Norwich, NR4 6JD

(continued from page 101)

```
7830IF AA(N)>£97FF;AA(N)=£B200
7890R.
8000IF E=2 G.8050
8005IF ?A=£00;?A=£DF
8010IF ?A=£18;?A=£00;G.b
8040R.
8050IF ?A=£00;?A=£FB
8060IF ?A=£18;?A=£00;G.b
8080R.
8100IF T<-8;G.8150
8120IF ?A=£DF;?A=£00;A=A-1;GOS.s;?A=£DF;T=T-1
8150IF T>8;G.8250
8220IF ?A=£FB;?A=£00;A=A+1;GOS.s;?A=£FB;T=T+1
8250R.
8300IF ?A=£18;G.b
8310R.
9000K=92;K=J
9002IF L<100;J=93;K=J
9005F=L
9020GOS.q
```

```
9070R.
9100QJ=64;K=J;D=D+1
9105F=M
9120GOS.q
9170R.
9400QJ=92;K=J
9405F=L
9410IF F<100;J=92;GOS.CH"0";GOS.1;J=K+1;K=J
9420GOS.q
9470R.
9500QJ=64;K=J
9505F=M
9510IF F<100;J=64;GOS.CH"0";GOS.1;J=K+1;K=J
9520GOS.q
9570R.
9620QSTR F,P
9630IF F<10 GOS.CH"0";GOS.1;J=K+1;K=J
9640GOS.(P?0);GOS.1;J=K+1;K=J
9650IF F>9 GOS.(P?1);GOS.1;J=K+1;K=J
9660IF F>99 GOS.(P?2);GOS.1;J=K+1;K=J
9670R.
9700IF V=0T07;S7=Q?V;J=J+32;N.V;R.
```

Vic synth

Kevin Boyd,
Dreghorn,
Ayrshire.

VIC-20

FOR THE UNEXPANDED Vic-20, this program will convert your keyboard into a synthesiser. When the program is run it asks which voice you require from 1-4.

The first three are the Vic's normal voices, and number 4 is white noise. You are then asked for the duration of the note. This is the number of the step in the loop which makes the sound die away — so if you pick 1, the note will die away very quickly; if you pick 0.001, it will die away slowly.

Now, all you do is play. The voice will change, if you press the button. As you play each note is remembered. Just press fl, and

after being asked to select a voice, you will hear your composition played back with all pauses removed. To insert rests, press the space bar when entering your tune. You can only have a tune of 99 notes, though this can be altered by changing line 1 and 135 to whatever number of notes you require.

If you wish to reset the duration of the note press 0, and the program will erase your tune and ask for voice and duration of note.

```
1 CLR:DIMP(100)
2 POKE36879,A
5 PRINT"J"
6 PRINT"#"
10 PRINT"VIC-20 SYNTHESIZER"
20 INPUT"WHICH VOICE";S
30 IF S(10RS)4 THEN 20
40 S=INT(S)+36873
50 POKE36878,15
51 DIMP(100)
55 PRINT"DURATION OF NOTE"
56 INPUTSP
57 IF SP>10RSP<0.001 THEN 56
60 READN:IF N=0 THEN 80
70 READR(N)
75 GOTO 60
80 GETA$:IF A$="" THEN 80
81 IF A$="0" THEN RUN
85 IF A$="1" THEN 1000
86 IF A$="2" OR A$="3" OR A$="4" THEN GOSUB 180:GOTO 80
90 N=ASC(A$)
95 IF A$="0" THEN N=79
97 IF A$="N" THEN N=78
120 FOR T= T010: NEXT
130 POKES,A(N):PRINT"J":POKE36879,A(N)
131 FOR R=15T00STEP-SP:POKE36878,B:NEXT:POKES,0:POKE36878,15
135 X=X+1:P(X)=A(N):IF X=99 THEN RUN
140 GOTO 80
180 POKES,0:K=VAL(A$):S=K+36873:RETURN
200 DATA 1,135,87,143,69,147,82,151,84,159,1,3,163,85,167,73,175
210 DATA 79, 79,80,183,64,187,42,191,92,195,65,199,83,201,68,203
220 DATA 70,207,71,209,72,212,74,215,75,217,76,219,58,221
230 DATA 59,223,61,225,13,227,90,228,88,229,67,231,86,232,66,233
240 DATA 79,235,77,236,44,237,46,238,47,239,17,240,29,24,0
1000 PRINT"MEMORY REPLAY"
1001 POKE36879,0
101 INPUT"WHICH VOICE ";R
1020 IF R(10RR)4 THEN 1010
1021 POKE36878,15
1030 FOR F=1T0X
1031 FOR R=15T00STEP-SP:POKE36878,B:NEXT:POKE36873+R,0:POKE36878,15
1040 POKE36873+R,P(F):PRINT"J":POKE36879,P(F)
1050 NEXT F
1051 FOR R=15T00STEP-SP:POKE36878,B:NEXT:POKE36873+R,0:POKE36878,15
1060 POKE36879,0
1065 PRINT"WHAT NEXT:"
1070 PRINT"1:PLAY TUNE AGAIN?"
1080 PRINT"2:RETURN TO KEYBOARD?"
1090 GETF$:IF F$="" THEN 1090
1100 IF F$="1" THEN 1000
1110 IF F$="2" THEN 1
1111 GOTO 1090
```

3-D bar chart

J Meech,
Stockport,
Cheshire.

BBC

THIS PROGRAM is for Model B users — for conversion to Model A change lines.

10 MODE 7
115 MODE 5

It is a variation on a bar graph, but each

column is viewed in perspective, giving a three-dimensional appearance.

The user types in data which the program draws as a pie chart, giving the data as fractions of 360. The percentage is also given, along with the corresponding colour.

```
>LIST
10 REM **** J MEECH ****
20 MODE 1
30 PRINT"TAB(10)"3-D BAR CHART""PLEASE TYPE IN THE NUMBER OF""ENTERIES (2-10)"
40 INPUT S:IF S<2 OR S>10 THEN 30
50 DIM A(S)
60 X=100
70 PRINT"PLEASE TYPE ENTRIES FOLLOWED""BY RETURN"
80 FOR I=1 TO S
90 INPUT Y
100 A(I)=Y
110 NEXT I
120 PRINT"THE ENTRIES WILL BE AUTOMATICALLY""SCALED - THE MAXIMUM & AVERAGE D IS PLAYED"
```

(continued on page 105)

ORDER
NOW FOR
CHRISTMAS

**C ★ TECH
SOFTWARE**

present

Is this the end of
SPACE INVADERS
as we know it?



KONG

An Unbelievable
Video Game from
C Tech. If you
want the latest in
Software then this
is for you.

The Program begins
with a full colour
KONG jumping
across the screen
causing the stairway
to tilt out of place,
then your man must
run up the ladders
avoiding KONG'S
barrels to rescue
his girl.

The final scene has
lifts and fireballs all
in full colour, sound
and with M/C subroutines.

PANIC ISLAND

The Standard
Panic Program
has been modified
to produce
Panic Island,
where you must
bury Monsters
and hunt for
buried Treasure...
...before they
hunt you.

plus
Panic Island

K R A Z Y K O N G

CONTROL TECH. SOFTWARE, 184 MARKET ST, HYDE, CHESHIRE.

FOR THE 16K OR 48K

SPECTRUM £5-00

ACCESS & VISA
061-366-8223

SOFTWARE FILE

(continued from page 103)

```
130 PRINT "PRESS RETURN TO START": INPUT Q$:CLS
140 PROCSCALE
150 PRINT "AVERAGE ";J;"MAXIMUM ";R
160 MOVE 100,0: DRAW 100+(S*100),0
170 FOR I=1 TO S
180 Y=A(I)
190 PROCDRAW(Y)
200 NEXT I
210 END
220 DEFPROCdraw(Y)
230 REM **** DRAW TOP ****
240 GCOL 0,1
250 MOVE X,Y: DRAW X+100,Y
260 PLOT85,X+130,Y+100
270 DRAW X+30,Y+100: DRAW X,Y
280 PLOT 85,X+130,Y+100
290 REM ****DRAW LINES TO BASE ****
300 GCOL 0,2
310 MOVE X,Y: DRAW X,0
320 MOVE X+100,Y: DRAW X+100,0
330 MOVE X+130,Y+100: DRAWX+130,0
```

```
340 MOVE X,Y: MOVE X+100,Y: PLOT 85,X,0
350 MOVE X+100,0: PLOT 85,X+100,Y
360 X=X+100
370 ENDPROC
380 DEF PROCSCALE
390 J=0
400 FOR I=1 TO S
410 J=J+A(I)
420 NEXT I
430 J=J/S
440 FOR I=2 TO S
450 IF A(I)>A(I-1) THEN R=A(I)
460 NEXT I
470 K=-1
480 IF R<400 THEN K=2
490 IF R<200 THEN K=4
500 IF R<100 THEN K=9
510 IF R>900 THEN K=.5
520 IF K=-1 THEN ENDPROC
530 FOR I=1 TO S
540 A(I)=A(I)*K: NEXT I
550 ENDPROC
```

Visual recall

A J Hynd,
Hayling Island,
Hampshire.

BBC

THIS PROGRAM allows the contents of memory to be displayed and examined. I have used this on my BBC Model A to recover programs, which have become corrupted when saved or loaded, by examining the line numbers and line lengths in the stored Basic program.

Errors can be calculated and then corrected by Poking new data into the appropriate addresses.

The start addresses can be entered in either decimal or hexadecimal form, but all displayed values are in hex. Lines 20 and 30 set page mode and print format, and line 130 resets these on Escape.

The input procedure first checks to see if the entry is a hex number otherwise it checks for valid decimal inputs.

I found the EVAL function very useful for converting the string input to a hex number.

The Shift key is used to give further pages of display, and the Escape key to exit.

The program has to be entered so as not to overwrite the memory contents you wish to examine. First Load the program to be examined but do not Run, then enter

PAGE = TOP + 8100

Then Load this program which can be Run without affecting your first program; to reset enter

PAGE = 8E00

which is where Basic programs are normally stored for conventional purposes.

```
2 REM MEMORY CONTENT
5 MONITOR
10 ON ERROR GOTO 130
20 MODE 7:VDU14
30 @% = &A04
40 PROCinput
50 REPEAT
60 PRINT~address;
70 FOR J = 1 TO 8
80 PRINT,~?address;
```

```
90 address=address+1
100 NEXT
110 PRINT
120 UNTIL FALSE
130 VDU!%*%=&A0A:END
140 DEFPROCinput
150 *FX15,0
160 CLS: INPUT"START ADDRESS "A$
170 IF LEFT$(A$,1)="#"
```

```
THEN address=EVAL(A$):ENDPROC
180 FOR K=1 TO LEN(A$)
190 IF ASC(MID$(A$,K,1))<48 OR ASC(MID$(A$,K,1))>57 THEN K=LEN(A$):VDU 7:GOTO 160
200 NEXT
210 address=VAL(a$)
220 ENDPROC
```

New quirk

Deryck Brown,
Kilmarnock,
Ayrshire.

ZX-81

I DO NOT mean one of the frequently publicised ZX-81 quirks but a brand new one. Believe it or not the ZX-81 accepts the following commands quite happily:

```
10 LOAD "ANYNAME" (THEN) REM COMMENT
or 10 SAVE "ANYNAME" (THEN) REM COMMENT
```

The Then is in brackets as it can be deleted if wished after typing Rem or left in—it makes no difference. Possibly there are other statements which behave like this but I have not found any.

This additional Rem not only saves bytes but does not, of course, have to refer to the Save or Load instruction. This would be particularly useful in adventure games where the program may be saved from inside so that it restarts automatically or used when chaining programs. String variables can also replace the program name:

10 SAVE A\$ (THEN) REM COMMENT

Bit bandit

S P Elliot,
Middlesbrough,
Cleveland.

ATOM

A SIMPLE "one-armed bandit", this program for the Acorn Atom requires 32K RAM. Floating point is not required. Instructions are included in the program. Note that, in the printout, £ means #.

```
1 REM bandit BY S.P.ELLIOT: 31.1.82
2 GOS.i;CLEAR0;P.$30;@=0;K=0
3 P."$$$ = 1000"'"$- = 100"'"x- = 50"'"&- = 50"'"
4 P."££- = 50"'"$-- = 40"'"x-- = 20"'"&-- = 20"'"
5 P."£-- = 20"'"SCORE"'"
6 GOS.a
7 G.v
10 P.K" "
12 A=£A3;B=£A6;C=£A9
```

(continued on next page)

SOFTWARE FILE

(continued from previous page)

```

15 D=0;E=A.R.X13+15;F=E+A.R.X9+5
16 G=F+A.R.X9+3;H=1;J=E002;O=0
30 IF D<E GOS.b
40 IF D<F GOS.c
50 IF D<G GOS.d
51 ?J=?J:4
52 D=D+1
57 IF D>58 G.e
60 G.30
200=MOVE21,5;DRAW21,32;DRAW36,32;DRAW36,5;MOVE36,20
210 DRAW39,20;DRAW39,30
220 FORI=0TO6;I?E14B=EFF;N.
230 FORI=0TO6;I?E16B=E66;N.
240 FORI=0TO6;I?E18B=ED9;N.
250 FORI=0TO6;I?E1AB=E7F;N.
255 ?E80E=E3E;?E80F1=E3C
260 ?E80CC=E82;?E80CE=E81;?E80D0=E8E;?E80EC=E84;?E80EE=E89
265 ?E80F0=E94;?E810C=E84;?E810E=E84;?E8110=E84;?E811=0
270 R.
300bWAIT;?E80CC=A;GOS.z;WAIT;?E80EC=A;GOS.z;WAIT;?E810C=A
302 A=A-1
305 IF A=E82 A=E8B
306 A=A-1;IF A=E82 A=E8B
307 A=A-1;IF A=E82 A=E8B
310 GOS.w;R.
350c WAIT;?E80CE=B;GOS.y;WAIT;?E80EE=B;GOS.y;WAIT;?E810E=B
351 B=B+1
353 IF B=E8C B=E83
355 B=B+1;IF B=E8C B=E83
357 B=B+1;IF B=E8C B=E83
360 GOS.w;R.
400d WAIT;?E80D0=C;GOS.x;WAIT;?E80F0=C;GOS.x;WAIT;?E8110=C
402 C=C-1
403 IF C=E82 C=E8B
405 C=C-1;IF C=E82 C=E8B
407 C=C-1;IF C=E82 C=E8B

```

```

410 GOS.w;R.
450w IF D>F H=14;G.455
451 IF D>E H=9;G.455
455 F.I=1 TO(D*X);N.;R.
500x C=C+1;IF C=E8C C=E83
505 R.
520y B=B-1;IF B=E82 B=E8B
525 R.
550z A=A+1;IF A=E8C A=E83
555 R.
600e IF?E80EC=E84 AND?E80EE=E84 AND?E80F0=E84 GOS.f;G.v
605 IF?E80EC=E84 AND ?E80EE=E84 GOS.g;G.v
610 IF?E80EC=E8A AND?E80EE=E8A GOS.h;G.v
615 IF?E80EC=E86 AND?E80EE=E86 GOS.h;G.v
620 IF?E80EC=E83 AND?E80EE=E83 GOS.h;G.v
625 IF?E80EC=E84 GOS.j;G.v
630 IF?E80EC=E8A GOS.k;G.v
635 IF?E80EC=E86 GOS.k;G.v
640 IF?E80EC=E83 GOS.k;G.v
645 C.v
750f D=100;GOS.1;K=K+100;R.
800g D=10;GOS.1;K=K+100;R.
820h D=5;GOS.1;K=K+50;R.
840j D=4;GOS.1;K=K+40;R.
850k D=2;GOS.1;K=K+20;R.
900v F.13,K" "LINKEFFE3;K=K-10;P.13;G.10
950l FORI=1TO30;WAIT;N.
955 F.I=1TO 0;WAIT;WAIT;WAIT;F.L=1TO25;?J=?J:4;N.L;N.I;R.
1000i P.12" instructions for bandit""
1005 P."PRESS ANY KEY TO RUN BANDIT,"""
1007 P."SCORE IS REDUCED BY 10"
1010 P." EACH GO.""
1015 P."WINNINGS ARE ADDED TO SCORE.""
1020 P."PRESS ESC.WHEN BANKRUPT!""
1025 P." press any key""
1050 LI,EFEE3;R.

```

Vic stick

Andrew Tuck,
Westcliff on Sea,
Essex.

VIC-20

THIS SHORT PROGRAM allows the user to draw in high resolution using a joystick on the

unexpanded Commodore Vic-20 machine.

The first line sets the screen size to 16 by 10 and changes the Screen and Border combination to black.

Lines 1 to 4 set up the screen and draw a box around it to show the user the limits of the screen.

Line 10, which must be entered using

Shifted keywords, converts the joystick port to X and Y values.

Line 20 allows the point to move and draw by pressing the fire button. Lines 50 and 60 plot and calculate the point.

There are approximately 2,500 points to plot, quite adequate for most drawings although not true high resolution.

```

0 POKE36879,8:POKE36867,21:POKE36864,17:POKE36865,45:POKE36866,144:POKE36869,253
1 PRINT"J":FORA=1TO16:FORN=1TO10:POKE7663+16*N+A,N+10*A-11:NEXTN,A
2 FORA=5120TO7679:POKEA,0:NEXT:POKE37154,127:X=64:Y=80
3 FORA=5120TO7679STEP160:POKEA,255:POKEA+159,255:NEXT
4 FORA=5121TO5278:POKEA,128:POKEA+2400,1:NEXT
10 A=PEEK(37137):X=X+((AAND16)=0):Y=Y+((AAND4)=0):Y=Y-((AAND8)=0):X=X-((PEEK(371
52)AND128)=0)
20 F=-((AAND32)=0):IFF=1THEN60
50 Y1=Y+5120+160*INT(X/8):POKEY1,PEEK(Y1)OR2↑(7-XAND7):GOTO10
60 Y1=Y+5120+160*INT(X/8):POKEY1,PEEK(Y1)ANDNOT2↑(7-XAND7):GOTO10

```

List self-starters

Gino Gracin,
Rijeka,
Yugoslavia.

ZX-81

PROGRAMS THAT start automatically after Loading, and that are fully in machine code, like ZX Chess, can not be easily Listed. Here is a program which enables this.

Before writing in or loading this program POKE 16389,127/NEW must be done. After inputting program name, the ZX-81 starts looking for the program.

When the program is Loaded, C/170 will appear, and the program is ready for further manipulation.

```

1 FAST
10 LET A=32513
20 POKE A,17
30 POKE A+1,8
40 POKE A+2,127
50 POKE A+3,205
60 POKE A+4,67
70 POKE A+5,3
80 POKE A+6,201
100 PRINT "PROGRAM NAME?"
110 INPUT N$
120 IF LEN N$=1 THEN GOTO 160
130 FOR I=1 TO LEN N$-1
140 POKE 32519+I,CODE N$(I)
150 NEXT I
160 POKE 32519+LEN N$,CODE N$(L
EN N$)+128
170 RAND USR A

```

Tape salvage

Paul Mudditt,
Jarrow,
Tyne and Wear.

BBC

IN ANSWER to many a BBC Micro owner's prayers I offer my own version of a tape salvage program. As many BBC owners will know the 0.1 operating system has two bugs in the cassette filing system. This program attempts to salvage a program which has had

Block 0 corrupted due to one of these bugs. According to Acorn this bug would corrupt on average Block 0 of one program in 16.

There is now a well-publicised machine-code fix for both of these bugs, but these have

(continued on page 108)



CABEL ELECTRONICS LTD.,
MOUNT ROAD, BURNWOOD,
WALSALL, STAFFS WS7 0AX
Tel: 021 308 7075 TLX: 339671

MC 370M R.G.B. COLOUR MONITOR

14" Colour Monitor with a full 2 year guarantee, moulded in a stylish cabinet to match your computer.

The Advantages of Pure R.G.B.


- 80 x 25 Character display
- Crisp definition on colour graphics
- Degaussing facilities
- Permanent link to your computer
- 3 x the band width of your normal TV

CABEL ELECTRONICS LTD., are manufacturers of a complete range of colour and monochrome monitors with 10 years of experience within the television industry, our 2 year guarantee proves our faith in our products.

REC. RETAIL PRICE £289.00 inc. VAT & Postage

See us at the Northern Computer Fair
Stand V23

Ring us for immediate delivery, most major credit cards accepted.

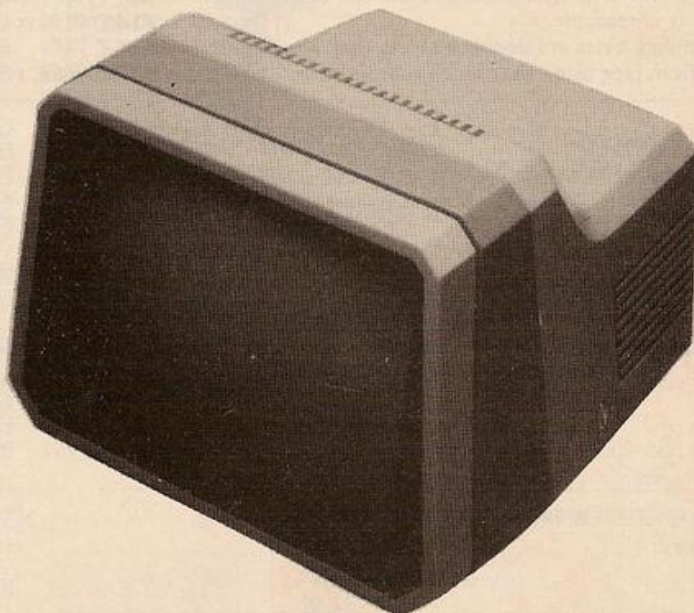

SPECTRUM SOFTWARE

SPECTRUM TEXT MASTER (48K only) . . . £5.95

Turn your Spectrum into a miniature word processor. Enter your text using the keyboard as a typewriter (features moving cursor and on screen editing). Your Spectrum then justifies the text ensuring no split words and inserting new paragraphs where indicated. After justification proof read text and make any final corrections, insertions or deletions, before saving letter on tape for future use. Special feature allows user to specify number of characters per line when sending text to printer.

SPECTRUM MAIL MASTERS (48K only) . . . £5.95

Enter into memory a data bank of names and addresses. When loaded program asks you to load pre-saved letter (ideally written using SPECTRUM TEXT MASTER). Then identify names in data bank letter is to be sent to. Leave the rest to your Spectrum, it will produce for every name specified a professional looking personalised letter. The program even caters for when you upgrade to a full size printer.

TEXT MASTER AND MAIL MASTER

ORDERED TOGETHER . . . £9.95

S & B SOFTWARE
54 Wychwood Road, Wolds View,
Bingham, Notts.

16k ZX SPECTRUM



MAKE MUSIC WITH SPECTSOUND

**A SOFTWARE PACKAGE WHICH CONVERTS
YOUR SPECTRUM INTO A POWERFULL
9 OCTAVE ELECTRONIC ORGAN**

INCLUDES:

- * SOFTWARE ON CASSETTE
- * KEYBOARD OVERLAY SHOWING NEW FUNCTIONS
- * AUTO MEMORY & RECALL OF NOTES PLAYED
- * FULL 9 OCTAVES AVAILABLE FROM KEYBOARD
- * T V DISPLAY OF NOTES PLAYED & BEEP NO
- * RANDOM MUSIC FACILITY
- * FREE BEEP CHART - CONVERTS MUSICAL NOTES TO BEEP NOS & VICE VERSA
- * FULL INSTRUCTIONS

To PDQ SOFTWARE, PARSLEY RYE, HILDERS LANE,
EDENBRIDGE, KENT. TN8 6JU (p&p free)

Please send me the Spectsound package

Name

Address

I enclose cheque/PO for £ (inc p&p)

**ONLY
£5.95**

(continued from page 106)

arrived too late for many users.

My program will attempt to read in as many Basic lines as possible starting from any block number until the end of the program is reached. Errors in the format of the data coming from the tape will simply mean a missing line of Basic which the user will have to re-enter but at least you will not have to retype 10K of program lost because the first block is unreadable.

The data bytes are de-tokenised as they are read from tape using the crunch subroutine in

the Basic ROM converting single bytes to Basic keywords so that a check can be made of the lines coming in. However I am de-tokenising all but the line number and the line length and consequently characters within quotes and Goto/Gosub statements will appear to be incorrect when in fact they are intact.

I suggest that the machine-code fixes are chained in before loading this program to ensure when you resave your salvaged program you do not have to repeat this process unnecessarily.

To use the program, type Run and position

your cassette to just before the program to be salvaged.

Then, the program will list to the screen as it is found on tape and is stored above this program in memory. When the end of the program is reached or Escape is pressed the program will reset page to the start of the salvaged program. Typing List will display the salvaged program which can be saved in the usual way.

If you are not satisfied with the salvaged program, type Break then Old <CR> and repeat the process.

```

10 ON ERROR PRINT "REPORT:PRINT" error at line ";ERL:GOTO 310
20 CRUNCH=1853A:REM THIS SUBROUTINE DETOKENISES BASIC
   OR PRINTS THE ASCII OF A%
30 REM SELECT SHORT MESSAGES
40 *OPT 1,2
50 REM MAKE COMPUTER IGNORE ALL TAPE ERRORS
60 *OPT 2,0
70 page=(TOP DIV 256)*256+256:REM SELECT NEW PAGE VALUE TO LOAD
   PROGRAM INTO.
80 index=0:REM page OFFSET POINTER
90 X=OPENIN(""):REM LOAD ANYTHING ON THE TAPE
100 REM SELECT NO TAPE MESSAGES FROM NOW ON
110 *OPT 1,0
120
130 REPEAT A%=BGET#X:UNTIL A%=800:PRINT:REM WAIT HERE UNTIL WE FIND THE START
   OF A NEWLINE OF BASIC TEXT.
140 PROCPOKE(A%):REM POKE IN 800 'CR' CHARACTER TO START PROGRAM STORAGE
150
160 REPEAT:Lastnewline=index
170 LhZ=BGET#X:PROCPoke(LhZ):REM 1st BYTE IS HIGH PART OF LINE NUMBER
180 LhZ=BGET#X:PROCPoke(LhZ):REM 2nd BYTE IS LOW PART OF LINE NUMBER
190 LZ=BGET#X:PROCPoke(LZ):REM LENGTH OF BASIC LINE
200 PRINT TAB(20);LhZ*256+LhZ:REM DISPLAY LINE NUMBER

210
220 REM THIS PART LISTS BASIC LINE TO SCREEN AND STORES IT IN MEMORY
230
240 REPEAT
250 A%=BGET#X:PROCPoke(A%)
260 IF A%<32 OR A%=127 THEN PRINT " "; ELSE CALL CRUNCH
270 UNTIL A%=800:PRINT
280
290 UNTIL EOF#X
300
310 CLOSE#X
320 PRINT
330 index=Lastnewline:PROCPoke(8FF):REM FINAL BYTE IN ALL BASIC PROGRAMS MUST
   BE 8FF SO INSERT THIS FOLLOWING LAST RECORDED <CR>
340 REM RESET DEFAULT MESSAGES
350 *OPT
360 PAGE=page:REM SET PAGE TO START OF SALVAGED PROGRAM
370 END
380
390 DEF PROCPOKE(B%)
400 page?index=B%
410 index=index+1
420 ENDPROC

```

Error fix

C Cytera,
Mangotsfield,
Avon.

ATOM

HERE IS A way of removing an irritating quirk of the Acorn Atom. I am referring to the error message produced whenever a control code is used. The Escape key can, of course, be pressed after any control code is executed, but this should not be necessary.

The program works by intercepting OSRDCH. Routine LL0 saves the previous address of OSRDCH in location #90 and #91. It then installs the address of routine

LL2 in #20A and #20B. This means that LL2 is called whenever the Atom requires an input from the keyboard. LL2 firstly calls the usual routine to obtain the ASCII code of the key pressed. If this represents a character, or one of the control codes representing Escape, Cancel and Carriage Return, an exit occurs with the code retained in the accumulator.

This is necessary because other sections of the operating system must take action on these codes. If it is any other control code, the program loops back, executes it by calling OSWRCH, and waits for another key to be pressed.

The error remover resides in an otherwise unused area of memory: from #28D1

to #28FF. Once assembled it is executed by LINK #28D

The machine code, which should be *Saved with the mnemonics discarded, can be reloaded and executed with *Run. The Plot commands in graphics mode 0 can be made to operate in grey instead of white simply by filling the screen with character #C0 after a Clear 0 command.

FOR S = #8000 TO #81FF STEP 4:IS = #COCOCOCO:NEXT S

Black-on-grey plotting can be achieved by FOR S = #8000 TO #81FF STEP 4:IS = -1:NEXT S

The usual plot-in-black commands, for example, Plot 15, should be used there.

```

10 DIM LL4
20 FORZ=0T04:LLZ=-1;
NEXT
30 PRINT#21
40 FORN=1 TO 2
50 P=#28D1
60 C
70 :LL0 \ INIT.
80 LDA #20A
90 STA #90
100 LDA #20B
110 STA #91

120 LDA @LL2:&#FF
130 STA #20A
140 LDA @(&LL2/256)&#FF
150 STA #20B
160 RTS
170:LL1 JSR #FFF4 EXEC
UTE IT
180:LL2 JSR LL4 GET KE
Y
190 CMP @#1B ESC
200 BEQ LL3
210 CMP @#18 CAN

220 BEQ LL3
230 CMP @#D
240 BEQ LL3
250 CMP @#20
260 BCC LL1
270:LL3 RTS
280:LL4 JMP (&#90)
290J
300 NEXTN
310 PRINT#6
320 ENDPROC

```


Music notation

Ashley Robinson,
Monks Risborough,
Buckinghamshire.

ZX-81

FOR THOSE who have a limited 1K ZX-81 here is a little program which helps you to learn

notes in music. It does not play the notes, but displays them on a treble stave.

When Run it shows a treble stave with a random blob or note somewhere on it. You have to press the correct note on the keyboard. It will then tell you whether you are right or wrong and if you press another key it will display another note.

It works by taking a random number and Printing At that number on the Y co-ordinate, a graphic square. It finds the answer by taking the code of that number, adding 34, and finding the CHR\$, which should be a letter from A to G.

For those with 16K RAM packs you could make it play the note and display it.

```

1 LET A=7
8 PRINT
9 PRINT
10 FOR B=1 TO 5
20 FOR N=0 TO 10
30 PRINT "-";
40 NEXT N
45 PRINT
46 PRINT
50 NEXT B
60 PRINT AT 0,0; "███"
70 PRINT
80 PRINT "███"
90 PRINT "███"
100 PRINT "███"
110 PRINT "███"
120 PRINT "███"
130 PRINT "███"
140 PRINT "███"

```

```

150 PRINT "███"
160 PRINT "███"
170 PRINT "███"
180 PRINT "███"
190 PRINT "███"
200 LET B=INT (RND*11)+1
210 PRINT AT B,A;"███"
215 IF B>=8 THEN LET B=B-7
220 LET B=(11-B)+34
230 PRINT AT 15,10;"YOUR GUESS?"
240 INPUT A$
250 IF CODE A$<>B THEN PRINT AT
15,10;"WRONG"
260 IF CODE A$=B THEN PRINT AT
15,10;"RIGHT"
270 PAUSE 4E4
275 CLS
280 RUN

```

Long line

Andrew Houston,
Manchester.

ATOM

THIS PROGRAM will allow Acorn Atom users to edit lines up to 160 characters long — five lines on the Atom's screen. Copy, Delete, Repeat can be used as usual.

When the program is Run, or whenever Link Q is entered — for example, after pressing Break — the prompt will look like this:

#>

indicating that all is well.

The machine code can be assembled at any desired address by altering Q in the first line. By forgoing the cancel facility, Control-X, and omitting lines 150 and 160, the code will even fit into the free space at #21C.

The program works by tricking the Atom's input routine, located at #CD0F, into believing that there is always just one more space available in the input buffer. If anyone should want to experiment with even longer lines, try changing line 130.

```

10 Q=#2800
20 DIM EE(3)
30 FOR J=0 TO 3: EE(J)=Q: NEXT J
40 FOR K=1 TO 2
50 P=Q
60 [
70 :EEO LDA @EE1&#FF; STA #20A
80 LDA @EE1/256; STA #20B
90 LDA @CH"#"
100 JMP (#208)
110 :EE1 JSR #FE94
120 CPY @63; BCC EE3
130 CPY @161; BCS EE3
140 CMP @127; BEQ EE3
150 CMP @24; BNE EE2
160 LDY @#FF; STY #52
170 :EE2 INC #52
180 :EE3 RTS
190 ]
200 NEXT K
210 LINK Q
220 END

```

Quick Peek

Alan Potter,
Glasgow.

ZX-81

IN MANY BASIC 1K games there is a line similar to:

```
LET A=PEEK(PEEK 6398+256*PEEK 16399)
```

This line tests to see if the next position in the display file to be Printed has anything in it, and, if so, what it is.

(PEEK 16398+256*PEEK 16399) gives the address of the next position to be Printed, and this line Peeks into that address to see what is there.

This is a useful line, but time-consuming and heavy on memory. I have written a machine-code routine which duplicates this function, and is faster while using less memory, which, as any 1K user knows is a great help. This routine is:

Decimal	Hex	Mnemonic
42	2A	ld hl, (NN)
14,64	0E,40	16398
78	4E	ld c,(hl)
6,0	06,00	ld b,0
201	C9	ret

When this routine is called by a USR function, on return it will give the equivalent of the earlier Peek. To enter the routine, first of all write a Rem statement with seven characters. Then enter, as direct commands:

```

POKE 16514,42
POKE 16515,14
POKE 16516,64
POKE 16517,78
POKE 16518,6
POKE 16518,6
POKE 16519,0
POKE 16520,201

```

This will cause the Rem line to change, and the routine will be directly addressable using USR 16514. For those experienced in machine code, the routine may be stored anywhere since it contains no jumps.

I have written a short program to demonstrate this routine:

```

1 REM (machinecode)
10 LET P=9
20 LET S=PI-PI
30 SCROLL
40 PRINT AT 12,P;
50 LET U=USR 16514
60 IF U<0 AND U<118 THEN GOTO
VAL "200"
70 PRINT AT 12,P;"V"
80 LET P=P+(INKEY$="P" AND
P<25)-(INKEY$="Q" AND P>0)
90 PRINT AT 21,(RND*25)+1;" "
100 LET S=S+1
110 GOTO 30
200 PRINT "SCORE:";S


```

Strange patterns

James Southgate,
Colchester,
Essex.

SPECTRUM

THIS SHORT program makes good use of colour high-resolution graphics on the Spectrum. When the program is run a pattern is drawn on the screen. This pattern continuously changes in shape and colour.

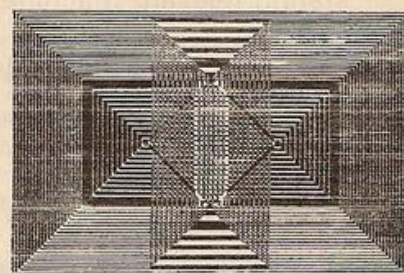

```

10 LET V=INT (RND*70)+100: LET
X=INT (RND*80): LET Z=INT (RND*
3)+4
20 FOR F=Y TO X STEP Z
30 PLOT F,F: DRAW 0,175-2*F
40 DRAW 255-2*F,0
50 DRAW 0,-175+2*F
60 DRAW -255+2*F,0
70 INK RND*5
80 OVER 1
90 NEXT F
100 GO TO 10

```


ZX81/ ZX SPECTRUM HARDWARE



TV stand removable for access to add-ons, wiring, etc. Can be used separately from the base.

Desktop console for the ZX81. It raises and tilts the TV to minimise eyestrain, holds in place the ZX81 printer, RAM packs (and other add-ons), power supply, tape recorder and hides most of the wiring. Provides storage space for cassettes.

Optional: Two built-in illuminated power switches. Similar unit for the ZX Spectrum also available which holds ZX Microdrive in place.

Qty	Description	Item Price	Total
	Console for ZX81	£29.95	
	Console for ZX Spectrum	£30.95	
	Power Switch for Tape Recorder	£3.00	
	Power Switch for ZX81/ZX Spectrum	£3.00	
	Sub Total		
	Carriage	£3.00	
	Total Due		

Date

YOUR NAME AND ADDRESS (In Capital Letters Please)

Cheques/ P.O. Made payable to:

COMPUTERLOCK

2 Wychperry Road, Haywards Heath,
West Sussex RH16 1HJ
Telephone: (0444) 451986

All Prices inclusive of VAT. Allow 28 days for delivery.



MICROTANIC COMPUTER SYSTEMS LTD.



BOOKS SOFTWARE COMPUTERS ZX81 BBC ATARI 400/ 800

Interfaces available for the following computers which will enable you to use the Sinclair Printer with your computer. VIC ACORN ATOM BBC MICROTAN Price £29.95 inc. VAT

We stock a large selection of software and books. Please write or call for catalogue stating relevant machine.

DRAGON 32 GOES FORTH

The FORTH language is NOW AVAILABLE on the DRAGON 32 — Create and run your programs up to 10-12 times faster than BASIC. AVAILABLE ON TAPE £24.95 inc. VAT.

MICROTAN 65

VIC

ACORN ATOM



SHOWROOM:
16 Upland Road,
Dulwich, London SE22

MAIL ORDER:
235 Friern Road,
Dulwich, London SE22



TELEPHONE: 01-693 1137

COMPETITION CORNER

A £15 book token will be awarded to the first correct solution drawn from the competition bag. All entries must be at the *Your Computer* offices by the last working day in December. The name of the winner, the solution, and a competition report will be published in the February, 1983 issue of *Your Computer*.


If you want to set a competition for Competition Corner, remember that the simplest solution should be calculable by a short program rather than by any other form of reckoning.

XMAS BOX

BY ANTHONY ROBERTS

HERE'S A seasonal box for you from *Your Computer*. If you cut it out and paste it together, it will present you with an appropriate message.

You just have to find it! Each letter is diagonally adjacent to the previous one, ignoring edges of the cube, but never going over its corners, and never re-using letters.

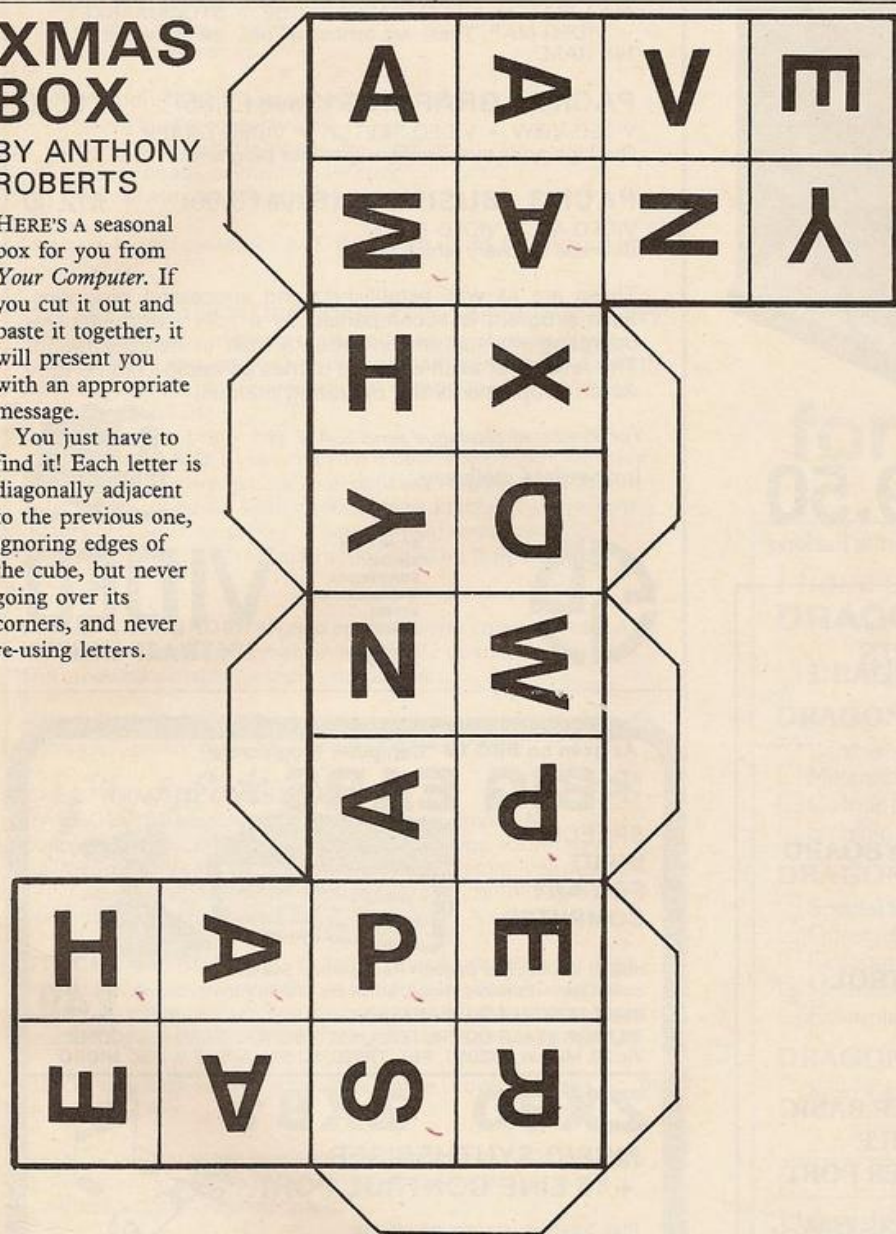

Competition results

OUR PRIZE for the October competition, a Sanyo PHC-25, attracted a disappointing bunch of entries. The imminent Japanese invasion of the home-computer market was clearly not enough to release people's creative juices. Perhaps there was some confusion about the product. P McKenna said that he would use a Sanyo PHC-25 "to shave with".

With due apologies for picking yet another punster, we have awarded the prize to D Blakemore, 141 Bottleacre Lane, Loughborough, Leicestershire, who sounded a sceptical note with "take a Peek to see if it was a flash in Japan".

R Craig hoped to "get a PHD in hi-fi nance" and J Douglas wanted to "fulfil my yen for colour and sound".

We thought it was the Chinese, and not the Japanese, who are supposed to be unable to pronounce the letter "r"; but a number of people like C Hewitt thought otherwise. He



Solution to the October crossword.

suggested using a Sanyo to "refresh the ports that no other micro can leach".

Finally, Elizabeth Wright took a more personal line than most with her "bring a little colour into J Conway's life".

Many people found it easy to crack the Enigma Code for our October puzzle. The deciphered message read: "Beware gunpowder treason plot fifth November Parliament cellars". Only a few programs were submitted so we gave the £15 book token to the first entry picked from the bag, from C Davis, 31 Avondale Road, Palmers Green, London N13 4DX.

Here is Anthony Roberts' own explanation of the puzzle: "Each character is represented by three symbols, each of which may be in three states — missing, outline or black — so there are 3^3 possible codes — one for the letters A-Z and one for space. The instructions say that the codes and letters are in strict sequence, so all that remains is to see in which order to take the symbols and the three states. A simple group of nested For statements tried out in turn against the code would soon reveal the message: there are $3! \times 3!$ that is, 36 possibilities, only one of which gives the message".

No-one supplied a program to print all 36 possibilities but the program on the left from previous winner A Smith, could easily be adapted to do so.

A B Smith's program to solve the Enigma Code problem.

```
10 REM CODEBREAKER BY A.B.SMITH 10/10/82
20 DIMA$(64),B$(64),C(26),D(26)
30 FORI=1TO64:A$(I)="-":READB$(I):IFB$(I)=""000" THENA$(I)=""
40 NEXT
50 DATA100,102,112,200,010,102,000,201,012,122,221,021,112,202,102,010
60 DATA000,110,010,102,200,210,021,122,000,221,022,021,110,000,001,020
70 DATA001,110,101,000,122,021,212,102,222,100,102,010,000,221,200,010
80 DATA022,020,200,222,102,122,110,000,002,102,022,022,200,010,210,000
100 I=0:FORX=0TO2:FORY=0TO2:FORZ=0TO2:C(I)=X*100+Y*10+Z:I=I+1:NEXT:NEXT:NEXT
110 FORI=1TO64:FORJ=1TO26
120 IFVAL(B$(I))=C(J) THEND(J)=D(J)+1
130 NEXT:NEXT
140 FORI=1TO26:IFI=20 THENSTOP
150 PRINTC(I),D(I):NEXT:STOP:GOTO500
200 PRINT"Q":FORI=1TO64:PRINTRIGHT$(STR$(I),1):NEXT:PRINT
210 FORI=1TO64:PRINTA$(I):NEXT:PRINT:RETURN
500 GOSUB200:PRINT:INPUT"ENTER LOCATION":X:PRINT:INPUT"DESIRED LETTER":D$
510 A$(X)=D$:FORI=1TO64:IFB$(I)=B$(X) THENA$(I)=D$
520 NEXT:GOTO500
READY.
```


let the
DRAGON 32
fire your
imagination . . .



for only £199.50

Plus £5 Post & Packing

*No other computer offers
you all these features
at any price . . .*

- 32K RAM MEMORY
- PROFESSIONAL STANDARD KEYBOARD
- 1 YEAR WARRANTY
- 9 DISPLAY COLOURS
- 5 DISPLAY RESOLUTIONS
- EXCEPTIONAL GRAPHICS CONTROL
- 5 OCTAVE SOUND GENERATOR
- DIRECT MUSIC COMMANDS
- REAL-TIME CLOCK/TIMER
- MICROSOFT EXTENDED COLOUR BASIC
- PLUG-IN CARTRIDGES AVAILABLE
- CENTRONICS PARALLEL PRINTER PORT
- SOCKETS FOR JOYSTICKS
- SOCKETS FOR FULL CASSETTE CONTROL
- EXCELLENT CASSETTE FILE HANDLING
- COMBINED AUDIO/DATA INPUT FACILITY
- AUDIO OUTPUT VIA T.V.
- EXPANDABLE TO 64K RAM
- POWERFUL 6809E MICROPROCESSOR
- FREE 160 PAGE TRAINING MANUAL
- BRITISH MADE

Available now from:

ComServe

98 TAVISTOCK STREET, BEDFORD MK40 2RX.
TELEPHONE: BEDFORD (0234) 216749

ZX81 SOFTWARE ZX81 SPECIAL OFFERS

PACK 1 GAMES (Save £5.60) **£12.00**

TEST-MATCH + FOOTBALL-LEAGUE + STOCKMARKET
+ VIDEO-MAP. These are serious games, using the full
16K RAM.

PACK 2 GRAPHICS (Save £7.85) **£12.00**

VIDEO-VIEW + VIDEO-SKETCH + VIDEO-GRAPH
Our high acclaimed series of graphics programs.

PACK 3 BUSINESS (Save £3.90) **£12.00**

VIDEO-AD + VIDEO-PLAN.
Business software which works.

These are all well established and successful programs.
Each program is accompanied by a fully comprehensive
operating manual and includes a built in demonstration.
The reverse of each cassette carries an audio-commentary
which supplements the operating manual.

For illustrated catalogue send S.A.E. (9" x 6")

Immediate delivery.



STONE LANE
KINVER
STOURBRIDGE
WEST MIDLANDS
DY7 6EQ
ENGLAND
TEL: KINVER 2462
STD 043 3462

VIDEO
SOFTWARE LIMITED

As seen on BBC TV "Computer Programme"

*** BIG EARS ***

SPEECH
INPUT
FOR ANY
COMPUTER



Hugely successful Speech Recognition System,
complete with microphone, software and full instructions.

BUILT TESTED & GUARANTEED

ONLY £49

PLEASE STATE COMPUTER: UK101, SUPERBOARD, NASCOM2,
Vic 20, Micron, ZX80/81, PET, TRS80, MZ80K, APPLE II, BBC MICRO

ZX80 ZX81

**MUSIC SYNTHESISER
+ 16 LINE CONTROL PORT**



Play 3-part music, sound effects,
drums etc. Full control of attack, decay
and frequency. Input/Output lines provide
control and monitor facility for Home Security, Robot Control,
Model Railway, etc. etc. Works with or without 16K RAM.

Add keyboard to make a live performance polyphonic synthesiser!
Full instructions/software included.

AMAZING VALUE AT ONLY £19.50 (KIT)
Extra 23 way connectors at £2.60
The "Composer" Music Program (16K) £7.40 £25.50 (BUILT)

COLOUR MODULATOR KIT £12
RGB in, PAL/UHF out (not for ZX) BUILT £18

UK101/NASCOM COLOUR GRAPHICS KIT £45
Inc. Modulator. Still the best selling system! BUILT £60

Please add VAT at 15% to all prices.
Barclay/Access orders accepted by telephone All enquiries S.A.E. please

**WILLIAM
STUART
SYSTEMS Ltd**

Dower House, Billericay Road,
Herongate, Brentwood,
Essex CM13 3SD
Telephone: Brentwood (0277) 810244



The SHIVA Christmas Hamper

For the SPECTRUM

Normal
Published
Price

By Ian Stewart & Robin Jones

Easy Programming for the ZX Spectrum £5.95

Computer Puzzles: For Spectrum & ZX81 £2.50

Machine Code and Better Basic £7.50

Cassette: Spectrum Special 1 £4.95

By Martin Wren-Hilton

Games to Play on your ZX Spectrum £1.95

~~£22.85~~

£15.75
incl. p. & p.

For the ZX 81

By Ian Stewart & Robin Jones

PEEK, POKE, BYTE & RAM:

Basic Programming for the ZX81 £4.95

Computer Puzzles: For Spectrum & ZX81 £2.50

Machine Code and Better Basic £7.50

By Martin Wren-Hilton

The ZX81 Add-on Book £5.50

~~£20.45~~

£14.75
incl. p. & p.

Order the complete hamper and
save yourself a packet!

Or make up your own with any 3 items
for £10.50 (incl. p. & p.)

Offer open until 31st January 1983

Hampers will be dispatched from
1st December onwards.

All books and cassettes are also available individually
at the normal published prices.

ORDER FORM

Please send me a SPECTRUM hamper, at £15.75

Tick here

☐

Please send me a ZX81 hamper, at £14.75

☐

I wish to make up my own hamper with the
following, at £10.50

☐

I wish to order 1 or 2 items only, at the normal
published price:

☐

£ _____

£ _____

NAME

ADDRESS

I enclose a cheque for £.....

Please debit my Access/Barclaycard/American Express

Account number

Signature

Shiva Publishing Limited

4 Church Lane, Nantwich, Cheshire CW5 5RQ

Telephone: (0270) 628272



ZX99

AUTOMATIC TAPE CONTROLLER FOR THE SINCLAIR ZX81

● DATA PROCESSING

The ZX99 gives you software control of up to four tape drives (two for reading, two for writing) allowing merging of data files. This is achieved by using the remote sockets of the tape drives, controlled by USR statements or commands.

● RS232C INTERFACE

The ZX99 has an RS232C output allowing connection with any such printer using the full ASCII character code (you can now print on plain paper in upper or lower case, and up to 132 characters per line) at a variable baud rate up to 9,600

● SPECIAL FEATURES

There are so many special features it is difficult to list them all, for example:

AUTOMATIC TAPE COPY: You can copy a data file regardless of your memory capacity as it is processed through the Sinclair block by block.

TAPE BLOCK SKIP: Without destroying the contents of RAM

DIAGNOSTIC INFORMATION: To assist in achieving the best recording settings.

The ZX99 contains a 2K ROM which acts as an extension to the firmware in the Sinclair ROM. The ZX99's ROM contains the tape drive operating system and the conversion to ASCII for the RS232C output.

There is an extension board on the rear to plug in your RAM pack (larger than 16K if required). The unit is supplied with one special tape drive lead, more are available at £1 each.

Now only
£49.95

plus
£2.95p+p



● ZX99 SOFTWARE

We now have available "Editor 99", a quality word processing program including mail-merge, supplied on cassette for £9.95. Also following soon:

- * Stock Control (October)
- * Sales Ledger (November)
- * Business Accounts
- * Debtors Ledger
- * Tax Accounting

Dept. YC5 Data - Assette, 44 Shroton Street, London NW1 6UG. 01-258 0409

data-assette®

44, Shroton Street
London NW1
Tel 01-258 0409




● FERGUSON CASSETTE RECORDER £28 inc. p&p.

Tested with ZX81, Acorn, BBC, Dragon etc. etc.
Features: Din, Ear, Mic. and Remote sockets,
Tape Counter, Tone Control, Built-in Mic.,
Autostop. Battery/mains. Recommended by
Acorn for use with BBC computer.

● STAR DP8480 RS232C (SERIAL) £285 plus £6 Securicor delivery CENTRONICS (PARALLEL) £265 plus £6 Securicor delivery

This professional printer works with almost any computer with very good upper and lower case typeface.

- Bi-directional
- 80 column width (10" paper)
- Switchable - Tractor or Friction Feed
- 80 chrs. per second

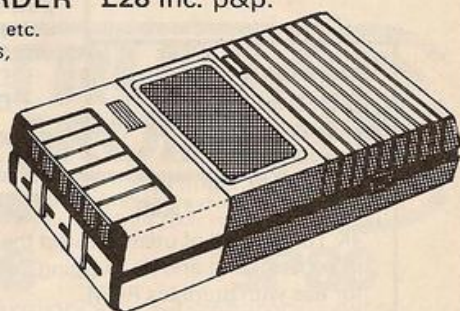

● 2,000 SHEETS OF PRINTER PAPER £19.50 plus £3.50 p&p.

● E690 REVOLVING CASSETTE RACK

- Single - £2.99 (holds 32 tapes or 20 in cases)
- Double - £5.99 (holds 64 tapes or 40 in cases)
- Treble - £8.99 (holds 96 tapes or 60 in cases)
- Quad - £11.99 (holds 128 tapes or 80 in cases)

All plus £1 p&p.



● BBC CASSETTE LEAD

7 pin plug to two 3.5mm plugs and one 2.5mm plug.
Only £2 inc. P & P.

Other leads available - please telephone.

COMPUTER CASSETTES

High quality, screw assembled cassettes supplied with library boxes. Any lengths available.

- C5 - 35p
- C10 - 37p
- C12 - 38p
- C15 - 39p
- C20 - 41p
- C25 - 43p
- C30 - 44p

P&P 10% (min. charge £1.50)

ORDER FORM

Dept YC12 Data - Assette, 44 Shroton Street, London NW1 6UG. 01-258 0409

Code	Item	No.	Price	P & P	Total

Cheques/PO made payable to Storkrose Ltd.
Charge my Access/Visa No.

Signed _____ Name _____
Address _____

ZX81 & SPECTRUM KEYBOARDS COMPLETE WITH LUXURY CASE FOR ONLY £37.95 INC. V.A.T.

These highly professional keyboards incorporate executive buttons similar to those used on top-quality computers. A repeat key facilitates entering of characters much faster than is possible with a conventional keyboard, thus making it particularly ideal for cursor control and erasing. Attractive black plastic moulded case. Supplied with 12" flexible ribbon cable for connection into your computer. **Not to be confused with toy keyboards currently on the market. Other attributes as reviewed by Tim Hartnell, ZX Computing/Interface.**



OTHER KAYDE HARDWARE/SOFTWARE

ZX81 4K GRAPHICS BOARD

The KAYDE Graphics Board is probably our best accessory yet. It fits neatly inside your ZX81. It comes complete with a pre-programmed 4K Graphics ROM. This will give nearly 450 extra graphics and with the inverse makes a total of nearly nine hundred.

The KAYDE Graphics Board has facilities for either 2K of RAM (for user definable graphics) 4K of ROM or our 4K Tool Kit Chips that will be available shortly. All the graphics are completely software controlled therefore they can be written into your programmes. Here are a few examples:

A full set of space Invaders —
Puckman — Bullets, Bombs —
Tanks — Laser Bases and
Alien Ships

NO EXTRA POWER NEEDED

£29.95

16K GRAPHICS SOFTWARE

PECKMAN — The only true ZX version of the popular arcade game.

SPACE INVADERS — The best version available anywhere.

CENTIPEDE — "In all I think this is the best presented moving graphic programme I've yet seen" —

**Phil Garratt,
INTERFACE**

£5.95 each

Graphic Software can only be used with a Graphics board

RAMPACKS ... With a difference

Kayde Rampacks are exceptionally stable. They don't over-heat, lose memory, wobble or cause you to lose your program. They are fully compatible with all accessories and need no extra power, and therefore will run efficiently on existing Sinclair power supply. Simply plug them straight into the user port at the rear of your computer. Top quality massive add-on memory only:

**£29.95 for 16K ZX81 Rampack and
£48.95 for 32K Spectrum Rampack**

**FLEXIBLE RAMPACK RIBBON CONNECTOR
only £12.95**

16K 81 SOFTWARE

3D/3D LABYRINTH

— A cubit maze that has corridors which may go left, right, up and down. **£5.95**

4K Tool Kit full of utilities to aid the programmer in constructing and de-bugging E. PROM version for use with graphics ROM. **£9.95**

VIC 20 SOFTWARE

THE KAYDE VALLEY
OTHELLO
TWINKLE TWINKLE
KAYDE PECKMAN
APPOLO 8
SPACE ATTACK
PLUS MANY MORE
All £7.95 EACH

Vic 20 dealer

Overseas please add £2.50 p & p for all hardware and 75p for all software. All hardware comes fully built and tested and complete with a 14 day money back option. PRICES INCLUDE V.A.T.

SEND FOR A FREE CATALOGUE STATING TYPE OF COMPUTER.

KAYDE ELECTRONIC SYSTEMS LTD.

THE CONGE, GREAT YARMOUTH, NORFOLK NR30 1PJ

TEL: 0493 57867 TELEX: 975 247 CHATCOM G



**TO: KAYDE ELECTRONIC SYSTEMS LTD,
DEPT.YC12 THE CONGE, GREAT YARMOUTH,
NORFOLK NR30 1PJ**

PLEASE PRINT

Qty.	Item	Item Price £	Total £

Please allow £1.50 P&P for all Hardware 50p for all software



**DON'T FORGET YOUR CAN ALWAYS ORDER ON
THE TELEPHONE WITH YOUR CREDIT CARD.
DEALERS WELCOME.**

*I enclose a cheque/postal order payable to KAYDE Electronic Systems Ltd., for
£..... *Please charge to my Access/Barclaycard/Trustcard account no.
* Please delete/complete as applicable.

Signature _____
Name: Mr/Mrs/Miss _____
Address _____

The new Dragon 32. So well designed, you'll even understand this ad.

If you're already a computer expert, may we refer you to the box of technical specifications displayed opposite.

If you're not, may we refer you to the new Dragon 32 Family Computer. A computer so easy to understand, you won't understand why all the others seem so difficult.

And the new Dragon 32 costs under £200.

32K RAM FOR UNDER £200?*

When you're comparing computers, the first thing you need to know is the size of the memory. In plain English, the Dragon has approximately 32 thousand units of Random Access Memory. (32K RAM for those who prefer to be blinded by science.) This means that the Dragon's memory is at least twice as powerful as its competitors.

With a memory this powerful, the amount of information the Dragon can store is literally vast. But the Dragon doesn't just make it easy to store information. It makes it easy to use, too.

USER-FRIENDLY?

You may have heard of the term 'user-friendly.' Reverting to plain English once more, this means simply that the computer will go out of its way to understand you, rather than vice-versa.

The Dragon 32 is so user-friendly, it practically licks your hand.

You tap (literally) its vast resources through a beautifully-designed keyboard that's as easy to use as a typewriter.

On this keyboard, you type in a language which is surprisingly close to the English you talk every day. The Dragon 32 will receive your order. Understand it. Send it to the appropriate section of its massive brain. And then display the appropriate information on your screen. All before you can say 'gobbledygook.'



*TV not included in price.

SPECIFICATIONS

6809E MICROPROCESSOR. Pet, Apple, Atari 400, BBC Micro, and VIC 20 still have the less powerful 6502.
32K RAM (as standard). At least twice the power of similarly priced machines. Expandable to 64K RAM.
EXTENDED MICROSOFT COLOUR BASIC (as standard). Featuring: ADVANCED GRAPHICS (set, line, circle, paint, print, draw, rotate and print using). ADVANCED SOUND 5 octaves, 255 tones. AUTOMATIC CASSETTE RECORDER CONTROL. FULL EDITING with INSERT and DELETE.
9 COLOUR, 5 RESOLUTION DISPLAY.
USE WITH ANY U.H.F. TV and/or separate P.A.L. monitor.
PROFESSIONAL QUALITY KEYBOARD. Typewriter feel. Guaranteed for 20 million depressions.
PRINTER (Centronics parallel).
JOYSTICK CONTROL PORTS.

FIRE YOUR IMAGINATION.

Learning how to use the Dragon 32 won't cause you to experience any problems. Learning what you can use it for will cause you to experience something entirely different.

Delight. Surprise. Fascination. And challenge.

The Dragon offers a range of some of the most popular computer games in the world. From those celebrated space battles to mind-boggling adventures in seemingly unfathomable dungeons and caves.

As if by magic, a simple typed message will command the Dragon to create your own drawings. Then it will colour and paint them in 9 colours.

And it's clever enough to create virtually any image you want - circles and arcs as well as straight lines.

The Dragon will also play and compose music with you, with a range of 5 octaves. And it works with any UHF TV or PAL monitor.

LEARNING THROUGH PLAYING.

All of this makes the Dragon the ideal machine to build your children's interest in the world of computers as they become increasingly more vital. School-children already enjoy using computers.

The Dragon is the first computer specifically for the family - so by enjoying yourselves at home, you and your children can soon become expert enough to create your own programs.

PRODUCT FEATURE	DRAGON 32	SINCLAIR SPECTRUM	ACORN ATOM	VIC 20	TI 99/4A	BBC MICRO V.
PRICE	£199	£125	£175	£190	£199	£300
STANDARD RAM SIZE	32K	16K	8K	5K	16K	16K
STANDARD AVAILABLE RAM FOR HIGH RESOLUTION GRAPHICS	26K	9K	N/A	N/A	14K	3K
EXTENDED MICROSOFT BASIC AS STANDARD	YES	NO	NO	NO	NO	NO
PROFESSIONAL-TYPE KEYBOARD	YES	NO	YES	YES	YES	YES

BRILLIANTLY SIMPLE GUIDE.

The Dragon is living proof that you don't have to be an expert in computerspeak to be an expert in computers. It comes with the easiest-to-understand instruction manual ever written for a home computer.

Every step, every explanation, is made clear - even if you're a beginner. In minutes, it will show you how to write a simple program. Within hours, you'll be fascinated. And from then on, you'll continue to be astounded by the new world which the Dragon's power and versatility will open up to you.

See the new Dragon 32 in your High Street. At under £200, it's not just the first family computer. It also has all the features an expert could wish for.

Except perhaps the jargon.

DRAGON 32

The first family computer.

To: Jean Webster, Dragon Data Ltd, Queensway, Swansea Industrial Estate, Swansea, Glamorgan SA5 4EH.
Tel: 0792 580651.

Please send me further information about the Dragon 32.

Name _____

Address _____

YC

A member of the Mettoy Group of Companies.

Now available from J.P. GIBBONS A.I.B.

(Author of The Best Banking Programs In The World!)

The PBS Bank reconciliation is believed to be the first such program to be available for the Sinclair ZX81 and ZX Spectrum

- AUTOMATICALLY MATCHES BANK STATEMENT ITEMS WITH TRANSACTIONS RECORDED IN YOUR 'PERSONAL BANKING SYSTEM'.
- LISTS ALL OUTSTANDING ITEMS SUCH AS UNCLEARED CHEQUES, FUNDS RECEIVED BUT NOT ADVISED TO YOU, BANK CHARGES — HIGHLIGHTS ALL DISCREPANCIES. NO MORE 'SCRATCHING AROUND' TO TRY AND FIND OUT WHY YOUR STATEMENT BALANCE IS DIFFERENT TO WHAT YOU EXPECTED.
- FULL SEARCH FACILITY, ALLOWING ON-SCREEN CORRECTION OF ANY ITEM.
- SAVES AND LOADS DATA TO AND FROM TAPE (ZX81 VERSION, AT DOUBLE SPEED). EXCHANGES DATA WITH THE MAIN PBS PROGRAM. NO NEED TO SAVE PROGRAMS.
- SINGLE KEY OPERATION — USES MACHINE CODE KEYBOARD SCAN FOR SINGLE LETTER COMMANDS (ZX81 VERSION).
- EXTREMELY EASY TO USE. NO JARGON TO WADE THROUGH BEFORE YOU GET STARTED. DEMONSTRATION PROGRAM INCLUDED.
- ALL ITEM LISTS, SEARCHES (WITH TOTALS), CAN BE OUTPUT TO YOUR ZX PRINTER.
- FULL INSTRUCTIONS INCLUDED.
- UNIQUE AFTER SALE MAINTENANCE PROVIDED.

OPERATES IN CONJUNCTION WITH THE 'PERSONAL BANKING SYSTEM' (FULL INPUT & CORRECTION FACILITIES PLUS AUTOMATIC POSTING OF STANDING ORDERS ON DUE DATES AND FULLY DETAILED STATEMENTS).

SO BANISH THE HEADACHES, MAKE LIFE EASIER FOR YOURSELF, SEND £15 FOR THE PERSONAL BANKING SYSTEM + PBS BANK RECONCILIATION AND USERS MANUAL.

EXISTING CLIENTS NEED ONLY SEND £5 FOR THE PBS BANK RECONCILIATION WHICH WILL OPERATE WITH THEIR PRESENT PBS.

THE PERSONAL BANKING SYSTEM (AS REVIEWED IN POPULAR COMPUTING WEEKLY — 1ST JULY) IS AVAILABLE SEPARATELY FOR £9.95 FOR CASSETTE & USER MANUAL. ZX81 PBS OWNERS CAN ORDER THE SPECTRUM VERSION FOR JUST £5.


PLEASE SPECIFY WHETHER ZX81 (16K) OR ZX SPECTRUM (48K).

Guaranteed Software available from:

J.P. GIBBONS A.I.B.

14 Avalon Road, Orpington, Kent,
BR6 9AX

Your PBS is never out of date!



ZX Spectrum — ZX81

In 1981, ACS Software published ACSEMBLER and DIS-ACSEM. These are now generally regarded as quite simply the best assembler and disassembler programs available for the ZX81.

"The disassembler... is really fantastic." A.M., London
"I am very pleased with the assembler and I feel that you have a real winner in this program." R.B., Gloucester
Your programs are first class. Looking forward to more." A.J., Norway.

"... the single biggest step to proficiency in machine code programming." SINCLAIR USER

Now, with the superior facilities of the ZX Spectrum, ACS Software have done it again. **Ultraviolet** and **Infrared** are assembler and disassembler programs that will extend your Spectrum. Look at the facilities that Ultraviolet offers:

Works entirely in decimal (no hex problems); all Z80 instructions correctly assembled; supports the pseudo-instructions EQU, ORG (multiple ORGs allowed), DEFB, DEFW and DEFS; code can be assembled at one location and then re-located; allows alphanumeric labels of any length; full listings of assembled code and mnemonics can be output to the printer; full error trapping with faulty instruction clearly indicated; comments can be included in the source file.

So now there is no need to be intimidated by machine code — with Ultraviolet and Infrared it's child's play! Buy them from the machine code specialists — ACS Software.

ULTRAVIOLET - £7.50

INFRARED - £6.75

The following programming aids are available for the 16K ZX81 at £5.50 each. SAE for details. Prices include postage and packing for UK orders, overseas clients please add appropriate postage.

ACSEMBLER: DIS-ACSEM: ACS DEBUG: PROGSTORE: TOOLKIT:
PROGMERGE (version 2): TAPEKIT
PROGMERGE and TAPEKIT won't make a Spectrum out of your ZX81 but they will give it some interesting new facilities!



ACS SOFTWARE 7, Lidgett Crescent,
Roundhay,
Leeds LS8 1HN

SOUND with ZX-81!

MAKE AMAZING SOUND EFFECTS WITH YOUR ZX-81



£25.95 THE ZON X-81

incl p&p & V.A.T.

- * The ZON X-81 SOUND UNIT is completely self-contained and especially designed for use with the ZX-81. It just plugs in — no dismantling or soldering.
- * No power pack, batteries, leads or other extras.
- * Manual Volume Control on panel — ample volume from built-in loudspeaker.
- * Standard ZX-81 — 16K Rampack or printer can be plugged into ZON X-81 Sound Unit without affecting normal ZX-81 operation.
- * Huge range of possible sounds for games or: Music, Helicopters, Sci-Fi, Space Invaders, Explosions, Gun-shots, Drums, Planes, Lasers, Organs, Bells, Tunes, Chords etc., or whatever you devise!
- * Uses 3-channel sound chip giving programme control of pitch, volume of tones and noise, all with envelope control.
- * Easily added to existing games or programmes using a few simple "BASIC" lines.

FULL instructions with many examples of how to obtain effects and the programmes, supplied. Fully Guaranteed.

BI-PAK

Dept. YC 12 P.O. Box 6
63A High Street,
Ware, Herts.



Access & VISA accepted
Ring 0920 3182 for
immediate despatch.

Victagraph
plot window.

An essential aid to all computer owners with Plot, Draw, Draw to a plotted co-ordinate, and medium/high resolution graphic capabilities, VICTAGRAPH gives you a fully adjustable window from plot 0,0 to plot 320, 200.

Higher resolution is possible by simple multiplication X2, etc., or reduction by division. Plot 0,0 in each corner to suit your requirements.

Place your drawing, tracing diagram etc., on a single sheet of paper and position in the VICTAGRAPH, AND you are ready to plot all the points quickly using the movable window AND easy to read scale.

Made from high quality plastic sheets, 17" x 12" approx.

Ideal for multi-graphic resolution computers such as Atari etc. Not suitable for Spectrum.


Total price £7.00. Cheques payable to: Victa Ceramics and crossed. SAE for Details. UK only.

VICTA CERAMICS
6a BOW STREET, RUGELEY
STAFFS WS15 2BT.

MEMOTECH Explores the Excellence of your ZX81

Access Barclaycard Holders
Please Tel. Oxford
(0865) 722102

**MEMOTECH
KEYBOARD**
including separate
buffered interface
only
£43.43
plus VAT

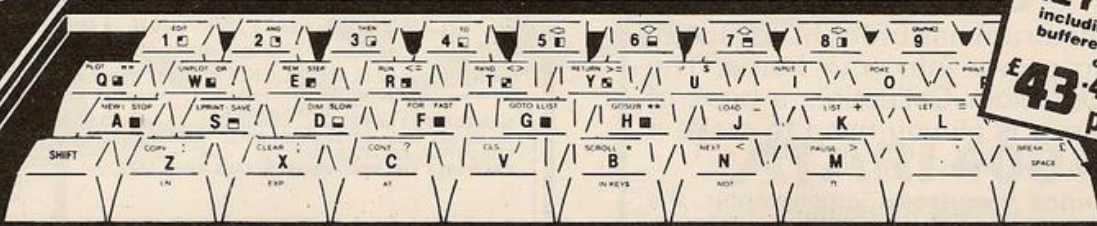

MEMOTECH

ZX81 Plug-in Keyboard

NEW Memotech's Plug-in ZX81 Keyboard

- Plugs directly into the back of your ZX81
- Keys have durable Sinclair legends
- High quality typewriter keys
- Does not inhibit other add-ons
- Automatic hold-down repeat
- Complete with buffered interface
- Fast and easy data entry
- Moveable between configurations

Memotech's Memopak Range

Current
Memopaks

16K
32K
64K
HRG
Centronics
Interface

MEMOPAK 64K MEMORY EXTENSION

The 64K Memopak extends the memory of the ZX81 by 56K, and with the ZX81 gives 64K, which is neither switched nor paged and is directly addressable. The unit is user transparent and accepts commands such as 10 DIM A(9000).

Breakdown of memory areas...0-8K Sinclair ROM. 8-16K This area can be used to hold machine code for communication between programmes or peripherals. 16-64K A straight 48K for normal Basic use.

MEMOPAK 32K and 16K MEMORY EXTENSIONS

These two packs extend and complete the Memotech RAM range (for the time being!) A notable feature of the 32K pack is that it will run in tandem with the Sinclair 16K memory extension to give 48K RAM total.

MEMOPAK HIGH RES GRAPHICS PACK

HRG Main Features — • Fully programmable Hi-Res (192 x 248 pixels) • Video page is both memory and bit mapped and can be located anywhere in RAM. • Number of Video pages is limited only by RAM size (each takes about 6.2K RAM) • Instant inverse video on/off gives flashing characters • Video pages can be superimposed • Video page access is similar to Basic plot/unplot commands • Contains 2K EPROM monitor with full range of graphics subroutines controlled by machine code or USR function

MEMOPAK CENTRONICS TYPE PARALLEL PRINTER INTERFACE

Main Features — • Interfaces ZX81 and parallel printers of the Centronics type • Enables use of a range of dot matrix and daisy wheel printers with ZX81 • Compatible with ZX81 Basic, prints from LLIST, LPRINT and COPY • Contains firmware to convert ZX81 characters to ASCII code • Gives lower-case characters from ZX81 inverse character set



Coming Soon..
RS232
Interface
Digitising
Tablet

© R. Branton & G.A.C. Boyd 1982

We regret we are as yet unable to accept orders or enquiries concerning the above products, but we'll let you know as soon as they become available.

We want to be sure you are satisfied with your Memopak — so we offer a 14-day money back Guarantee on all our products.
Memotech Limited, 3 Collins Street, Oxford OX4 1XL, England Tel: Oxford (0865) 722102 Telex: 837220 Orchid G

Please make
cheques payable to
Memotech
Ltd.

Please Debit my
Access/Barclaycard*
account number

Please send me

64K RAM £68.70 + £10.30 VAT
32K RAM £43.43 + £6.52 VAT
16K RAM £26.00 + £3.90 VAT
HRG £52.00 + £7.80 VAT
CENTRONICS I/F £34.70 + £5.20 VAT
MEMOTECH KEYBOARD. Price £43.43 + £6.52 VAT
Packaging & Postage £2.00 per unit (UK), £3.00 (overseas)

Price No Total

64K RAM	£68.70	£79.00
32K RAM	£43.43	£49.95
16K RAM	£26.00	£29.90
HRG	£52.00	£59.80
CENTRONICS I/F	£34.70	£39.90
MEMOTECH KEYBOARD	£43.43	£49.95

TOTAL ENC

*Please delete whichever does not apply

SIGNATURE

NAME

ADDRESS

DATE

Now Available
at major branches of
WHSMITH

ZX Spectrum

20 Programs £6.95

The ZX Spectrum has brought advanced computing power into your home. The Cambridge Colour Collection, a book of 20 programs, is all you need to make it come alive.

No experience required. Simply enter the programs from the book or load them from tape (£2.95 extra) and run.

Amazing effects. All programs are fully animated using hi-res graphics, colour and sound wherever possible.

Entirely original. None of these programs has ever been published before.

Proven Quality. The author already has 30,000 satisfied purchasers of his book of ZX81 programs.

Hours of entertainment

- **Lunar Landing.** Control the angle of descent and jet thrust to steer the lunar module to a safe landing on the moon's surface.
- **Maze.** Find your way out from the centre of a random maze.
- **Android Nim.** Play the Spectrum at the ancient game of Nim using creatures from outer-space.
- **Biorhythms.** Plot the cycles of your Emotional, Intellectual and Physical activity. Some would say this is not a game at all.

Improve your mind

- **Morse.** A complete morse-code training kit. This program will take a complete beginner to R.A.E. proficiency.
- **Maths.** Adjustable to various levels, this program is an invaluable aid to anyone trying to improve their arithmetic.

Run your life more efficiently

- **Home Accounts.** Keeping track of your finances with this easy-to-use program will enable you to see at a glance where the money goes and plan your spending more effectively.
- **Telephone Address Pad.** Instant access to many pages of information.
- **Calendar.** Displays a 3 month calendar past or future, ideal for planning or tracing past events.

ORDER FORM:

Send Cheque or P.O. with order to:-
Dept. C., Richard Francis Altwasser, 22 Foxhollow, Bar Hill,
Cambridge CB3 8EP

Please send me

- ☐ Copies Cambridge Colour Collection Book only £6.95 each.
☐ Copies Cambridge Colour Collection Book & Cassette £9.90 each

Name: _____

Address: _____

ZX81 GAMES

from

J.K. GREYE SOFTWARE LTD

THE NEW GENERATION SOFTWARE HOUSE

"Without question the finest machine code games available today".....J.N. ROWLAND Product Manager for W.H. SMITH.

GAMESTAPE 1 for 1K only £3.95
10 Games incl. ASTEROIDS, UFO, CODE, BOMBER, GUILLOTINE, KALEIDOSCOPE, etc.
PROBABLY THE BEST VALUE 1K TAPE AVAILABLE.



We've done in 1k, games which some of our competitors require 16k to do!



GAMESTAPE 2 for 16K only £3.95
***STARFIGHTER** Superb machine code Space Battle. Set against a background of twinkling stars, with stunning explosions - if you can hit the enemy!
PYRAMID Can you move the Pyramid? Make a mistake and it will collapse! A Thinkers game.
ARTIST The ultimate Graphic Designers aid. 8 Directions, 10 Memories, SAVE, COPY, RUBOUT, CLS, etc.

GAMESTAPE 3 for 16K only £4.95
***CATACOMBS** A Multi-Level Graphics Adventure. Each level can contain up to 9 Rooms, 8 Passages, 7 Monsters, Food, Gold, Traps, Phantoms, an Exit (to the next level), and there's an infinite number of levels.
NOTE. . . . This is NOT one of the necessarily limited text Adventures as sold elsewhere.
"An excellent addictive game which will keep you amused for hours"..... **COMPUTER & VIDEO GAMES.**



GAMESTAPE 4 for 16K only £4.95
***3D MONSTER MAZE** The Game to Top All Others. Unbelievable Graphics! Can you find your way through the Maze? The EXIT is there somewhere, but then so is a T.REX, and its after YOU! All in 3D (the T.REX will actually run towards you in full perspective!), you've never seen anything like this before!
"3D MONSTER MAZE is the best game I have seen for the ZX81"..... **COMPUTER & VIDEO GAMES**

"If I had to choose just one programme to impress an audience with the capabilities of the ZX81, then J.K. Greys 3D MONSTER MAZE would be the one without doubt"..... **ZX COMPUTING.** "Brilliant, brilliant, brilliant!"..... **POPULAR COMPUTING WEEKLY**

GAMESTAPE 5 for 16K only £4.95

***3D DEFENDER** The Ultimate Space Game. Super fast Machine Code 3D version of the Arcade favourite. You have to save your home planet from the marauding Alien Spacecraft. This is all in 3D, your viewscreen shows you the view out of your fighters cockpit window. The backdrop moves when you turn, or fly up or down (8 flight directions), just as if you were really flying it! But then YOU ARE! The Enemy Saucers will actually zoom towards you in 3D, and shoot you if you let them! Your display includes Score, Shield Strength, Altitude, Proximity, Forward Radar and your viewscreen, which shows your rotating home planet, backdrop of Stars, Meteors, Explosions, Plasma Blasts, your Photon Beams, up to 4 Enemy Saucers and of course its all in full 3D!
"Another 3D winner"..... **SINCLAIR USER**



GAMESTAPE 6 for 1K only £1.95
***BREAKOUT** Super Fast Full Screen Display Game. Your all time favourite with an added twist. See how much Money you can win and watch the pounds convert to Dollars. All in Machine Code for Fast Action with 3 Speeds, 2 Bat Sizes and three angles of rebound! The best BREAKOUT around and at this price you can't go wrong!

"The best of its kind"..... **WHICH MICRO & SOFTWARE REVIEW**

GAMES MARKED * INCL. MACHINE CODE.

Prices include VAT and U.K. P. & P.

(Add appropriate Postage on Foreign Orders). Cheques/P.O.s to

J.K. GREYE SOFTWARE LTD

Dept **YC** 16, Brendan Close, Oldland Common, Bristol BS15 6QE

CREDIT CARD SALES: FOR INSTANT DESPATCH, BY PHONE ONLY

TEL: 01-930-9232 (9 am - 7 pm)

If you prefer to see before buying, our range of **GAMESTAPES** are stocked by the following stores.

BUFFER MICROSHOP	374A Streatham High Rd., London SW18:
GAMER	24 Gloucester Rd., Brighton;
GEORGES	89 Park St., Bristol, Avon;
MICROSTYLE	29 Belvedere, Lansdown Rd., Bath, Avon;
MICROWARE	131 Melton Rd., Leicester;
SCREEN SCENE	144 St. Georges Rd., Cheltenham, Glos;
W.H. SMITH	Over 200 Computer Branches;
ZEDXTRA	5 School Lane, Kinson, Bournemouth, Dorset;

TRADE & EXPORT ENQUIRIES WELCOME

South London's Largest Micro Computer Centre

VISION STORE

COMMODORE VIC-20



5K £154.95

inc. basic

21K £199.95

inc. basic

Vic Cassette **£44.00** Vic Disk Drive New
Vic Printer **£229.00** Low Price **£299.95**

New

Commodore 64

64K Colour Computer
in stock now **£345**

Dragon 32

Now in stock
with range of software

Sinclair ZX81

Now available

£49.95 with free programme.

Over 900 software programmes
always in stock. We carry probably
the widest range with continuous
demonstrations.

Top Cash Prices paid on Second
Hand Equipment or Part Exchange
Welcome.

ATARI 400



16K £189.95

Less Basic

32K £249.95

Less Basic

Basic Cartridge £34.90

Atari 800 16K inc. Basic	£499.00
Atari 800 48K	£569.00
Atari 410 Cassette	£49.00
Atari 810 Disk Drive	£299.00
Atari 822 Printer	£199.95

plus every Atari accessory.

EXCLUSIVE:

New for Atari — Percom
Double Density Disk Drive.
174K Per Diskette.
On demonstration now!

Now available*

EMI Submarine Commander.
EMI Jumbo-Jet Lander.
Incredible Games for Atari.

*from November 8

Mail Order — send for our
comprehensive list

Instant Credit
Available
subject to status

Access/
Barclaycard




VISION STORE

**3 Eden Walk Precinct,
Kingston-on-Thames, Surrey.
Tel: 01-546 8974**




Tonight on your micro

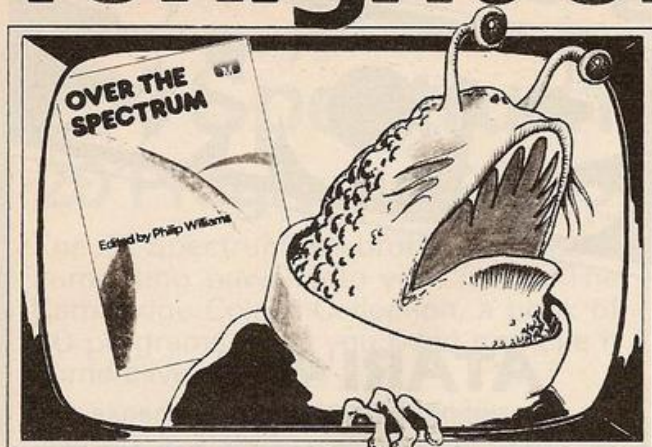


Meet an Invader up close!

And play Adventure, Chess or any of 26 more programs, plus tips and hints, all in book **OVER THE SPECTRUM** £6.95.

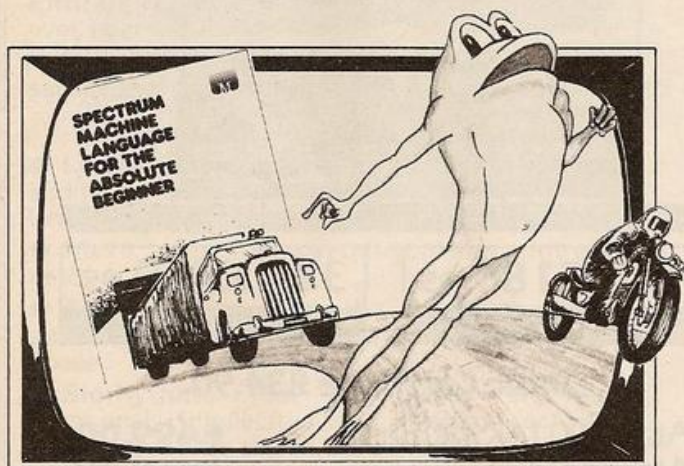

Hop your way through the night!

This is the way to learn **SPECTRUM MACHINE LANGUAGE FOR THE ABSOLUTE BEGINNER**. Includes entire original **FREEWAY** game. Great book value at £6.95.

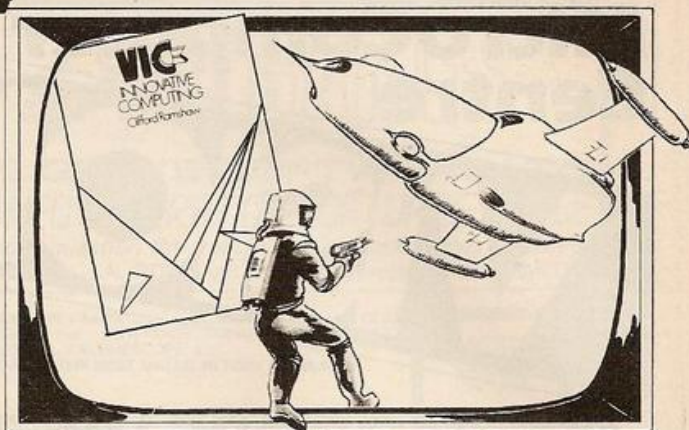

Is there life after the Alien Overrun?

You'll find out in Clifford Ramshaw's book **VIC INNOVATIVE COMPUTING**—undoubtedly one of the finest collections of BASIC programs. Only £6.95.



Talk to your Spectrum!

Why is this man smiling? You will too when you read Dr. Logan's book **UNDERSTANDING YOUR SPECTRUM**. The definitive guide for only £7.95.

Unconditional Guarantee

All Melbourne House cassette software is supplied on high quality cassettes with attractive inserts. Full instructions are provided and the cassettes are unconditionally guaranteed against malfunction.

SPECTRUM

Programs from books now available on cassette.
Over 9 programs on each cassette!

Over The Spectrum Cassette 1	£5.95
Over The Spectrum Cassette 2	£5.95
Over The Spectrum Cassette 3	£5.95

Programs From Spectrum Machine Language	£5.95
--	--------------

VIC 20

Programs from books now available on cassette.
7 programs on each cassette!

VIC Innovative Cassette 1	£5.95
VIC Innovative Cassette 2	£5.95
VIC Innovative Cassette 3	£5.95

Prices include V.A.T.

Orders to: **Melbourne House Publishers**
131 Trafalgar Road, Greenwich, London SE10.
Correspondence to: Glebe Cottage, Station Road, Cheddington, Leighton Buzzard, BEDS LU7 7NA.

Please send me
(please add 80p for post and pack)

Name

Address

..... Postcode

MELBOURNE HOUSE PUBLISHERS



**"QS Produce the most
ULTRA-MEGA-AMAZING Games in
the entire known Universe!"**

TIMEGATE

Quicksilver's 1st level two game. The best space/time adventure of 82.

TIMEGATE

High speed graphics combine with electrifying space adventure makes TIMEGATE the game of all games.

Foil the ruling aliens by travelling back through time and blasting out their home planet. Fight 3D space battles on your journey, seeking the time gates that lead to year zero and the salvation of the human race.

Features: 4D, High speed graphics, versatile scanning, status and battle computers, land & take-off from many planets, time-travel, 5 skill levels, score & rating plus free training program.

MORE NEW RELEASES!

THE CHESS PLAYER

Who is he? Dare YOU challenge him? Risk high stakes and pit your wits against the chess game with personality, speech and devastating chess skills. THE CHESS PLAYER costs less, while offering you more skill—boosting enjoyment. Features: 6 skill levels, analysis, copies display and all moves to printer or screen, colour or B & W display, save game at any point, Personality & speech.

SPEAKEASY

Add speech or music to your programs! In response to massive demand, we have released SPEAKEASY for your own use and enjoyment.

Simply record your sound onto a cassette and play it into your Spectrum via load. The signal may then be edited and replayed on command from your Basic or M/c program. NO EXTRA HARDWARE REQUIRED!

Edward de Bono's Classic L-GAME

Simple rules and complex strategies make the L-GAME an essential for everyone.

Also includes outstanding and compulsive versions of Mastermind & Pontoon. As featured on T.V. in Edward de Bono's Thinking Course.

L-GAME REACHES THE BITS OTHER GAMES DON'T TOUCH!

SPECTRUM ARCADE ACTION FROM QUICKSILV

SPECTRUM ARCADE ACTION FROM QUICKSILV

SPACE INTRUDERS

Features 4 alien types, random saucer points, 2nd attack wave mutant, exploding aliens, bonus base 50,000 points, left-right & fire, sound effects and colour.

METEOR STORM

3 meteor types, 2 saucers, full screen wrap-around, bonus ship every 10,000 points, amazing explosions, left-right-thrust-fire & hyperspace, sound effects and speech.

WHAT THEY SAY ABOUT OUR ZX81 GAMES:

GS SCRAMBLE—

"...amazing, fantastic!..." [P.C.W.]

GS INVADERS—

"...just like the real thing!..." [C & V.G.]

GS ASTEROIDS—

"...very good." "...addictive game..." [C & V.G.]

GS DEFENDER—

"...Better than any other arcade game I've seen..." [Sync]

"...nicest games I've played on the ZX81. All the tapes were impressively packaged..." [Which Micro & S.R.]

**COME AND SEE OUR AMAZING RANGE AT:
THE NORTHERN COMPUTER FAIR (25th - 27th Nov)
THE NEXT ZX MICROFAIR (Mid December)**

ZX - 81 GAMES

Scramble m/c 16k £3.95 ☐
Invaders m/c 16k £3.95 ☐
Asteroids m/c 16k £3.95 ☐
Defenders m/c 16k £3.95 ☐

SPECTRUM GAMES

Speakeasy m/c 48k £4.95 ☐
Timegate m/c 48k £6.95 * ☐
The Chess Player m/c 48k £6.95 ☐
Space Intruders m/c 16k £4.95 * ☐
Meteor Storm m/c 16k £4.95 * ☐
L-Game Basic 16k £3.95 ☐

*THESE GAMES INCLUDE SPECIAL SEASONAL DISCOUNTS, ORDER NOW AND GET FREE KEYBOARD OVERLAY!

Please send me the games as ticked.

Total cheque/P.O. enclosed

Name

Address

Send order to: QUICKSILVA, DEPT SPE, 92 NORTHAM ROAD, SOUTHAMPTON, SO2 0PE

ZX81 Workstation...



... is a stylish and ergonomic plinth for the ZX81. It raises and tilts the TV to avoid eyestrain, holds the 16K RAM in place and hides the wiring and power supply. This very professional unit costs £15, a built-in power switch is £3, plus postage at £2.00, inc. VAT.

Peter Furlong Products, Unit 5, South Coast Road Industrial Estate, Peavehaven, Sussex BN9 8NA.
Telephone 07914-81637 for C.O.D. and Credit Card Sales.

AND NOW!

Spectrum workstation



Following the success of our ZX81 plinth we have introduced a workstation for the Spectrum. This stylish ABS plinth raises and tilts the TV for better viewing whilst angling the Spectrum and making typing easier. The PSU is hidden underneath, the printer and cassette may still be used, and a matching, stackable unit for Microdrives will be available.

Peter Furlong Products, Unit 5, South Coast Road Industrial Estate, Peavehaven, Sussex BN9 8NA. Tel. (07914) 81637.

VIC 20 ACCESSORIES

FUN WITH SPEECH?

WOW! only

£49.95

"CHATTERBOX"

(including integral software enhancement)

- * allows you an infinite vocabulary
- * important educational tool at home
- * improves your games dramatically!
- * free beginners documentation
- * quality designed plug in cartridge
- * serious uses and fun for the family
- * uses sophisticated hardware but is very easy to use eg: HH1/EH/EL/OW/-HE-LL-O!

HIGH SPEED MICRO SYSTEM

- * integral operating system
 - * uses micro cassettes
 - * 64K/side
 - * to store loads of games and files and running 20 x faster than audio tapes
 - * floppy disks £££!
- We offer the ½ price alternative you will need for storage. No waiting or hassles, easy to use.

£129.99

MEMORY

- 16K DRAM **£39.00**
- 8K STATIC RAM **£35.80**
- 3K STATIC RAM **£22.55**

plug in cartridges for using those 16K quality games you have heard about.

== COMPARE PRICES ==

SOFTWARE

The highly acclaimed range of MR. MICRO software available from us on micro cassette.

DON'T HANG AROUND!
Phone, write or order NOW

Prices excluding VAT

CURRAH

COMPUTOR COMPONENTS,
GRAYTHORP IND. EST.,
HARTLEPOOL,
CLEVELAND. TS25 2DF

(0429) 72996

MOTHERBOARD

3 SLOT expansion
at this price you must buy one with
all the exciting cartridge units available.

£26.00

*Professionally engineered
and presented
products
for your*

VIC 20

See next page

See us on STAND 108
at the Northern Fair

PRESENTING
THE NEW...

KEMPSTON (Micro) ELECTRONICS ZX SPECTRUM HARDWARE

We are proud to announce that we have developed for the ZX SPECTRUM a new 24 line programmable peripheral Interface using MOS technology with the following features:—

- 3 × 8 bit ports
- Port mapped, using IN and OUT commands
- I/O via 16 pin DIL sockets
- I/O also via 28 way edge connector
- Can be used in BASIC or Machine Code

The port is available fully built with a detailed set of instructions and control applications. The port can either be used with out motherboard, thus allowing a further card to be used, or with a stackable connector. Either way, it means that Micro-Drives, Printers, etc., can still be used with the port.

Please note that this is DEFINITELY NOT a ZX81 MODIFICATION but an exclusive design for the new ZX Spectrum.

ZX Spectrum PPI port. £16.50

ZX 2 slot Motherboard. £16.95

ZX Stackable connector. £ 5.50

All prices inclusive of VAT, but postage must be added at 70 pence for a single item, 100 pence for 2 or more items. Available by mail order only. Cheques, P.O.'s made payable to:

KEMPSTON (Micro) Electronics

60 Adamson Court, Hillgrounds Road, Kempston, Bedford MK42 8QZ.

Please allow 21 days for delivery. S.A.E. in all correspondence.



Your name _____
Your address _____

Date _____

Quantity	Description	Unit price	Amount
	ZX Spectrum PPI Port	£16.50	
	2 Slot Motherboard	£16.95	
	Stackable Connector	£5.50	

Postage
Total

YC12

IMPORTANT ANNOUNCEMENTS



- VIC TINY BASIC COMPILER-Produces true 6502 code. Subset of BASIC supports all floating point operations. Compiler listing optional if you have memory (8K exp.) Req 3K/8K expander £15.95
- VIC JOYSTICK DRAWING- Paintbrush for VIC MULTICOLOUR mode pictures. Requires 3K/8K expander and a joystick £ 9.95
- GRAPHVICS - super graphics package adds 18 commands to VIC BASIC. Plot 152x160 points. Hires & multicolour modes on same screen! Text & graphics screens. Save/load pictures to/from tape. Req 3K/8K expander. Sample programs & user's manual £17.95
- VIC VICIL- Interactive Games Language- Program your own or play the 9 games included. With 60+ powerful commands. Easy to learn, has colour & sound Req 3K/8K expander. Complete with users manual £25.00
- VIC PIPER THE MUSIC MACHINE- Simplest way to compose & play music. Complete control of notes, volume, repeats, tempo. Sample compositions & users manual £15.95



MR MICRO APPOINTED SPECTRUM DEALER.

We are proud to announce that in addition to our existing range of quality software MR MICRO now offer the full range of products detailed in the SPECTRUM COMPUTER GROUP'S advertisements (in this issue). Our new retail shop will be open NOVEMBER 1982. We look forward to seeing you there.

The above are just a selection from our new catalogue of VIC 20 software -Send a large sae for your copy.

24HR. TELEPHONE ORDERING SERVICE. with ACCESS or VISA. Ring 061-728-2282 or send a cheque or postal order. All prices include VAT & postage.

NEW DEAL FOR SOFTWARE AUTHORS.

MR MICRO are now accepting submissions for any colour computer. Our deal can mean ten to one hundred times the earning potential that you would get elsewhere! PLUS we offer additional benefits such as equipment loans, discounts, special commissions, advice, protection and important access to U.K. and WORLDWIDE MARKETS. Send us your work today for an immediate reply. Your hard efforts deserve to be well rewarded.

spectrum MR MICRO



LTD.



MR MICRO LTD., 69 PARTINGTON LANE, SWINTON, GTR. MANCHESTER M27 3AL.

Push your Sinclair to the limit

ZX81/SPECTRUM ARCADE GAMES

NEW

ZX INVASION FORCE (ZX81)

Use your skill to fire through the energy band to destroy the menacing alien ship — £3.95

NEW

SPEC GALAXIANS SPEC INVADERS SPEC GOBBLEMAN

These three exciting high-speed classic games incorporate hi-resolution graphics and sound to bring you the best in arcade action at only £4.95 each (16/48K)

NEW

SPEC FROG 5/SHOWDOWN (16/48K)

Hop across the dangerous road avoiding the lethal cars, then lorries. Go back to the wild west for a gunfight battle amongst cacti and wagons. Features include western music. £4.95

NEW

NAMTIR RAIDERS (ZX81)

High speed, quick action arcade game with four separate groups of attackers. £3.95

Galaxians and Gobbleman also available for ZX81 at £3.95 each.

UTILITIES

NEW

TOOLKIT

Nine powerful new functions for your ZX81 (including re-number lines (goto, gosub), program merge, string finding and replacement. £5.95

SPEC BUG

A 30 in 1 machine code tool and disassembler for your ZX Spectrum. £6.95

ZX BUG

A 30 in 1 machine code tool and disassembler for your ZX81. £6.95

Improve your machine code programs with this new 48K Spectrum Assembler

Just released by Artic, this new professional quality assembler is also available for 16K ZX81 and features:—

- * Word-processor-like text editor. * High-speed, versatile two-pass mnemonic assembler with labels and detailed error-trapping. Will assemble to any address.
- * Essential support facilities such as memory-edit, register inspect/modify and search for de-bugging. * Full output to ZX-printer. * Memory-status report and comprehensive user-manual.

**ONLY
£9.95**



ADVENTURE GAMES



**JUST RELEASED
for 48K
SPECTRUM**
Still available for ZX81

INCA CURSE

(Adventure B) In a jungle clearing you come across an ancient Inca temple. Your mission to enter, collect the treasure and escape alive. But beware!

Includes a cassette save routine. £6.00

SHIP OF DOOM (Adventure C)

You are unavoidably drawn to an alien cruiser. Can you reach the control room and free yourself? Or will they get you first? Includes a cassette save routine. £7.00

ESPIONAGE ISLAND (Adventure D)

While on a reconnaissance mission your plane loses control and you are forced to land. Can you survive and escape with the island's hidden secret? £8.00

PLANET OF DEATH (Adventure A)

You find yourself stranded on an inhabited alien planet. Can you reach your ship and escape? £5.00

**REDUCED TO
£29.95**

ZX FORTH

Supplied on cassette with editor cassette, user manuals and keyboard overlay. ZX FORTH combines the simplicity of basic with the speed of machine code

THE ULTIMATE ADVENTURE FOR THE SPECTRUM/ZX81 for only £9.95

**AND THE CHANCE
TO WIN
£10,000
or more IF YOU**



Your eccentric father has left you £10,000 in his will.

In order to claim your windfall you must solve twelve clues and gain access to a bank account in which the money has actually been deposited. Be the first to crack the puzzle and the prize is yours! Plus you will win two tickets to the city of the secret KRAKIT™ vault location. The prize money is increased weekly. A telephone number will be supplied so you have the opportunity to find out just how much you could win.

RULES AVAILABLE FROM ARTIC

DON'T MISS YOUR CHANCE TO WIN A FORTUNE!

ALWAYS AHEAD WITH ZX81/SPECTRUM SOFTWARE.

Cheques & P.O. made payable to: Artic Computing Limited. Dealer enquiries welcome. Please state whether your order is for ZX81 or Spectrum. Send S.A.E. (6in x 9in) for catalogue.



ARTIC COMPUTING LTD.

**396 JAMES RECKITT AVENUE,
HULL, N. HUMBERSIDE,**

A GREAT CHESS GAME FOR YOUR ZX81 OR SPECTRUM



ZX CHESS I

Very popular machine code program, with six levels of play and an analysis option. Available for ZX81. £6.50

ZX CHESS II

A new improved version, with a faster response time, seven levels of play, analysis option and in addition a recommended move option. £9.95

ZX 1K CHESS

An incredible game in 1K for only £2.95

SPECTRUM CHESS now only £9.45

NEW SPECTRUM VOICE CHESS

This incredible program talks you through your game. It tells you its move, recommends a move, and contains a range of facetious comments. The game is based on the highly successful ZX Chess II and is offered at the Christmas offer price of £9.95.

*SPECTRUM CHESS 48K

To: Artic Computing Ltd., 396 James Reckitt Avenue, Hull, N. Humberside. HU8 0JA.

Please supply.....

Cheque for total amount enclosed.

Name.....

Address.....

YC 12



WHAT PEOPLE ARE SAYING ABOUT OUR . . . **BBC MICRO GAMES**

"... I bought all your tapes to date for the BBC Micro and I think they are just super, especially STAR TREK, and the sound effects in CANDY FLOSS really made me sit up! Well done and keep them coming!"
J. S., Paisley

"... I was very impressed, not only with the cassette, but also at the speed at which it came!"
— R.L., Cheshire

"... I must congratulate you on your **MUTANT INVASION** cassette. I have had it for two weeks now and it is really superb. Incidentally, I have beaten your high score of 4,500 — mine is 7,580!"
— S.L., Berks

AND NOW LOOK AT OUR LATEST CASSETTES!

CASSETTE EIGHT Model A Invaders



Actual screen photo

Cassette Eight contains Model A Invaders. A superb full feature machine code teletext colour graphics version of the popular 'Space Invaders' arcade game for the Model A BBC Micro. Choice of Invader and Missile speeds. FAST, SMOOTH AND GREAT FUN!

Only £4.95 inc.

Cassette Nine contains Model B Invaders. A superb full feature adaptation of the arcade 'Space Invaders' game in machine code and high resolution colour graphics, for the Model B BBC Micro. Choice of Invader and Missile speeds. QUITE SIMPLY THE BEST.

Only £6.95 inc.

CASSETTE NINE Model B Invaders



Actual screen photo

NOT FORGETTING THE REST OF OUR FANTASTIC RANGE

FOR MODELS A AND B

- Cassette One: STAR TREK (8x8 Galaxy, Klingons, Phasers etc) and CANDY FLOSS, the tremendous new game everyone is talking about! **Only £5.95 inc.**
- Cassette Two: HANGMAN, KRYPTOGRAM, DICE, BEETLE, GRAND NATIONAL and MUSIC. **Only £3.95 inc.**
- Cassette Three: MUTANT INVADERS (arcade game). Can you destroy the Mutants before they destroy you with their radioactivity. **Only £5.95 inc.**
- Cassette Four: BREAKOUT (arcade game). Superb version, 6 skill levels, 1 or 2 players. **Only £3.95 inc.**

FOR MODEL B ONLY

- Cassette Five: BEEB MUNCH (arcade game). Our version of the 'Pacman' game. Tremendous version containing multi-ghosts, tempting fruits, superpoints, screams etc. **Only £5.95 inc.**
- Cassette Six: SUPER HANGMAN. The special feature is the high-resolution animated man. Marvel at the detail of his clothing and witness his impatience! Contains many categories. **Only £3.95 incl.**
- Cassette Seven: 3D MAZE. Battle against the clock to escape from the maze, with the computer showing your view in 3-D each step you take! **Only £3.95 inc.**

ALL CASSETTES AVAILABLE NOW FROM:

(All our software is available before we advertise)

I. J. K. Software

55 Fitzroy Road, Bispham, Blackpool, Lancs

ELKAN ELECTRONICS

Make the most of your pocket computer

- new books..... for **DRAGON 32**
101 program tips & tricks..... **£6.95**
55 programs home/school/office..... **£6.95**
color computer graphics..... **£7.95**
Add 50p per book post & packing (max. £1.50)
- new software..... for **SHARP PC1500**
World Exclusive! NEW Business Programs
from GEMINI..... **Silicon Notebook £19.95**
Executive Suite (6 programs)..... **£29.95**
New Idea..... **Ideal Gift**

At last - no more tape-loading problems!

SHARP PC152 cassette tape recorder
purpose built for computers only **£39.93**

Send cash, cheque, Access or Visa Card No. Ask for our New FREE pocket brochure. Trade enquiries welcome anytime.

ELKAN ELECTRONICS (Dept. YC)

FREEPOST, 28 Bury New Road, Prestwich, Manchester M25 6LZ or telephone 061-798-7613 (24 hr. service). See full list on Prestel 258-2022.

We specialise in pockets!

OAKLEAF COMPUTERS LTD

Education Hobbyist & Small Business Computers

BBC

Model B

Computer

£399.00 + £7.50 carr.

Dragon 32



£199.00 + £7.50 carr.

Acorn Atom & BBC Twin User

Joystick Interfaces **£13.95**

(Please state Model)

Oaktree Computer Workstation

£17.50 + £7.50 carr.

BBC & DRAGON SOFTWARE

Please send
your remittance
to:

121 DUDLEY ROAD, GRANTHAM, Lincs NG31 9AD
Tel: (0476) 76994



ACORN SPECIALISTS

S.A.E. FOR BOOKLIST

ALL
IN
STOCK

All prices include VAT

PRO SOFTWARE

BBC MICRO (A&B)

* NEW * SPACE ADVENTURE (Mode 1) Machine Code - Model B only £8
Our best selling game for the Atom now re-written and enhanced for the BBC. Intriguing mixture of Space Invaders, Maze and Adventure.

MIDDLE KINGDOM (Mode 7) Basic & Machine Code. £8
Original real time adventure with over 300 rooms to find and explore. Fight (or avoid!) the many different monsters and retrieve the lost treasures of Hylem. Many different scenarios and characters.

SPACE INVADERS (Mode 5) Machine Code. £8
Fast action, full-feature version of this popular game. Outstanding high resolution colour graphics plus sound.

REVERSI and COMOKO (Mode 5) Machine Code. £8
Response time under one second for the first 3 levels. Many features, graphic board, problem solving, etc. Both games are very absorbing and challenging.

GAMES TAPE 1 (Mode 5) Machine Code. £8
Moving Wall Breakout, Snake and Hunt are fast moving addictive games, very colourful. Three quality games for the price of one.

MICRO MAN (Mode 2) Machine Code - Model B only - Fast moving, excellent colour graphics with sound. £8

* NEW * Now available. Word Processor package only £19.95
Written in machine code for speed and versatility. Easy to use with full on-screen editing and justification (more useful and powerful than a text editor), insert, delete, move, copy, variable tab setting, margins plus many more features. Complete with instruction manual. Large SAE for further details.

All programs supplied on quality C-15 cassettes. All prices are inclusive, no extras. Buy any two cassettes and deduct £1 from total. SAE for catalogue.

ATOM software also available. Space Adventure Invaders, Air Strike Only £6 each. SAE for details of our full range.

PRO SOFTWARE BBC

1 2 1 T Y N - Y - T W R
B A G L A N
P O R T A L B O T
W E S T G L A M O R G A N
S A 1 2 B Y E

MAIL ORDER ONLY

Extend your ZX81 System: Add Memory that won't Forget!


✓ ADD YOUR OWN SYSTEM UTILITIES

✓ BUILD UP A LIBRARY OF MACHINE LANGUAGE SUBROUTINES

✓ UP TO 8K NONVOLATILE RAM

✓ USE HM6116P CMOS RAM OR 2716/2732 EPROM

✓ COMPATIBLE WITH 16K RAM PACKS

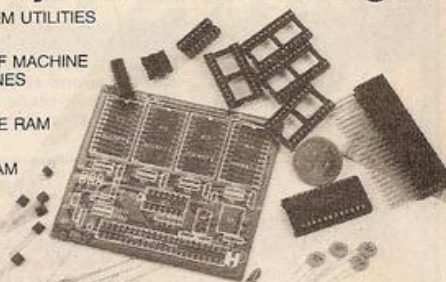

£19.95
INCL. VAT

INTRODUCTION

This memory board is designed to fill the transparent 8K block of memory (from 8 to 16K) in a ZX81-16K system. This area of memory is an ideal place to store, either permanently or temporarily, machine language routines or data which are to be used by the BASIC system. Such routines could be, for example:

- fast graphics routines
- custom mathematical or statistical functions
- Sinclair code/ASCII conversion tables
- octal/decimal/hex conversion routines
- interrupt servicing routines
- I/O servicing routines for control applications
- a disc operating (DOS) or other development system
- speech synthesis routines
- additional BASIC commands
- EPROM programming and verify routines

A sample rapid display routine and procedures for storing utilities on tape are included with the kit.

The use of HM6116P 2K CMOS RAM memory IC's with their own reserve power supply means that routines stored in the RAM are nonvolatile — the RAM retains its memory even when the ZX81 is switched off or reset. Moreover, being RAM, the routines you store in the memory are easily modified. The lithium cell supplied with the board will maintain sufficient reserve power for about ten months for 2K or for about two months for a fully populated board. A connector is made available for an alternative external supply.

With this board it's no longer necessary to place your machine language routines in REM statements, in string variables, or beyond RAMTOP. You can build up a resident library of machine utilities for use by your BASIC system.

Once your system utilities and other machine language routines are established you can, if you wish, replace the 6116P CMOS RAM's with 2716 or 2732 EPROM's.

OTHER OPTIONS

The board can be jumper programmed to occupy any one of the four 8K blocks of memory in the first 32K. You can, for example, modify the SINCLAIR operating system. Alternatively the board can be used as system/user RAM.

ASSEMBLY

Complete step-by-step instructions in a 16 page manual make assembly of the board easy. Construction takes between one and two hours. The kit (pictured above) is complete with a silkscreened solder-masked printed circuit board, all capacitors, resistors, transistors, sockets, connectors, integrated circuits, and the lithium cell. The board is supplied with one 2K CMOS 6116P-3 RAM — it will accommodate three more for a total of 8K.

HUNTER ELECTRONICS,

KENWAY, RAYMONDS HILL, AXMINSTER, DEVON

Send check or money order for £19.95 plus £1.95 shipping and handling to the address below. The printed circuit board with the instruction manual is available separately for £10.00 post paid.

H HUNTER ELECTRONICS, P.O. BOX 5, AXMINSTER, DEVON EX13 5AS

Christmas Space action with . . .

SPECTRUM STORM-FIGHTERS

. . . explosive machine code space action

They come from deepest space.

An alien fleet whose skill is matched only by its ruthlessness. They hide and manoeuvre in the cover of asteroid clouds . . . showers of cosmic rubble that spell death on collision to the commander of the lone space ship that protects Earth. You are that commander.

In one of the toughest challenges the Sinclair Spectrum can offer your mission is to destroy the aliens and avoid the asteroids before they destroy you.

Your weapon is a twin firing laser canon. Double bolts of pure energy that mean instant annihilation to on-target aliens. Its responsive. Its fast. But only as fast as you are. Put yourself at the controls. On the thrilling edge of adventure . . . the STORM-FIGHTERS await you.

All machine code action . . . full colour graphics . . . full sound sync . . . progressive difficulty . . . comprehensive scoring . . . high value mother-ship . . . runs automatically on both 16K and 48K models:

Available on quality cassette atom £4.95
(post free in U.K.) from

John Prince
29 Brook Avenue, Levenshulme,
Manchester, M19 3DQ

JOYSTICKS



ZX Spectrum / ZX81

FOR ONE JOYSTICK AND
INTERFACE MODULE

BUILT, TESTED & READY FOR USE

- ★ NO SOLDERING, plugs into rear expansion port between ZX and Ram Pack, Printer or Microdrives.
- ★ TWO JOYSTICKS connect via one interface module.
- ★ NO SPECIAL PROGRAMMING, Joystick 1 operates as keys 5 to 8 through inkey instruction.
- ★ IMMEDIATELY COMPATIBLE WITH ALL CURRENT SOFTWARE using arrow keys for movement.
- ★ INTEGRAL 'FIRE' BUTTON
FREE 'Video Graffiti' listing + full instructions.

Send ADDRESS and CWO to:
A.G.F. HARDWARE, Dept YC.,
26 Van Gogh Place, Bognor Regis, West Sussex PO22 9BY

QTY	ITEM	ITEM PRICE	TOTAL
	JOYSTICK	6.99	
	INTERFACE MODULE	15.96	
ZX Spectrum <input type="checkbox"/> ZX81 <input type="checkbox"/> Please tick		FINAL TOTAL	

NEW

SPECTRUM GAMES

AIRPORT This could be a nightmare! As a member of the airport groundstaff your task is to assist in the successful landing of an aircraft but beware, there are many obstacles in your path!

ALIEN Search for the alien hiding in the maze of air ducts on the spacecraft. Your only weapon is a flamethrower, so progress carefully as your success relies on your skill and judgement.

16K programme cassette

CRABS Collect points as you proceed through the maze - but beware, the crabs will be hunting you.

Full animated instructions included with each game

ON ONE CASSETTE FOR ONLY £4.95**GRAPHICS TOOLKIT**

22 exciting MACHINE CODE routines that give you control over your screen as never before!

(ZX81 - 16K RAM ONLY)

Draw/Undraw	Print position controls	Scroll Facilities	Onscreen/Offscreen
Foreground On/Off	- UP, DOWN, LEFT, RIGHT	- UPSCROLL, DOWNSCROLL, RIGHTSCROLL, LEFTSCROLL	Background On/Off
Border/Unborder	Editprint - moves next	Search and replace	
Fill screen	PRINT position to first edit line		
Reverse screen			

All these routines are in machine code for SUPER-FAST response! GRAPHICS TOOLKIT uses only 2K of your RAM and that includes space to load the programmer's TOOLKIT described below.

ALL FOR ONLY £5.95 (\$11.90)**PROGRAMMERS TOOLKIT**

Renumber - including GOTO's and GOSUB's	Hyper graphics mode	All these routines are written in machine code
Search and list	Fillscreen	
Search and replace	Reverse screen	
	Tape wait	
	Free space	

FOR 16K ZX81 ONLY £4.95 (\$9.90)**ZX81 GAMES CASSETTES FOR 16K**

Lost Island - An adventure program
Games Tape II - 3 fast action machine code games
(City Bomb, 3D Battle, Gridball)
Battleships - You verses the computer!

ONLY £4.95 (\$9.90)

ONLY £4.95 (\$9.90)

ONLY £4.95 (\$9.90)

SPECIAL CHRISTMAS OFFER - ALL THREE FOR ONLY £11.95 (\$23.90)

NEW

an essential addition to your 16K or 48K Spectrum

PROGRAMMERS TOOLKIT

Provides the following additional facilities:-

Renumber - inc. GOTO'S, GOSUB'S, RUN'S, LIST'S, LLIST'S AND RESTORE'S.
Search and List, Search and Replace, Free Space, Shrink - removes REM statements, Delete - removes blocks of lines by single command.
This program is completely menu driven with prompts and performs full error checking.

FOR 16K OR 48K SPECTRUM - ONLY £5.95

AVAILABLE SHORTLY

GRAPHICS TOOLKIT

This will include:- Search and Replace Multiple Scroll Routines
Attributes Reverse Square/Rectangle Draw PLUS MUCH MUCH MORE!!

FOR 16K OR 48K SPECTRUM - PRICE TO BE ANNOUNCED

NEW

As reviewed in 'ZX Computing' August/Sept '82

ECONO TECH 16K RAM PACK

We believe the Econo Tech is the lowest priced 16K RAM available.

No frills - just a reliable and economical way to expand your ZX81.

ONLY £20.95 (\$39.95)

With advances in microtechnology we are now able to offer the

64K RAM PACK

Same quality as the 16K RAM below but giving massive memory to your

ZX81, yet having external dimensions no larger than the 16K RAM.

ONLY £62.95 (\$119.95)

As reviewed in 'Your Computer' March 82

16K RAM PACK

Quite simply the best available plus FREE 'Alien Attack' (7K M/code) on cassette - value £5.75 (\$11.00)

Compatible with printer
No wobble problems
Gold plated edge connector for perfect contact with your ZX81

Fully built, tested and guaranteed.
Uses existing power supply (Min. 600 m.a.)


Normally despatched within 10 days of receipt of your order.

**ONLY £26.50 (\$49.95)**

All prices are fully inclusive of post and packing.
OVERSEAS CUSTOMERS PLEASE NOTE: ALL PRICES ARE APPLICABLE FOR EXPORT, INCLUDING AIRMAIL POSTAGE. PAYMENT MAY BE MADE IN STERLING (MONEY ORDER AVAILABLE AT YOUR BANK) OR YOUR OWN U.S. \$ CHEQUE, MADE PAYABLE TO JRS SOFTWARE. DESPATCH NORMALLY 7 DAYS FROM RECEIPT OF YOUR ORDER.

JRS SOFTWARE**19 WAYSIDE AVENUE, WORTHING, SUSSEX. BN13 3JU Telephone: (0903) 65691**

PRINT OUT

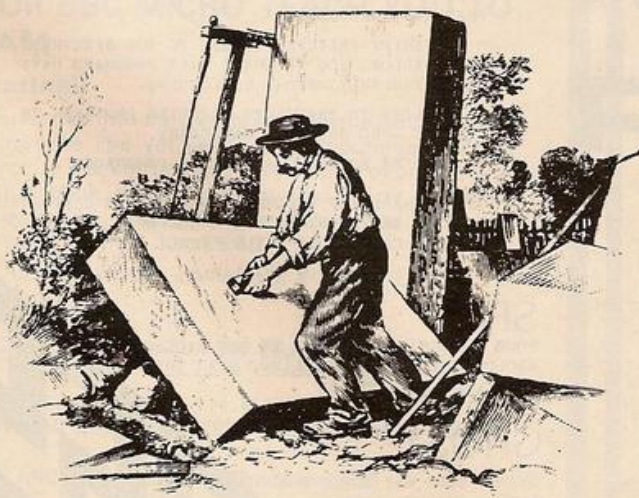

"Life would be so much easier with an
Amber 2400 Matrix Printer....."


**AMBER 2400
MATRIX PRINTER**

LOW RUNNING COST USING
PLAIN PAPER
FITS BBC, DRAGON, SPECTRUM
ATOM, TRS 80, UK101, VIC-20
AND MOST OTHERS

£69.95

excluding VAT
SEND LARGE STAMPED
ADDRESSED ENVELOPE FOR
DETAILS TO:

AMBER CONTROLS LIMITED
Central Way
Walworth Industrial Est.
Andover
Hampshire SP10 5AL

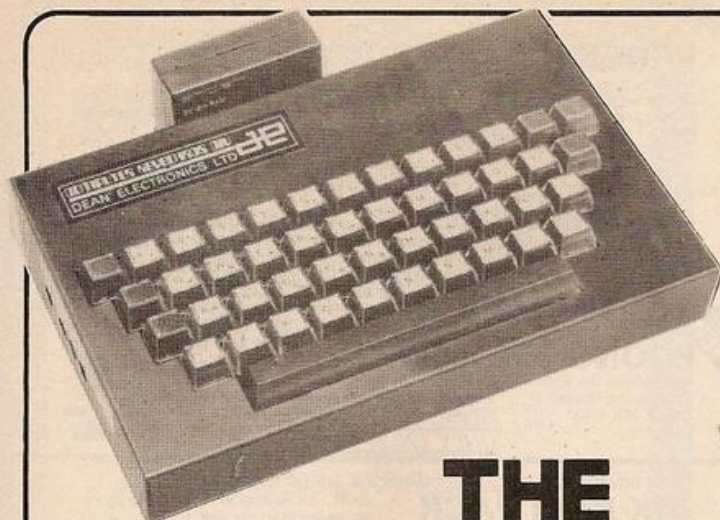

THE PROFESSIONAL ZX81 KEYBOARD

- All-you-need Keyboard Kit £28.95.
- Case only £15.00.

All prices inclusive of VAT, postage and packing.
Please allow 21 days for delivery.

- Plug in — no desoldering.
- Space bar linked to space key.
- Full travel keys. Six spare keys for your own use.
- Case available to hold keyboard and ZX 81 microcard.
- 16K RAM pack clamp supplied with case to eliminate white outs!!



COMPUTER KEYBOARDS DIV.
DEAN ELECTRONICS LIMITED

Glendale Park Fernbank Road Ascot Berkshire England
Dial-a-leaflet 03447 5661 Telex 849242

MAZE DRAG RACE

DRIVE THROUGH A GIANT MAZE 9 TIMES THE SIZE OF THE SCREEN PICKING UP POINTS AS YOU GO - BUT WATCH OUT FOR THE OTHER CARS, ROCKS, OIL AND ICE. A REALLY SUPERB M/C GAME...£3.95

KRAZY KONG

ALL MACHINE CODE VERSION OF THE POPULAR ARCADE GAME. THIS PROGRAM HAS ALL THE FEATURES OF THE ORIGINAL AND IS EVERY BIT AS FAST.....£3.95



** NOW YOU CAN WRITE INSTANT MACHINE CODE WITH -

MCODER

THE FIRST REAL COMPILER FOR THE ZX81. THIS SUPERB PROGRAM WILL INSTANTLY TRANSLATE BASIC PROGRAMS INTO SUPER-FAST MACHINE CODE.

MCODER OCCUPIES JUST OVER 2K AND ONCE ENTERED ALL YOU DO IS WRITE (OR LOAD) BASIC PROGRAMS, RUN AND DE-BUG THEM, THEN A SINGLE COMMAND WILL BRING MCODER INTO ACTION.

PRESS A KEY AND WATCH AS YOUR BASIC IS REPLACED WITH MACHINE CODE WHICH IS AUTOMATICALLY STORED IN A REM STATEMENT.

MCODER FAR OUTPERFORMS ANYTHING ELSE ON THE MARKET. WE GUARANTEE THIS PROGRAM WILL AMAZE YOU !

BUY MCODER NOW AND YOU'LL NEVER WRITE BASIC AGAIN -
.....£7.95



** IMPORTANT - ALL THESE PRODUCTS ARE FOR 16K ZX81 **

QSAVE

QSAVE IS AN EXCITING PACKAGE WHICH GIVES NEW LIFE TO YOUR ZX81. QUITE SIMPLY YOU CAN SAY GOODBYE TO THOSE WASTED HOURS SPENT LOADING AND SAVING PROGRAMS -

QSAVE LOADS & SAVES 16K IN ONLY 29 SECONDS!

HOW? - BY A COMBINATION OF SOPHISTICATED SOFTWARE AND AN AMPLIFIER / FILTER UNIT WHICH PLUGS IN BETWEEN YOUR CASSETTE RECORDER AND THE ZX81.

FEATURES INCLUDE:

- * A VERIFY FEATURE SIMILAR TO THE SPECTRUM WHICH ALLOWS YOU TO CHECK THAT PROGRAMS HAVE SAVED PROPERLY BEFORE UNPLUGGING.
- * ABILITY TO TRANSLATE EXISTING PROGRAMS IN MINUTES - NO RETYPING NECESSARY.
- * HANDLES BOTH M/C AND BASIC PROGRAMS.

THIS REMARKABLE PRODUCT WHOSE USE IS SUPPORTED BY MANY TESTIMONIALS COMES COMPLETE & READY TO USE AND COSTS JUST £15.95 INCL.

** 64K VERSION NOW AVAILABLE - £17.95 **

SP4

FOUR SUPERB SPACE GAMES IN ONE PACKAGE INCLUDES TAILGUNNER, ALIEN, STAR TREK AND SPACE DEFENDER. SUPERB VALUE AT ONLY.....£4.95

GHOST

GOBBLE YOUR WAY THROUGH A MAZE - GHOSTS, POWER FILLS ETC ETC. VERY FAST...£3.95



BBC MICRO INSTANT MACHINE CODE!

Yes, it's true. Instant machine code from a good subset of BBC BASIC. Type your BASIC program into your model B BBC Micro, trigger the compiler, and your program is changed almost instantaneously into superfast machine code. For £34.95 you get: Cassette version of the complete compiler (along with a version of the compiler for use with discs, ready for when you upgrade, the disc version being dubbed on the cassette after the cassette version); complete compiler listing; extensive documentation and instructions. The compiler was written by Jeremy Ruston.

THE BBC MICRO REVEALED

By Jeremy Ruston

...destined to become the bible of all BBC microcomputer users. ... (Personal Computing Today). If you've mastered the manual, then this book is for you. Just £7.95

LET YOUR BBC MICRO TEACH YOU TO PROGRAM

By Tim Hartnell

...takes you further into the cloudy areas of the BBC machine than anything else I've yet seen. ... (Computer and Video Games). If you're just starting out in the world of programming, then this book is the one for you. Forty complete programs, including Othello/Reversi, Piano and a host of dramatic graphic demos. Just £6.45

Interface, Dept. YC

44-46 Earls Court Road, London W8 6EJ

Please send me:


- ☐ INSTANT BBC MACHINE CODE—tape and book—£34.95
- ☐ THE BBC MICRO REVEALED—Ruston—£7.95
- ☐ LET YOUR BBC MICRO TEACH YOU TO PROGRAM—Hartnell—£6.45

I enclose £

Name

Address

SPECTRUM

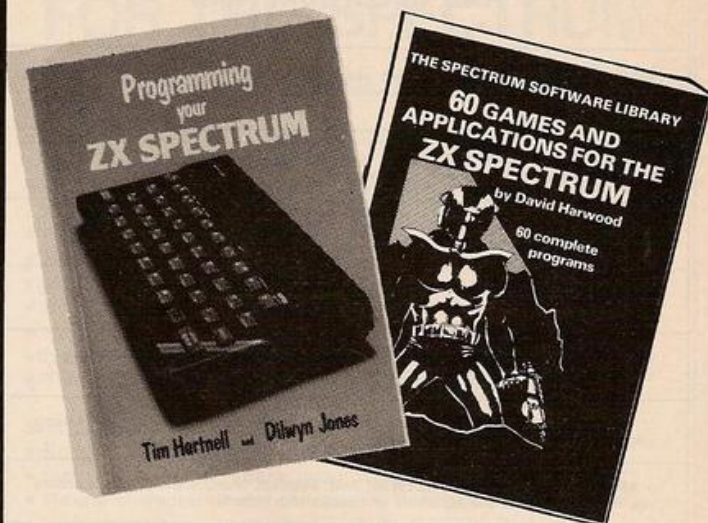

Make the most of your Spectrum, with these acclaimed books from the experts!

PROGRAMMING YOUR ZX SPECTRUM

Tim Hartnell and Dilwyn Jones

More than 100 routines and programs, 230 pages, and value for every Spectrum user. Learn how to make the most of user-defined graphics (with a Pacman-like program, DOTMAN), sound, colour, and such commands as ATTR, SCREEN\$ and BRIGHT. From the co-ordinator of the National ZX Users' Club, Tim Hartnell. Just £6.95.

THE SPECTRUM SOFTWARE LIBRARY

60 GAMES AND APPLICATIONS FOR THE
ZX SPECTRUM!

By David Harwood

Arcade games, intelligent board games, brain games and utility programs. They're all here in this massive collection of 60 tested programs for the Spectrum, compiled by Interface columnist David Harwood. Just £4.95.

Interface,
Dept. YC

44-46 Earls Court Road, London, W8 6EJ

Please send me:

- ☐ PROGRAMMING YOUR ZX SPECTRUM—£6.95
- ☐ THE SPECTRUM SOFTWARE LIBRARY—£4.95
- ☐ A sample issue of INTERFACE, the monthly magazine published by the National ZX Users' Club—£1.00

I enclose £

Name

Address

EDUCATIONAL SOFTWARE ZX81 (16K) AND SPECTRUM (48K)

INTERMEDIATE MATHS 1: 6 teach and test programs. Long Multiplication, Long Division, Highest Common Factor, Lowest Common Multiple, Fractions 1 (+ & -), Fractions 2 (X & ÷).

INTERMEDIATE MATHS 2: 6 teach and test programs. Areas, Perimeters, Simple Equations, Percentages, Sets, Venn Diagrams.

INTERMEDIATE ENGLISH 1: Meanings 1, Meanings 2 (harder), Parts of Speech, Proverbs, Similes, Anagrams.

INTERMEDIATE ENGLISH 2: Idioms, Opposites 1, Opposites 2 (harder), Group Terms, Odd Word Out, Spellings.

• **"O" LEVEL FRENCH REVISION:** 3 teach and test Grammar programs, plus 3 comprehensive Vocabulary programs.

• **"O" LEVEL MATHS REVISION:** 1 teach and test program, plus 2 programs using generated questions from the "O" level syllabus.

• **ARITHMETIC FOR THE UNDER 8s:** Add, Subtract, Multiply and Divide. Numbers are in large size type. 3 levels. Entry of answers with units first.

• **EDUCATIONAL QUIZ:** 4 programs for the family. Questions on General Knowledge, Reasoning, English and Maths. All questions use RND function.

*CASSETTES marked * are not yet available for the Spectrum. £4.50 per cassette, or send sae for catalogue to:*

ROSE CASSETTES
148 Widney Lane, Solihull,
West Midlands LB91 3LH

Our software has received good reviews in "Your Computer", "Educational Computing" and "Sinclair User" and is included in the MUSE Library of educational software.


Lion Micro Computers

London's widest range of Computer Books & Computer Magazines

EXTENSIVE RANGE OF SOFTWARE
ACCESSORIES AND PERIPHERALS

For experts and beginners alike

Lion House, 227 Tottenham Court Road, London W1P 0HX
Telephone: 01 580 7383 & 01-637 1601 Telex: 28394 Lion G.

Open 9 to 6 Mon-Sat 
SEND LARGE SAE FOR OUR LISTS



BRITAIN'S LARGEST SINGLE
MICRO USER GROUP

BEEBUG FOR THE BBC MICRO

INDEPENDENT NATIONAL USER
GROUP FOR THE BBC MICRO

IF YOU OWN A BBC MACHINE, OR HAVE ORDERED ONE, OR ARE JUST THINKING ABOUT GETTING ONE, THEN YOU NEED BEEBUG. BEEBUG runs a regular magazine devoted exclusively to the BBC Micro (10 issues per year). Now 36 pages.

Latest news on the BBC project.

What you should know before you order a machine.

Members' discount scheme on books and hardware.

New program listings, regular advice clinic, and hints and tips pages in each issue.

April Issue: 3D Noughts and Crosses, Moon Lander, Ellipse and 3D Surface. Plus articles on Upgrading to Model B, Making Sounds, and Operating System Calls.

May Issue: Careers, Bomber, Chords, Spiral and more.

Plus articles on Graphics, Writing Games Programs, and Using the Assembler.

June Issue: Mazetrap, Mini Word Processor, Polygon; plus articles on Upgrading, The User Port, TV set and Monitor Review, Graphics Part II, More Assembler Hints, Structuring in BBC Basic, plus BBC Bugs.

July issue (36 pages) Invaders and patchwork programs. Fix for BBC cassette Bugs, Mode 7 explored, User define Keys, Software reviews, High res graphics printout, RS423 receive fix.

Membership

6 months £4.90

1 year £8.90

Send £1.00 and A4 SAE
for sample

(Overseas add £1.00 for 6 mths.
£1.50 for 1 year)

Make cheques to
BEEBUG

and send to

BEEBUG, Dept 4,
374 Wandsworth Rd.,
London, SW8 4TE.

ZX SPECTRUM & ZX81 EDUCATIONAL SOFTWARE

Spectrum Junior Education

£5.50

Use your Spectrum to help your children with their school work. This cassette contains eight attractive, easy-to-use programs for the 7 to 11 age group.

Topics include English comprehension, spellings, homophones, junior science, maths and history.

* Entering your own questions and answers allows you to adapt two of these programs for exercises in any subject area.

* Moving colour graphics and sound are extensively used to improve motivation.

* Use the "draw" program to produce pictures, maps and diagrams.

Suitable for the 16K or 48K Spectrum. Program notes are supplied.

O-Level Chemistry (C1)

£5.50

This cassette contains four clearly presented revision/tutorial programs. The subject matter has been carefully structured to cover the most important aspects of:

* Elements, compounds and mixtures.

* Structure, bonding and properties.

* Redox, electrolysis and the activity series.

* Acids, bases and salts.

48K Spectrum and 16K ZX81 versions of the cassette are available. Please specify which you require.

Professional Computer Assisted Learning materials from:


CALPAC COMPUTER SOFTWARE
108 Hermitage Woods Crescent, St Johns,
Woking, Surrey GU21 1UF.

Overseas orders: £6.50 (\$11.60) per cassette; includes AIRMAIL postage.

ANDREW HEWSON'S BOOKS

20 BEST PROGRAMS

for the ZX SPECTRUM WITH EXPLANATORY TEXT



NETT
PRICE
£5.95

ANDREW HEWSON

Mr HELPLINE — the man who answers your ZX queries in his column in Sindair User, the author of HINTS & TIPS FOR THE ZX80 and HINTS & TIPS FOR THE ZX81 now presents:

★ 20 original programs for you to load into your Spectrum.

★ 20 interesting programs for you to enjoy and learn from.

★ 20 great programs to teach you about fixed and variable length records, binary searches, bubble sorts, graphic displays and much, much more...

Program titles include:

Machine Code Editor — Write, modify, extend and load machine code using this all-basic program. No need to use an Assembler when you have this program.

Index File — Learn about fixed length records, save numeric and string information, add to, sort, modify, delete and print your records. Ideal as a computer based filing system.

Duckshoot — Learn how to manipulate the attributes file and have fun at the same time.

Graphix — Construct up to 210 graphics characters with the full on-screen editing facilities, enhance and modify them and recall them later to build a detailed display to save on cassette.

Spiromania — A program to stretch your artistic talents, imagination and ingenuity. Draws a limitless variety of curves and spirals.

Plus: FOOTBALL, DIGITISER, DIARY and many more.

Available through Computer Bookshops and W.H. SMITH.

FOR THE SPECTRUM

40 BEST MACHINE CODE ROUTINES FOR THE ZX SPECTRUM

£5.95

by Andrew Hewson and John Hardman.

Section A: Three chapters explaining what you need to know about Z80 machine code on the Spectrum.

- ★ How to load and save machine code.
- ★ How to use the system variables.
- ★ How memory is organised.
- ★ How program lines are stored.
- ★ How to use the stack, the display, the attribute files.
- ★ How to call ROM routines — where they are and what they do.
- ★ The structure of Z80 code — plus a valuable glossary.

Section B: 40 routines including,


- ★ Scroll — up, down, side to side by pixel or by character.
- ★ Search and replace, token swap, string search.
- ★ Rotate character, invert character — horizontally and vertically.
- ★ Line remember — including GOSUBs, GOTOs, RUN etc.

All routines are relocatable (except 'line remember')

This book teaches the beginner all he needs to know in a simple, easy-to-learn form and its an invaluable reference work for the expert too!

NIGHTFLITE FOR ZX SPECTRUM

£5.95

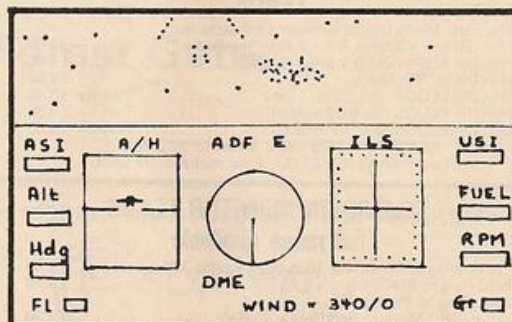

Fly your own aircraft from take off to landing via navigational beacons, over mountains and using a fully detailed direction finding and instrument landing system. *You are the Pilot of a light aircraft flying at night. *You must use your skill and judgment to fly your aircraft accurately over radio beacons and then land safely on the runway. *Hazards are mountains and cross winds. *Instruments: Artificial Horizon, Non Directional Beacon, VHF Omnidirectional Range, Instrument Landing System. *Readouts: Gear, Flap, Air Speed, Distance Measuring Equipment, Vertical Speed, RPM and heading. *Visual display of runway on approach. *5 Modes from Take off to Autopilot. *Happy landings.*

Z80 OP CODES £1.45

A must for the beginner and the experienced programmer alike. This handy ready reckoner lists all 600 plus Z80 machine code instructions in decimal and hexadecimal with their mnemonics. Each Op Code is succinctly explained and cross-referenced. Supplied in a protective transparent wallet for easy reference and durability.

PILOT ZX81 £5.95

Essentially the same as Nightflite but without the hi res graphics.

PUCKMAN ZX81 £5.95

All action display. Best score to date, scour the maze for food, dodge the ghost, eat a strawberry and attack the ghosts.

HINTS & TIPS FOR THE ZX81 £3.95

Available by direct mail order or through computer bookshops and W.H. Smith.

THE PROGRAMS

The programs advertised here are available from computer bookshops with a software stand, and many independent micro-computer shops.

RETAILERS

We are continually on the look out for new outlets. If you are interested in stocking the items advertised here, write to us for our trade rates.

URGENT

We require high quality Spectrum and Dragon software. Good royalties paid. Send your samples today for fast evaluation.

QUANTITY	PRODUCT	COST
TOTAL		

MAKE CHEQUES/PO's PAYABLE TO: HEWSON CONSULTANTS.

NAME.....
(block capitals please)
ADDRESS.....

My Access/Barclaycard No. is.....

Signed.....
Post to: HEWSON CONSULTANTS, DEPT SU 60A ST MARY'S STREET, WALLINGFORD, OXON OX10 0EL.
TEL (0491) 36307.

C.J.E. Microcomputers

BBC
SPECIALISTS

VAT included where applicable

QUALITY DISK DRIVES

Single drive 40 track single sided 1 x 100k	£200.00
Dual drive 40 track single sided 2 x 100k	£350.00
Dual drive 40 track double sided 2 x 200k	£546.25
Dual drive 80 track double sided 2 x 400k	£799.25

All drives are cased with own PSU for reliability, and include connecting cables and utilities disk.
Delivery £4.00.

SOFTWARE FOR THE BBC MICRO

MISSILE CONTROL the first implementation on the BBC Micro of the popular arcade game. (32K)	£9.00
MAZE MAN an authentic version of the popular arcade game. (32K)	£6.00
BALLOONS a highly original game that soon becomes compulsive playing. (32K)	£6.00
DISSASSEMBLER the memory dump routine includes a scrolling back in memory facility. (16K)	£5.00
MISSILE CONTROL, MAZE MAN & BALLOONS use the Keyboard or Joysticks for control	

30+ PROGRAMS FOR THE BBC MICROCOMPUTER

This Book contains program listings, with explanations & tips on using the BBC Micro
GAMES UTILITIES GRAPHICS & MUSIC
Most programs will run on Model's A & B
Edited by C.J. Evans, various Authors.
A pair of cassettes with all the programs is available.

BOOK £5.00
BOK & CASSETTE SET £9.00

LEADS

The BBC Micro comes without a cassette lead	
7Pin Din to 2 x 3.5mm & 1 x 2.5mm minijacks	£4.00
7Pin Din to 5Pin Din & 2.5mm minijack	£4.00
7Pin Din to 7Pin Din	£4.00
7Pin Din PLUGS	Two for £0.65
6Pin Din PLUGS (for RGB socket)	Two for £0.65
5Pin Din PLUGS (360° for RS232)	Two for £0.65
RS423 TO RS423 (BBC Micro to BBC Micro)	
Two metre cable £4.00 Four metre cable £5.00	

TELEVISION/MONITOR LEADS

full range available

Phono plug to Co-ax with high quality cable 3 Metres	£3.00
BNC Plug to BNC Plug	£3.10
BNC Plug to Phono Plug (i.e. BBC Micro to Rediffusion TVRM)	£2.20

PRINTER CABLES

BBC to 36 way Centronics Type connector	£17.50
BBC to 25 way D Type (For use with RS232)	£9.50
BBC to 40 way edge connector (Centronics 739)	£20.00
TORCH to 36 way Centronics Type connector	£20.00

BLANK C30 COMPUTER CASSETTES

Ten for £4.50
15 Way D Type Plug with Cover £2.75
Computer graphics design pads 100 sheets £4.00

BBC UPGRADE KITS

RAM UPGRADE (100ns)	£23.00
KIT A Printer & I/O Port	£9.50
KIT B Analogue Port	£8.00
KIT C Serial I/O & RGB	£10.00
KIT D Expansion Bus/Tube	£7.50
Full Upgrade kit	£58.00

All components full specification

STAR DP8480 PRINTER FROM £250.00 INC VAT

80 CPS : 80/96/132 COLS BIDIRECTIONAL LOGIC SEEKING TRACTOR WITH FRICTION FEED	
CENTRONICS	£217.39 + £32.61 VAT = £250.00
RS232	£235.00 + £35.25 VAT = £270.25
High Res Graphics option to allow BBC Screen dumps	£15.00/£20.00
(24HR SECURICOR DELIVERY FOR PRINTERS £8.00)	

VAT included where applicable

Send SAE for full Price List of our large range of accessories.
POSTAGE Add 50p per order or as stated

C.J.E. Microcomputers

Dept (YC), 25 HENRY AVE, RUSTINGTON,
W. SUSSEX BN16 2PA (09062) 6647

HOME COMPUTER USERS

PRODUCT INFORMATION SERVICE

Do you want the right computer for you? Do you want the right hardware? Or the right software? At the right price? If you're thinking about making a purchase but aren't sure just which product will suit you best why not seek a swift overall picture of what's around from us? Simply let us know what you're interested in and we'll send you a personal summary of what's available: facts, figures, suppliers, details. We'll also enclose as much manufacturers' literature as we can and add whatever related data we think might be worthwhile for you. We'll tell you of any special offers we're aware of, and even help you with your order is you wish. If we don't know how to answer your enquiry we'll try to find out: if we can't we won't take your money. Try us — we're here to help you make the right decision.

SECONDHAND COMPUTER REGISTER

We can also help if you want to buy or sell secondhand. We keep a register of currently available used computers and peripherals and send appropriate details from it to every interested enquirer. This advertisement appears in many computer magazines, which means a lot of people will read it. So, if you're looking for secondhand value write and ask us. If you want to sell, send us full details of what you have to offer and we'll do the rest. Registration costs £4 (or £3 if the total asking price is under £100), and will be maintained until you've sold. Each registration will be acknowledged.

ALL ENQUIRIES COST £1

Please send enquiries/registrations (including cheque/PO) to:

DAVID HEARTFORD
91 High Street, Evesham, Worcs WR11 4DT

SUPPLIERS: If we haven't contacted you please write to us.

Campbell Systems

The very best in machine code for SPECTRUM and ZX81

Spectrum 16K GULPMAN game of the xxxMAN variety, with 15 mazes, 4 chasers, laser defence, 9 grades, 9 speeds, demo mode, choice of joysticks control. "An extraordinarily good program" raves Boris Allan for *Popular Computing Weekly*. We think you will agree. £5.95.

Spectrum 48K MASTERFILE business/domestic filing and reporting system. So flexible it is equally usable for your mailing-lists, catalogues, stock control, text extracts . . . applications are endless. Fully user-defined data and report display formats, dynamic variable-length file, records, and data items. Fully menu-driven, with powerful search facilities, sorting, total/average, update, multiple independent files, printing. Yes, we aim to support Microdrive when Uncle delivers. Nearly all the 8K we use is machine code, so you get 32K per file. Comes with example file and 12-page manual. £15.00.

Spectrum SPDE 16K Disassembler and Editor, as used by other ZX professionals, and we used it to develop the above. £5.95.

ZX81 16K GULP II almost identical spec to GULPMAN, £4.75.
ZX81 16K to 64K THE FAST ONE is the predecessor to MASTERFILE and is in use all over the world now. Specification is very similar to MASTERFILE. £12.00.

All programs supplied double-recorded and mailed 1st class by return. Prices include VAT and postage within Europe. SAE for full list.

CAMPBELL SYSTEMS (Dept YC)
15 Rous Road, Buckhurst Hill, Essex IG9 6BL, England

There's only one thing that can help you get the best out of your BBC Micro . . .



The only non-commercial independent National BBC Microcomputer User group

Please enrol me as a member of LASERBUG. I enclose a cheque/postal order for £12.00 for twelve months subscription/£1.00 plus S.A.E. for sample copy.

Name

Address

Tel

Please make all cheques/postal orders payable to Laserbug and send to:

LASERBUG,
4 Station Bridge,
Woodgrange Road, Forest Gate,
London E7 0NF.

SIMON MICRO-SOFT

FULL COLOUR, SOUND, HIGH RES. & U.D.G. PROGRAMS
 FOR THE

16K ZX SPECTRUM

COLLECTION ONE £4.95

CAR CHASE

Similar to the popular Arcade game "Dodgems" but with a unique and exciting difference.

FRUIT MACHINE

This game offers gamble, hold and super nudge and is possibly one of the most realistic versions available.

COLLECTION TWO £4.95

PLANET DEFENDER

New moving landscape space game for the Spectrum. If you can retrieve the Plasma Bombs then stand by to defend yourself.

U.D.G. Toolkit

User defined graphics made easy! Auto-load, Auto-save data display (printer optional), rotate. Binary or decimal number accepted without the need to use the awkward BIN key.

Our computer programs are recorded on quality cassettes and are guaranteed for one year. Each collection of two programs costs only £4.95 and all four may be purchased at a special discount rate of £7.95.

ORDER FORM

NAME

ADDRESS

PLEASE SEND ME

COLLECTION ONE ☐ COLLECTION TWO ☐


BOTH COLLECTIONS ☐

I enclose cheque/P.O. for

SIMON MICRO-SOFT, Dept YC, 175 GODINTON ROAD,
 ASHFORD, KENT, TN23 1LW

*****SPECTRUM AND ZX81 SOFTWARE*****

from



*****SUPERCHESS*****

Play against the most powerful ZX chess program. *10 levels of play *2 evaluation strategies *a substantial book of openings eg. Siciliani, Ruy Lopez, Queens Gambit *high quality display with hi.res. pieces & board, list of moves, playing level. Many more features too: self play; recommended move; analyse. Each cassette comes with full instructions.

16K ZX81 £6.95..... 48K SPECTRUM £7.95

SPECTRUM SPEECH

Yes it's possible! Speech for the Spectrum, ready to use in your programs. Each cassette is supplied with user documentation and sample program. No extra hardware is required, uses Spectrum's speaker and top 32K RAM.

VOICE PACK 1 — MATHS, 30 plus words (0 to 9, plus, add, divide, etc.)

VOICE PACK 2 — SPACEWAR, 30 plus words ('red alert', 'fire', 'phasors', etc.)

48K SPECTRUM..... £6.95 each

SPACESHIP ADVENTURE

Can you find a way to leave the planet with your damaged spaceship?

48K SPECTRUM..... £3.95

SPECTRUM ASSEMBLER

An essential aid for all machine code programmers. User documentation is supplied with each cassette.

48K SPECTRUM..... £5.50

All prices are inclusive. Dispatch within 48 hours of receipt of order. Send cheque or postal order (and state whether ZX81 or SPECTRUM) to:

CP SOFTWARE

17 Orchard Lane, Prestwood, Gt. Missenden
 Bucks. HP16 0NN.

Also available from:


PHILIP COPLEY Ltd

West Yorkshire. Tel: 0924 272545



GEORGES

89 Park Street, Bristol


A + F SOFTWARE A + F

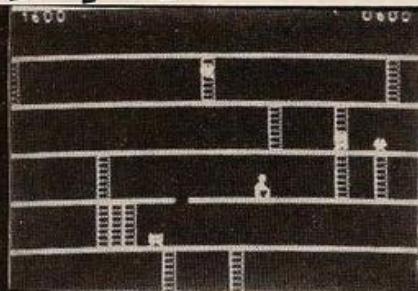

SPACE PANIC 12K ATOM
PAINTER 12K ATOM

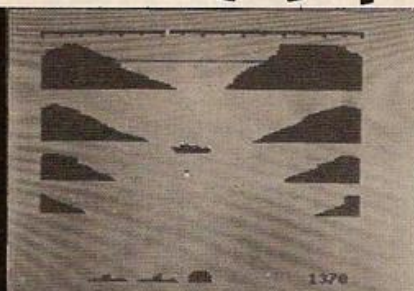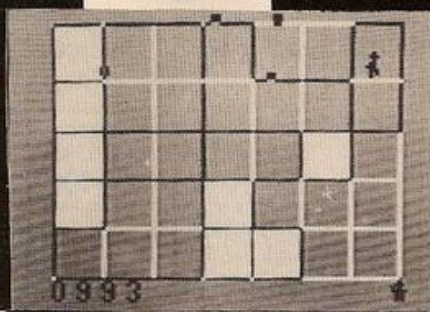

TORPEDO RUN 12K ATOM
FROGGER BBC MODEL B

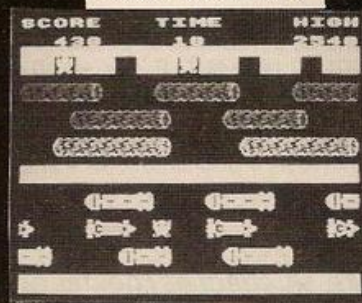

12K ATOM

Starburst £5.75
Torpedo Run
Zodiac*
Cylon Attack
Space Panic £6.90
Dath Satellite*
Painter

Hours of enjoyment for all the family. Most are written in machine code and feature fast moving graphics, sound effects, high score tables etc.

BBC MODEL A

Tower of Alos*
(above also runs on Model B)

BBC MODEL B

Lunar Lander
Early Warning £6.90
Road Runner
Frogger £8.00

* Hours of purgatory with these adventure games — can you get out alive?

* **NEW** BBC MODEL B — BRAND NEW INTERACTIVE ADVENTURE GAME WITH SUPERB GRAPHICS. 'PHARAOH'S TOMB' WILL BE THE BEST £8.00 YOU HAVE EVER SPENT ON AN ADVENTURE GAME. *

ADD 4 OR 6 EPROMS TO YOUR ATOM WITH OUR 'ADDA' BOARDS 4 WAY 'ADDAN EPROM' BOARD £20.75

6 WAY 'ADDAN EPROM' BOARD £28.75

ATOM 'TOOLKIT' EPROM — 22 EXTRA COMMANDS AND 5 FEATURES INCLUDING 1200 BAUD CASS. OPERATING SYSTEM £18.50


A + F's QUALITY SOFTWARE LIBRARY ALWAYS REQUIRES NEW PROGRAMS. SUITABLE PROGRAMS CAN EARN TOP ROYALTIES. SOFTWARE UNDER DEVELOPMENT FOR ATOM, BBC, DRAGON, SIRIUS AND SINCLAIR.

TO ORDER, WRITE ENCLOSING CHEQUE, POSTAL ORDER OR CREDIT CARD NUMBER OR TELEPHONE CREDIT CARD NUMBER — 24 HOUR SERVICE
VISIT OUR SHOWROOM FOR A DEMONSTRATION OR MAIL ORDER

061-223 6206

TELEX: 667461 (Attn. A + F)

830 HYDE ROAD GORTON MANCHESTER M18 7JD

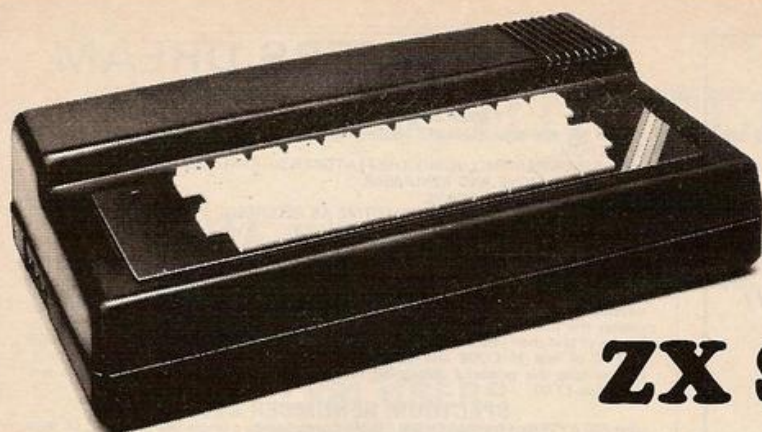

New From Fuller
FD System for the

ZX SPECTRUM

£39.95

+ £2.50 p & p.

Professional Keyboard & Case —

This unit has the same high standard as our ZX81 unit.

Tough A.B.S. Plastic case encloses our Keyboard, the Spectrum Printed Circuit Board and the Power Supply.

Our own Power supply is available:- 9 volts DC at 2 amps.

Mains either 110v or 240v AC at £5.95 + 80p. p & p.

The Keyboard has 42 keys with all the spectrum functions printed onto them, the full travel key switches have gold plated contacts and a guaranteed life of 10⁶ operations.


INSTALLATION - Simply unscrew the ZX printed circuit board from its case and screw it into the FD case, plug in the keyboard and that's it. No technical know how or soldering required, the built unit is tested and comes with a money back guarantee.

Spectrum Keyboard and Case Kit £33.95

Our Mother Board for the spectrum has 2 slots at £15.95 or 3 slots at £19.95, this unit also fixes inside the case. p & p 80p.

SPECTRUM SOUND AMPLIFIER £5.95 + 80p p & p.

Complete with leads, volume control and loud speaker in tough ABS Plastic case measuring 5" x 3" x 1" just plugs into your spectrum MIC input.



First Anniversary Offer

The FD System is now one year old and Fuller are celebrating with this amazing offer on the FD42 Professional Keyboard and Case.

Makes an ideal Christmas present to expand the new low priced Sinclair ZX81. Or why not buy a new ZX81 based system directly from us, consisting of ZX81, FD42 keyboard and case with power supply and reset switch, leads and manual £69.95 + £2.50 p & p

FD42 Keyboard and Case Kit £24.95 + £2.50 p & p

FD42 Keyboard kit £14.95+80p p & p

£29.95

+ £2.50 p & p

STAR TREK FOR ZX 16K SPECTRUM

Play this popular adventure game on your Spectrum with ship display and sound
£5.00 + 50p p & p

GUARANTEED 14 DAYS DELIVERY FROM RECEIPT OF ORDER, OR CALL TO THE ZX CENTRE.

Mail to **FULLER MICRO SYSTEMS,**

The ZX Centre, Sweeting Street, Liverpool 2. England, U.K.

Please Supply:-

Name

Address

SAE for more details — Enquiries: Tel. 051-236 6109

FULLER FD SYSTEM

THE

BUFFER MICRO SHOP

(NEXT TO STREATHAM STATION)

NEW SOFTWARE SHOP EXCLUSIVELY FOR

ZX81

PROGRAMS, GAMES, "ADD-ONS"

MOST OF THE MAIL ORDER ITEMS ADVERTISED
IN THIS MAGAZINE AVAILABLE OVER THE COUNTER

LOADING PROBLEMS? TRY OUR INTERFACE
BUSINESS & TECHNICAL DATA HANDLING PROGS;
PROPER KEYBOARDS; CONSOLES; VDUs

The BUFFER Micro Shop,
374a Streatham High Road,
London SW16
Tel: 01-769 2887

PROGRAMMERS DREAM (SPECTRUM)

P.D. is an advanced TOOLKIT adding the following extra features to the standard SPECTRUM.

- (1) RENUMBER (INCLUDING THE FEATURES OF RENUMBER DELETE).
- (2) BLOCK MOVE AND RENUMBER.
- (3) BLOCK OR LINE ERASE.
- (4) CHANGE STRINGS (AS SELECTIVE AS REQUIRED).
- (5) DUMP (VARIABLE NAMES AND VALUES).
- (6) DISPLAY PROGRAM AND VARIABLES SIZE.

If you need a speedy M/CODE program that will RENUMBER, CHANGE all or some of your variable or string names. Change commands, string contents, MOVE whole blocks of program and RENUMBER them to fit into available gap. Print to the screen the final or developing values of the program variables, inside a FOR NEXT LOOP if required, to display the size of your program with or without variables. To erase instantly lines or blocks of text then you need PROGRAMMERS DREAM. The whole program is just 1450 BYTES of fast M/CODE and requires only a single line of BASIC to control it. Furthermore this powerful debugging tool is complete with explicit instructions and costs just £7.00.

SPECTRUM RENUMBER DELETE

Just 600 BYTES of fast MACHINE CODE. Controlled by a single line of BASIC (A 9999 REM) into which the START, NEW START, INTERVAL & STOP NUMBERS are entered. A BLANK REM gives an AUTO 10 RENUMBER. Resolves leading jump numbers in expressions and non-existent jump numbers if affected by a renumber pass. All GOTO, GOSUB, RUN, LIST, LLIST, RESTORE JUMP NUMBERS ARE CATERED FOR. NO EXTRA WORK. The last altered jump number can be flagged by listing after a pass. Full legality checks and ERROR REPORTS. DELETE simply requires a start and stop number and it's ready. Call from BASIC or immediate mode. Quick, clean and easy. "You won't buy a better RENUMBER program for the SPECTRUM." £5.00, inc VAT and post.

SPECTRUM DISASSEMBLER

Your flexible friend. By using the printer buffer for temporary storage this program allows you to format output as required. Its output is a clearly defined 12 CHARACTER mnemonic although 9 will suffice. This can be printed to the screen in one or more columns, or to the ZX printer, into an array for later printing, or use it with your M/CODE loader program. All 1,2,3 and 4 BYTE Z80 op-codes handled. Also included are the calculation of both absolute and relative addresses plus SPECTRUM RST literals. Switch literals on and off to print TABLES and other FLAGS. Complete with a demo program in order that you may extract the best from this excellent program. This may be the key to your understanding of the SPECTRUM. JUST 1500 bytes of fast M/CODE it's flexible and will even disassemble itself. JUST £5.50, INC.

DI-LOADER

All the features of the disassembler and more. Disassemble CODE as you load it. Backtrack. INSTANTLY create an insertion gap, or DELETE any amount of CODE. Use LITERAL SWITCHES, RESTARTS or STOPS. Auto RAMTOP setting loads CODE at given address. Display features ADDRESS, CODE, Z80 MNEMONIC AND ASCII. Program holds M/CODE in BASIC to preserve RAMTOP for the loaded CODE. Only 4692 BYTES. Speed your understanding of M/CODE PROGRAMMING. Full instructions. £7.00.

ALL THE ABOVE M/CODE UTILITIES ARE POSITION INDEPENDENT FOR LOCATION. ABOVE A RAMTOP OF YOUR CHOICE.

WORK FORCE

140 WILSDEN AVE, LUTON, BEDS.

Hardware & Software

HARDWARE

- ADPROM 4000 FOR CONNECTING EPROMS TO YOUR COMPUTER (VIA 24 PIN EPROM SOCKET) ATOM, PET ETC.
- GEM 100 CMOS BASED EXPANSION BOARD FOR ACORN ATOM.
- COMPUTAPMASTER FOR ALLEVIATING THOSE TROUBLESOME LOADING PROBLEMS — CAN BE USED FOR COPYING TAPES.
- CONSOLE CASES FOR THE ATOM.

SOFTWARE

- GAMES, BUSINESS PROGRAMS ETC.

★ STOP PRESS ★
CPROM SPM
A REVOLUTIONARY METHOD OF
PROGRAM STORAGE USING SEMI-
PERMANENT MEMORY CHIPS WITH BATTERY
BACK-UP. FOR USE WITH ADPROM 4000.

SEE US AT THE

NORTHERN COMPUTER FAIR

25-27 NOV. 1982 STAND 432

FULL DETAILS OF ALL OUR PRODUCTS WILL BE SENT
ON RECEIPT OF AN A5 S.A.E.

ELINCA PRODUCTS LTD (Dept. C)
LYON WORKS, CHAPEL STREET
SHEFFIELD S6 2HL

ZX81 & 16K

THE TOMB OF DRACULA!

3D HORROR ADVENTURE GAME!



Occupying over 13½K of memory, a superb 3D graphics adventure game for the ZX81 with 16K RAM, for only **£3.95!** Enter Dracula's tomb at 30 minutes to sunset ... wander through the tomb's pre-mapped 300 vaults in search of the fabled Vampire's Treasure ... pick up valuable silver stakes and use them to defend yourself against the lurking horrors ... ghouls, zombies, pits of primeval slime ... See them all on the ZX81's plan of the tomb ... when it will let you! Take a chance on a Mystery Vault ... if your dare! And all the time the minutes are ticking by to sunset ... when Dracula rises from his coffin and comes after you! Each of the infinite levels of the tomb has its own 300 vaults ... go as deep as you like, the Prince of Darkness will seek you out in his blood-lust! **WARNING:** people of an exceptionally nervous disposition should play this game only during the hours of daylight! Special facility enables a game in progress to be saved on tape so you can continue it whenever you choose.

Price of only **£3.95** includes ready-to-load cassette with library case and inlay, full instructions, postage and packing. Order today! Money refunded if not delighted! Send cash, P.O. or cheque to:

MOVIEDROME VIDEO (DEPT. YC7)
19 Leighton Avenue, Pinner, HA5 3BW.

STONECHIP ELECTRONICS



PRODUCTS FOR VIC-20, SPECTRUM, ZX81

ZX81 USERS THE ZX-PANDA

UNIQUELY EXPANDABLE 16K RAM
PACK



EXPANDABLE INTERNALLY BY PLUG-IN MODULE TO
FULL 32K

ATTRACTIVE CUSTOM MADE CASE CONTOURED TO
REAR OF ZX81 FOR MAXIMUM STABILITY
COMPACT SIZE. LED POWER INDICATOR
COMPATIBLE WITH MOST EXPANSION SYSTEMS

ZX-PANDA 16K EXPANDABLE RAM
ZX-PANDA 16K EXPANSION MODULE
OR FULL 32K EXPANDED

Now available from Green's at Debenhams
and other local dealers.

Suggested retail price for 16K — £32.95



ZX SPECTRUM OWNERS SPECTRUM ECHO

MAKE FULL USE OF YOUR SPECTRUM'S SOUND
FACILITY BY AMPLIFYING IT! ENABLES LOADING AND
SAVING TO TAPE WITHOUT SWITCHING LEADS
NO ADDITIONAL POWER SUPPLY REQUIRED
OTHER FEATURES INCLUDE:

- * TONE AND VOLUME CONTROL
- * AUDIBLE CUEING FACILITY
- * DIN COMPATIBILITY
- * ATTRACTIVELY CASED

£23.50

VIC-20

OWNERS

Fully Assembled, Cased and Guaranteed

MASSIVE 16K RAM MEMORY EXPANSION

PLUGS DIRECTLY INTO YOUR VIC-20 OR
MOTHERBOARD

£44.95

EXPAND YOUR VIC-20 WITH

Tandem

3 + 1 EXPANSION UNIT
FOR USE WITH MEMORY AND GAMES CARTRIDGES
MORE THAN 1 UNIT CAN BE USED IN TANDEM TO GIVE
EVEN MORE EXPANSION
INCLUDES ROM SOCKET
PLUGS DIRECTLY INTO YOUR VIC-20 EXPANSION PORT
ATTRACTIVELY CASED

£35.00

PLEASE SEND ME:

.....

.....

I enclose £

NAME

ADDRESS

.....

.....

YC12

Send now to:

**STONECHIP ELECTRONICS,
UNIT 4, HOSKINS PLACE, WATCHETTS RD, CAMBERLEY,
SURREY. TEL: (0276) 681131
MAKE CHEQUES OR P.O.'s PAYABLE TO: STONECHIP LTD**

ALL PRODUCTS FULLY ASSEMBLED, TESTED AND GUARANTEED
ALL PRICES FULLY INCLUSIVE
ALLOW 28 DAYS DELIVERY

ZX81 MACHINE CODE?

**ZX.ASZMIC rom transforms ZX81 into an
Assembly Language programming unit**

• FULL-SCREEN EDITOR

Sixteen shift keys take you into a world with a word processor feel. A blink cursor moves at your command to control insertion, rubout, line or string deletion, auto-scroll & page flip up or down. Text block operations. Ultra-fast editing.

• MULTI-FILE SYSTEM

Declare as many files as you like, with any names you like, & they are automatically handled by the Operating System. Merge them, delete them, print, save & load them, & edit them by name. Superb flexibility with a simple but powerful system.

• TOTAL ASSEMBLER

Full Z80 mnemonics, unlimited length labels, ORG & EQU directives, proper assembly listings with errors flagged on screen or printer. Relocatable object code & options to facilitate cross-assembly. Interpretive immediate execution available.

• POWERFUL DEBUG

All the usual dump, modify, fill & copy commands; plus breakpoints, single stepping, context control, the convenience of interpretive execution mode, full use of the names in your program, Command Macros, autodump, and full operating system interface.

• HI-RES GRAPHICS

255 x 144 resolution under program control to give you truly convincing graphics. With the power & flexibility of assembler you can really use this high definition.

• MUCH, MUCH MORE

Repeat function on all keys. Double height titling on printer. Lots of extras. But more important than all these features, attractive though they are, is the fact that ZX.ASZMIC is an integrated development system in which everything fits together to give you a tool which can satisfy the professional programmer by simplifying all stages of the program development process. It is excellent for those who are taking the first steps into real programming but the more expert you become the better you realise just what ASZMIC can do for you. If you are at all interested in machine code it will be worth your while to find out more.



£ 39.95
total

NEW
Send for details of
under-the-keyboard board
for ASZMIC & BASIC.

Comprosys limited

I enclose £39.95. Please rush me ZX.ASZMIC + manual

NAME

Address

Sole UK agents: CAPITAL COMPUTERS LTD.

1 Branch Rd. Park St. St Albans AL1 4RJ.

Phone 0727 72917.

Cheques payable to Comprosys/ASZMIC YC12

EXPLORING SPECTRUM BASIC

Mike Lord's latest book takes the reader beyond the Sinclair Manual. It contains a wealth of programs and explanations of Spectrum BASIC programming techniques. Topics include writing games programs, personal, business and engineering applications, and utility programs. Worth far more than £4.95

THE EXPLORERS GUIDE TO THE ZX81

Mike Lord's acclaimed book for the ZX81 enthusiast. Includes games, business, engineering and utility programs for both 1K and 16K machines, an introduction to Machine Language, with a list of useful ROM routines, hints & tips, and hardware notes including RAM and I/O circuits. "Of the greatest value" (ZX Computing review) £4.95

MASTERING MACHINE CODE ON YOUR ZX81

By Toni Baker; 180 pages of immense value to beginner and expert alike. £7.50

All prices include U.K. P & P - no VAT on books.
Overseas customers add £1.50 carriage per order.

TIMEDATA Ltd. Dept A


57 Swallowdale, Basildon, Essex SS16 5JG

Tel: (0268) 411125 (Mon-Fri)

VISA



TIMEDATA

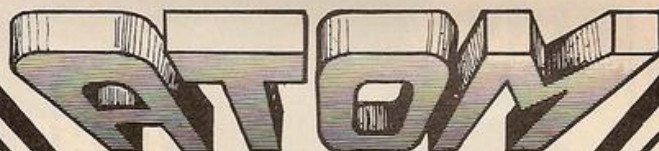

THE ATOM MAGIC BOOK

By Mike Lord. A wealth of games and other programs; storing speech in your ATOM, converting programs written in other BASICs, and many more useful software & hardware tips. £5.50

GETTING ACQUAINTED WITH YOUR ACORN ATOM

By Tim Hartnell & Trevor Sharples. 80 programs including draughts. £7.95

PRACTICAL PROGRAMS FOR THE BBC COMPUTER & ACORN ATOM

By David Johnson-Davies £5.95

ATOM CASSETTES

We stock a selection of the best; our latest being CAAD: Muncher + Mancala + Target + LIFE 7K. 4 great programs on one cassette for only £6.00

RAM FOR YOUR ATOM (Or other 1MHz 6502/68XX machine)

16 or 32 Bytes; expand your ATOM to 28 or 38K RAM, ideal for Word Processing, Chess programs & Business software. Compatible with other Atom software & hardware including the disc drive. To fit inside the ATOM or Eurocard rack mounting. Some types run from a single +5V supply. S.a.e. for details.

NEW!! ATOM ROM BOARD MZ165

..... £35.00 inclusive
Allows software switching between up to 3 utility ROMs and also 4K RAM fitted so you can load your own 'utility' programs from tape or disc. Simple plugs into sockets on ATOM board.

All prices inclusive of U.K. P & P & VAT where applicable.
Overseas customers please add £1.50 surface mail.

TIMEDATA Ltd. Dept A

57 Swallowdale, Basildon, Essex SS16 5JG

Tel: (0268) 411125 (Mon-Fri)



TIMEDATA



CHRISTMAS BONANZA SPECIAL OFFERS

Electronic Products Crewe

SINCLAIR KEYBOARDS

EPC H.D. 19 Hexpad (Machine Language) £13.00
 *EPC 41 Standard Keyboard + Extra Shift £25.00
 *EPC 53 Alpha/Numeric-Numeric Keyboard £28.00
 EPC RAM PACK FLEXI CABE (stops white/out due to vibration) £8.09

VIDEO-GENIE 1 II TRS 80 32K RAM PACK UPGRADE KIT TO FIT ALL MODELS No POWER PACK UPGRADES REQ'D £28.50

LOOK! LOOK!
 (DUE OUT SOON)
 ATARI — RAM PACK
 KEYBOARD
 (COMPUTER GRADE)
 SAE BRINGS INFO.

NOTE
 *EPC 41 & 53 ARE PLUG IN i.e. NO SOLDERING EPC HD 19 REQUIRES SOLDERING AND HAS TO BE USED WITH AN EXISTING KEYBOARD (Full fitting instructions supplied.) IF ORDERING EPC 41 & HD 19 SPECIAL CONNECTING LEAD SUPPLIED.

Trade Enquiries Invited. Prices inc. VAT and P & P

ELECTRONIC PRODUCTS CREWE
 2 Ennerdale Road, Wistaston, Crewe,
 Ches CW2 8RT. Tel: 0270 664376

MAIL ORDER ONLY
 ELECTRONICS APPLIED,
 4, DROMORE ROAD,
 CARRICKFERGUS, Co. ANTRIM BT38 7PJ
 Please add 55p/order P & P

5%
 discount

software

COMPATIBLE

MAIL ORDER LIST SEND LARGES A.E.

*Envelope and Character
 Definer.* (32k)

Together these utility programs offer a complete character and sound envelope defining package for the BBC Micro. Even if you fully understand both the envelope and character defining commands, these programs will make their definition quicker and more accurate.

side 1	side 2
<p>ENVELOPE DEFINER</p> <ul style="list-style-type: none"> Excellent use made of graphics windows and colour to display pitch and volume. Database containing 20 predefined envelopes of everything from phasers to explosions. Example graphs and step by step prompts allow easy defining of your own sound envelopes. 	<p>CHARACTER DEFINER</p> <ul style="list-style-type: none"> A very nice VDU23 character definition program — Computer Users Club (CUB). Shows both magnified and true size characters as they are defined. All other definable characters can be called up for display. Easy to use and check performed on all input.


Recorded on quality cassettes, sent by first class post

Introductory Price - £4.95

Dealer Enquiries Welcome

MICRO-PLINTHS

WITH THIS ALL STEEL PLINTH, MADE ESPECIALLY TO MATCH YOUR VIC 20

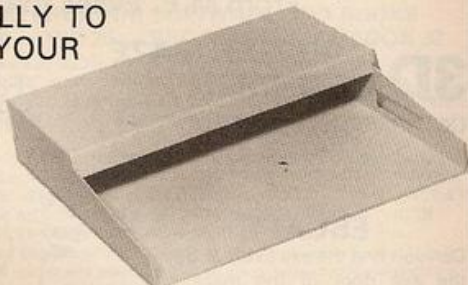

You can give
 your HOME
 COMPUTER
 THAT
 MICRO LOOK

It's inexpensive too — Just **£29.50**

SEND CASH WITH ORDER

MICRO-PLINTHS
 18 LAMMERMOOR ROAD
 LIVERPOOL L18 4QP

VIEWPOINT

THE PROGRAM THAT
 YOUR ZX SPECTRUM HAS
 BEEN WAITING FOR!

Draw complex 3-dimensional objects. View them after rotation in any or all of 3 dimensions.

Features:

- 1) Rotation in 3 dimensions about a single point.
- 2) Rotation about a line between two points.
- 3) Generation of stereo pairs.
- 4) View from one point towards another point.

Objects can be stored separately on tape and copied to the ZX printer.

Written in BASIC for you to modify to your own requirements.

Ideal for computer modelling, molecular modelling, CAD etc.

Viewpoint - with full instruction and examples
£6.50

Just starting to write machine code programs? The ideal assembler for beginners is Ultraviolet. Look at the facilities that it offers:

Works entirely in decimal (no hex problems); all Z80 instructions correctly assembled; supports the pseudo-instructions EQU, ORG (multiple ORGs allowed), DEFB, DEFW and DEFS; code can be assembled at one location and then re-located; allows alphanumeric labels of any length; full listings of assembled code and mnemonics can be output to the printer; full error trapping with faulty instruction clearly indicated; comments can be included in the source file.

The ideal complement to Ultraviolet is Infrared - an easy-to-use disassembler.

So now there is no need to be intimidated by machine code - with Ultraviolet and Infrared it's child's play! Buy them from the machine code specialists - ACS Software.

ULTRAVIOLET - £7.50

INFRARED - £6.75

All our Spectrum programs will work in both 16K and 48K models. Please send sae for details of ZX81 programs.

ACS SOFTWARE 7, Lidgett Crescent,
 Roundhay,
 Leeds LS8 1HN

ACS

QCP-FORTH!

- *FULL FIG-79 STANDARD (NON-DISK)
- *FASTER THAN BASIC
- *EASIER THAN MACHINE CODE
- *SUPPORTS ZX-PRINTER

Forth, for those who are not already converts, is perhaps the closest yet to the ultimate all-purpose computer language. It is designed to be fast, portable and extremely flexible. A FORTH program consists, largely, of definitions of new FORTH words, enabling a user to develop a unique, application oriented, vocabulary. It is even possible to alter the syntax to suit your application (or just your style of program!).

*TAPE & DOCUMENTATION . . . £10

GAMES PACKS 1&2

Pack 1 includes: Space Torpedo, Reverse, M/C Life and more.
Pack 2 includes: Robot chase, Nim, Music, Mini Adventure etc.

UTILITIES PACK

Enhance your BASIC Programs with this set of useful machine code routines.

GAMES PACKS . . . £6 each

UTILITY PACK . . . £5

COMING SOON

PILOT: the educational language


ALL PRICES INCLUDE VAT & P&P
QUALITY STACKABLE CASSETTES

**Quasar Computational
Paraphernalia**

SOFTWARE

11c HERCIES ROAD · UXBRIDGE · MIDDLESEX

SOFTWARE & IDEAS FOR THE SPECTRUM 16 & 48K MICROS



GRAPHICS PLOTTING PAD
Hi Res Graphics Plotting Pad. Full 256+176 pixel resolution. Semi-transparent to aid copying. Supplied with pixel ruler and full instructions — £2.90 (50-sheet pad).



SHAPE DRAWING PACKAGE
Shape — a shape drawing routine with a library of shapes — including skeleton: provides the ability to easily construct your own designs. Many facilities including expand, rotate, mirror and shift. Full instructions — £4.50.

* SPECIAL OFFER — GRAPHICS PAD +
SHAPE PACKAGE — £6.00 *




CHART DRAW
Chart draw allows pie charts, bar charts and line graphs to be easily drawn, in full colour. The inputs required for each chart are fully prompted by the program and they provide such facilities as axis labelling & scaling. A completed graph may be a ZX printer or stored on cassettes, to for a chart slide show. Full instructions — £5.00.

* Software design service available.

* Wanted — Spectrum Games.
High royalties paid.

Please make cheques payable to
Keyboard and send to: 28 Forest
View Road, Walthamstow, London
E17 4EL

KEYBOARD

WORD PROCESSING & ADVANCED OFFICE SYSTEMS

SOFTWARE IN ASSOCIATION WITH INTELLIGENCE (GB) LTD.

MACHINECRAFT LTD SPECTRUM SOFTWARE

FINANCE ZX A complete personal banking system. Menu driven and allows for the separate saving of data. £5.75

CAVE ATTACK Guide your spaceship through a treacherous cave system trying to destroy as many alien eggs as possible. At the exit is the alien that laid the eggs!! £5.75

737 COCKPIT Requires 48k. £5.75

JAHID A space exploration game. An unlimited universe is the setting for this game. The object is to trace the JAHID, a priceless jewel stolen by pirates. In order to find the JAHID you must pilot your ship through the vastness of deep space. You may go into orbit of any planet (habited or otherwise), trade with the natives, perform mining operations for fuel, food or minerals for sale. Features a "game save" facility and occupies 48k. £11.50

ASSEMBLER Full assembler for the Spectrum. £5.75

DISASSEMBLER Full disassembler for the Spectrum. £5.75

LINES An artist program that will enable you to draw any picture onto the screen. Commands include circle, square, text, ink, paper and copy to printer. £5.75

MONSTERS An all action game with excellent graphics. You must climb the ladders to reach the vital oxygen supplies. BEWARE of the monsters that will try to block your path. £5.75

3D NOUGHTS AND CROSSES Think this is easy? The computer plays a disgustingly hard game. I have lost every game so far and the author has only won once. £5.75

NIGHT RAIDERS which is a version of Defender for use on 48k Spectrum. £5.75

ALL PROGRAMS ARE FOR THE 16K SPECTRUM UNLESS OTHERWISE STATED.

MACHINECRAFT LIMITED
The Bazarr, Market Hill, Coggeshall, Colchester,
Essex



New Generation Software

Professionally Written and Produced
Software for the Home Computer
From M.E. Evans the author of: —

**3D MONSTER MAZE
DEFENDER**
comes a game for the

For the ZX81
SPECTRUM

ESCAPE

Can you find the axe to break down the exit door of the maze and ESPACE? The maze is inhabited by 5 hunting dinosaurs including a TRICERATOPS who has the habit of hiding behind the hedges, and a PTERANODON that soars over the maze to swoop down on you.

Trade enquiries welcome
at address below.



Send to: **NEW GENERATION SOFTWARE**
FREEPOST, oldland Common Bristol BS15 6BR
(no stamp reqd. in UK)

or for **INSTANT CREDIT CARD** sales ring 01-930 9232

Please send me a copy of Escape for the 16k Spectrum.
I enclose cheque/P.O. for £4.95

Mr/Mrs
Address
post Code

YC12

What can you get for your

SPECTRUM?

Find out from our new

GUIDE TO SPECTRUM RESOURCES

- Suppliers
 - Hardware + software in various categories
 - Books
 - Magazines
 - User groups, and so on
 - Illustrated

We attempt to assess *objectively* and in some details all that our Panels have seen. And we list, without comment, all other resources that come to our attention.

For this sizeable and, we hope, complete collection of information, send £2.50 (overseas £3 sterling) to:

MICROSCENE
6 Battenhall Road Birmingham B17 9UD

SOFTWARE HOUSES,
WHOLESALEERS, DEALERS

YES. WE MANUFACTURE CASSETTES

DUPLICATING – Need 50 – 50,000
Program Copies within 10 days?

Short-run in-cassette copying, high-speed volume duplicating, with on-cassette body printing, labelling, over-wrapping, blister-carding etc. And YES – we verify our work – methodically.

BLANKS – Need any length blank
cassette for copying or re-sale?

We manufacture tapes in bulk, with or without boxes, as well as our own fully-packaged standard length products.

We use high quality batch certified HM-1260 tape, for error-free copies.

Please ring or write to Nigel Boyle today for full details – all enquiries and material treated in the strictest confidence.

Phone
01 223 5955

Write to
BIBI Magnetics yc
Freepost
London SW11 2BR

BIBI Magnetics Limited,
101/105 Plough Road, London, SW11 2BJ

ANIROG Computers

ONE STOP SHOP FOR SOFTWARE AND BOOKS
SPECTRUM – VIC 20 – BBC MICRO – DRAGON 32

Full range of software by leading software houses in the country.
BUG BYTE, QUICK SILVA, RABBIT, AUDIOGENIC, ARCTIC, A.S.K., SILVER SOFT, ROMIC, SOFTWARE FOR ALL, PROGRAMME POWER, LLAMASOFT, SOFTEK, VIDEO SOFTWARE, COMMODORE, DRAGON, and many others.

Huge selection of computer books. Massive stock of books and software. Despatch within 48 hours of receipt of order.

TWO OR MORE ITEMS 7.5% DISCOUNT. 5 ITEMS – £1.00 EXTRA DISCOUNT. ANY MIX OF BOOKS OR SOFTWARE ACCEPTED. VIC 20 – VALUE FOR MONEY SOFTWARE BY ANIROG.

Our packs of seven games contains a balanced mixture of action packed arcade style games, board games and adventure games. All games are in Hi-res Graphics for unexpanded VIC and offer exceptional value for money.

PACK OF SEVEN (VOL 1) – £6.

PACK OF SEVEN (VOL 2) – £6.

TINY TOTS SEVEN – Games for young children. Bright colour graphics and exciting sound effects are special features of these specially written programmes. – £6.

CAVERN FIGHTER – Very similar to arcade game 'Scramble'. Four missions to complete, using joystick or keyboard. Solid machine code programme to give all the thrills of arcade game – £6.

CRAWLER – All machine code version in the interrupt mode of the arcade game 'Centipede'. Fast and furious – £6.

SEND S.A.E. FOR CATALOGUE. PLEASE STATE THE COMPUTER TYPE.

Personal Shoppers
Welcome at

CO-OP CRAWLEY

Mail Order
Payment by cheque,
P.O. or Visa



26 Balcombe Gardens,
Horley, Surrey.
Horley (029 34) 2007/ 6083

SPOCK: "Computer! Calculate the value of Pi to ten thousand decimal places".
COMPUTER: "Working..."

CAN YOUR COMPUTER SPEAK?

The **WIDEBAND SPEAKEASY** speech synthesiser adds voice response to any computer with a parallel port including PET, ZX-81, VIC, BBC, ATOM, HORIZON etc.

for Only £69 + VAT

- * UNLIMITED VOCABULARY
- * EASY TO PROGRAM
- * LOW MEMORY OVERHEAD
- * COMPLETE MANUAL WITH
DICTIONARY, SAMPLE
SOFTWARE AND TUTORIAL
ON SPEECH PRODUCTION.



Also includes high flux speaker and power supply, all housed in high quality wood cabinet, with volume control and rear pitch control.

Programmed with simple phonetic codes. Apart from the obvious applications of voice response in manufacturing, testing, blind terminals etc., this product also teaches a great deal about linguistics and speech production.

Software is available in BASIC and Z-80 and 6502 assembly for direct input in PHONETIC SPELLING closely related to the ARPABET international phonetic alphabet.

For your nearest dealer contact:

WIDEBAND PRODUCTS, CAMBRIDGE RD.,
ORWELL, ROYSTON, HERTS. TEL: 0223 208017

A subsidiary of Sands-Whiteley Research and Development

SIR Computers Ltd.

Agents for Acorn and Torch Computers

BBC Microcomputers

Model A	£299.00
Model A + 32K RAM	£339.00
Model B	£399.00
Model B + Disc interface	£479.00

BBC Compatible TEAC Disc drives

Single disc drive	£249.00
Dual disc drive	£459.00

Torch Disc unit

This is a complete package including a Z-80 processor, 64K RAM, Dual disc drive and the CP/M operating system — fully compatible with all existing CP/M software. Requires a disc-upgraded BBC Model B.

Torch disc pack	£1,149.00
-----------------------	-----------



8K ROM + 2K RAM	£149.50
8K ROM + 12K RAM	£179.00
12K ROM + 12K RAM	£199.00
16K ROM + 12K RAM	£229.00
1.8 A Power supply	£8.50
ATOM Disc pack	£345.00

please add £7.50 for interlink delivery of BBC Computers & Disk Drives

All prices are inclusive of VAT

SIR Computers Ltd.
38 Dan-y-Coed Road, Cyncoed, Cardiff
Tel: (0222) 759015

SPECIAL OFFER!
Deduct £1 per cassette when ordering 2 or more.


TOP QUALITY MACHINE-CODE PROGRAMS

FOR THE
BBC
MICROCOMPUTER




GALAXIANS (32K) £6.50

Fast action version of the popular arcade game. 4 types of Galaxians (in 3 initial screen formations) swoop down individually or in groups of two or three. 6 skill levels, hi-score rankings, bonus laser bases and increasing difficulty. Superb sound effects and graphics.




INVADERS (32K) £6.50

Superb version of the old classic arcade game with a few extras. 48 marching invaders drop bombs that erode your defences, and 2 types of spaceship fly over releasing large bombs which penetrate through your defences. Increasing difficulty, hi-score, superb graphics and sound.



SPACE FIGHTER (32K) £6.50

Arcade-style game based upon features from DEFENDER and SCRAMBLE. 5 types of menacing aliens fire at you and may attempt to ram you. Separate attack phases, fuel dumps, asteroids, repeating laser cannon, smart bombs, hi-score, rankings, 6 skill levels, sound effects.



CENTIPEDE (32K) £6.50

Another incredible arcade type game featuring mushrooms, snails, flies, spiders, and centipedes of course. Excellent graphics and sound. 6 skill levels, hi-score, rankings, bonuses, and increasing difficulty as the spiders become more active and the number of mushrooms increases.

All programs feature FULL COLOUR GRAPHICS. The above pictures cannot show the true quality of these graphics.



SUPERIOR SOFTWARE

Dept. YC2, 69 Leeds Road, Bramhope, Leeds.


TELEPHONE:
0532-842714

Please add 50p
per order
for P&P.

SPECIAL OFFER FOR CHRISTMAS!

Buy all four of these excellent programs for the bargain price of just £19.50.



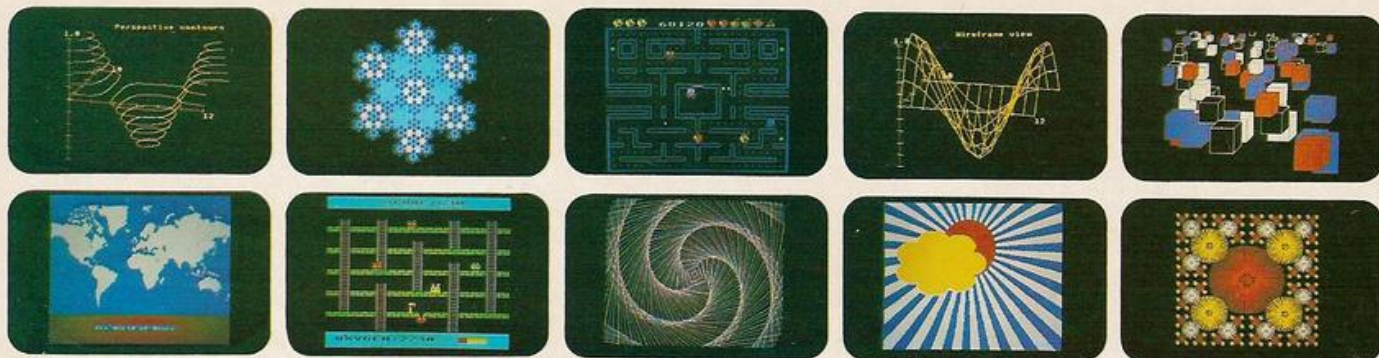

YOU'VE SEEN THE PICTURES, NOW SEND FOR THE WORDS

BBC Microcomputer or Acorn Atom

Acornsoft is the software division of Acorn Computers, designers and manufacturers, of the BBC Micro and Atom. We know better than anyone the capability of the machines, we know how to get the very best from the hardware. And we have produced a range of exciting games, exacting business and useful household software.

The Biggest Range Available

Acornsoft software ranges from authentic arcade games like Snapper to Algebraic Manipulation to Desk Diary to other languages like FORTH and LISP. Striking colour, amazing sound effects and powerful

graphics are all used to the full. And it does not stop there. There is a complete range of manuals, accessories and plug-in ROMs.

Free Brochures

Just clip the coupon or write to us and we will rush our catalogue absolutely free. Can't wait for the post ring 01-930 1614 now! Don't delay - do it today. Let Acornsoft help you get the best from our machine and open the doors to your imagination.

Acornsoft and Atom are registered trade marks of Acorn Computers Ltd.

ACORN^{SOFT}

4A Market Hill,
CAMBRIDGE CB2 3NJ.



Please rush me my free literature from Acornsoft.

☐ Atom
☐ BBC Please tick

Name _____

Address _____

Postcode _____



WHAT PEOPLE ARE SAYING ABOUT OUR ...

BBC MICRO GAMES

"... I bought all your tapes to date for the BBC Micro and I think they are just super, especially STAR TREK, and the sound effects in CANDY FLOSS really made me sit up! Well done and keep them coming!"

J. S., Paisley

"... I was very impressed, not only with the cassette, but also at the speed at which it came!"


— R.L., Cheshire

"... I must congratulate you on your MUTANT INVASION cassette. I have had it for two weeks now and it is really superb. Incidentally, I have beaten your high score of 4,500 — mine is 7,580!"

— S.L., Berks

AND NOW LOOK AT OUR LATEST CASSETTES!

CASSETTE EIGHT Model A Invaders



Actual screen photo


Cassette Eight contains Model A Invaders. A superb full feature machine code teletext colour graphics version of the popular 'Space Invaders' arcade game for the Model A BBC Micro. Choice of Invader and Missile speeds. FAST, SMOOTH AND GREAT FUN!

Only £4.95 inc.

Cassette Nine contains Model B Invaders. A superb full feature adaptation of the arcade 'Space Invaders' game in machine code and high resolution colour graphics, for the Model B BBC Micro. Choice of Invader and Missile speeds. QUITE SIMPLY THE BEST.

Only £6.95 inc.

CASSETTE NINE Model B Invaders



Actual screen photo

NOT FORGETTING THE REST OF OUR FANTASTIC RANGE

FOR MODELS A AND B

- Cassette One: STAR TREK (8x8 Galaxy, Klingons, Phasers etc) and CANDY FLOSS, the tremendous new game everyone is talking about! **Only £5.95 inc.**
- Cassette Two: HANGMAN, KRYPTOGRAM, DICE, BEETLE, GRAND NATIONAL and MUSIC. **Only £3.95 inc.**
- Cassette Three: MUTANT INVADERS (arcade game). Can you destroy the Mutants before they destroy you with their radioactivity. **Only £5.95 inc.**
- Cassette Four: BREAKOUT (arcade game). Superb version, 6 skill levels, 1 or 2 players. **Only £3.95 inc.**

FOR MODEL B ONLY

- Cassette Five: BEEBUNCH (arcade game). Our version of the 'Pacman' game. Tremendous version containing multi-ghosts, tempting fruits, superpoints, screams etc. **Only £5.95 inc.**
- Cassette Six: SUPER HANGMAN. The special feature is the high-resolution animated man. Marvel at the detail of his clothing and witness his impatience! Contains many categories. **Only £3.95 inc.**
- Cassette Seven: 3D MAZE. Battle against the clock to escape from the maze, with the computer showing your view in 3-D each step you take! **Only £3.95 inc.**

ALL CASSETTES AVAILABLE NOW FROM:

(All our software is available before we advertise)

I. J. K. Software

55 Fitzroy Road, Bispham, Blackpool, Lancs

GREAT GIFTS COME 1




for the
VIC 20

Bug-Byte programs make ideal Christmas stocking fillers! If you have a friend, or member of the family, who already owns a ZX81, Spectrum, VIC, Atom or BBC Micro they will be thrilled by the gift of one of our beautifully packaged, exciting cassettes.

Whats more, Bug-Byte games are the best! Tens of thousands of contented customers testify to that, so do consistently hot reviews in the popular micro-press.





If your game isn't shown, don't worry, we probably have more quality programs for more machines than any other software house, and new ideas are constantly being generated by our young, enthusiastic team of skilled programmers.



WHERE TO BUY?—

Look for the sign!
Bug-Byte programs are AVAILABLE NOW from:
All Laskys Stores Nationwide.
Large branches of Boots and Curry's Micro-C, plus over 100 independent computer dealers.
If you can't find a Bug-Byte dealer near you — then fill in the coupon opposite and order direct by post — and receive your free copy of our 1983, 16 page, full colour brochure, it's packed with lots of enthralling games for the whole family.

BUG-BYTE SOFTWARE

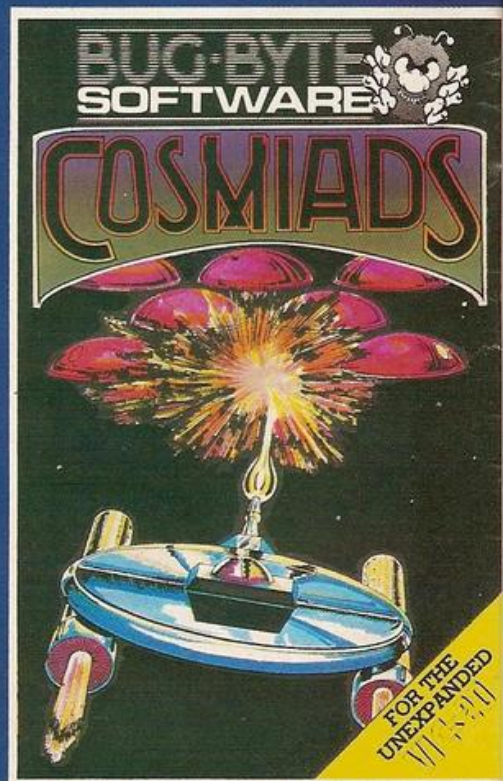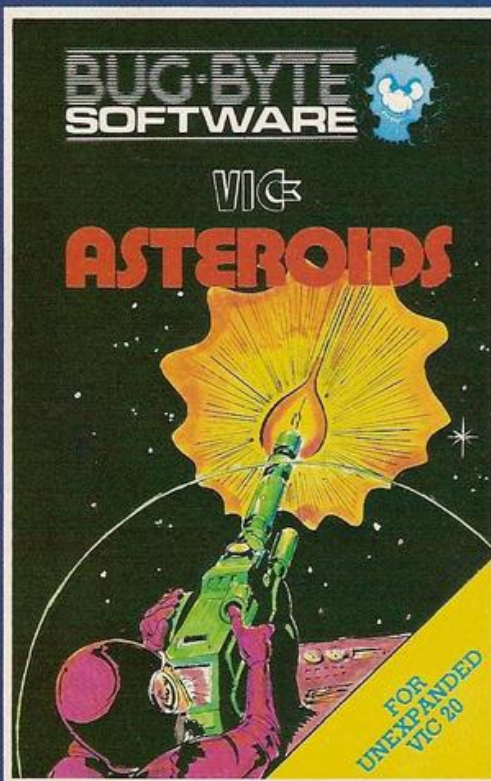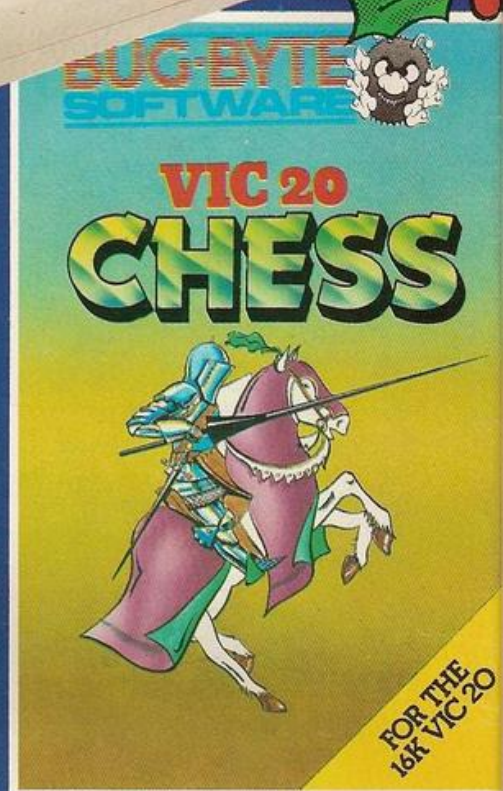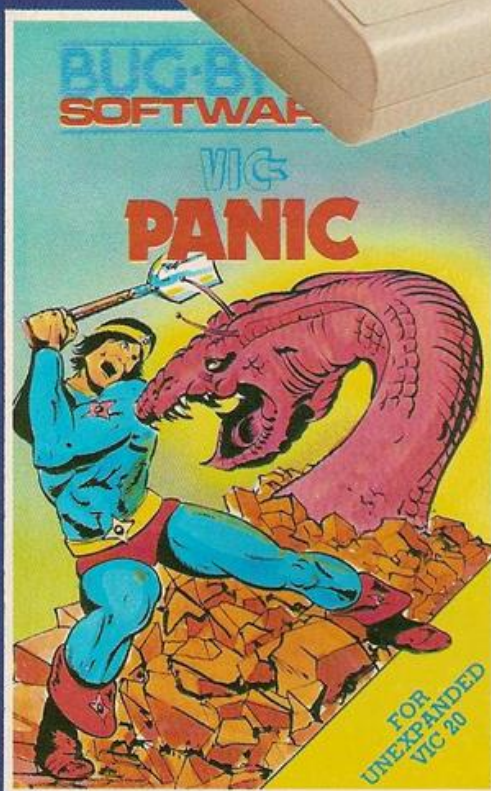

Also for your VIC:
Backgammon
Another VIC in the Wall

All VIC Programs — £7.00 each
including post and packing

N SMALL PACKAGES!




for the
SINCLAIR ZX 81
or
ZX SPECTRUM



BUG-BYTE
SOFTWARE

Sinclair zx81
ZXAS
ASSEMBLER

BUG-BYTE
SOFTWARE
**ZX SPECTRUM
SPECTRES**

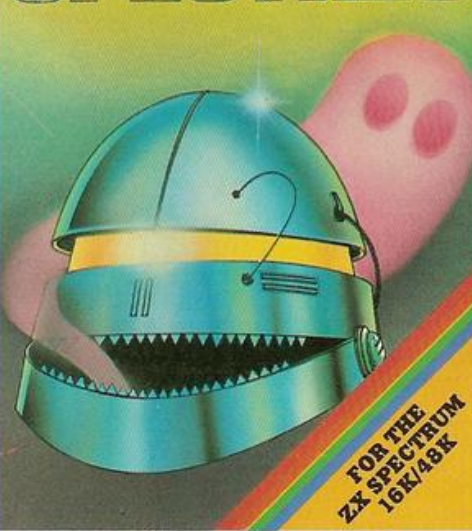

FOR THE
ZX SPECTRUM
16K/48K

BBC Micro

We have a large selection of programs for the BBC Micro (A and B models). Our new brochure gives a complete listing, so send for your free copy today! Also see our huge range of software for the ever-popular Acom Atom!

50^P

VOUCHER
with all orders
of 2 tapes or more

BUG-BYTE
SOFTWARE


MAZOGS



For 16K
SINCLAIR
ZX81

BUG-BYTE
SOFTWARE

**Spectral
INVADERS**

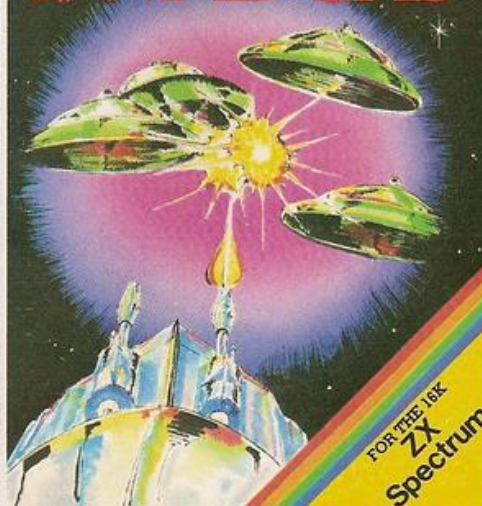

FOR THE 16K
ZX
Spectrum

Please send me:

- VIC Panic ☐ Spectral Invaders ☐
VIC Asteroids ☐ Spectres ☐
VIC Chess ☐ Mazogs ☐
VIC Cosmiads ☐ ZX AS ☐

OR the following:

I enclose S.A.E. for Catalogue ☐

I enclose cheque/P.O. for _____

OR Please debit my Access 5224

Barclaycard 4929 _____ Expiry Date _____

Name _____

Address _____

Code _____

Dealers Discount Available

**ACCESS, BARCLAYCARD ORDERS
WELCOME ON 24hr. ANSWERPHONE
051-227 2642,**

or mail to:
**BUG-BYTE SOFTWARE,
FREEPOST (No stamp req.)
LIVERPOOL L3 3AB.**



ZX81 Prices: Mazogs - £10.00
ZXAS Assembler - £5.00
XDB Debugger - £6.50
XTK Tool Kit - £6.00
X Invaders - £4.00

Spectrum Prices:
Spectral Invaders - £5.00
Spectres - £8.00
'Aspect' Assembler - £9.00
All prices include post and packing

**BUG-BYTE
SOFTWARE**

MICHAEL ORWIN'S ZX81 CASSETTES

The best software (by various authors) at low prices.

QUOTES

"Michael Orwin's £5 Cassette Two is very good value. It contains 10 stolid well designed games which work, offer plenty of variety and choice, and are fun."

from the ZX Software review in
Your Computer, May '82 issue.

"I had your Invaders/React cassette ... I was delighted with this first cassette."

P. Rubythor, London NW10

"I have been intending to write to you for some days to say how much I enjoy the games on 'Cassette One' which you supplied me with earlier this month."

E. H., London SW4

"I previously bought your Cassette One and consider it to be good value for money!"

Richard Ross-Langley
Managing Director
Mine of Information Ltd.

CASSETTE 1

(eleven 1K programs)

machine code:

React, Invaders, Phantom aliens, Maze of death, Planet lander, Bouncing letters, Bug splat.

Basic:

I Ching, Mastermind, Robots, Basic Hangman. PLUS Large screen versions of Invaders and Maze of Death, ready for when you get 16K.

Cassette One costs £3.80

CASSETTE 2

Ten games in Basic for 16K ZX81


Cassette Two contains Reversi, Awari, Laser Bases, Word Mastermind, Rectangles, Crash, Roulette, Pontoon, Penny Shoot and Gun Command.

Cassette Two costs £5.

CASSETTE 3

8 programs for 16K ZX81

STARSHIP TROJAN



Repair your Starship before disaster strikes. Hazards include asphyxiation, radiation, escaped biological specimens and plunging into a Supernova.

STARTREK This version of the well known space adventure game features variable Klingon mobility, and graphic photon torpedo tracking.

PRINCESS OF KRAAL An adventure game. BATTLE Strategy game for 1 to 4 players.

KALABRIASZ World's silliest card game, full of pointless complicated rules.

CUBE Rubik Cube simulator, with lots of functions including 'Backstep'

SECRET MESSAGES This message coding program is very txlp qexi jf.

MARTIAN CRICKET A simple but addictive game (totally unlike Earth cricket) in machine code. The speed is variable, and its top speed is very fast.

Cassette 3 costs £5.

CASSETTE 4

8 games for 16K ZX81

ZX-SCRAMBLE (machine code)



Bomb and shoot your way through the fortified caves.

GUNFIGHT (machine code)



INVADERS (machine code)



GALAXY INVADERS (machine code)

Fleets of swooping and diving alien craft to fight.

SNAKEBITE (machine code)

Eat the snake before it eats you. Variable speed (very fast at top speed)

LIFE (machine code)

A ZX81 version of the well known game.

3D TIC-TAC-ONE (Basic)

Played on a 4 x 4 x 4 board, this is a game for the brain. It is very hard to beat the computer at it.

7 of the 8 games are in machine code, because this is much faster than Basic. (Some of these games were previously available from J. Steadman).

Cassette 4 costs £5.

Recorded on quality cassettes, sent by first class post, from:

Michael Orwin, 26 Brownlow Rd. Willesden, London NW10 9QL (mail order only please)

ARE YOU A ZX81 USER WHO'S NOT PLAYING GAMES?



£47.50
Including VAT.
complete

ECR 81 DATA RECORDER SAVES AND LOADS YOUR PROGRAMS EVERY TIME!

The ECR81 Enhanced Certified Recorder from MONOLITH is a major advancement in cassette recorder technology which minimises the problems associated with standard audio recorders. The unit is a high reliability program store for ZX computers based on a modified, proven cassette mechanism. The two sections of data recording circuitry automatically ensure precise levels are written onto the tape and that optimised signals are received by the computer.

THE ECR81 IS NOT SUITABLE FOR AUDIO REPRODUCTION
NO MANUAL VOLUME OR TONE CONTROL ADJUSTMENT PROVIDED

- Each ECR81 comes complete with its own individual certification tape, tested and serial numbered to prove your machine reliability.
- Mains Operation only.
- Mains & DIN connector leads provided.
- Certification of tape head alignment - height and azimuth.
- Certified tape tension, torque and speed.
- Fast forward and rewind tape search controls.

The ECR81 is also suitable for Sinclair ZX80

- Please allow up to 28 days delivery. ● The ECR81 is backed by our 14 day money-back option.

MONOLITH
electronic products

Telephone: Crewkerne 0460 74321 Telex: 46306

To: MONOLITH ELECTRONICS CO. LTD., 5/7 CHURCH STREET, CREWKERNE, SOMERSET

Please supply me with:

	Price	Total
.....(Qty.) Monolith ECR 81 Enhanced Certified Recorder(s)	£47.50 (Each)	

to be used with my ZX81

I also enclose postage & packing per recorder

£2.50

Please print

Prices include VAT

£

Name: Mr/Mrs/Miss.

Address

MicroStyle

29 BELVEDERE, LANSDOWN ROAD, BATH
47 CHEAP STREET, NEWBURY
67 HIGH STREET, DAVENTRY

**NEW SHOP
WILL OPEN
IN NEWBURY
IN SEPTEMBER**


PRINTERS

EPSON MX80
EPSON MX100
ANADIX
PAPER TIGER
T.E.C.
SCRIPTA
MICROLINE 80.

SEIKOSHA GP100A PRINTER

ENTIRELY NEW DESIGN.
UNBELIEVABLY LOW PRICE.
FULL GRAPHICS CAPABILITY.
CENTRONICS PARALLEL
INTERFACE. PAPER WIDTH
ADJUSTABLE UP TO 10".

£195.00 + VAT

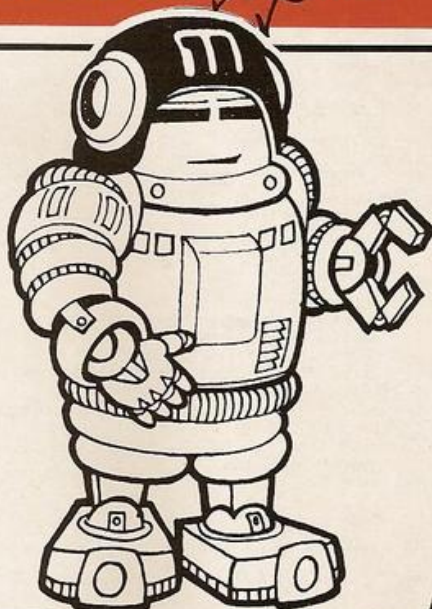

SHARP
MZ 80A & MZ 80B
ALWAYS ON DISPLAY



**(0225)
334659.**



ACORN ATOM

Sensational New Micro-Pack!
8K ROM 5K RAM, PSU included.
Colour fitted. Starter pack
software.


£170.00 + VAT



THE TI-99/4A FROM TEXAS INSTRUMENTS.

- 16K RAM (Expandable to 48K)
 - Keyboard: 48 key QUERTY
 - Sound: 5 octaves, 3 simultaneous tones plus noise generation
 - Colours: 16.
 - Resolution: 192 x 256 (24 x 32 characters)
 - Built-in software: 14K byte BASIC interpreter.
- Vast range of Educational
and Pre-school early
learning modules!

£199 incl. VAT

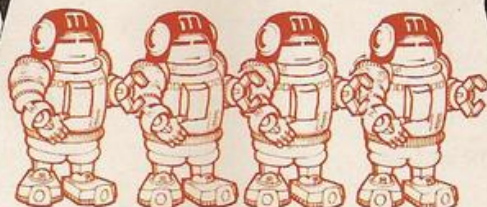

BBC MICROCOMPUTER SYSTEM

Complete BBC support:
books — software — peripherals
Model "B" ex-stock

VIDEO MONITORS

All sizes and prices.
Black/white 9" **£90.00**
Black/white 12" **£65.00**
Green Screen 12" **£85.00**
Amber 9" **£95.00**
All Plus VAT

**BBC — COMPATIBLE
COLOUR MONITOR
£225 + VAT**

**EXTENSIVE RANGE OF
BOOKS AND SOFTWARE
ALSO AVAILABLE**

Plus Lots More

Post to:
MICROSTYLE, FREEPOST,
29 Belvedere, Lansdown Road, Bath BA1 1FP

Please send me further details on the
following, and your special offers:

Name
Company
Address
Tel.



SOFTWARE

for ZX-81, ZX Spectrum BBC Micro

New maths programs – improve your maths and programming skills by playing Simon maths Games.

Choose your own level of difficulty – suit ages 10-16.

10 programs on each tape – most incorporate Moving Graphics and are fun to run.

Let your computer help you to pass your exams.

- Maths 1** Number, Area, Fractions, Decimals, Money, Length, Number, Estimation, Test 1, Game 1.
- Maths 2** Volume, Ratio, Percentages, Perimeter, Bases, Time, Number, Estimation, Test 2, Game 2.
- Maths 3** Directed Number, Co-ordinates, Angles, Scale, Probability, Density, Temperature, Estimation, Test 3, Game 3.
- Maths 4** Square Roots, Indices, Circles, Inequalities, Statistics, Number, Fractions, Angles, Test 4, Game 4.
- Maths 5** Equations, Directed Number, Statistics, Probability, Circles, Equations, Pythagoras, Simultaneous Equations, Test 5, Game 5.

Simon Software

Quality tapes copied at normal speed for better reproduction.

Cassettes with

Printed Programs £5 (inc. VAT). Please add £1 p&p.

FREE! blank tape with each set ordered.

Send cheque/PO to: Simon Software, Dept. E.S.

Freeport, New End,

Redditch, Worcestershire.

(Please state ZX-81(1K), (16K) or BBC Micro) or ZX Spectrum.



Scramble for your Spectrum

High-speed arcade game – easily the fastest available. Thrust, altitude, fire and bomb controls. For 16K or 48K Spectrum.

ONLY £5.50

from MIKRO-GEN the leaders in ZX games



Plus Mikro-Gen games for your ZX81

Space Invaders ★ Breakout ★ Bomber ★ Frog

Paxman ★ Sorcerer's Castle ★ DeBug (Disassembler/Monitor)

All on cassette, with library case

ONLY £3.95 EACH

Write for full details of the Mikro-Gen range of programs and add-ons, available from local stockists or direct from the manufacturers (please make cheques/PO's payable to Mikro-Gen and add 40p post & packing)

Suppliers of Software to Sinclair

MIKRO-GEN

24 Agar Crescent Bracknell Berks RG12 2BK Tel: Bracknell (0344) 27317

MIDWICH COMPUTER COMPANY LIMITED

FAST EX-STOCK DELIVERY OF MICROCOMPUTER COMPONENTS AT UNBEATABLE PRICES

MIDWICH NOW APPOINTED OFFICIAL ACORN BBC MICRO DEALER

ACORN ATOM UPGRADES

Description	Price
* Atom disc pack (AAH06)	299.00**
* Atom colour card (AAH07)	39.25**
* 4K Atom DOS (AAS41)	60.00**
* 4K FP ROM (AAS22)	20.00
* BBC ROM Set (XXXXX)	43.43**

BBC Microcomputer Upgrades

* Memory Upgrade (BBC1)	21.50
* Printer & User I/O kit (BBC2)	7.60
* F Disc interface inc DCS (BBC3)	70.00
* Analogue input kit (BBC4)	7.60
* Serial I/O & RGB kit (BBC5)	10.25

* Expansion bus & tube kit (BBC6)	5.95
* Printer cable inc Amphenol plug (not assembled) (BBC21)	13.00
* User port connector & cable (BBC22)	2.00
* Analogue input plug & cover (BBC44)	2.25
* 5 pin DIN plug for serialint (BBC111)	0.60
* 6 pin DIN plug for RGB int (BBC109)	0.60
* 7 pin DIN plug for cassette (BBC141)	0.60
* Connector for bus & cable (BBC66)	3.50
* Single disc drive (100K) (BBC31)	225.00*
* Dual disc drives (BBC32)	345.00*
* Games Paddles (per pair) (BBC45)	11.30

* Prices on these items are likely to change please contact sales office before ordering.
As some items are on extended delivery from Acorn please check availability before ordering items marked **

JOYSTICKS AND CONTROLLER FOR ZX81 AND SPECTRUM

* Controls 1 or 2 Joysticks	
* Fire Button Facility (1 or 2)	
* Easy to use	
* Plugs straight into Expansion Slot	
* Edge Connector provided for RAM Pack Discs etc	
* Joystick Controller (kit)	14.95 ea.
* Joystick Controller (Assem)	19.95 ea.
* Joysticks (uncased)	3.00 ea.
* Fire Buttons (uncased)	1.50 ea.

* Please specify ZX81 or SPECTRUM when ordering
(All Kits supplied with full assembly instructions)

MEMORIES

2114 Low Power		4116 200ns	0.75
200ns	0.80	4118 150ns	3.38
2708 450ns	2.79	4164 200ns T.I.	4.65
2716 450ns		4164 200ns	
(+SV)	2.10	NEC	4.95
2716 350ns		4516/4816	
(+SV)	3.59	100ns	2.69
2716 450ns		5516 250ns	9.38
3 Rail	5.95	6116 P3 150ns	3.85
2732 350ns	4.40	6116 LP3	
2732 450ns	3.20	150ns	5.75
2532 450ns	3.20		
2564 450ns	9.99		
2764 450ns	9.99		
4116 150ns	1.10		

★ SPECIAL LOW PRICES FOR QUANTITIES ★

ACORN & BBC MICRO COMPONENTS

2114 Low Power	0.80
200ns	
4516/4816 100ns	2.69
6522	2.99
74LS244	0.59
74LS245	0.69

81LS97	0.90
DP8304	4.50
DS3691N	4.50
DS88LS120N	4.50
20 way Right Angle	
IDC Header	2.46

26 way Right Angle	
IDC Header	3.24
34 way Right Angle	
IDC Header	3.80
15 way Right Angle	
D. SKT	3.50

VISA

24 Hour Telephone order service for credit card holders. All prices exclude VAT and carriage (0.75 on orders under £10 nett). Official orders from educational and government establishments, and public companies, accepted. Credit accounts available to others (subject to status). All orders despatched on day of receipt. Out of stock items will follow on automatically at our discretion or a refund will be given if requested. NO SURCHARGE FOR CREDIT CARD ORDERS

MIDWICH COMPUTER CO LTD

DEPT YC, RICKINGHALL HOUSE, RICKINGHALL, SUFFOLK IP22 1HH
TELEPHONE (0379) DISS 895871

FOR YOUR MICRO COMPUTER NEEDS

- MICRO COMPUTERS
- ACCESSORIES
- PERIPHERALS
- EXTENSIVE RANGE OF SOFTWARE
- WIDE RANGE OF BOOKS & MAGAZINES
- IN HOUSE AFTER SALES SERVICE DEPARTMENT

STOCKISTS FOR APPLE, OSBORNE, NEWBRAIN ETC.

Lion Micro Computers

THE SPECIALISTS

Lion House, 227 Tottenham Court Road, London W1P 0HX

Telephone: 01-580 7383 & 01-637 1601

Telex: 28394 Lion G.

Open 9 to 6 Mon-Sat



BLAST-OFF YOUR ZX81

COMPUTER PROGRAM TAPE FOR Sinclair ZX 81 (1K)

BUMPER 7

To be programmed with
instructions in cassette



SEVEN GREAT PROGRAMS FOR YOUR ZX 81

FOR LOADING TIPS TURNOVER
Details for this tape behind cassette case

COMPUTER PROGRAM TAPE FOR Sinclair ZX 81 (1K)

NIGHTMARE PARK

To be loaded using
Load "E"



MUSIC

To be loaded using
Load "E"

WEEK INSTRUCTIONS YOUR ZX81

FOR LOADING TIPS TURNOVER
Details for this tape behind cassette case

COMPUTER PROGRAM TAPE FOR Sinclair ZX 81 (16K)

MAGNUS

To be loaded using
Load "E"



TEACHERS - PARENTS

- You may never need another educational program.
- With Magnus you can build up a whole library of tests - on any subject!
- Magnus makes it easy for you to incorporate your own material into the program - and lets you save it for further use.
- Magnus allows one, two, or even three correct answers.

COMPUTER PROGRAM TAPE FOR Sinclair ZX 81 (16K)

FOOTBALL MANAGER

To be loaded using Load "E"



MANAGE YOUR OWN FOOTBALL TEAM IN THIS
EXCITING GAME OF SKILL

4 Divisions: Promotion and Relegation, F.A. Cup,
Transfer Market, Full League Tables, 75+ Levels,
Save Game Facility, hand made much more packed,
tightly into 16K RAM.

FOR LOADING TIPS TURNOVER
Details for this tape behind cassette case

COMPUTER PROGRAM TAPE FOR Sinclair ZX 81 (16K)

MAZOGS

To be loaded using Load "E"



MAZOGS IS A MAZE ADVENTURE GAME WITH VERY
FAST MOVING ANIMATED GRAPHICS. A LARGE
PROPORTION OF THE PROGRAM IS WRITTEN IN
MACHINE CODE TO ACHIEVE THE MOST AMAZING
GRAPHICS YOU HAVE EVER SEEN ON THE ZX81.

FOR LOADING TIPS TURNOVER
Details for this tape behind cassette case



from
Bookstores
or Computer
shops

And explore a galaxy of NEW software!

Software Masters Ltd. Dept., C, 30 Lincoln Road, Olton, Birmingham B27 6PA, England. Telephone: 021-707 7544.

All these titles are available now from your local Bookstore or Computershop. In case of difficulty, send cost of tape plus 25p postage per tape with the coupon to: Dept., C, Software Masters Ltd., 30 Lincoln Road, Olton, Birmingham B27 6PA. Trade enquiries welcome!

SM2015.....	Breakout	16K	5.95
SM2011.....	Computacalc	16K	7.95
SM2022.....	Constellation	16K	8.00
SM2023.....	Football Manager	16K	7.95
SM2003.....	Labyrinth	16K	5.95
SM2025.....	Magnus	16K	9.95
SM2021.....	Mazogs	16K	10.00
SM2017.....	Mugsy	16K	5.95
SM2018.....	Murgatroyds	16K	5.95
SM2019.....	Murgatroyds Revenge	16K	5.95
SM2005.....	Nightmare Park/Music	16K	6.95
SM2027.....	P.E.P.	16K	5.95
SM2012.....	Personal Banking System	16K	9.95
SM2024.....	Pilot	16K	5.95
SM2020.....	Progmerge	16K	5.95
SM2026.....	Puckman	16K	5.95
SM2008.....	Space Intruders	16K	5.95
SM2014.....	Space Invaders/Space Rescue	16K	6.95
SM2013.....	Star Trek/3D Os & Xs	16K	6.95
SM2007.....	ZX 81 Chess	16K	6.90
SM2001.....	Bumper 7	1K	5.95
SM2016.....	1K Games Pack	1K	6.00
SM2002.....	1K Super Trio	1K	7.95

Prices include VAT

Please send me the following programs

Code	Title	Cost
		£

Postage:-

I enclose Postal Order/Cheque for Total £

Name

Address

Y C

Software Masters Ltd.

Dept., C, 30 Lincoln Road, Olton, Birmingham B27 6PA, England. Telephone: 021-707 7544.



ZX81 OWNERS

**SPECIALISED PRODUCTS
MODULAR EASY TO USE
FOR HOME/INDUSTRY &
EDUCATION**

TE10 INPUT/OUTPUT PORT — Easy to use. Fits between ZX & RAM PACK/PRINTER (if required). No skill required to connect. Can be used for such things as:— motor control; sound/music generators, connection to printers/floppy discs/light pens/other computers, temperature monitoring, square wave generating, control of rotating aerials, even train sets etc. Port has 16 programmable I/O lines and may be used without any electronics knowledge to connect other add-ons. Motherboard required ONLY when two or more add-ons are used at any one time.

FULLY ASSEMBLED KIT (WITHOUT CASE) £17.95

TE12 4 CHANNEL RELAY BOX — To suit Port Contact rating:— 240v AC/1.5A — 24V DC or 110V AC/3A. Up to 4 units i.e. 16 relays can be operated £14.95

TE15 8 WAY TRANSISTOR DRIVER — £9.95

TE17 8 WAY SWITCH UNIT (EDUCATIONAL) — £12.95

TE18 8 WAY INDICATOR UNIT (EDUCATIONAL) — £12.95

TE20 JOYSTICK & FREE GAME — (2 Joysticks may be connected via Motherboard.) £12.95

TE30 MOTHERBOARD — Allows multiples combinations of add-ons — up to 16 I/O lines may be used — £15.95

TE126 POWER SUPPLY — 6/7.5/9V DC at 300 mA — Required for use with add-ons TE12/15 & 18 £4.95

23 + 23 WAY ZX Edge Con £2.85. Contact cleaner £2.30.

16 WAY SINGLE SIDED EDGE CON £1.95. EXTENDED P10 NOTES £1.

PRICES INCLUDE VAT

Receipts always provided: — Delivery normally ex-stock. ADD 50p towards p&p on all orders under £20.00, with the exception of accessories, e.g. Edge on. Full instructions and examples with all products.
SEND S.A.E. FOR CATALOGUE. TELEPHONE ORDERS ACCEPTED.

THURNALL (ELECTRONICS) ENG.

DEPT Y, 95 LIVERPOOL ROAD,
CADISHEAD, MANCHESTER M30 5BG
TEL: 061-775 4461 (24 hour)



GAMER

24 Gloucester Rd
Tel: (0273) 698424
BRIGHTON

ATARI



400 (exc. BASIC)	£173.04
400 (inc. BASIC)	£216.52
800 (exc. BASIC)	£390.43
800 (inc. BASIC)	£433.91

ATARI PACKAGE DEALS

400 (16K) + BASIC + Recorder + Joystick + 5 Blank Cassettes + Free Programs	£251.30
400 (32K) + All above items	£307.83
800 (48K) + All above items	£546.96
800 (48K) + Disk Drive + Joystick + 3 Blank Disks + Demo Disk	£734.78

SHARP

MZ80A	£434	EPSON HX20	£402
MZ80B	£789	VIC 20	£129.50
		GENIE I & II	£289
		ATOM	from £150

NOW IN STOCK — **DRAGON** — 32K + COLOUR + SOUND + TYPEWRITER KEYBOARD **£173 + VAT**
+ PERIPHERALS + SOFTWARE + BOOKS
+ MAGAZINES + CHESS COMPUTERS
+ GAMES FOR ZX81 AND APPLE
PLEASE ADD 15% VAT TO ALL PRICES



YOU need the PROXIMA GRAPHIC PLANNER

Don't be trapped into designing one graphic at a time on the VDU screen. Work on 2, 4 or up to 48

Introductory Price
£3.50
80 Pages

adjacent units with this quality-printed Graphic Planning Pad. Prepare your designs at home, on the train, at school or the office — anywhere.
■ Full instructions ■ Over 300 pre-designed graphics to use or to spark your imagination
■ Space to design over 2000 graphics of your own. ■ All column values printed to aid coding ■ Sample program to calculate values, POKE to memory and SAVE
■ Written for Spectrum but invaluable for any computer with 8x8 user defined graphics ■ All in all the best to be had.

Also available: ZX81/Spectrum BASIC coding sheets. Printed blue on quality paper for neat and precise program development. **£2.50 inc p&p per 100 sheets.**

SPECIAL OFFER

PROXIMA GRAPHIC PLANNER PAD PLUS 100 BASIC CODING SHEETS ~~£6.00~~ **£5.00**

Remittances to **Proxima Centauri Ltd.**
Suite A6, 23 Denmark Street,
London WC2H 8NA.

Please specify exact requirements.



EDUCATIONAL COMPUTING

Suit children ages 5-11

strongly recommended by educational authorities

Almost all programs work on the **SPECTRUM**

ZX81

No comparable collection offers so much for so little

Fifty high-quality programs to turn your ZX81 or Spectrum into a powerful educational tool.

And you don't even need to know programming. There are clear instructions and plenty of tips & advice. Designed to go beyond drill & practice the promote learning through interaction & discovery.


All programs fit 1K

Creative use of graphics

Many innovative ideas

Fully documented

Includes many games



Includes:—

TORTOISE

A simplified version of the famous Turtle programme

CODED MISSILE

Combines the fun of arcade games with learning

£5.95 only
paperback 110 pages plus Spectrum supplement

Graph-plotter • Histogram • Simon-spell • Sketchboard • Times-table • Sets Series-quiz • XY-coordinates • Count • Equations • Areas • Guess-a-Volume Angles • Upstairs-Downstairs • Music-notes • See-saw • Wipe-out • Spell Temperature • Clock • Money • Snake Mastermind • Number-shoot • +26 more

EDUCARE

To: **EDUCARE**
139a Sloane St.
London
SW1X 9AY

Please send me copies Educare's 50.
I enclose cheque/postal order for £.....
Name.....
Address.....

Let your child benefit early - Send now

**ELTEC SERVICES LTD****BBC MICROCOMPUTER SPECIALISTS****COMPUTERS**

BBC Model "A" (in stock now)	£299.00
BBC Model "B" (in stock now)	£399.00
BBC Model "A" plus extra 16K memory	£330.00
16K Hitachi memory (as fitted by ACORN)	£31.00
FULL UPGRADE KIT (Genuine ACORN issue)	£90.00
UPGRADE KIT fitting charge	£10.00

BBC SOFTWARE

ACORN/SOFT Peeko Computer	£9.95
ACORN/SOFT Defender	£9.95
ACORN/SOFT Monsters	£9.95
ACORN/SOFT Philosophers Quest	£9.95
ACORN/SOFT Snapper	£9.95
ACORN/SOFT Arcade Action	£11.90
ACORN/SOFT Disky Diary	£9.95
Sinclair Mutant Invaders	£3.95
Sinclair Super Hangman (Hilarious! with sound)	£3.95
Sinclair "B" Invaders (Just like the Pub version)	£5.95
Sinclair Beebunch (Like Snapper)	£5.95
Sinclair 3 D MAZE (FAST & INTRICATE!)	£3.95
Sinclair WORD PROCESSOR	£9.95
Agents for BUG-BYTE & PROGRAM POWER software	

PRINTERS

Sekosha GP100A	£225.00
EPSON MX30 F/T III	£390.00
EPSON MX100 F/T III	£530.00
SMITH CORONA Daisy Wheel Printer	£557.00
Printer Cable	£18.40

EDUCATION PACKS by PROCYON

All the following are designed by practising teachers & written by professional programmers. They are intended for use with the BBC Microcomputer both in school & at home.

PRO DIS RAM resident colour disassemble/dump/ edit program £9.14

PRO STAT Part 1 Statistical analysis program £9.14

PRO STAT Part 2 Regression (line fitting) program £9.14

PRO TEST 4 Function (+ - x /) Maths training program £9.14

Utility Pack - Rank, Alphabet, Calendar etc. £6.95

FLETCHER Fletcher's interaction analysis £9.14

RAPHSON Advanced maths program £6.95

CASSETTE RECORDERS

Cassette Recorder (Pye)	£23.00
Cassette Recorder (Ferguson)	£28.00
Cassette Recorder (Sony)	£37.95
Cassette lead (7 pin DIN/3 jacks)	£5.00
Blank Cassettes (Scotch 3M)	£0.70

BBC BOOKS

NEC 30hr Basic	£5.50
Practical Programs for the BBC Microcomputer	
Johnson Davies	£5.95
Basic Programming on the BBC Computer Crier	£5.95
NEW	
Let Your BBC MICRO Teach you to Program Hartnell	£6.45
The BBC MICRO Revealed Ruston	£7.95

MONITORS

14" Full colour MONITOR (used in BBC computer programmes)	£309.35
12" Green Screen MONITOR	£126.00
RGB Monitor lead	£5.00
Monitor lead	£5.00

PS FOR ATOM OWNERS!

DISATOM SUPER ROM 27 new words plus FULL DISASSEMBLE	£29.95
SOFTSWITCH 4x4K ROMS Software selectable, plug-in	£22.95
PRO LOG ADC Board. Eight inputs for joysticks, paddles, machine inputs	£24.95
ACORN/SOFT BBC BASIC board	£49.50

ELTEC SERVICES LTD**231 Manningham Lane, Bradford BD8 7HH****Tel: (0274) 491371**

OPEN Mon-Fri 9am-5pm Sat 9am-12 noon

Prices are VAT INCLUSIVE

P&P £1.00 for orders under £100.00: Orders over £100.00 add £10.00 for a Securicor Delivery

ZX81/ SPECTRUM/ DRAGON 32

A fantastic range of 16K games, each complete with fully comprehensive instructions from:

M.C. LOTHLORIEN ENTER THE DRAGON!**1. TYRANT OF ATHENS**

Can you survive long enough to turn Athens into the most feared state in the Mediterranean? Train troops, build warships, fight battles by land and sea against hostile Greek States and the vast Persian Empire. Many more features in this very addictive game.

Price: DRAGON £6.95 ZX81 £4.50 SPECTRUM £5.50**2. ROMAN EMPIRE**

Your aim is to conquer the hostile countries surrounding Rome. Build armies, appoint Generals and fight campaigns. This challenging game takes full account of morale, fighting efficiencies, leadership ability, etc. 3 levels of play.

Price: ZX81 £4.50 Spectrum £5.50**3. PELOPONNESIAN WAR**

Set in Ancient Greece from 431-404 BC, covering the Great War between Athens and Sparta. Your goal is a final victory over the Spartans but you will need all your skill in a combination of diplomacy and military force before you even stand a chance. 3 levels of play.

Price ZX81 only £4.50**4. SAMURAI WARRIORS**

How would you have fared as a Samurai in 13th Century Japan? Face challenges from Samurai and bandits. Are you a survivor? Or will you be forced to commit ritual suicide? 7 levels of play, a most fascinating game.

Price: DRAGON £6.95 ZX81 £4.50 Spectrum £5.50**5. WARLORD**

A challenging game of analytical skill set in 13th century Japan. You control a village and must meet attacks from other armies, combat challenges from other warlords and their Samurai, attack and defeat pirates, make raids for gold or slaves and feed your village.

Price: ZX81 £4.50 DRAGON — AVAILABLE DECMEBER

Cheques and PC's please, made payable to: M.C. LOTHLORIEN
4 Granby Road, Cheadle Hulme, Cheadle, Cheshire SK8 6LS





Keyboard with Electronics for ZX81

A full-size, full-travel 43-key keyboard that's simple to add to your ZX81 and requires no soldering in the ZX81.

Complete with the electronics to make "Shift Lock", "Function", and "Graphics 2" single key selections making entry far easier.

Powered from ZX81's own standard power supply—with special adaptor supplied. Two-colour print for key caps.

Amazing low price only £19.95 incl. VAT and carriage.

Order As LW72P

Full details in the June 1982 issue of "Electronics—The Maplin Magazine" on sale at all good newsagents price 60p. In case of difficulty send 60p to address below, or £2.40 for annual subscription (4 issues).

MAPLIN

Electronic Supplies Ltd

P.O. Box 3, Rayleigh, Essex SS6 8LR. Tel (0702) 552911

Retail shops at
159 King St., Hammersmith, London W6. Tel 01-748 0926
284 London Road, Westcliff-on-Sea, Essex. Tel (0702) 554000
Lynton Square, Perry Barr, Birmingham. Tel: (021) 356 7292
(Shops closed Mondays). All mail to Rayleigh address.

SPECTRUM 48K : ZX81 16K SIX PART ADVENTURE



BLACK CRYSTAL THE QUEST IS ABOUT TO BEGIN

The ultimate role-playing adventure for the SPECTRUM/ZX81. You can become a warrior, elf or wizard on a quest to find and use the rings of creation: to destroy the Black Crystal and defeat the Lords of Chaos. Held within six programs lies a land of fabulous treasures and mythical monsters. Journey through the land of Beroth, explore the castle of shadows, descend into the Shaggoths lair, search for diamonds in the sea of sand but beware of sand sharks! Confront the fire demon in his temple, battle against the Lords of Chaos and win your way to the Black Crystal.

By splitting Black Crystal into six programs we can provide more variety and detail than any other adventure for the Sinclair computers.

Real time monster battles. Superb graphics. Save game feature. All six parts are supplied together on cassette, boxed with instruction booklet.

**SPECTRUM 48K: 180K OF PROGRAM
IN SIX PARTS — ONLY £7.50**
**ZX81 16K: OVER 100K OF PROGRAM
IN SEVEN PARTS — ONLY £7.50**
**WHY PAY MORE FOR LESS OF AN
ADVENTURE**



To: CARNELL SOFTWARE, DEPT 2, 4 STAUNTON RD, SLOUGH, SL2 1NT.
Please send me: Black Crystal for my,

☐ Spectrum 48K..... £7.50
☐ ZX81 16K..... £7.50

I enclose a cheque/postal order (payable to Carnell Software) for £

NAME.....

ADDRESS.....

PROPRIETORS R. CARNELL, S. GALLOWAY

H&H SOFTWARE

Software for the BBC Computer

Model B only

ALPHABETA A complete Word Processing Package with instantaneous response. Features include automatic wraparound, insert, delete, over-write, title centring, tabs, merging and other editing facilities. Up to 224 lines of 80 characters can be produced. For longer documents editing between files is possible. Price includes a manual and labels for the red keys.....£28.50

BILLIARDS This is a game of skill and cunning. Key in the direction, pace and backspin on your cue ball and watch the result. The computer does the rest.....£8.50

TESS Are you bursting with imagination or flare for graphic designing or just wanting a completely different type of program? TESS is for you. Design a shape, choose colours, pattern and size, then watch the screen fill with copies of your design interlocking together. Animations are possible, the tape includes an example.....£8.50

Model A or B (Family games with sound and colour)

SHAPE and RACE For 6 year olds upwards. In SHAPE, a tracer bounces inside a blue box and rebounds off a hidden shape. Can you identify the shape before your opponent. The RACE is between a hare and a tortoise. First one to the flowers wins.....£5.50

SIGNALS and MAGIC Make up sums to reveal a hidden shape. Guess the shape to get bonus points. Complete a magic square to get promoted and hear the fanfare. The higher your rank, the better the fanfare. 3 levels of difficulty.....£5.50

Prices include cased cassette, instructions, postage etc.
Please send orders and cheques/PO/Transcash (No. 614 131 707) to:

H&H, Dept A, 53 HOLLOWAY, RUNCORN, CHESHIRE.

For further information please send S.A.E.

Some DRAGON
versions available

16K ZX SPECTRUM GRAPHICS SUPERDRAW16 16K ZX SPECTRUM GRAPHICS

- 16K Spectrum graphics pack.
- Full screen high resolution colour.
- Moving cursor control.
- Large alphabet facility.
- Pictures saved on cassette.
- Automatic "slide show" option.
- Menu driven, easy to operate, crash proofed.
- Documented to usual high Video Software standard.
- Demonstration slide show.
- Audio commentary on reverse of cassette.

If you've now got your Spectrum you will be wanting to explore its graphics potential. SUPERDRAW16 will help you get the best from it.

Price: £5.00 inc. VAT, P. & P. Immediate delivery.



STONE LANE
KINVER
STOURBRIDGE
WEST MIDLANDS
DY7 6EQ
ENGLAND
TEL: KINVER 2462
STD 058 403 3462

VIDEO
SOFTWARE LIMITED



MEMORY DEVICES FROM: GCC ELECTRONICS

Tel: 0223 21044

Telex: 817672

EPROMS		6500 Family		MEMORIES	
2708	200p	6502	375p	2114LP-2	90p
2716+5V	200p	6520	285p	2114-450	85p
2732	385p	6522	375p	4116-150	90p
2532	365p	6532	520p	4116-200	88p
2764	1200p	6545-1	900p	4816-2+5V	250p
				4164-200	410p
				6116-150	350p
				5516-250	635p
6800 Family		Z80 Family			
6800	270p	CPU	315p		
6802	325p	ACPU	350p		
6810	110p	CTC	270p		
6809	850p	ACTC	290p		
6850	135p	PIO	340p		
6821	110p	APIO	350p		

We supply 74LS TTLs, CMOS 4000 Diodes, Transistors, etc., etc. All components are guaranteed prime parts, from leading manufacturers.

Orders from Government, Educational and Overseas buyers welcome. Special prices for volume enquiries. Please add £1 post and packing plus VAT at 15%. Minimum order £15.00.

GCC ELECTRONICS
18 CLAYGATE ROAD, CHERRY HINTON
CAMBRIDGE CB1 4JZ
TEL: 0223 210444

TELEX: 817672

★ ★ NEW FROM CAMEL PRODUCTS ★ ★ DREAM-81 FOR ZX-81

64K RAM Plus

- PLUS** A 28 pin EPROM socket for 2716/2732/2764 and even the latest 27128 from Intel.
- PLUS** Fast/Slow option, to allow for EPROMs of different speeds.
- PLUS** Link option to disable any part of 0-16k memory area in 2kB multiples.
- PLUS** Full 64k capacity of high speed RAM available for VDU or other use of your ZX81.
- PLUS** Professional standard, built and tested unit in black ABS case with an LED indicator. £69.95 + VAT

OTHER CAMEL PRODUCTS

- MEMIC-81** A 2 or 4 kilobyte CMOS memory unit with Lithium battery backup. Program/ £24.95 + VAT
data storage up to 10 yrs. Instant £29.95 + VAT
retrieval. Basic/M.C.
- MEMIC L/T** Two kilobyte CMOS RAM units for a 2716/2732 socket in any system £26.05 + VAT
- ROM-81** 2kB-8kB EPROM Unit with Wait States £14.95 + VAT
- PIO-81** 8+8 Ch. latched Input/Output ZX81 card £13.00 + VAT
- PPS** Cased 25w pwr. supply 5v, 3A/12v, 1A/-12v, .25A £44.95 + VAT
NEW CRAMIC 81 NEW
A 16 kB CMOS RAMPACK for ZX81 soft switch via keyboard between CRAMIC 81 and ordinary RAM. Cased, cabled & tested £79.95 + VAT



Cambridge Microelectronics Ltd., One Milton Rd., Cambridge, CB4 1UY Tel (0223) 314 814

TRANSFORM LTD.

ZX Business Software.
FOR SMALL BUSINESSES AND THE SELF EMPLOYED

Business Bank Account: this program enables you to make debits under 11 subheadings. Statements include totals of all subheadings. £8.75

Sales Day Book: for all your invoices, this program will enable you to prepare statements of outstanding invoices. Program will also calculate VAT. £8.75

Purchase Day Book: keeps a complete record of all your purchases under 11 subheadings. The program will also calculate and deduct VAT. £8.75

Quarterly Analysis: quarterly totals from Bank Account, Purchase and Sales programs can be analysed with this program. £4.75

All the programs have full search facilities and will enable you to prepare quarterly accounts for your VAT returns and annual accounts for your accountant. These programs can also be used by companies not reg. for VAT.

Business Pack: incl. Bank Account, Sales and Purchase programs. £25

Please specify memory size when ordering for your ZX81.

All prices include VAT, Post & Packaging. For details send S.A.E. to:

TRANSFORM LTD.,
41 Keats Ho., Porchester Mead, Beckenham, Kent.
Tel: 01-658 1661



FAST MAIL ORDER-SEND TODAY!

SPECTRUM MONITOR. Machine Code Debug/Disassembler
• Enter, Run, Debug machine code programs. • Compatible with Basic • Breakpoints and Registers Display • Disassembly to screen and/or ZX Printer • 16K and 48K versions on one cassette + 30 page manual. **£7.50**

SPECTRUM EDITOR/ASSEMBLER. A powerful and essential machine code programming aid.
16K & 48K on same cassette with full documentation. Major features include:
EDITOR with Auto Line Numbering: 40 Column screen display, tabulated into fields for easy reading: 5 character Label Names: simple Line Editing and Cursor Control: SAVE/LOAD Text Buffer to cassette: output to ZX PRINTER.

TWO-PASS ASSEMBLER accepts all Z80 mnemonics (plus many unpublished mnemonics): Decimal or Hex numbers: simple arithmetic on operands: Assembler Directives — ORG, END, DEFB, DEFW, DEFL, EQU, DEFM.
WE CANNOT FULLY DESCRIBE THIS IMPORTANT UTILITY HERE, AND ASK YOU TO SEND S.A.E. FOR COMPLETE DETAILS OF THIS AND ALL OUR PROGRAMS. £8.50

ZX81 SCREEN KIT 1. More power to your screen in all your Basic programs
BORDERS any size, anywhere on screen. SCROLL in all 4 directions. CLEAR and REVERSE PART OF SCREEN. FLASHING CURSOR anywhere on screen — simulates INPUT. DATA FILES SAVE AND LOAD Basic variables: Double Speed. 880 bytes machine code for INSTANT RESPONSE. Becomes part of Basic Program. **£5.70** 4K to 64K

ZX81 ZX-MC. Machine Code Debug/Monitor
• ENTER, RUN, DEBUG machine code programs • SAVE, LOAD, VERIFY at double speed • BREAKPOINTS and REGISTERS DISPLAY • Self contained — cannot be used with Basic • Cassette plus 36 page manual. **£7.50** 4K to 64K

ZX81 REMLOAD. Machine Code Debug/Monitor
• A version of ZX-MC without the Save/Load/Verify facility • Compatible with Basic • CREATE A REM LINE of any length • BREAKPOINTS and REGISTERS DISPLAY • Cassette plus 30 page manual. **£6.95** 16K to 64K

SEND S.A.E. NOW FOR DETAILS
6 Corkscrew Hill, West Wickham,
Kent BR4 9BB.
Prices include VAT & P&P

**PICTURESQUE
PICTURESQUE
PICTURESQUE**

**V & H COMPUTER SERVICES
PRESENTS**

SPECTRUM SPECTACULAR

(50 PROGRAMS FOR THE SINCLAIR SPECTRUM)

And what programs! New games! Old games! Business programs (like invoicing and sales ledger), word processor, machine code routines, graphics . . . All in **SPECTRUM SPECTACULAR**, the new book by Roger Valentine. **SPECTACULAR VALUE AT £4.95.**

By the same author:

WHAT CAN I DO WITH 1K? (ZX81) — £4.95

WHAT CAN I DO WITH 16K? (ZX81) — £4.95

**V & H COMPUTER SERVICES
182c KINGSTON ROAD, STAINES, MIDDXX.
TEL: STAINES 58041**

Business users please note:

Our PAYROLL program is now available for:
ZX81, SPECTRUM, PET, BBC and KONTRON.

Please write for details or send £2.00 for comprehensive manual.

SPECTACULAR GAMES AND UTILITIES

— FEATURING FULL COLOUR AND SOUND

SPECTRUM 16/48K

TRACK-N-ATTACK

Shoot down the enemy carrier based helicopters using your laser beams. Complete with on-screen scoring and full graphics.

SUPERSCRIPT M.P.F.


Enhance your programmes with this magnified print facility. (MPF). Features full positioning and character size selection.

BLACKJACK

The classic card game (21s/Pontoon). Full colour on screen presentation of bets, wins and debts — with your Spectrum as the croupier.

CHAR-WALLAH

Over 40 ready defined characters for you to liven up your own programmes. Includes — Airplanes, Helicopters, Space-Ships, Faces and Card-Suites.



**KEYWORD SOFTWARE
31 AVENUE ROAD
N. HAYLING ISLAND
HANTS**

PUT YOUR MICRO TO WORK!



**YOUR
MACHINE**

CONTROL MACHINES, ROBOTS, FACTORY OR HOME

Have you ever wanted your MICRO to control a machine for you, or manage your house? If so, the MDR 'MICROCOMPUTER CONTROL INTERFACE' will give you isolated channels of OUTPUT (8A @ 250 volts) and switch sensing INPUTS.

Available now for connection to PET USER, PORT, RS232 and IEEE488, allowing expansion up to more than 900 channels.

Supplied complete with connecting cables, full data and guarantee from £12.54 per channel. Complete preprogrammed systems or individual components available. Write or phone for details.

M D R (INTERFACES) LTD.

**Little Bridge House, Dane Hill,
Nr. Haywards Heath, Sussex RH17 7JD.
Telephone: 0825-790294.**

BBC FORTH

"rFORTH" runs on BBC A or B and costs only £15, including its 70 page manual. It:

- * needs no added hardware;
- * runs up to 10 times faster than BBC BASIC;
- * includes full screen editor tailored for the BBCcu;
- * is FORTH-79 STANDARD and has fig-FORTH facilities;
- * provides 260 FORTH words;
- * is infinitely extensible;
- * allows full use of the MOS via its CALL & *MOS words;
- * provides recursion easily;
- * comes with a full 70 page technical manual;
- * is available NOW.

Price of £15 includes P&P/VAT

NASCOM

Extension Basic . £15/£30 ROM
Adds 30 new keywords to BASIC

Compression Assembler ... £12
Smaller source + higher speed

Q-DOS for G805 .. £25/£40 ROM

Asteroids m/c,g £7.90
Bomber m/c,g £4.90
Fantasy basic £5.90
Galaxy Invaders . m/c,g £5.90
Life m/c,g £5.90
Missile Defence . m/c,g £7.90
Nightmare PORK .. basic £4.90
Space Invasion .. m/c,g £6.90
Super Gulp eb,g £4.90
5-games Cassette . misc £5.90

P&P/VAT included. Most are OK with Nascom 1s (Nas-Sys/C.B.).

Spectrum BBC nascom adventures

Colossal Adventure: The classic mainframe game "Adventure" with all the original treasures & creatures & 70 extra rooms.

Adventure Quest: Through forest, desert, mountains, caves, water, fire, moorland and swamp on an epic quest vs Tyranny.

Dungeon Adventure: NEW! The dungeons of the Demon Lord have survived His fall. Can you get to their treasures first?

Every Level 9 adventure is packed with puzzles and has over 200 individually described locations - a game can easily take weeks to complete! Only data and code compression allow so much to be provided.

Each adventure needs 32K and costs £9.90, including P&P/VAT.

Send order or SAE for catalogue, describing your computer, to

LEVEL 9 COMPUTING

Dept Y, 229 Hughenden Road, High Wycombe, Bucks. HP13 5PG

SNAKE...HITCH-HIKER...REVERSI... ...CUBE.....ASTEROIDS....LOGO II MEMORY KITS...CHESS...DISASSEM



'Hitch-Hiker' is a great adventure game based on characters from the book 'Hitch-Hikers Guide to the Galaxy'. A fascinating game to test your skill and wits whilst trying to collect five objects scattered around the Universe located in such places as the 'Restaurant at the end of the Universe', 'Arthur Dents House' and Belteguese Spacedrome'. Directions can be found in the clues. An intriguing game that can create hours of fun. £5.80+VAT

in our opinion the best
B.B.C. software in town!

COMPUTER CONCEPTS

16 Wayside, Chipperfield,
Herts, WD4 9JJ. tel (09277) 69727

Send an S.A.E. to get the latest details of our software.



THE ADVENTURE GAME THAT'S FOR REAL !!!!

£6,000 PRIZE! FREE HIT SINGLE! 48K ZX SPECTRUM
(16K ZX81 VERSION NOW AVAILABLE)

Will you be the first to locate the Golden Sundial of Pi in time and space, and be rewarded with the original? Exquisitely crafted by the winner of the De Beers Diamond International Award, from gold, diamond and the most precious of the earth's riches.

PIMANIA - where saxophones turn into hangliders, where music meets madness and where the Pi Man rules supreme! He'll talk with you, he'll befriend you, he'll betray you, he'll even do the Hokey Kokey! Animated cartoon graphics! Full musical score! Spectacular colour and sound effects! Includes free hit single 'Pimania', with vocals by Clair Sinclair and the Pi Men!

It could take you a week to play, it could take you a lifetime! PIMANIA, "the best evidence that computer gaming has come of age - an adventure enthusiast's dream!" (Computer & Video Games)

An investment at £10 (48K Spectrum) £8 (16K ZX81)



Automata Ltd. (YC)
65a Osborne Road
Portsmouth PO5 3LR
England

SPECTRUM ZX81

- (1) NEW! SPECTRUM ANALOGUE PORT (purpose built)
8 channels analogue voltage input
8 channels digital voltage output
Cased unit including all connectors (uses D type) £49.00
'Chunky' terminal box for above £23.00
(suitable industry, schools etc.)
Optional ribbon cable extender £10.00
- (2) ZX81 ANALOGUE PORT
Our popular, proven board. Spec. as for (1) but without case £29.95
2 DIL header plugs for inputs and outputs £2.00
Light sensitive 'test transducer' £3.00
- (3) ZX81 23+ 23 Female edge connector £2.00
Male edge connector £1.60
- (4) ZX81 Fast Fourier Transform
Educational software on cassette £15.20
- (5) ZX81 EXPERIMENTER KIT
Edge connectors, veroboard + design notes £6.50

TERMS: Add £1 post + packing to cost of order (not on item (3)). Delivery normally return of post. Delays on item (1) possible during 1982. Official, bulk orders welcome. Cheques payable to:

UNIVERSITY COMPUTERS
5 ST BARNABAS RD, CAMBRIDGE CB1 2BU

COMPUTER RENTALS PRESENTS . . .

GALACTIC PATROL*

Galactic Patrol is the "State of Art" ZX-81 "Star Trek". 729 levels of play, Phasers, Torpedos, Automatic sights, Scanner with on/off, distance, number, vector, Shields, Starbase vector, Warp drives (speeds 0-8), damage control, fuel counter, flight vector, repair facilities, control key reminder facility, stardate and kills counter. Completely Machine Code offering a simulation of the Enterprises screen with passing stars, dazzling speed and dramatic kill and damage effects. You must destroy as many Klingons as possible and dock with the Starbase before you run out of energy, but be careful you can lead the aliens onto the Starbase and they will destroy it.

COLLECTION CASSETTE VOLUME 1*

This Cassette contains Five Original Arcade-style games called ALIEN CAPTURE, ALIEN GOBBLER, LOONY BALLOON, MAZE SURVIVAL and POT HOLE. Tired of Flash and Bang Invaders? You will have to plan ahead in these FIVE action games. So come to grips with these exciting programs and let your mind control your reactions.

NORTH SEA TRAWLER*

Sail out from Aberdeen and plot your course on a map of the treacherous North Sea. Hunt the roaming shoals of Cod, Plaice and Herring and learn where the hazards lie. Mind the Oil-rigs and return to Port with your catch. But which Port? Aberdeen, Inverness and Wick each have different prices for fish and the supplies you need. Can you stay in business in such a harsh industry.

THE KEYS OF GONDRUN

What is the Secret of the Dancing Daises? What is the Skeleton trying to tell you? Can you avoid dying in combat against Orca, Trolls or the dreaded Giant Jubjaroo? Will you pick up the right objects from the cavern floors? How will the Magic of the tunnels affect you? Will you ever be able to find the Keys of Gondrun? Who can tell! The perils are numerous, but your skills may suffice.

POPSTAR

Can you take the twelve steps to fame and emerge a Millionaire. Barter with your record company, trade off popularity for wealth, give back-handers, go on Tour, cut a record, go on TV or act in a Film. These are some of the options, but can you pick the best one? Remembr, your Bank Manager is relying on you.

ALIEN REACTOR*

Beamed into their complex, the Aliens Androids are alerted. They multiply through the building to make the reactor inaccessible, which also has two surrounding force fields. You must steal energy from their stores to break through them. The high energy Supercharger is the key, can you reach it? Three levels of play, hall of Fame and hidden rules only play will reveal.


ASK THE ASTROLOGER

The only SERIOUS Astrological Oracle to be produced for the ZX-81. Written by a Professional Astrologer it condenses Astrology's complex mathematics and relations into a program that advises you on the Auspices of a "Shall I . . ." type question. It is not a game, but gives a serious prognosis.

Titles marked contain Machine Code.*


Each cassette £4.95 including VAT & P&P. Send cheque P/O to:

COMPUTER RENTALS LTD, 140 WHITECHAPEL ROAD, LONDON E1

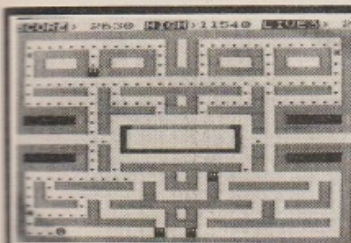

ZUCKMAN ZX81 (16K)

- *ALL MACHINE CODE (10K)
 - *FOUR INDEPENDENT GHOSTS
 - *HIGH-SCORE 'HALL OF FAME'
 - *AUTHENTIC ARCADE ACTION
 - *TITLE/DISPLAY MODE
- ONLY £5.95 INC. P&P**



FROGGER ZX81 (16K)

- *MOVING CARS, LOGS, TURTLES
 - *ALLIGATORS, DIVING TURTLES
 - *FOUR 'SCREENS' OF ACTION
 - *ALL ARCADE FEATURES
 - *ENTIRELY MACHINE CODE
- ONLY £5.95 INC. P&P**

NEW ☆ DRAGON 32 SOFTWARE ☆ NEW

MISSILE COMMAND..... **ONLY £5.95**
FULL HIGH-RESOLUTION COLOUR GRAPHICS + SOUND

GRAPHICS DEMONSTRATOR..... **ONLY £5.95**
LEARN THE SECRETS OF HI-RES GRAPHICS PROGRAMMING

DJL SOFTWARE

**DEPT YC, 9 TWEED CLOSE, SWINDON,
WILTS SN2 3PU**

TRADE ENQUIRIES WELCOME



The Spectrum Handbook DR TIM LANGDELL

A comprehensive and accessible introduction to the ZX Spectrum. A handbook and program library in one – *The Spectrum Handbook* contains more games and application programs than any other book on the market and contains over 80 programs.

224 pp £4.95 (paperback)

ORDER FORM

To: Department O1C, George Philip Services Ltd,
Arndale Road, Wick, Littlehampton,
West Sussex BN17 7EN.

Please send me _____ copy/copies of
THE SPECTRUM HANDBOOK by TIM LANGDELL
at £5.45 per copy (post paid)

I enclose my cheque/postal order for £ _____
(payable to George Philip)

Name _____

Address _____

Please allow 28 days for delivery

SILVERSOFT

NEW!

SPECTRUM - BBC - ZX81

STARSHIP ENTERPRISE

Soar through the stars as a starship commander in this exciting new space ship simulation. This new, advanced version of Startrek uses the full colour graphics and sound facilities of modern micros. Full 3D - Klingon attacks, graphic hyper-warp, plus all the normal 'Startrek' features and a whole lot more, add up to one of the best games in the galaxy!!
48K Spectrum £5.95. BBC Micro model 'B' £6.95.

ORBITER

Fast and furious action is what you get in this amazing Defender-style program for the ZX-Spectrum.

ORBITER is written entirely in m/c code and has full arcade features, including scanners, reverse, hyper-space, continuous scoring and sound effects, plus humanoids, landers, mutants and all the other alien nasties. 16K or 48K Spectrum £5.95.

GROUND ATTACK

Survival is the name of the game in this exciting Scramble-type arcade game for the ZX-Spectrum.

Your mission is to pilot your spaceship through torturous caverns while destroying the enemy missile launchers and fuel dumps.

GROUND ATTACK is written completely in machine code. And has full arcade features including lasers, bombs, explosions, continuous scoring and sound effects, plus rockets, fuel dumps and airborne aliens. 16K or 48K Spectrum £5.95.

Any hiring, lending or copying (except backup) of Silversoft software is strictly forbidden without written permission from Silversoft.

GENEROUS DEALER DISCOUNTS AVAILABLE

Silversoft Ltd, 20 Orange Street, LONDON WC2H 7ED.

KILLER SATELLITE

A mysterious Black Box has appeared in earth's orbit. You have to send your killer satellite to Probe it with high energy lasers. Amazing 3D colour graphics and sound for the Model B only £5.95.

3D CONNECT 4

An advanced, challenging four in a row game for the BBC Micro. Displayed in full 3D-perspective and using the extensive colour and sound facilities of the BBC Micro. Model B only £5.95.

NEW! ZX81-COMPILER

Yes! Now you can write machine code on your ZX81. No more messing about with assemblers and disassemblers simply type in the BASIC program and the machine does the rest. ONLY £5.95.

ZX81 ARCADE ACTION (New low prices)

MUNCHER Exciting pacman game for the ZX81	£4.95
ASTERIODS "Just the thing for asteroid addicts"	£4.95
INVADERS "Probably the best version of INVADERS"	£3.95
ALIEN-DROPOUT Exciting ORIGINAL arcade game	£3.95
STARTREK YES! you can be a starship commander	£3.95
GRAPHIC GOLF 18 graphically displayed holes	£3.95
SUPERWUMPUS An underground adventure	£3.95
GAMES PACK 1 Fantastic value for money, nearly 50K of programs on one cassette! Only	£3.95

Please send me _____
 I enclose a cheque/PO for £ _____
 Name _____
 Address _____
 Silversoft Ltd, 20 Orange Street, LONDON WC2H 7ED. YC12

A		Deans Electronics	132	Lion Micro	134, 152	R	
Abacus	64	D.J.L.	161	Llamasoft	32	R.D. Labs	76
Abbex	10	DKtronics	66, 67	Lowe Electronics	54, 55	Romik	34
Acorn	147	Downsway	80			Rose	134
A.C.S.	120	Dragon Data	118, 119	M		S	
Adda	Inside back cover			Machinecraft	144	Salamander	86
Addictive Games	156	E		Maplin	72, 73, 157	Saturnsoft	117
A & F Software	138	East London Robotics	117	M.C. Lothorian	155	S & B	107
A.G.F.	130	Educare	154	M.D.R.	159	Shiva	141
Amba	90	Electronics Applied	143	Melbourne House	4, 124	Silversoft	162
Amber Controls	131	Elinca	140	Memotech	121	Simon Hessel	80
Amsoft	82	Elkan	129	Michael Orwin	150	Simon Microsoft	137
Anirog	145	Eltec	155	Microdeal	37	Simon Software	152
Artic	128	E.P. Crewe	143	Micromania	90	Sinclair	15, 16, 17, 18
Audio Computers	40			Microplinth	143	Sir Computers	146
Audiogenic	60	F		Microscene	145	Silica Shop	7
Automata	160	Flight	92, 156	Microstyle	151	Softek	35
		Fuller	139	Microtanic	110	Software for All	61
B				Microwave	100	Software Masters	153
Basicare	24	G		Midwich	152	Software Supermarket	87
Beebug	134	Gamer	154	Mikro-Gen	152	Stonechip	114
Bi Bi	145	G.C.C.	158	Monolith	150	Storkrose	125
Bi-pak	120	Ground Control	86	Moviedrome	140	Superior Software	146
Bridge	113			Mr Micro	127		
Buffer	140	H				T	
Bug-Byte	148, 149	Hewson	135	N		Texas	14
		H & H Software	157	National ZX Club	133	Thorn EMI	46, 47
C		Hilderbay	86	New Generation	144	Thurnall	154
Cabel	107	Hisoft	156			Timedata	142
Calpac	134	Hull Junior	86	O		Titan Programs	11
Cambridge Collection	122	Hunter	130	Oakleaf	129	Transform	158
Cambridge Learning	102			Oric Products	12, 13	Trojan	102
Cambridge Micro	158	I		P		U	
Campbell	136	Impact	100	Pase	80	University Computers	160
Cardigan	136	I.J.K. Software	129, 147	P.O.Q. Software	107		
Carnell	157			Peter Furlong	126	V	
Century	161	J		Phipps	92	Vectis	117
Chromasonic	29	J.K. Grege	122	Planet	102	V & H	159
C.J.E. Micro	136	John Prince	130	Picturesque	159	Victa	120
Cobra	22	J.P. Gibbons	120	Pixel	90	Video Software	112, 158
Comprosys	142	J.R.S.	131	Print n' Plotter	96	Visionstore	123
Computer Concepts	160	Jupiter Cantab	8, 9	Program Direct	6		
Computer Lock	110			Program Power	Inside front cover, 83	W	
Computer Rentals	161	K		Pro Software	130	Wideband	145
Computers for All	5	Kayde	116	Proxima	143	William Stuart	112
Comserve	112, 113	Kempston	127	P.S.S.	132	Workforce	140
Control Technology	104, Back cover	Keyboards	144				
C.P. Software	137			Q		Z	
Currah	126	L		Q-tek	76	ZX Microfair	64
		Laserbug	137	Quasar	144		
D		Level 9	160	Quicksilver	125		
D.A. Computers	117						

The Best Vic Software from Adda

GAMES

All these selected games on cartridge (except Blitz)
AVENGER 'INVADERS' in colour £19.95
SUPER LANDER land the lunar module game £19.95
ALIEN bury marauding aliens in the maze £19.95
STAR BATTLE 'GALAXIANS' in full colour 1-2 players £19.85
JELLY MONSTERS is this 'PUCKMAN', or not? £19.95
ROAD RACE drive thro' the night and stay on the road £19.95
RAT RACE VIC's answer to 'RALLY X' £19.95

MOLE ATTACK stop the moles to survive £19.95

SARGON II CHESS the best available, seven playing levels £24.95

SUPER SLOT computerised one armed banditry £19.95


GORF five famous arcade games £24.95

OMEGA RACE sophisticated version of 'ASTEROIDS' £24.95

ADVENTURE GAMES telephone for titles - all £24.95

BLITZ flatten the city before you collide with the skyscraper £4.99

BRIDGE superb version of the card game £24.95

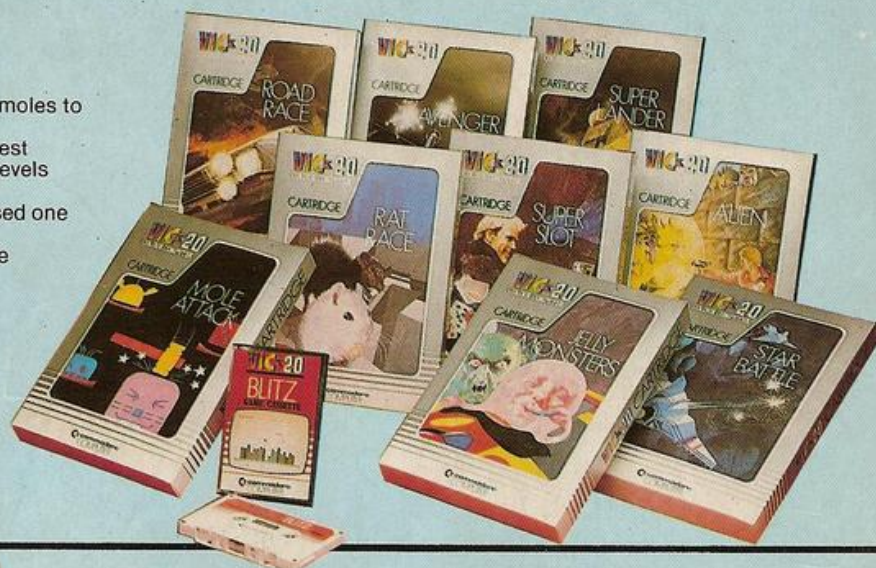

PROGRAMMING

Enhance your VIC with these programmer's aids - and add memory with the RAM Packs.

SUPER EXPANDER high-res graphics, sound, additional 3K RAM £34.95

PROGRAMMERS AID program development tool £34.95

MACHINE CODE MONITOR simplifies machine code programming £34.95

VIC FORTH fast, compact language cartridge with additional 3K £38.95

VIC REL simple electrical control for up to six pieces of apparatus £28.95

VIC STAT single word commands for statistical calculations with colour displays £28.95

VIC GRAF explores graphs and their equations £28.95

VIC SWITCH allows eight VIC's to use one printer and disk £79.95

16K RAM memory pack £74.95

8K RAM memory pack £44.95

3K RAM memory pack £29.95



EDUCATION

For home or school. Unless shown otherwise need 16K memory. Age range shown in brackets.

FACEMAKER for spelling and observation skills (5-12) £8.95

NUMBER CHASER exciting number estimating (5-12) £8.95

NUMBER GULPER gobble away at addition, subtraction, multiplication and division practice, (5-12) £8.95

WE WANT TO COUNT helps the very young to learn numbers (3 upwards) £8.95

TWISTER Rubik like geometric puzzle with 'SUPER TWISTER' section (8 upwards and the whole family) £8.95

SHAPE UP teaches shape and pattern recognition (3 upwards) £8.95

G.C.E. 'O' level revision programs (8K/16K) titles: English Language, Maths 1, Maths 2, Biology, Chemistry, Physics, Computer Studies, Geography, History £9.99 each

For 9-11 year olds (8K/16K) titles: Arithmetic, Reading, General Knowledge, Spelling £9.99 each

Dealer enquiries to
 Adda Computers, Tel 01-579 5845

RAINBOW TOWERS problem solving to exercise memory and logic (8 upwards and the whole family) £8.95

CRANKY addition and subtraction practice (5-12) £8.95

HIDE & SEEK improves short term memory (5-12) £8.95

WORDS WORDS WORDS helps spelling and object identification (5-12) £8.95



How to order:
 Visit your local VIC dealer

by mail
 - add 50p per item post and packing
 - send order with cheque or P.O.
 to
 Adda Computers, FREEPOST,
 London, W13 9BR no stamp needed

Telephone orders 24 hour service
 telephone

01-200 0200 with
 Access/Barclaycard number

commodore
VIC 20

adda

C ★ TECH

Spectrum & Dragon Software

SPECTRUM ARCADE PACK

CITY BOMBER, POLECAT, BREAKOUT, SUBHUNT, CRAZY RACE, FRUIT MACHINE, MISSILE COMMANDER, AND LUNAR LANDING.



We now present our ZX Spectrum album. This brand new album contains no less than 8 superb games for the ZX Spectrum and is the best available for both quality and quantity. These are the games which appear on the album . . .

BOMBER . . . a fast action game making clever use of Spectrum graphics. The game involves the destruction of cities as your plane flies lower and lower towards the buildings until it finally crashes if the buildings have not been destroyed quickly enough. This is a very addictive game for the Spectrum.

FRUIT MACHINE . . . this is similar to the familiar one-armed bandit with very realistic graphics. A very enjoyable game for everyone.

POLECAT . . . this is a very entertaining game with interesting and colourful graphics. It is a completely original and ingenious maze program in which you are a rabbit and the computer is a polecat. The plot involves the rabbit collecting carrots and bringing them back to his burrow whilst avoiding the attentions of a ravenous polecat.

BREAKOUT . . . this is a colourful bat and ball game with great sound effects and constitutes a very addictive game for the Spectrum.

CRAZY RACE . . . this is an amusing game involving a car being driven around a racing track by you knocking down as many objects as possible whilst avoiding other cars. It is fast and uses detailed graphics.


SUBHUNT . . . as a pilot of a helicopter you have to fire down at submarines whilst avoiding their missiles. The user-defined graphics are superb.

MISSILE COMMANDER . . . this game involves defending your city against alien attack. It has 10 skill levels and is noisy and colourful.

LUNAR LANDING . . . by making full use of your limited fuel and time you have to land your spacecraft on the surface of the moon without crashing and killing all the crew. This program makes full use of hi-res graphics and programmable characters.

DRAGON

SEA HARRIER
FLIGHT
SIMULATOR

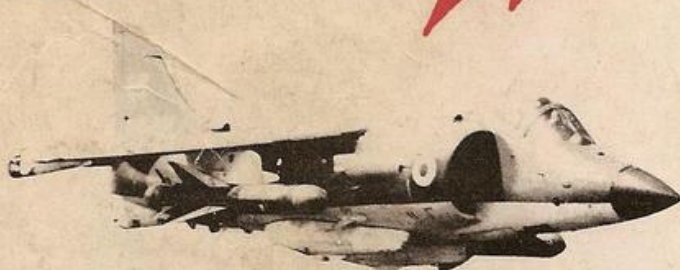

A high resolution Colour Sea Harrier Flight Simulator. This program shows you a full colour view of the sky, ground and runway which move in 3 dimensions. Using your air speed indicator, artificial horizon and compass, all in HiRes colour in the lower part of the display, you must bring your Sea Harrier into land at Port Stanley runway.
£5.00

FREE OFFER
C-TECH COLOUR
POSTER
(APPROX 3FT x 2FT)
WITH EVERY ORDER
BEFORE XMAS

NEW THE **ZX-16K-81**
GAMES

4 MAGNIFICENT MACHINE CODE
GAMES ALL ON TAPE



S.S. SMILE • INVADERS

GALAXIANS • GUNFIGHT

ALSO INCLUDES LIFE & 3D TIC-TAC-TOE

BBC SOFTWARE — SPECIAL OFFER

LUNAR LANDING
£3.00 INC.

EARLY WARNING
£3.00 INC.

C ★ TECH Software

184, MARKET ST
HYDE CHESHIRE
061-366-8223

48 hr
DESPATCH
GUARANTEED

Please send me as soon as possible the following:

☐ £

☐ £

I enclose a Cheque/P.O. for the total £

NAME

ADDRESS

POSTCODE

ALL PRICES INCLUDE VAT & P&P