

SOFTWARE FROM BETASOFT

GAMES MASTER FOR THE SAM COUPE:

At last YOU can create stunning games and demos for the Coupe, with fast, smooth, animated sprites, complex sound effects, missiles, platforms, lifts, detailed backgrounds etc. No programming expertise required! Most of a game's design is specified by the menu-driven editor, which lets you edit graphics, animation, movement, sprite collision actions, sound effects, masking, control keys etc. A simple but very fast compiled language controls some features. A complex demo with animated bouncing sprites passing over and under each other, in front of a background, can be written with just a few commands to start the sprites off. (Once started, the sprites can act by themselves.) The editor produces stand-alone ROM-independent CODE programs that are free from any copyright restrictions - so you can sell your masterpiece! Impressive demonstration programs and an extensive sprite library are included to get you started. Backgrounds and sprites can also be grabbed from any Mode 4 screen and edited.

SIX SPRITE PLANES PLUS BACKGROUND

BIG SPRITES - UP TO A THIRD OF THE SCREEN AREA

TRUE COLLISION DETECTION ON SPRITE EDGE

SMOOTH, FAST PIXEL MOVEMENT OVER 100 ON-SCREEN SPRITES

POWERFUL EASY TO USE EDITOR COMPILED CONTROL LANGUAGE

COMPLEX MOVEMENT PATTERNS AND ANIMATION SEQUENCES

STEREO SPRITE-FOLLOWING SOUND EFFECTS

Written by Dr Andy Wright, author of the Sam ROM, MASTERDOS and MASTERBASIC, the program works with 256K or 512K RAM and ROM 2.0 and above. A comprehensive manual is included.

GAMES MASTER COSTS JUST £24.99 INCLUSIVE OF POSTAGE AND PACKING (ADD £1 IF OUTSIDE EUROPE). SPECIAL PRICE TO INDUG MEMBERS: £22.50 (QUOTE MEMBERSHIP NUMBER)

NEW !! Secrets of the SAM ROM revealed! The complete ROM 3 source listing on disk, extensively commented by the programmer, Andy Wright. Addresses and memory contents are included to make comparison with the actual ROM easy. The viewing program lets you move lightning-fast through the listing with various step sizes, perform searches, or list any part to a printer or (with MasterDOS) a disk file. A must for the serious SAM user! Just £9.95.

FILE MANAGER - The flexible file program. Files up to 780K. Requires MasterDOS and MasterBasic v1.7 or later (updates are free if you return your original disk. Enclose an SAE if you're not buying anything.) £12.99

MasterDOS - The DOS for the serious user. Faster, easier to use and more reliable than SAMDOS. Now available EXCLUSIVELY from BETASOFT. Offers RAMdisk and clock/calendar support, subdirectories, BACKUP, serial and random access files, multi-sector READ and WRITE AT, and much more! £15.99.

MasterBASIC - The much-praised SAM Basic extension adds many new commands for graphics, sound, printing, data-handling, improving DOS, searching and editing programs, etc. £15.99.

STILL AVAILABLE: Beta DOS for the PLUS D. More files per disk, much faster, random-access files, file compression, BACKUP and many other features. Fully compatible with existing disks and files. Only £9.95. **BETA BASIC** for the Spectrum (48K/128K/+2) adds over 100 new commands and functions to Spectrum Basic. Versions available for Disciple/+D, Discovery, or Tape/Microdrive. A classic for just £15.95!

Prices include P & P. Make cheques and postal orders payable to:
BETASOFT, 24 WYCHE AVENUE, KINGS HEATH, BIRMINGHAM, B14 6LQ


Vol.7 Nº6.

February 1994.

FORMAT

FOR SPECTRUM AND SAM USERS

FAMOUS LOVERS OF THE WORLD, No. 319...

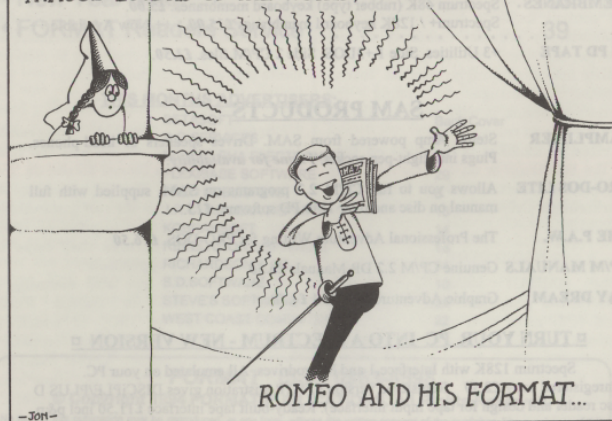

ROMEO AND HIS FORMAT...

There Is No Competition
For FORMAT

£1.25 (UK R.R.P.)

ISSN 0963-8598.

B.G.SERVICES

64, Roebuck Road, Chessington, Surrey, KT9 1JX. Tel: 081-397-0763.

SPECTRUM PRODUCTS

- +2A MOD KIT** Converts a black +2A into a genuine +2 with standard expansion port. This allows the PLUS D to operate properly. Includes replacement ROM, FIXER and full fitting instructions + manual updates. **£15.50.**
- THE FIXIT** Converts the +3 and +2a expansion port so that some 48K add-ons will work. Single port version **£9.50**, double port version **£10.50.**
- VTX5000** **SPECIAL OFFER** - V23 direct connect modem with viewdata software in ROM. Version for 48K or gray +2 (+2A/+3 users need FIXIT) - **£10.**
- PD TAPE 01** Comms software for VTX5000, VTX711 and RS232s. **ONLY £1.50.**
- Dr. SCROLL** Scrolling software for VTX5000. **£4.00.**
- MEMBRANES** Spectrum 48K (rubber type) keyboard membranes. **£5.00.**
Spectrum+ / 128K keyboard membranes **£15.00.** ++ Now Available ++
- +3 PD TAPE** +3 Utilities. Side 1 +3DOS. Side 2 CP/M files. **£1.50.**

SAM PRODUCTS

- SAMPLIFIER** Stereo Amp powered from SAM. Drives speakers or head-phones. Plugs into light-pen socket. **Phone for availability.**
- PRO-DOS LITE** Allows you to run CP/M 2.2 programs on SAM, supplied with full manual on disc and over 1Mb PD software. **£15.**
- THE P.A.W.** The Professional Adventure Writing for PRO-DOS. **£16.50**
- CP/M MANUALS** Genuine CP/M 2.2 DR Manuals **£6.50**
- DAY DREAM** Graphic Adventure for SAM **£4.50**

□ TURN YOUR PC INTO A SPECTRUM - NEW VERSION □

Spectrum 128K with Interface 1 and Microdrives. All emulated on your PC. Unregistered copy **£2.50** Registered version **£15.** (Registration gives DISCiPLE/PLUS D disc reader and design for tape input interface). Ready-built tape interface **£11.50** incl p&p.

□ RIBBON RE-INKING SERVICE □

Star, Citizen and other standard fabric ribbons re-inked for **£1.50** each + return postage.

Please allow 28 days for delivery. All prices include UK postage and packing. Overseas customers please add £2 on modems; PRO-DOS and +3 CP/M, add £1 on all other items. Please make cheques/postal orders payable to B.G.Services.

BGS-L9

CONTENTS

Vol.7 N°6.

February 1994.

• News On 4	4
• The Editor Speaks	5
• Short Spot	7
• Hardware Design Course - Part 4	15
• BASICally Speaking - Part 4	19
• SAMPaint Reviewed	23
• The Help Page	27
• Small Ads	30
• Your Letters	31
• New Year Sale	38
• FORMAT Readers Service	39

THIS MONTHS ADVERTISERS:-

BETASOFT	Back Cover
B.G.SERVICES	2
BLUE ALPHA ELECTRONICS	29
FLEXIBASE SOFTWARE	29
FRED PUBLISHING	6
J.R.C. CAMERA REPAIRS	13
KOBRAHSOFT	14
REVELATION SOFTWARE	18
RICHARDSON & CO	34
S.D.SOFTWARE	10
STEVE'S SOFTWARE	34
WEST COAST COMPUTERS	22

FORMAT ISSN 0963-8598

© Copyright 1994 FORMAT PUBLICATIONS. All Rights Reserved.

No part of this publication may be reproduced, in any form, without the written consent of the publisher. The purchaser of this magazine may copy program material published herein for his or her own personal use and provided that any such programs are erased if and when the purchaser disposes of this magazine in any way. While every effort is made to ensure accuracy in FORMAT the publisher will not be held liable for any errors or omissions.

FORMAT is published by FORMAT PUBLICATIONS.

34, Bourton Road, Gloucester, GL4 0LE, England.

Telephone 0452-412572. Fax 0452-380890.

Printed by D.S.Litho. Gloucester. Telephone 0452-523198.

NEWS ON 4

GO FOR SAM

GO is a very ancient Oriental game of strategy often considered more difficult to master than chess. It is considered *THE* game in Japan and is taught in schools and night classes.

Well now both Spectrum and SAM Coupé owners can play using a new computer version produced and marketed by John Marshall.

The program is for two players and allows the size of board, the colours and the control keys to be customized. It automatically provides handicap stones, records captures and keeps the rules (which are surprisingly easy to learn). Another advantage to using the computer version is that you can always save a game to reload later.

Priced at £2.99 it is supplied on tape for the Spectrum or on disc for SAM and is available direct from John Marshall, 7 Claborough Drive, Arnold, Nottingham, NG5 7LL.

RADIO UPDATES

The AMRAD MULTIMODE and MULTILOG programs (see News On 4 Vol.6 N°5) have now been updated to versions 2.7 and 2.6 respectively. These programs are much respected among radio ham circles and are available as SHAREWARE.

For more details write to Ian Spencer, Fichtenweg 10C, 53804 MUCH, Germany. (Please note new post code).

CBM STILL IN TROUBLE

Heavy losses are still plaguing the ailing Commodore company in the US. A \$590 million loss was recorded for the

year ending 30th June 1993 which although far lower than the record \$911 million loss of 1992 was still higher than expected.

In a statement issued from its US headquarters the firm commented: "The company's financial position and operating results raise substantial doubts about the company's ability to continue as a going concern."

Commodore are now attempting to restructure its finances by raising \$50 million in order to escape from its 'negative equity position'. In other words it is looking both for new investment as well as looking to its creditors to convert debts into equity in the company.

TV GAMES WAR HOTS UP

Channel 4's highly successful *GamesMaster* show, which was the first of the glut of video games shows on TV, has been moved to Tuesday evenings at 6.30pm and has had its run guaranteed until at least the first quarter of 1995. With many new features they hope to keep ahead of the opposition.

Meanwhile SKY are still claiming a growing audience for *Games World* (weekdays 6pm on SKY 1) which is actually produced by the same company - Hewland International - as *GM* and are looking for a slot to repeat the show later each night to catch older games players.

ITV's *Bad Influence* also looks set to run until at least the end of 1994.

Credits: Harold Lunsun, M.D. Palmer.

URGENT we need your news. Anything you think other people should know about. Each item printed earns the contributor 3 months extra subscription (please claim when next renewing).

The Editor Speaks

Well Christmas is over, the New Year has begun and so it is back to the grind-stone. Our sincere thanks to all of you who sent Christmas cards, they help to cheer up the office very much - I'm sorry we can't reply to you all personally but thank you for your kind thoughts.

The Christmas holiday seemed to flash by, helped I must say by the addiction to Revelations latest SAM game 'Legend Of Eshan'. I got a pre-release version a couple of weeks before Christmas but did not have time to play it properly until Boxing day. That was it, until Jenny turned up on the 4th January and forced me back into work mode, all I seemed to do was eat, watch TV, and play Eshan (and given the number of repeats on the box it is safe to say Eshan won more often than the TV).

It is not often I get time to play games but I made time for this one. Eshan can trace its roots back to games like 'Lords Of Midnight' which has probably been the subject of more letters in *FORMAT* over the years than any other Spectrum game. But, with the extra memory and Mode 4 graphics of SAM, Eshan goes far beyond *LOM* in both size and scope. For anyone who likes an intelligent game - this is the one to start 1994 with.

The first Gloucester Gathering in November was very well attended. I've had lots of phone calls and letters pushing for us to organize another as quickly as possible. Well, we have booked a date. **Saturday 30th April**, same venue, same times. "Why so far away?" I can hear many of you say. By then the weather will be better, the days will be longer, both making it easier for people to travel longer distances. The other

reason is that shows do take a lot of organizing and we need the time.

As with the first show we will be selling advanced tickets but I will give details of those next month. One idea that was raised, and I would like to pass on early, is that of car sharing or even joint hire of a mini-bus. If you would like to offer to organize a mini-bus from your area or if you can offer to share your car with other SAM/Spectrum enthusiasts then drop us a line right away. We can then publish your name and telephone number in the March issue so people can get in touch in plenty of time.

I can promise that this second show is going to be even bigger than the first so put the date in your shiny new 1994 diary before you forget.

Now, as they say, to something completely different. Last month I asked for help in finding a +3 copy of PCG's DTP. Well I'm pleased to say I had several phone calls on the subject and we have now produced a master copy. So, if you turn to the NEW YEAR SALE page you will find the +3 version is now available. The clip-art is another problem and we are looking into that but at least the main DTP program is available. I'm sorry there has to be a surcharge for the 3" disc version but 3" discs are just so much more expensive than 3½" or 5¼". Still, I think you will find the program is worth the money.

While I'm talking about the NEW YEAR SALE, please note that this is your last chance - the offers close on 1st March so get your orders in quick.

Until next month.

Bob Brenchley, Editor.

THEY'RE
COMING
TO FRED
CAN YOU SAVE THEM?



THEY'RE
COMING
TO FRED
CAN YOU SAVE THEM?



THEY'RE
COMING
TO FRED
CAN YOU SAVE THEM?



THEY'RE
COMING
TO FRED
CAN YOU SAVE THEM?



THEY'RE
COMING
TO FRED
CAN YOU SAVE THEM?



THEY'RE
HERE...
LEMMINGS
FOR
SAM
Only £19.99
(INDUG Members £18)



Also Available Now:
SAMPaint, The New Art Package
For The Sam Coupé. £24.95
[10% Discount To INDUG Members]

Tel: 0382 535963.

FRED PUBLISHING 40, ROUNDYHILL, MONIFIETH, DUNDEE, DD5 4RZ.

SHORT SPOT

YOUR HINTS, TIPS AND PROGRAMMING IDEAS

Edited By:- John Wase.

Let's start February with a letter from across the continents. Mr L. G. Baumann of Cowies Hill, South Africa has a Spectrum tip, and as I was short of Spectrum items last month, we'll put it up-front. Ever put a listing which contains a lot of instructions into your little rubber-keyed beer mat? I bet you have. And I bet from time to time, you've looked at the screen and wondered what on earth is the crazy mixed up rubbish you've got on it. Or you've a beautiful print-out on-screen, but it prints rubbish on the printer. Mr Baumann's sent me several listings to demonstrate. He writes as follows:-

"There are times when you will want to add some lines of print to a program, and this requires some care if you want to avoid words being cut between two lines. You may also want to make all the lines right-justified. This is how it's easily done.

1. Enter a Line number and the Keyword PRINT.
2. Bring the Line down again to the Editing area. This lines it up correctly.
3. Add spaces across the screen and put an inverted comma in the last space of the line.
4. Now start typing the desired words and they will appear in the same position as they will when the program runs.
5. If you want to right-justify, then add the extra spaces needed as you finish each line. This is easier than going over the lines later.

6. Use a single apostrophe mark (symbol-7) before and after any Name.

7. When you have finished, run the lines to check that they appear correctly and to your satisfaction.

8. If this is a piece of a program, and you are short of room, now is the time to remove the unnecessary spaces from each line. You can also replace the apostrophes with two pairs of inverted commas if you want.

9. Now SAVE it.

Many thanks, Mr Baumann.

Now over to Roy Burford of Stourbridge, who is always meticulous in chasing up and correcting problems. And he's found problems a-plenty in the December issue...

First, my little 'Ghosts' game. Nice, innit. One o' me favrits. Except it didn't work on Roy's 128k Spectrum+ until he'd kept it happy by using CHR\$ 196 instead of 'BIN' in line 620.

Back to Roy, now. Roy points out that there's something dodgy gone on in Alan Cox's 'Spirograph', because not all the starfish pattern appeared after he typed it in. (I guess we've dropped a bit during one of its many transcriptions: my apologies). The problem with changing r1's sign for the wheel outside the ring is that is also changes simultaneously the upper counter limit, so the plot never really gets under way. A bit of thought has led Roy to the correct upper limit: 2*PI*r1/r*LCM. Many thanks.

Roy now proposes to leave the matter

of spiographs for a while. Probably just as well, for we now have a couple of Spectrum programs from Barry Twyman. Yerss, folks, it's trouble himself again; him wot originally started my Spirograph correspondents 'till they almost came to blows. And he reckons he's got another starter here. It's rather long, but most of it is data which converts the character set to a sort of lousy script. You LOAD the program, RUN it and watch the numbers in the top left of the screen: when it's done thinking, the Spectrum gives you some on-screen prompts, and prints out a letter in lousy script. Barry confesses it's riddled with bad habits, so he's waiting for our readers to improve it (and fight): it's even got no print routine: he "did the pathetic print with the DISCIPLE screen dump. BUT, I pulled some lovely jokes in a New Year's Party by videoing lots of handwritten 'E-Mail' from 'Famous Persons' and performing an elaborate routine to convince family and (ex)-friends of access to an exclusive bulletin board." Wicked, 'ent 'e. Here's the routine:-

```

1 POKE 23609,100
10 PRINT "LETTER WRITER"
20 IF PEEK 31500=0 THEN GOSUB
  9300
100 CLS : PRINT "LETTER WRITER"
110 INPUT "HOW WILL YOU SIGN YO
  URSELF?";a$
120 INPUT "WHO IS THE LETTER TO
  ?";b$
130 INPUT "TODAYS DATE?";c$
140 INPUT "TYPE IN TEXT OF LETT
  ER";d$: LET d$=" "+d
  $
150 FOR f=1 TO 5: LET d$=d$+"
  ": NEXT f
160 POKE 23606,24: POKE 23607,1
  20
200 FOR f=1 TO LEN d$-32 STEP 3
  2
210 IF d$(f+31)=" " THEN GOTO 3

```

```

10
220 FOR g=f+31 TO f STEP -1
230 IF d$(g)=" " THEN GOTO 300
240 NEXT g
250 GOTO 310
300 FOR h=g TO f+31: LET d$=d$(
  TO g)+ " "+d$(g+1 TO ): NEX
  T h
310 NEXT f
320 LET d$=d$( TO LEN d$-128)
400 CLS : PRINT ,c$' TAB 4;"Dea
  r ";b$;","
410 PRINT " ": FOR f=1 TO LEN d$
  -32 STEP 32: PRINT d$(f TO
  f+31)'; NEXT f
420 PRINT " " TAB 10;"Yours,","
  a$;" "": PRINT TAB 14+LEN a$
  , " "": PAUSE 0
430 POKE 23606,0: POKE 23607,60
9300 FOR f=0 TO 768: POKE 31000+
  f,PEEK (15616+f)
9310 IF f/20=INT (f/20) THEN PRI
  NT AT 1,0,f
9320 NEXT f
9330 RESTORE 9350: FOR f=496 TO
  728: READ a: POKE 31000+f,a
  : NEXT f
9350 RETURN
9360 DATA 0,0,48,72,136,16,96,12
  8,1,134,120,0,0,224,16,32,0
  ,7,24,32,64,64,35,28
9400 DATA 0,0,56,4,62,197,60,0,1
  6,48,32,124,163,34,60,0
9410 DATA 0,0,28,32,96,163,28,0,
  4,4,4,62,69,196,60,0
9420 DATA 0,0,56,68,249,66,60,0,
  12,10,20,112,159,48,80,96
9430 DATA 0,0,28,36,93,134,4,24,
  0,48,80,96,120,203,76,0
9440 DATA 0,16,0,16,49,214,8,0,1
  6,0,16,48,211,60,80,96
9450 DATA 32,80,116,164,56,37,38
  ,0,24,40,40,48,80,145,14,0
9460 DATA 0,0,104,84,212,85,86,0
  ,0,0,0,56,100,165,38,0
9470 DATA 0,0,56,70,197,68,56,0,
  0,0,56,100,167,60,32,32
9480 DATA 0,0,56,100,188,5,6,4,0
  ,0,36,122,161,32,32,0
9490 DATA 0,0,48,64,187,4,56,0,3
  2,32,56,32,97,166,24,0
9500 DATA 0,0,36,100,164,37,26,0
  ,0,0,36,38,105,168,16,0
9510 DATA 0,0,34,106,171,42,20,0
  ,0,0,102,152,136,25,102,0
9520 DATA 0,0,36,100,191,20,36,2
  4,0,0,56,72,145,34,116,12
9550 DATA 24,36,36,60,36,165,102
  ,0,120,36,36,56,37,166,120,

```

```

0,24,36,36,32,96,167,24,0
9560 DATA 60,82,81,57,97,209,62,
  0,56,72,64,48,64,199,56,0,3
  1,16,48,95,144,16,16,0
9570 DATA 56,68,68,64,207,68,56,
  0,100,36,36,60,36,165,102,0
  ,58,84,16,16,16,58,84,0
9580 DATA 63,22,8,8,72,72,48,0,9
  8,164,40,48,40,165,98,0,96,
  160,96,32,32,33,126,0
9590 DATA 34,54,42,42,34,163,98,
  0,108,178,162,34,34,34,35,0
  ,24,36,36,36,101,166,56,0
9600 DATA 60,34,34,124,160,32,32
  ,0,56,68,68,68,212,76,60,2,
  56,36,36,56,100,165,38,0
9610 DATA 28,34,32,92,130,3,28,0,
  ,113,142,8,8,9,14,24,0,68,6
  8,68,68,197,62,0
9620 DATA 68,68,70,69,168,40,16,
  0,130,130,130,147,146,146,1
  08,0,130,68,40,16,16,170,68
  ,0
9630 DATA 18,18,50,94,130,15,18,
  12,62,68,8,16,32,77,242,0

```

So, I've had enough: I'm going to treat you rough. I know this is a rather long piece: get typing. And in compensation, here's a real short spot; also from Barry.

```

1 INPUT A$: CLS : FOR N=LEN A
  $ TO 1 STEP -1: PRINT A$(N)
  ;: NEXT N: GOTO 1

```

It should form the basis for any number of stupid party games/tricks/jokes/programs.... C'mon, I'm not handing you a tiddler like this on a plate. Type it in and tell me what it does...

Now over to SAM, who's been sulking merely because I've actually had a few Spectrum programs for a change.

Ben Booth of Charlton Kings, Cheltenham, has sent a little program to draw Pie Charts. It's really very simple. Just enter a title, and also the number of entries (pie slices) you want. Then enter a value and a name for each slice. The program calculates each slice as a proportion of the whole, and then converts this to an angle in radians. Finally, it adds up the angles to obtain a

cumulative angle for each slice, and draws the lines. A separate angle is calculated which bisects each slice and is used to position the label. The on-screen picture colours each slice differently, and you are given the option to SAVE the file as a SCREEN\$, so that you can edit it in FLASH! and print it any way you want.

Here it is: many thanks, Ben

```

10 REM Pie charter
12 REM By Ben Booth
15 MODE 4: CLS #
20 LET xc=125, yc=90, rc=65,
  ll=5
30 PRINT "Welcome to PIE-CHAR
  T!"
40 INPUT "Graph title?";title
  $
50 INPUT "Number of entries?";
  ,no
60 PAPER 7: BORDER 7: CLS
70 PEN 0
80 PRINT AT 0,((32-LEN (title
  $))/2);title$
90 :
100 CIRCLE xc,yc,rc
110 DIM Entr(no)
120 DIM lab$(no,ll)
130 FOR go=1 TO no
140 INPUT ("Enter value";go;"
  >");entr(go)
150 INPUT ("Enter label";go;"
  >");lab$(go)
160 NEXT go
170 :
180 LET total=0
190 FOR go=1 TO no
200 LET total=total+entr(go)
210 NEXT go
220 :
230 LET factor=360/total
240 DIM vlu(no)
250 FOR go=1 TO no
260 LET vlu(go)=(entr(go))*fac
  tor
270 LET vlu(go)=(vlu(go)/180)*
  PI
280 REM set angle in radians
290 NEXT go
300 :
310 REM draw the lines
320 PLOT xc,yc
330 DRAW rc,0
340 LET total=0
350 FOR go=1 TO no

```

SD Software



Quality Serious Software For Spectrum & Sam Coupé

NEW - NEW THE FRACTAL COLLECTION NEW - NEW

A fast fractal generator for the ZX Spectrum. Now you can explore the fascinating world of fractals with this machine code program. Up to 200 shades on screen gives clear, crisp fractal pictures which can then be zoomed and expanded. Not just the Mandelbrot set but 18 different types can be made. Generates fractal music, you can hear the computer generate the fractal. Ready to use on disc for DISCIPLE/Plus D complete with ready-converted file for use with our SPECMAKER emulator on SAM.

SPECMAKER The simplest Spectrum emulator on the market for SAM. 1000s of 48K programs work without the need for any conversion. Most other programs need only minor changes. All the extra SAM keys work in Spectrum mode. Uses SAM's parallel printer port and up to 360K of SAM's memory as a RAMDISC. Plus D, DISCIPLE and Opus discs* can be loaded into SPECMAKER and saved to SAM disc. Can now convert files between Messenger and SPECMAKER format and so save on valuable disc space. Now comes with pre-converted Spectrum ROM image - no need to have a Spectrum available anymore. Supplied on 3 1/4" disc. *Requires MasterDos and MasterBasic to use Opus single density discs

PC-SUITE From the same author as SPECMAKER. Now you can transfer your IBM data files by reading and writing IBM discs (720K format) on your SAM Coupé. PC-SUITE will even let you format IBM discs on your SAM. Write and edit SAM Basic programs on your PC. Use PC-SUITE to copy SAM data files to PC so you can print them on that high quality laser printer at work... nb. This is not a PC emulator.

As used by Format Publications to transfer articles/programs for this mag.

SPECFILE+ Now a Spectrum data filing program that never gets out of date. Specfile+ holds a massive 28K of data and, by using compression makes it seem like much more. Free-format style means no complicated file design before you get started. Very fast CASE selective and complex searches. Designed to be extended - so it grows as you do. Works with PLUS D, DISCIPLE or under SpecMaker on SAM. This program is a must for anyone with data to store. Special +3 version also available on 3"

UNIDOS version 2 of the incredible new DOS from Steve Warr for the PLUS D and DISCIPLE. Same DOS system file for BOTH interfaces. Random Access Files; Sub Directories; Hundreds of files on one disc; Hidden files; Protected files; Copy files of ANY length; incredibly versatile Screen Dump routines; Error Trapping and MANY more features. Compatible with all Spectrums (+2a/+3 in 48K mode). Over 20 programs now included on the disc.

State DISCIPLE or PLUS D on order

PRICES:	Non Members	INDUG Members
The Fractal Collection	£5.95	£4.95
Specfile+	£12.95	£9.95
UNIDOS	£25.95	£19.95
Createfile Manual	£6.50	£5.50
SpecMaker	£12.95	£9.95
PC Suite	£25.95	£19.95
IBU* / SAM IBU	£4.90	£3.50
File Convertor*	£5.30	£4.00
Hacker's Workbench*	£9.90	£8.50

* GDOS programs still available

Please add £0.50 postage (£1.20 outside UK)

Spectrum Owners

Don't forget to say if ordering for PLUS D or DISCIPLE and state disc size - 3 1/2" or 5 1/4" (80 track only).

INDUG MEMBERS

Don't forget your membership number if claiming discount.

S.D. Software,
70, Rainhall Road,
Barnoldswick,
Lancashire,
England, BB8 6AB.

```

360 LET t2=total+(vlu(go))/2
370 LET total=total+vlu(go)
380 LET xp=COS (total)
390 LET xp2=COS (t2)
400 LET yp=SIN (total)
410 LET yp2=SIN (t2)
420 LET xp=(xp*rc)+xc
430 LET xp2=(xp2*rc)+xc
440 LET yp=(yp*rc)+yc
450 LET yp2=(yp2*rc)+yc
460 :
470 PLOT xp,yp
480 DRAW TO xc,yc
490 LET pn=go: IF pn>15 THEN L
    ET pn=pn-15
500 FILL PEN pn,((xp2-xc+1)/2)+
    +xc,((yp2-yc+1)/2)+yc
510 LET y1=170-yp2
520 LET x1=xp2/8,y1=y1/8
530 IF x1<16 THEN LET x1=x1-(1
    l+1)
540 IF y1>11 THEN LET y1=y1+1
545 IF y1>18 THEN LET y1=18
550 IF y1<11 THEN LET y1=y1-1
560 PRINT AT y1,x1:lab$(go)
570 NEXT go
580 :
590 INPUT "Save(y/n)?",s$
600 IF s$="y" OR s$="Y" THEN I
    NPUT "Filename?",f$: SAVE
    f$ SCREEN$
610 CLS #

```

Pretty good, eh. Ben reckons that all you've got to do is to change TITLE to T\$, ENTR to E, LAB\$ to L\$, GO to G, VLU to V, PEN to INK and CLS# to CLS, and if you omit lines 5, 490 and 500, it might even work on a Spectrum too, though it won't colour the segments. Pretty good. Ben is to be congratulated on a neat bit of programming.

I know it does what Ben wants, but I think we could improve it. It could show a sort of squat cylinder instead of a two dimensional circle. And one segment could be pulled out just a little from the rest - like a piece of cheese or a slice of cake - so that it stands out. Who's going to do it? Why, you are, of course. Get your solutions in to Short Spot; pronto. Many thanks, Ben.

You know, I suffer from Technology. As

my wife has developed a bad back as well as me, we've changed the solid fuel Rayburn cooker and the anthracite boiler which ran the central heating (4.5 hods of coal shovelled, and then down 70 or 80 foot of icy path; then empty the ashes. No joke) to a single oil unit. We've had double glazing in strategic places, a burglar alarm and a Fax/phone/answering machine. The current state of play is the Oil Rayburn's broken down, the man's just fixed the double glazing so that it doesn't let draughts through, Samsung's repair agents have changed the software chip to stop me recording 2.5 minutes of dialling tone - without success - I must wait for the exchange to be modernized in April, and the burglar alarm man's just fixing it (again) to stop me waking the neighbours in the middle of the night. I guess technology and I don't mix. Which is why, I think, I opened the pages and copied two identical wireframe programs into *Short Spot*, only realising I'd done it after the event. I am therefore particularly grateful to Ray Cox, who has offered to fix the offending section (I haven't forgotten, and will try and send a photocopy), and Eric Olyott, who sent a whole wad of stuff on wireframe drawing: unfortunately, a quick trawl through this has given me nothing to put into *Short Spot*. I have, however, got a little message from John Ewing, a Veterinary Surgeon at Wooler, Northumberland. He mentions that he has not really been following the previous correspondence, but used to make use of a well known bug in the Spectrum ROM to produce interesting screen effects. A two line program like the example enclosed can produce very good effects, writes John. He also mentions that varying the third number

in the DRAW statement by trial and error will produce anything from a black circle to spiky stars.

Here's the program. It's a proper short spot, too!

```
10 PLOT 50,50
20 DRAW 80,80,750
```

And I should just mention that they have sent me a picture which I am passing on to Bob, because it's from one of those original printers; either Uncle Clive's or the Alphacom. I hope Bob will manage to reproduce it: it makes me feel all nostalgic. [Sorry John & John, the poor photocopy of the lovely silver paper you sent down just would not reproduce in a shrunken form on these pages. Ed.]

Many thanks, John.

Finally, here's something a bit more esoteric; a demonstration of chaos! Chaos theory is in the news at the moment; believe me. This particular form of chaos is the reason why, even with the most powerful computers, one cannot forecast the weather ahead with any accuracy. When calculating non-linear expressions over and over again, the result can be incredibly sensitive to the starting values used, and minute changes there make big changes to the result. So a major change in the weather could perhaps be initiated by a butterfly's wings fluttering. This program, put together by Ted Cooke-Yarborough demonstrates this rather well. An equation published by Earle and Johnson in 'IEEE Spectrum' (no relation) in November 1993 (we're very up-to-date) is repeatedly calculated. The equation is:-

$$x_{n+1} = px_n(1 - x_n)$$

where the initial value of x is between 0 and 1.

The value of x obtained in one $n+1$ calculation is used for x in the next n calculation. For values of p less than 3,

the calculated values settle down to a constant number. For p just over 3, the calculated numbers oscillate between two numbers. As p is increased, the oscillation becomes more complex; with $p=3.6$, the result looks random. Yet with identical starting numbers, the pattern obtained is always the same, but if the start value of x is changed by as little as two parts in ten thousand million, then you get different patterns. This is because the Spectrum works to an accuracy of 9 or 10 decimal digits, and the Spectrum thinks numbers differing by less than this are the same. Type it in, press RUN and the program will ask for a value of p and for a starting value of x . If p is between 3 and 4, you get a descending wiggly line. The horizontal deflections correspond to changes of x in succeeding calculations. The line moves down one pixel per calculation until the bottom of the screen is reached, when it asks for another starting value for x : up to four vertical lines side by side will fit on the screen this way. At the end of the fourth line, a STOP is reached, and you'll have to key in RUN to start again.

This display can be used in a number of ways. For instance, if the second line is drawn with the same starting values as the first, you can easily see that the wiggles correspond exactly. The program will accept starting values of the form ".6+1E-8" and this corresponds to a very small increase in the starting value of x , namely 6. In spite of this, it's easy to see that a very different pattern eventually develops. If necessary, the sequence of calculation can be carried on from the end of one line to the start of the next, by keying-in "x" as the starting value for the next line. This line then starts with the value of x calculated in the previous line. This can be carried over to all four lines

if you want. For example, if you go from line to line in this way, you find that if $p=2.999$, the initial oscillation continues until it dies out on the third line. But if you start with $p=2.997$, it dies on the second line. The whole concept is philosophically important, for it shows that the future is much less predictable than we used to think.

```
1 REM CHAOS Demonstration
2 REM E H Cooke-Yarborough 9 Jan 1994
3 REM See Hunt & Johnson, IEEE Spectrum Nov. 1993
4 REM Shows that irregular sequence of results can depend critically on exact starting value x.
10 LET z=8: INPUT "p(1 to 4)="; p; IF p<1 OR p>4 THEN GOTO 10: REM Set position of first line. Set value of x.
15 INPUT "x(0 to 1)="; x$: LET x=VAL x$: IF x>1 OR x<0 THEN GOTO 15: REM Set initial value of x
17 PRINT AT 0,0;"x=": PRINT AT 0,z/8-2;x$: LET n=167: IF z<=160 THEN PRINT AT 0,z/8+5; INVERSE 1; OVER 1;" ": REM Put headings above lines. Invert last character of headings
20 LET x1=p*x*(1-x): REM Equation from Hunt & Johnson
30 PLOT z+50*x,n+1: DRAW 50*(x1-x),-1: REM Draw change in value of x
35 LET n=n-1: LET x=x1: REM Prepare for next cycle
40 IF n=1 THEN GOTO 20: REM If not at end of line, execute next cycle.
50 LET z=z+64: IF z>240 THEN STOP: REM Position start of new line. Stop if last line done.
60 GOTO 15: REM Start new line with new value of x.
```

There are two very small ranges of values of x for which the program goes haywire. About plus or minus ten to the power of minus ten on either side of

$x=0.5$, and also if the value of p is very close to 4. Anyone know why?

Many thanks, Ted.

And that's really all we've room for this month; I do hope you found it interesting. Please keep the snippets coming to me:-

John Wase,
Green Leys Cottage,
Bishampton,
Pershore,
Worcs,
WR10 2LX.

See you next month.



J.R.G. CAMERA REPAIRS

2, Forge Cottage, The Street,
EWELME,
Oxon, OX10 6HQ.
Tel/Fax 0491 834403.

REPAIRS AND SPARES SERVICE

Spectrum 48/128/+2/A/B.
Microdrive. Interface 1.

FOR SALE

Alphacom 32 Printer
With Paper/PSU/Leads £25.50
Microdrive Cartridges £2.00
48K+/128K Membranes £15.00
PSU For 40/128/+2/+2a/+3 £5.00
Brother 6volt PSU £6.50
All PSU £3.00 Post/Packing.
Tape Leads. TV Leads at £2.75

KOBRAH SOFT

Spectrum & Sam Coupé Utilities

SAM DICE DISC UTILITY. NEW!

Ver. 1.1 compatible with MasterDOS. Features READ, BACKUP, RECOVER erased files/lost data, REPAIR directories, DISC CHECK, LOCK OUT bad sectors, SEARCH for string, RENAME files, FORMAT all or just one track. Price:- £14.95 on disc, plus £0.45 P&P.

CD2 TAPE TO SAM DISC UTILITY. NEW!

Transfer THE VAST MAJORITY of your Spectrum tapes to SAM disc. Gives superb Spectrum tap compatibility. VERY EASY to use. Price:- £10.95 on disc, plus £0.45 P&P.

SAM Z80 MACHINE CODE COURSE. NEW!

Learn how to program your SAM Coupé in machine code. FULL course, suitable for all, with an assembler and disassembler. Price:- £20.00, plus £0.74 P&P.

SP7 TAPE TO +3 DISC UTILITY.

Transfer Spectrum tapes to +3 disc. Now comes with a BEGINNER'S manual, an ADVANCED user's manual and an Encrypter demo tape. Also a superb DISC CATALOGUER. Will now transfer FULL 128K programs. Includes SP7 Companion - shows how to transfer many games. Price:- £14.95, plus £0.74 P&P.

GHI GAMES HACKER UTILITY. NEW!

Shows you how to isolate the code from any game with a view to looking for infinite lives, names etc. Also shows you the tricks the professionals use. Provides hours of interest and fun. Comes with full manual which explains the routines involved. Price:- £14.95, plus £0.54 P&P.

DMS +3 DISC MANAGEMENT SYSTEM.

NEW Version 1.1, now with printout, high capacity formats AND extended directories. Organize all your disc files. LARGE database, FAST search, EASY to use. Price:- £14.95, plus £0.45 P&P.

D.I.C.E. +3 DISC UTILITY.

NEW Version 3.0 with high capacity format, data printout and disassembler, LOCK OUT faulty sectors, RECOVER erased files and much more. Very easy to use "An excellent package". CRASH Oct'88. Price:- £14.95 on disc, plus £0.45 P&P.

SPECTRUM MACHINE CODE COURSE.

FULL course from beginner to advanced level. Applies to ALL Spectrums. Suitable even for the complete beginner. FREE disassembler and Editor/Assembler. Price:- £20.00, plus £0.74 P&P.

DB2 +3 DISC BACKUP UTILITY.

Backup +3 PROTECTED discs to DISC or TAPE, EASY to use, handles Multi-Loads and now even MORE discs. Price:- £14.95 on disc, plus £0.45 P&P.

PLUS 3 DIARY AND FILING SYSTEM.

New Version 1.1 with full printout. Superb filing system/diary/database for the +3 with LARGE database, fast search/retrieve and also Biorhythms. Price:- £12.95 on disc, plus £0.45 P&P.

STILL AVAILABLE:-

SD5 Tape to M/D utility; SO5 Tape to Opus utility; MT1 M/D Toolkit; SW1 Tape to Wafadrive utility; CT2 Sam Tape utility; SM1 Multiface Suite; SP7 Companion Vol. 2; SC7 tape backup utility - please ring for FULL details.

MONEY BACK GUARANTEE - BUY WITH CONFIDENCE.

UPDATES:- Send old disc, tape etc, Plus ½ new price for latest version.

Send cheque/P.O. to:- KOBRAH SOFT, Dept. F, Pleasant View, Hulme Lane, Hulme, Longton, Stoke-on-Trent, Staffs, ST3 5BH.

Postage:- U.K. as above, Europe add £1 per item, others add £2 per item. Send SAE (9"x4") for detailed FREE catalogue. Please mark envelope "ENQUIRY".



FOR MORE INFORMATION PLEASE PHONE 0782 305244.
ACCESS and VISA welcome - please phone above number.
(24 Hour, 7 Day Service for FAST Mail Order)



UNDERSTANDING DIGITAL ELECTRONICS

By:- Adrian Parker.

First of all, let me apologise for my absence over the last few months. Not Bob's fault (honest!) but I am going to make sure that this is more regular from now on. Right - apologies over, where were we?

You may remember (or if you don't, have a look at your July **FORMAT**) that I left you with a little puzzle. I explained last time that the ASIC in your computer was monitoring the address and data lines just like any other device. We also know (from the Technical Manual) that 'port 254' is the port that controls the border colour. Going back to our analogy, this line of pure 'electronics jargon' means that when the ASIC 'hears' that the paperboy (Z80B) shouts out the address 254 on the address bus, AND shouts out that he is talking to the 'PORT' side of town, AND shouts out that he is sending or WRITING data (and of course sends the data) the ASIC will sense that the Z80 is talking to it and will 'capture' the data into itself and store it in the place where the border colour is controlled. (To complete the story, another 'department' of the ASIC is concerned with controlling the display, and it will take the data out of this port and convert it to a colour when the border needs 'colouring in' on the screen.)

OK, so we know that is when data is stored in the border port and we now know (I hope!) what is meant when we say 'border port'. This still doesn't

answer the question from my last article - why do each of the following commands send data to the border port?

OUT 254,1
OUT 510,1
OUT 22014,1
OUT 43774,1
OUT 65534,1

Let's look at these commands in more detail. We will now look at what happens (in Binary) when the Z80 executes each of these commands. As you know, if you read the last article, the OUT instruction causes the IORQL (I/O request) and the WRite lines from the Z80 to become active, so we only need to consider the address lines here. Here are the commands listed again with the contents of the sixteen address lines in each case:-

OUT 254,1 0000000011111110
OUT 510,1 0000000111111110
OUT 22014,1 0101010111111110
OUT 43774,1 1010101011111110
OUT 65534,1 1111111111111110

Can you see a similarity in each of these binary numbers? The lower eight bits are identical in each case. So what does this tell us? In actual fact, the ASIC is only interested in the bottom eight address lines - it simply ignores the rest! This means that you can put ANY combination of bits on the top eight bits, and as long as the lower eight bits correspond to 11111110, the data will be sent to the border port. This technique of only monitoring part of the address bus is known as 'partial decoding'.

Now as we can produce 256 combinations with the eight bits that are

ignored, there are 256 different ports that you may write to which all correspond to the border port. No other device may use one of these ports, they are wasted. Now this may seem a bit drastic, but to make the ASIC look at all of the address lines would have taken up so much space in the ASIC that there would not have been enough room for all of the other circuitry. Of course, there are 65536 ports to choose from, so there are plenty left over!

Whew! Now that I've got that off my chest, onto other matters. As most of you know, up to now the articles that you have seen have been pretty much those from the (now discontinued) SAM Newdisc. From this article onwards, we are going to be continuing where the Newdisc left off.

Now that we have covered (and understood?) the basic logic gates, their operation and the binary counting system, along with a simple overview of how your computer works, let's have a go at designing something. So where should we start with our hardware design? Well, the simple (and most glib) answer is 'that depends what you want to design!' We shall assume that you wish to connect something to the computer, to allow you to send and receive information to your device from the computer. You will (presumably) also want to store the data that you send to your device either to be used by the device later, or to be retrieved by you at a later date. This is the essence of most pieces of hardware. So the first thing that we need to do is to allocate ourselves an address that our hardware can be made to recognise.

So, what address shall we choose? If you are working with a Spectrum, this can be a real problem. Apart from the 'built-in' ports used for border control

etc, there was no recognised allocation of port addresses to hardware designers. The result was absolute chaos! Many peripheral manufacturers emerged randomly picking ports for their hardware to recognise. The inevitable result was that unless you bought all of your hardware from the same manufacturer, you could not guarantee that any two interfaces would work correctly together on the machine.

On SAM, the story is rather different. MGT (and later SamCo and West Coast) ask developers to request port allocation. This allows us to have a complete list of all ports that are used by all hardware currently in production (and future products), and so ANY combination of peripherals should work.

Right, so the choice of port is arbitrary, but should be selected carefully so that it doesn't clash with other devices which could be attached to the system. We are going to use port addresses 8048 (1F70hex) to 8063 (1F7Fhex). We will use partial decoding first to produce a signal that corresponds to these ports. (You may notice that the only difference in these port addresses is that the last Hexadecimal digit is different. Now as each Hex digit corresponds to four Binary bits, we simply do not include the bottom four address lines in our decoding. An indeterminate digit will now be represented by an 'x' - so our partially addressed ports are at 1F7x Hex) We shall be using Hex or Binary notation from now on as being the most appropriate. Now that that's decided, we now have to design some circuitry to make our interface recognise this address.

Figure 1 overleaf shows just such a circuit. Before continuing with this article, see if you can prove to yourself

that this circuit can recognise port address 1F7x hex and how it can do it.

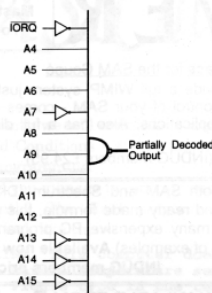


Fig.1 - Partial decoding for address 1F7x Hex.

Did you manage it? This is how it works. We know that when the CPU accesses port address 1F7x hex (either IN or OUT) the CPU makes the I/O Request (IORQL) active and produces the binary equivalent of 1F7x hex on its address lines (00011111011xxxx). Now when the IORQL line becomes active it goes LOW. This is indicated either by a 'bar' over the top of the signal name, or an 'L' at the end of the name (because simple typewriters can't produce the bar!) So we know the combination of inputs that we want to recognise, how do we sense them and what do we mean by sense?

Let's take the last question first. As we have been dealing with signals going ON and OFF, and as that is all our digital logic can produce or detect, it makes sense to say that we will signify that 'our' address has been recognised by our 'output' becoming active, ie for every other address combination, our output will be inactive. You may note that I have taken care to use the words

'active/inactive' rather than ON/OFF. This is quite deliberate as we do not know whether we need an active-high or active-low output yet!

Let's consider the first stage of our address decoding now. I have chosen a 13-input NAND gate to form the essence of our first stage. You may remember that the output of a NAND gate goes low IF AND ONLY IF all of its inputs are high. Wait a minute though, we need some of our address lines (A7, A13...) and IORQL to go low when 'our' address appears. How can we accommodate this?

The answer, as you can see from the diagram, is that if we need an address line to go low to produce our address, we take that address line through a NOT gate before it reaches the NAND gate. So as the address line goes low (when our address is produced) the input to the NOT gate goes low, its output goes high, and this is connected to the input of the NAND gate. The same is also true of the IORQL line.

So, our address decoding is now complete. We have a piece of circuitry that can recognise the port address 1F7x hex (which represents 16 different addresses).

Next month, we will look at what we are going to do with this decoded address output. If anybody has any suggestions (no rude comments accepted) then please feel free to drop me a line at the Blue Alpha address (see the advert elsewhere in this issue).



NOW
AVAILABLE

DRIVER

Needs
MasterDos
To Run

The new **Graphical User Interface** for the SAM Coupé

Works with Sam Mouse (or Keyboard) to provide a full WIMP* system just like the professional computers use. Puts you in full control of your SAM - comes complete with many built in utilities and ready to run applications. Also has a full disc-based tutorial to get you started really quickly.

Fantastic Value on disc with full manual £29.95 (INDUG members £24.95)

* WIMP = Windows, Icons, Menus and Pointers

• **CAMPION - The Spreadsheet** versions for both SAM and Spectrum (DISCIPLE or PLUS D). Featuring over 70 built-in functions and ready made formula, this program is easy to use and yet powerful enough to rival many expensive PC programs. A very comprehensive manual (over 80 pages, with lots of examples) **Available now at £29-95**

• State which computer version and disc size required.

INDUG members price £24-95.

OTHER SERIOUS SAM SOFTWARE AVAILABLE FROM Revelation

➤ **THE SECRETARY** - The most advanced word-processor available for SAM, powerful, versatile and easy to use. - £14-95 (£12-95)

➤ **SOUND MACHINE** - Make beautiful music with your SAM - Only £14-95 (£12-95)

➤ **COMET Z80 ASSEMBLER** - The professional one - £29-95 (£24-95)

Prices in brackets () are for INDUG members.

SAM GAMES AVAILABLE FROM Revelation

☆☆☆NEW☆☆☆NEW☆☆☆NEW☆☆☆NEW☆☆☆

LEGEND OF ESHAN

A game like none seen before on SAM.

This graphic game of strategy and adventure takes you into a vast world of demons and warlords.

As Eshan you must raise an army to save the beautiful land of Avinell from the terror of Barquin the Witchking and his hordes. With your friends and followers you must rescue Avorell the Noble and restore him to his palace.

This is not an arcade game, this is not an

adventure, this is something very special. Legend Of Eshan works with keyboard or joystick and is also fully Mouse- compatible. Comes complete with comprehensive instructions and a map of the lands of Avinell.

£14.95 (£12.95 to INDUG members)

ALSO AVAILABLE

• **WOP GAMMA** ☺ A Super-Fast 'Boulder Dash' game with **FAST Full Screen Scrolling** - '99' Levels. ☺

£9-95 (£8-95 to INDUG members)

Other Games Still Available - send SAE for list

URGENT - PROGRAMMERS NEEDED FOR SPECTRUM & SAM - Send sample of your work.

- All prices include UK postage and packing. Overseas add £1 surface, £2 airmail.
- Payment by UK cheque, Eurocheque or PO, Payable to Revelation Software.
- Please quote INDUG membership number clearly on order if claiming discount.

Send orders to:-
Revelation Software,
PO Box 114,
Exeter,
Devon,
EX4 1YY.

**Revelation
Software**

REVADL-J

BASICally Speaking...

Part 4.

This month we will continue to explore Logic and Conditions - a very important part of programming.

OK, did you manage to control your fan last month? The final program will probably look like this:-

```
10 PRINT "This computer does not have a temperature sensor. Please type in the temperature below."
20 INPUT temperature
30 LET cold = temperature < 18
40 IF cold THEN PRINT "Switch the heater on"
50 IF NOT cold THEN PRINT "Switch the heater off"
60 LET hot = temperature > 25
70 IF hot THEN PRINT "Switch the fan on"
80 IF NOT hot THEN PRINT "Switch the fan off"
```

You will find that if the temperature is between 18 and 25 then your program will tell you to switch both the fan and the heater off.

You could add the following.

```
90 IF NOT cold AND NOT hot THEN PRINT "The temperature is fine."
100 IF cold OR hot THEN PRINT "The temperature needs adjusting."
```

I have just introduced you to two more commands, AND and OR. They work like in English:-

```
IF (this is true)
AND (that is true)
THEN (do this)
```

For example:-

```
IF it is a weekday AND it is
term time THEN go to school
```

By:- David Finch.

IF you are tired OR you are ill
THEN go to bed

Note:-

- If it was a weekday but it wasn't term time, you would NOT go to school (nobody would be there).

- You would go to bed if you were tired but not ill.

- You would definitely go to bed if you were tired AND ill.

So:-

- IF false AND false THEN don't
- IF true AND false THEN don't
- IF false AND true THEN don't
- IF true AND true THEN do
- IF false OR false THEN don't
- IF false OR true THEN do
- IF true OR false THEN do
- IF true OR true THEN do

I haven't used the equals sign = yet. This is used more often than the inequalities (< or >) signs are.

Example:-

```
10 PRINT "What is the month. Eg Jan is 1, Feb is 2, Dec is 12."
20 INPUT month
30 LET december = month = 12
40 IF december THEN PRINT "Christmas is coming."
```

For line 30 you could have typed:-

```
30 LET december = month = 12
```

which means the same thing, but is confusing. You could also type:-

```
30 LET december = (month = 12)
```

which separates the condition, so it looks clearer. All do the same job.

There is a shortcut with conditions that I have deliberately not told you about yet. If you are sure you understand what I have said so far, try this: Delete lines 30 and 40 (type the line number then ENTER or RETURN).

Type:-

```
30 IF month=12 THEN PRINT "Christmas is coming."
```

You have combined the two lines into one. In English you might say:-

```
IF the month is the twelfth
THEN Christmas is coming.
```

Instead of saying

```
December is the twelfth month
If it's December
THEN Christmas is coming.
```

Also, if you would have written IF NOT december THEN ... , you can now write IF month<12 THEN ... < means does not equal. I think that writing IF NOT (month=12) is neater.

Try rewriting the temperature program, but using the short cut this time.

Remember the inequality signs (< and >). I would like to introduce two more: <= and >=.

The difference is:-

1<2 is true, 1<=2 is true

2<2 is false, 2<=2 is true (THE DIFFERENCE)

3<2 is false, 3<=2 is false.

<= means is less than OR equal to.

>= means greater or equal to.

If you are VERY confident with conditions, you may like to read this: You don't need to use IF ... THEN ... statements to use a condition. Take the following example:-

```
10 PRINT "How many apples do you have?"
20 INPUT a
30 IF a=0 THEN PRINT "Do you want one of mine?"
40 IF NOT (a=0) THEN PRINT "You have ";a;" apple"+"s" AND a>1)
```

The part of line 40 that reads; PRINT "You have ";a;" apple"+"s" AND a>1) contains a condition. It only adds an 's' to the string being printed if you have more than one apple. The part that reads ("s" AND a>1) means "s" if a>1 and means "" if a<2 (ie NOT a>1).

The last few bits now are SAM only I'm afraid. Speccy owners may like to finish now, but you can read it if you wish. See you next month Speccy owners.

Now that they are gone, we SAM programmers are going to look at some great conditions. You may remember the ELSE command last month (look back if you have forgotten). We are now going to do long IFs.

Take this example:-

```
10 INPUT "How many apples do you have?";a
20 IF a>2
30 PRINT "You have got too many apples."
40 PRINT "You must eat one."
50 PRINT "You now have ";a-1;" apples."
60 END IF
```

You can see that the condition is spread over many lines. If you have more than two apples then lines 30 to 50 are executed. Otherwise the program goes straight to the END IF statement, without doing anything in between. You can use ELSE in long IFs too.

Change lines 60 onwards to:-

```
60 ELSE IF a=2
70 PRINT "You have just enough apples."
80 ELSE
90 PRINT "You don't have enough apples."
100 PRINT "Have one of mine."
110 PRINT "You now have ";a+1;" apples."
120 END IF
```

You will find that if a condition is true, when it executes the commands and comes to an ELSE statement, it


automatically goes to the END IF.

You will also see that line 60 has a condition with the ELSE, but there isn't in line 80.

In a long IF: SAM looks at the first condition, and if it is true then the commands following are run, if SAM meets an ELSE then SAM goes straight to the END IF. If the condition is false, the commands are skipped until SAM meets an ELSE or END IF.

If SAM meets an ELSE: if the condition is true or there is no condition then the following commands are run, until an END IF or another ELSE is met. If the condition on the ELSE is false then the commands are skipped until SAM meets an ELSE or END IF.

See the diagram below for a clearer summary.

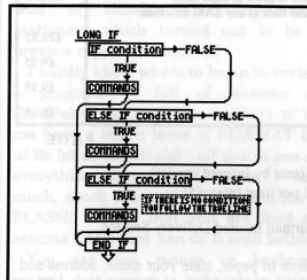

Next, as promised earlier, more with DO and LOOP. Do you remember this:-

```
10 DO
20 PRINT "This will carry on for ever!"
30 LOOP
```

You can attach conditions to the loop using the keyword WHILE and UNTIL. If you use WHILE [condition] then the loop will continue looping round WHILE the condition is true, but if (when it

comes to LOOP) the condition is not true then the program continues running after the loop.

UNTIL [condition] is equivalent to WHILE NOT [condition], so it will keep looping UNTIL the condition is true.

Here is an example:-

```
10 DO
20 INPUT "What is the security code?";a$
30 LOOP UNTIL a$="secrets"
```

You can also place the condition on the DO. The SAM manual suggests that there is no difference between the two, THERE IS.

Try this:-

```
10 LET a=3
20 LET b=3
30 DO
40 PRINT "HELLO"
50 LOOP UNTIL a=b
```

This will print HELLO once, because a=b. However, now try this:-

```
10 LET a=3
20 LET b=3
30 DO UNTIL a=b
40 PRINT "HELLO"
50 LOOP
```

This will never print HELLO. The first program checks the condition AFTER the loop has been run once, so if the condition is true (a=b), then SAM will leave the loop after it has been run once.

In the second program SAM checks the condition before it runs the loop for the first time, and so in this example, it skips the commands inside the loop.

I think that is the subject of conditions totally covered. If you are still unsure then read the whole lot again and experiment with your own programs, that is the only way you will really come to understand everything. Soon you will get the hang of it and then there will be no stopping you.

Bye.

WEST COAST COMPUTERS

Below you will find details of the full range of SAM hardware now available.

CODE	DESCRIPTION	PRICE
W1001	SAM - 512K - Single Disc Drive Fitted.	£199.95
W1002	SAM - 512K - Dual Disc Drives Fitted	£274.95
W1003	SAM - 512K - Plus External Drive Interface. [Allows you to use your own DISCIPLE/PLUS D 3 1/2" Drive]	£149.95
W1101	SAM Internal Disc Drive Unit.	£79.95
W1102	Parallel Printer Interface. (SPI)	£24.95
W1103	RS232/Parallel Interface (COMMS).	£34.95
W1104	1 MegaByte External Memory Pack. (Needs MasterDOS to run from Basic).	£89.95
W1106	SAM Mouse System. Interface, mouse and software.	£39.95
W1107	External Disc Drive Interface (Includes Parallel Printer Port).	£39.95
W1108	Internal 256K Upgrade (for older SAMs with only 256K of memory)	£34.95
W1109	TWO ¹⁶ allows two interfaces to be connected to SAM at same time. Special Offer - Save £5 if ordered at the same time as any SAM interface.	£24.95
W1201	SAM Power Supply.	£24.95
W1301	SAM Parallel Printer Cable (BBC type)	£9.95
W1302	SAM to TV/Monitor Scart Cable	£9.95
W1303	MIDI Cable Set	£6.95

E. & O.E.

UK Postage & Packing: Add £10 for computers (sent by insured carrier).
All other items add £1 per item (max £5).

Overseas customers: Please write for quote on Airmail Insured Delivery Service.

Write your order clearly on a reasonable sized piece of paper, state your name; address and phone number. Cheques, Postal Orders, Euro-cheques, should be made payable to **West Coast Computers Ltd.** We will try to dispatch your orders as quickly as we can - however please allow 28 days to be on the safe side. Some items have to be produced in batches and where this may cause a longer delay we will write to you as quickly as possible.

RAM SHORTAGE. Given the current shortage of RAM chips we may only be able to hold the current prices on SAMs, 256K upgrades and 1meg memory packs for short time. Any order received by 1st March 1994 will be accepted at the above prices - thereafter please see our next advert.

IMPORTANT NOTICE

To order any of the above items please send your order to:-
West Coast Orders, Format Publications, 34 Bourton Road, Gloucester, GL4 0LE.
Make cheques payable to West Coast Computers Ltd.

SAMPaint

Reviewed By:- Carol Brooksbank.

Until the Gloucester Gathering in November, most of my Sam artwork started life as Spectrum screens, so that I could use the curve drawing modes, rescaling options and so on of programs like Art Studio, which FLASH! lacks. I transferred them to FLASH! and mode 4 later on for adding colour and fine details.

Why until the Gloucester Gathering? That was when Fred Publishing gave me a preview copy of SAMPaint, and a thick wad of closely typed continuous stationery which turned out to be a preview copy of the manual.

I hardly know where to begin to review a program as full of features as SAMPaint, since Bob is unlikely to let me have a whole issue of *FORMAT* for it! So let us say straight off that it can do everything that FLASH! does - and much, much more. If I don't mention a FLASH! feature that you are fond of, assume SAMPaint can do it even better.

You can use mouse or keyboard control, but mouse is light years better than keyboard. Freehand drawing with the mouse is a delight - I was even able to produce a reasonable copy of my signature on screen. Hot keys allow you to select ink, paper, fill patterns and so on, or do OK and UNDO, from the working screen without returning to the menu. There are four working screens between which you can flip, and facilities for transferring graphics from one to another. The fifth (OK) screen can be


transferred to any of the others by UNDO. The palette is user-selectable, but as a short cut there are several pre-defined ones you can call up giving shades of grey, or blue, or green, or the Sam start-up palette, and so on.

Drawing tools include the usual circles, ellipses, rectangles and squares and also triangles, (separate or drawn with one side in common), parallelograms, multi-sided polygons - regular or irregular - (you specify the number of sides) - all in outline or filled with a colour or monochrome fill. Lines can be solid or stippled, or drawn in a fill pattern. You can select colours which your current line will avoid, so that it appears to pass behind them, or colours it will select, so that the line only appears when crossing the colours you have specified. All sorts of brush styles are available, and all can be redesigned and saved to disc. There are airbrushes and light shading brushes. If you draw a line and then wish to change either the colour or the brush, you select TRACE mode, the new brush and colour, and touch one end of the line. The whole line will be replaced.

There are two excellent curve modes. One lets you select two points, then move the pointer until the curve between them is what you want. The other mode is really for artistic duffers like me, incapable of drawing a series of smooth curves. Have you ever tried to draw a spiral? Freehand - it wobbles all over the

place; joining up a series of curves - you need the patience of Job. SAMPaint's second curve mode lets you draw straight lines and it converts them to curves. And if you can't even keep the straight lines the right length, there is a grid mode which lets you specify how many pixels each move of the mouse will move the pointer. In fig.1 I used 8-pixel jumps, and managed the square spiral very easily. SAMPaint produced the spiral from that, and TRACE went over it with a different brush.

Block handling is very impressive. Any size or shape of block can be grabbed. Blocks can be rescaled, rotated, mirrored, flipped, skewed, or have perspective applied. They can even be saved to disc.

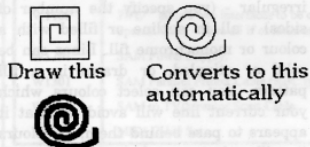

TRACE gives you this after only one keypress

Fig.1

Rotating is not limited to 90° turns as fig.2 shows. Although some edges may get a little ragged, but nothing you cannot tidy up, using one of the two enlarge options (zooms). One zoom gives varying degrees of enlargement, using the whole screen. The other has a small enlarged window superimposed on the screen, so that the effects of changes can be seen in normal size as you work.


Fig.3 shows perspective. Not only the shape, but any filling or decoration in the shape, have perspective applied to them. The square front of the figure is a 2x magnification of the block to which



The effect of rotating a block through angles other than 90°

Fig.2

perspective was applied to get the side of the figure. You are not limited to one- or two-dimensional perspective. You can move the figure around three axes - x and y are as normal but z is a depth axis. The degree of perspective and re-sizing can be changed. As in all block operations, every change you make can be previewed before you decide whether to accept it or try again.




PERSPECTIVE in action

Fig.3

Two collections of fill patterns are provided - full colour and monochrome, and all can be redesigned and saved as files to disc. Even screens, bits of screens or blocks can be used as a fill. In addition, a gradient fill is available. You can choose a number of colours which will be applied to the shape assuming a light source from a given direction, to give correct shading. The 'dither' - the amount of blending between the shades - is under your control. When I think of

the time I have spent in the past, trying to make a ball look like a sphere instead of a disc - now you can do it with the touch of a button!

There is also an interesting bend option, which will apply a gradient fill, or a fill taken from a block, in a series of straight lines between two other lines. It is hard to describe this, but for instance, if you draw a circle with a point above it and bend a gradient fill between them, you get a cone effect. Fig.4 shows this effect with a gradient fill, and fig.5 with a fill taken from a block. Fig.4 looks less impressive in shades of black and grey than it would have done in colour - but **FORMAT** hasn't gone over to colour printing yet.

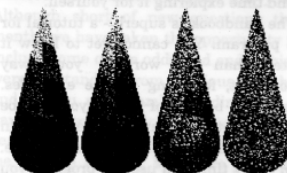

GRADIENT/BEND fill with varying degrees of dither

Fig.4

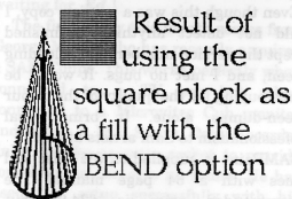


Fig.5

Window operations let you clear the window area; outline blocks within it with another colour (you specify which colours are to be outlined and whether the outline is to be outside or inside the

existing shape); invert the window; shadow the shapes (you specify the depth, direction and displacement of the shadow and the colours to be shadowed); scroll the window contents; flip; mirror; shade areas using the current ink; thicken; blur or blend (ways of defocusing the artwork by making the line between colours less sharp); replace all the pixels of one colour with another colour; rotate through 90°.

Text handling is brilliant. There is an impressive number of fonts on the disc, and by using the block/window options you can create more by shadowing, outlining or rescaling. Fig.6 shows just a few of the fonts supplied.

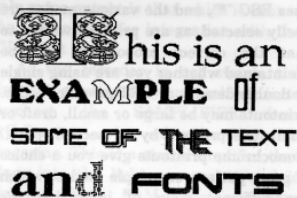


Fig.6

New fonts are defined by grabbing the letters from the screen, and then saving the font to disc. This is very quick and easy. Since the program will load Mode 1 screens, converting them automatically to Mode 4, you can very easily transfer PCG's DTP PACK Headliner fonts, or those from Spectrum programs like ICON GRAPHIX. You simply make a screen of the font, and then grab the letters one-by-one from the screen. You can, of course, grab fonts from other people's loading screens, though you may then have to make up missing letters yourself. There is also a facility for converting the 768-byte screen fonts like those in the **FORMAT** FONT LIBRARY

for use with the program.

Animation is catered for too. You grab the frames one by one from a screen, and the file of frames can be saved. When reloaded, the original screen must be in memory if you wish to test the animation, because the data saved is a list of the screen co-ordinates of the frame. There is also a way of saving a group of frames as a block in two code files, one of which acts as an index to the frame positions in the other. These files are independent of the original screen, and could be used in your own programs, because information about the make-up of the files is supplied in the handbook.

Printing is in monochrome or colour. It uses ESC "*", and the various modes are easily selected, as are printout widths so that the correct proportions can be maintained whether you are using single or double density or CRT graphic modes. Printouts may be large or small, draft or final (overprinted by a second pass.) Monochrome printouts give you a choice of grey, pattern or stipple modes, which use different ways of indicating the colours. The best one to use will depend on the screen you are printing.

The colour printing gives the best colour screen-dumps I have seen on Sam. There are two methods. One produces lighter shades by stippling and darker by solid colours. The other uses a different way of showing lighter colours, and gives an even better representation. Most colour screen-dumps play havoc with colour ribbons, corrupting the yellow band especially so that the ribbon is soon producing muddy colours. SAMPaint sees to it that all the yellow passes for a line of print are done first, then the red, and so on, instead of overprinting each colour separately. This prevents darker colours rubbing off on lighter and makes

the ribbon last much longer.

There is so much I have not described in this review - plasma (a marbling effect); anti-aliasing (a way of outlining shapes with progressively lighter or darker pixels so that they blend into the background); comparing screen areas (transferring the pixels that are the same in an area in the two screens to a third - or the pixels that are different); merging screen areas (transferring the contents of a window from one screen to another one colour at a time); colour shift (lines drawn with regular colour changes; palette sequencing (the colours rotate in the palettes, so that colour shifted lines look animated). All I can suggest is that you get hold of it and spend time exploring it for yourself.

The handbook is superb - a tutorial for the program. You cannot get to know it better than by working your way through it, following all the examples. There will be lots of things you will be astonished that I have not described in detail, but I simply had to be selective. And every time you use the program you find new ways of combining its facilities to get different effects.

Even though this was a preview copy, I could not detect anything unfinished except the version number on the loading screen, and I met no bugs. It would be worth buying for the quality of the colour screen-dumps alone. It brings real professionalism to Sam artists at last.

SAMPaint is supplied on 3½" disc and comes with a 64 page manual. The Recommended price is £24.95 but INDUG members get a 10% discount bringing the price down to £22.45 (remember to quote your number).

SAMPaint is available now from FRED Publishing, 40 Roundyhill, Monifieth, Dundee, DD5 4RZ.

The HELP PAGE

Edited By:- Ray Bray.

Looking back over past issues of Format I noticed that the Help Page has not been included in the January issue for the past three years. I assume the reason for this is either that readers are so busy during the run up to Christmas that they haven't time to write to us or, the compiler of the Help Page is in a similar position and fails to get his copy in on time! Both of these factors almost affected our production again this year. Although short of new questions this month, we have taken the opportunity to include some of the odds and ends which were outstanding from previous months, and, if you are actually reading this, I have succeeded in meeting Bob's deadline. [Well Ray did get the disc to me in time readers, but there just was not the space available to print it, so here it is - a month late - but worth waiting for. Ed.]

The first query this month comes from George Munro who has recently acquired a SAM Coupé. This works perfectly when connected to a TV set but when connected to a Microvitec Cub monitor and using a W.H.Smith Data Recorder linked to the cassette socket to provide sound output, he gets no sound. He has used this setup successfully with his 128K and 48K Spectrums, and the SAM cassette connection works perfectly with loading and saving tapes. He wonders what is wrong and what can be done about it.

The problem here lies in the difference


in design between Spectrum and SAM. Whereas on the Spectrum the cassette interface and the sound output are linked, on the SAM they are completely separate and the output from the sound generator is sent only to the light pen/audio port, the Euroconnector and the SCART socket.

All these outputs are stereo and the only mono output is that which is sent to the Power Unit for integration with the TV output signal.

As the recorder is not stereo, the simplest solution to your problem is to purchase the SAMPLIFIER from B.G.Services who advertise in this magazine. This is a stereo amplifier that plugs into the light pen socket and is powered from SAM, the necessary loudspeakers can also be purchased from B.G. As you claim to be handy with a soldering iron, another option is to make up your own amplifier which would need to be connected to the light pen socket pins 2, 3 and 5, which are left audio, right audio and audio earth respectively. A +5 volt power supply is available on pin 1 of the socket, but unless you are knowledgeable about the power requirements of the amplifier you should use an external power source.

Alternatively, if you wish to continue using the recorder for mono sound, you could make up an adaptor to fit between the power unit lead and its socket, to pick off the mono output to the TV modulator. You will need a six pin DIN

socket and a plug to match the SAM power connection, a plug to match the ear socket on the recorder, a single-pole double-throw switch, a short length of screened six core cable and a length of co-axial cable to reach the recorder. The diagram below shows the wiring connections.

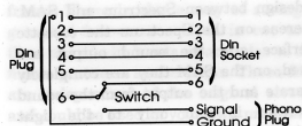

From several letters recently received there seems to have been plenty of bargains around in second-hand monitors (VDUs) which readers have been buying to use with their Spectrums. None of these letters asked for details of connections but it appears that most were bought without seeing them in operation, and this is where the problems have started.

One major problem is that some monitors need a custom built interface to work at all with the Spectrum; a minor problem is that many are not fitted with an audio amplifier and speaker. The solution to the first problem is beyond the scope of the Help Page and the second has been dealt with before.

Another problem frequently encountered is that some of these monitors will only reproduce two colours even though they work from the RGB socket. The variety of ink/paper combinations employed in a lot of the Spectrum software was obviously not designed for use with the many different monitors now being used, and some ink/paper combinations simply don't work in this new environment. As a result of this, areas of text will possibly

not show up on the display.

Can anything be done about it? To a certain extent yes, especially if the INK and/or PAPER commands or the controls used are set within BASIC. The +2a, +2, +3 (and possibly the 128K?) have RGB and T.V outlets.

Plug your monitor and T.V into the appropriate sockets and run your program as normal. When you find text, etc, that is displayed on your T.V but not on the monitor, make a note of the differences and go hunting in the program for that particular part of the displayed text. Then, when you have found the relevant part, make the necessary changes to the INK / PAPER settings using both the monitor and the TV to check the results. Colours set in machine code are rather more difficult to find and change. Unless you have good working knowledge of machine code and some idea of the program architecture, then it will be impossible.

Art Studio is a particular example of this problem, in that some menus are not visible or are simply displayed as black boxes. Perhaps some reader has devised a way to set a user defined colour scheme, if so please let us know.

Finally, more information on the +2 sticking keys problem. Further to his advice in the September SHORT SPOT about this problem, Miles Kinloch has kindly dropped us a note giving more information on fitting the capacitors. The voltage rating of the capacitors is not important as the keyboard signals are only a fraction of a volt, also they are not polarised so it makes no difference which way round the wires are connected to the diode. The capacitors I (Kevin) used were 220Pf ceramic discs, and were ordered from the Maplins Catalogue, (Page 449, Order No. WX 60 Q, price 7p).

That's all we have for this month. Please keep sending your problems/ answers to the following addresses:-

Anything SAM or General Purpose:-

Ray Bray (Format Help Page),
'Elmsleigh',
4, Tidworth Road,
Porton,
Salisbury,
Wiltshire, SP4 0NG.

Anything +3, CP/M:-

Mike Atkins (Format Help Page),
70, Rudgwick Drive,
Bury,
Lancashire, BL8 1YE.

Anything Spectrum (48K/128K/+2):-

Kevin Gould (Format Help Page),
2, Barleyfield Close,
Heighington,
Lincolnshire, LN4 1TX.

FLEXIPAGE

TEXT AND GRAPHICS AUTHOR
FOR BEGINNERS TO EXPERTS

Combines text, graphics and sound.
Interactive, automatic & free format.

PC 3.5" disc: £8. SAM disc: £12
SPECTRUM: £8. Plus D 3.5" and +3 3" disc
or tape (Microdrive and Opus compatible).
PCs need SPECTRUM EMULATOR:
shareware: £3.75, full registered version: £15.

Flexipage exercises £3 each: CRIME QUIZ*
Information/Tests: ZOO-VIEW and
SEVEN WONDERS OF THE WORLD.
POLICE PATROL 2: Beat simulation
OLAF THE VIKING: Adventure
£6 each: CYCLE CODE TEST* from Highway Code
ROADCRAFT TEST*: Advanced Driving
*also for BBC computer 5 1/4"/3 1/2" disc.

Send stamped addressed envelope for further details to:-

FLEXIBASE SOFTWARE,
20, The Parklands, Droitwich Spa,
Worcs, WR9 7DG.

BLUE ALPHA ELECTRONICS

We are pleased to be able to offer a full repair service to both Sam and Spectrum users. All our repairs carry a full 3 months guarantee against the same fault recurring.

PRICES

Sam	£35
All Sam Interfaces	£20
Spectrums	£35
Plus D	£20

Other Items not listed - please phone with details of fault and in many cases we can give an instant quote.

Please note that disc drive repairs are quoted for by us only after a FREE inspection - ring for details.

All prices include UK return postage by Insured Carrier - overseas customers please write for details of cost of postage and insurance. Please ring before sending items for repair.

ALSO AVAILABLE We can make and supply all types of cables - custom made to your specification. Just send us a Stamped Addressed Envelope with details of cable required (pin-outs, length, etc) and we will send you a quotation.

Send cheque/postal order (Pounds Sterling Only) payable to:- **Blue Alpha Electronics.**

Blue Alpha Electronics,
Abernant Centre For Enterprise,
Rhyd-y-fro, Pontardawe,
West Glamorgan, SA8 4TY.
Tel: 0269 826260.

SMALL ADS

SAM Coupé 256K including disc drive, power supply, manuals and some games. All boxed. £95 o.n.o. Tel: Nicolas Walker on 0298 812191.

FOR SALE. Philips 11" amber monitor, composite video, £5. Tatung TCS8000 386DX16 Computer, MS-DOS, EGA card, Hard & Floppy Card, 1meg RAM, 1 3/4" or 5/4" FDD, Manuals, As new, Boxed, £100. Delivery extra. P.A.Last. Tel: Norfolk (0760) 337463

SAM 512K. Single drive, Comms interface, Mouse and software. £230 for the lot. Also Spectrum software for sale from £1 each. Tel Peter Hutchison on 0422 366120 (evenings).

WANTED. The games Bloodwych, Battle Command, Twin World, War In The Middle Earth. Also I would like a pen-pal to swap games and the like. William Goodwin, 57 Stanley Park, Litherland, Liverpool, L21 4JR. Tel 051 928 2122.

RADIO FAX Receive Interface (J&P Electronics) for 48K Spectrum, with software tape and booklet. £15. Peter Garrick. Tel: 0992 465428.

TOSHIBA ExpressWriter 301 Printer. Portable (mains or internal rechargeable battery) 24 pin, 360dpi. Offers. **ProDos** NOT lite, boxed with manual £15. **Keleidoscope**, uncased £15. Phone David after 4pm on 0904 760692.

FOR SALE RAMWRITE Word processor and printer interface for Spectrum (not +2a/+3) £25. Faulty +2a (no video output to TV) for spares/repair, no PSU. £15. New +2a manual £5. All plus postage.

Mr R.Connelly, 54 Churchview close, Kilkeel, Co. Down, Northern Ireland. BT34 4JE.

WANTED. VATRACK or similar share/portfolio program for the Spectrum. Phone Peter Garrick on 0992 465428.

SPECTRUM GAMES. Send SAE for list of 48K, 128K,+3 disc games and light guns to Alan Cresswell, 18 West Street, Geddington, Northants, NN14 1BD.

WANTED. Version of SIM CITY for 48K Spectrum. Will pay reasonable price or does anyone know where I can get it from. Michael Capstick, 3 Sunnyside Avenue, Pudsey, Leeds, LS28 7PN.

FOR SALE. Spectrum 48K (rubber key) for spares or repair £5. Spectrum 48K which I understand works £7. Saga Emperor keyboard for either of above £4. Neither computer has a power supply. Post/packing extra. Kevin Gould, 0522 793994.

PLUS D and Drive complete with 40 games on 3 1/4" discs £47 including p&p will secure. ono. Phone Barry on 0462 684650.

SPECTRUM GAME. The Empire Strikes Back on cassette for 48/128K - still sealed, 75p incl p&p. Also ZX81 16K RAM Pack £1 incl p&p. Tel: Andrew More on 081 651 2529 (Croydon).

WANTED. Second 3 1/4" 80 track DS/DD Drive for PLUS D Any sensible price considered. Phone Kevin Gould on 0522 793994.

YOUR ADVERTS

Selling, Buying, Pen Friends, etc.

Any PRIVATE advert, subject to acceptance, will be printed FREE in the next available issue. Any software sold MUST be original. The publishers will not be held, in any way, responsible for the adverts in this column.

Due to shortage of space, if your advert remains unpublished after two months then please send it in again. Trade advertisers contact the publisher for rates.



YOUR LETTERS

Dear Editor,

Thank you once again for an excellent magazine. Enclosed you will find an article I am submitting for inclusion in FORMAT if you feel it is interesting enough, and contains points of sufficient importance. If it is not acceptable then never mind, I got a great deal of satisfaction from writing it anyway.

There is one area, concerning the PLUS D, that very often sends me screaming to the kitchen for a cup of tea (I am T-Total so that is the best I can do). It involves that perennial old chestnut 'printer drivers'. Programs such as the +80 suite which require a driver to be loaded are an absolute pain, so is there a driver available for the PLUS D that can be loaded into such programs? If not could you do a few articles on solving such problems for us people with minimal knowledge of machine code.

Since I am a new subscriber I do not know if you have done this before. It might be an idea if you invited members to write in with details of any programs they have converted for the PLUS D printer port.

Thank you for printing my letter concerning Joe Daniels. I do not know the result as I have not heard from him for a few weeks, so fear the worst. I will write to Mavis this week and let you know the outcome in due course.

Yours sincerely, J.J.Blizard.

I will look at the article as soon as I can and let you know, in the meantime thank you very much for at least making the effort.

Printer drivers were covered in early issues, probably the best being in Vol.1 N°4. Of course, I know that we don't sell just that issue any more - you need to buy the complete volume, but they are well worth the investment.

However, if someone would like to write another article on the subject I will be only too pleased to consider it for a future issue. **Ed.**

Dear Editor,

In one of the last editions of *Your Sinclair* there was an article on Spectrum emulators. I currently own a Spectrum +2A, but will soon be purchasing a 486PC in order to work from home, so I was particularly interested in the emulator sold by BG Services. YS, typically, failed to provide an in depth review. How do I get my tape-based software onto the PC's hard disc? Can I access the printer from the emulator? How are joy-sticks emulated? Can it run old 48K software that my +2A won't load? If you can answer my questions or, better still, print a proper review, please do.

Yours sincerely B.Chima.

A review for the Z80 emulator appeared in the October issue (Vol.7 N°2) that should tell you all you need to know, if not ring the Hot-line sometime. **Ed.**

Dear Editor,

Would it be possible for the writers to the *Your Letters* page to put a telephone number or their address when they require information or help?

This would reduce the phone calls to you, also a much quicker reply to them.

If the reply to the above is that it would shorten the *Your Letters* section it would be well to leave out some of the "Ed's" comments and the last letter in November issue Vol.7 N°3.

Yours sincerely P.A.Last.

Often the reply to one reader's question is of great interest to other readers so I try to encourage the use of these pages when possible. However we always pass on any letters we get straight away so they don't have to wait for the next issue of *FORMAT* to appear before they see some response. *Ed.*

Dear Jenny,

I've written this letter to you because I think you do all the work and Bob gets all the credit, just like most bosses. With my last issue of *FORMAT* you sent me another renewal form. As this is the second one I assume the first one I sent in must have been lost in the Christmas post along with my cheque so I've sent in this one as I don't want to miss any issue's of *FORMAT*.

I think the *Basically Speaking* articles are going to be a big help to people like me who don't know a lot about programming so keep them going.

Oh, by the way, ask Bob if he knows why my Sam Print program does not work on my new 24 pin printer, the design's are larger and go off the end of the A4 paper. It worked fine on my old 9 pin printer.

Yours sincerely, J. Stewart.

Now look here, anyone who spends any time in the *FORMAT* office soon finds out who the boss is - and it is not me. Still, at least Jenny makes a nice boss (and she is better to look at than most).

Anyway. Yes, a lot of people would have got a second renewal notice with their January issue - this is because they were packed up about a week before Christmas. Don't worry though, you were not the only one confused, every January the phone is red-hot with people who forget that Christmas does funny things to work schedules.

As to your 24pin printer. Well some are more compatible than others with the 9pin models. If you can find where the printer routines are you may be able to change things - but it would take a bit of work. *Bob [general skivvy/Editor].*

Dear Editor,

Subscription due again! Another year must have gone. I refuse to write another of those letters saying how good *FORMAT* is and how much I look forward to receiving it etc.,

Though it must be said that help line can be a major contribution to sanity. I've rung Bob only a few times over several years and always got a friendly and extremely helpful reply. Bob has clearly not been on the course most 'service' people seem to go on where they are trained in the provision of unhelpful confusing data. We must all continue to keep him too busy to attend!

Again I will vow to finish that nearly complete masterpiece and send it in. Last year it was the shopping program, the year before the A level maths graphics engine. Now I have a printer I can at least list both programs so I stand some chance of understanding how they work! It seemed obvious at the time.

Perhaps an incentive like cancelling my subscription if I fail might work!

Yours sincerely, Alan Harper.

Time to go on courses? I'm lucky to have the time for sleeping these days.

And as for cancelling your subscription - heaven forbid. But how about a £5 fine for every month you take to finish your programming efforts? *Ed.*

Dear Editor,

Do you or any of your readers know if it is possible to make a lead to go in the back of the Sam Coupé and then plug in to the Datel genius mouse and get it to work? You see I have a mouse which I got for my Spectrum 128K and I would like to get it to work on the Sam.

Yours sincerely Jon Rose.

No, sorry, not possible. The hardware is totally incompatible.

Dear Editor,

I asked your advice on the Hot-line about my problem with my disc drive. Well, I tried it out on my mates system with the same results. So, off it went with a covering letter back to Datel, posted last Thursday. I was amazed to find on Monday afternoon when I got home, that my PLUS D had been returned. One slight problem though, they put a standard type note in saying that they could not find a fault with it. I immediately got on the phone to check the note out, to find that after checking their records they HAD found a fault on the drive and replaced it with a brand new one. Apparently, the note had been put in in error.

All in all Bob, I'm well impressed with their service, especially after what you said about the stories you had heard.

As you can see by this, I'm back

'tickling the ivories' again now.

Once again Jenny & Bob, thank you for a most enjoyable *do* at Gloucester. I'm looking forward to next March to pick up some more goodies and have a good matter.

Yours sincerely, Des Fisher.

Glad you got things fixed Des. As you will see from the Editorial a date for the next show has been fixed. *Ed.*

Dear Editor,

Thanks for publishing such an informative magazine, I only wish I knew about it earlier. I purchased a PLUS D and disc drive from Richardson & Co a few months ago and they gave me your telephone number when I was unable to get it to work in 128 mode.

Unfortunately, you were unable to tell me what the problem was other than it would never work properly as it is not a proper Spectrum but a +2A (Soon to be sorted I hope when I get a +2A Mod kit from B.G.Services who were very helpful when I rang).

After two weeks of frustration I spoke to someone at Datel who told me I had an old PLUS D (Issue 2 June 88) users manual and that if I inserted two POKE@ statements I would be able to get it to snapshot and load in 128, which I am glad to say it does.

Anyway, I have now got the computer 'Bug' again and I look forward to *FORMAT* dropping through the letter box each month. This letter is printed using a Cannon T-22A MSX printer which I bought second hand and it too prints very well on thermal fax paper. Is there anyone in the Plymouth area who I can contact who can boost my computing interest further.

Yours sincerely, Kevin Cross.



sinclair



**NOW
IN STOCK
AGAIN**

W.N. RICHARDSON & CO
(EEC)

QL & SPECTRUM PRICES REDUCED
QL £85 SPECTRUM +2 & +2A £70 SP+3 £80

KEYBOARD MEMBRANES NOW AVAILABLE
FOR SPECTRUM+ AND 128 £12 EACH.



**ALL
PRICES
INCLUDE
17.5% VAT**

*** MICRODRIVE EXPANSION KIT ***
Includes microdrive & interface 1, booklet, introduction cartridge, flex connector & wallet of 4 cartridges £59.95
As above with extra microdrive £69.95
NEW MICRODRIVES £24.95 - 2 for £40 (with connector)

*** MICRODRIVE CARTRIDGES ***
4 new cartridges in wallet £10.00
20 in plastic box with separators £50.00
8 new (program cartridges for reformatting) in wallets £15.00

*** UNIVERSAL 3.5" DISC DRIVE FOR MICROS ***
1Mb and 2Mb 3.5" cased, complete with built-in PSU, mains switch & 13amp plug, EXTERNAL dip switches adapt drive for Spectrum, QL, PC, Atari, Amiga etc. Comes with full instruction book, and free DS/DD disc. (DS+HD with 2Mb) Price includes free lead.
(Spectrum & QL need (Face) - Disc Drive 1Mb £89 2Mb £89
Additional leads - for above 1Mb £29 2Mb £12
Unceased 3.5" Disc Drives - low profile 1Mb £29 2Mb £36

*** SPECTRUM POWER SUPPLIES ***
SPECTRUM PLUS AND PLUS 2 £9.99
BLACK PLUS 2 AND PLUS 3 £12.25
(QTY DISCOUNTS AVAILABLE)

Orders to:-
18-21 Malsbourne House, Chiltern Hill,
Chalfont St Peter, Bucks, SL9 9UE.
Fax: 0753 887149 Tel: 0753 888866

VISA
Add postage £8. Disc Drives £8
Outside UK add £15. Other items £5. C.W.O. or
Visa/Access
ALL OFFERS SUBJECT TO AVAILABILITY
Spectrum may be reconditioned



SOFTWARE FOR THE SAM COUPE

SC_ASSEMBLER £12.50 Machine code editor
Type in machine code programs with the easy to use auto-
matic autoboot editor, type in listings from this magazine, or
your own. Highly recommended by Carol Brooksbank.

SC_MONITOR £15.00 Debug Machine code utility.
SC_Monitor will merge in with SC_Assembler and allow
you to slow run machine code programs, seeing what effect
it has on registers, flags, etc. Comes with Disassembler.

SC_AUTOBOOT £15.00 Replacement Rom
When you turn on the coupe there is no wait or pressing of
the F9 key, instead you now have instant reset and auto-
matic Boot up. Features powerful break button.

SC_DISC PROTECTOR £15.00 Interface to solder
No more disc corruptions when turning the power on to the
Sam or pressing the reset button. Unit has 3 colour coded
wires to solder Sams circuit board.

FOR MORE INFORMATION, see November Issue
of Format. OR for a detailed Catalogue, Demos & Screen-
shots, and other products send a blank Formatted disc and
three 2nd class stamps to cover cost

PRINTERS Just Phone
For a very competitive quote and
advice, New printer models.

SC_FILER £12.50 Powerful user defined database
Set up the database to your exact requirements with fields
of any size, position, colour, charset on a mode 3 screen.
99% machine code, massive storage.

SC_PD3 £2.50 Public Domain software
SC_Specclone (Spectrum Emulator), Two Screen/Code
compressors, SC_Discclone (clone disc copier), plus a disc
directory utility, unerase, rename, sort files etc.

SC_24 PIN DUMPER £2.50 Screen dumper
If you have a 24 pin printer, this utility will dump hi-res Mode
4, 16 grey shade screen\$ to the printer, at any position on
the paper, enhanced 48 pin dumps for Canon Printers.

SC_DTP £25.00 (Need Masterdos, £12 for a copy)
Desk Top Publisher, organise text and graphics to produce
professional Newsletters, Manuals etc. Comes with built in
word-processor, output to 9 and enhanced 24 pin printers

BUY NOW PAY LATER A very popular way to pay
for software, just phone the below number and quote the
items you would like to order, software sent out first thing
next morning with invoice, have up to 1 month to pay.

STEVES SOFTWARE

7 NARROW CLOSE, HISTON, CAMBRIDGE, CB4 4XX
TEL 0223 235150 From 6pm-9pm MON-SAT

Dear Editor,

Just a line to let Keith Watt know
(your correspondent in the December
FORMAT) that he is not the only Sam
owner in Belfast. I also have one which I
think I bought in the same shop as him.
If he wishes to get in touch with me I
would be happy to hear from him.

I enclose a stamped envelope for you to
pass on my name to him.

Yours sincerely, Ivan R. Betts.

Very neighbourly of you Ivan. Ed.

Dear Editor,

Please find enclosed a eurocheque to
re-subscribe to your rather delightful
magazine. It is nice to see what the rest
of the Sam world is up to, and from
another perspective than that of the
excellent FRED.

Also congratulations on organizing
what sounds like an excellent computer
event, I hope to be able to get to England
for the next happening you plan.

I would also like to know if West Coast
Computers are still producing the
SAMBUS unit (previously code W1105)
plus a 1Meg (W1104). When ordering
my mouse about a half year ago I also
asked for a quote, but I received no reply
(luckily I did receive my mouse). I hope
you can improve their ordering system
because it was totally pathetic.

I was just re-reading your reply to
Geoff Winkless (September 1993).
Although I think Geoff was being a bit
negative (a simple hardware upgrade to
allow scrolling would always be
welcomed by me), especially I think
slamming Enigma was rather below the
belt since they were the only company
who took the risk and produced
commercial software for the Sam, if more
companies had done so (instead of just

talking about it) the Sam would have
been noticed a whole lot more. Take the
Spectrum code, change the graphics
routines (optimized on speed which costs
more memory but this is available) and
bingo! If the original Spectrum
programmer did this it would take little
to no time at all.

I myself have also done some work for
Statues of Ice and am therefore
according to you a stupid demo writer,
thanks! Demos are rather a good way to
learn tricks that you can perform on your
computer. As I see it, the demos are the
testing ground of all good routines. If
there hadn't been demos, ESI probably
wouldn't have learnt to program, which
would have meant no ETracker (which
makes use of that excellent sound-chip).
What use is a sound-chip without code to
make proper use of it? Also, concerning
samples, I wrote a program to play
Amiga MOD files on the good old SAM
(should be on FRED soon). These bits of
music are not samples, but merely
TUNES written WITH samples. This
means that just as much musical talent
is needed to write a good tune. All that
the samples do is give some interesting
instruments to play around with, and
these can sound VERY cool.

Anyway, that was all from me, keep up
the good work..

Yours sincerely, Stefan Drissen.

The best way to learn about a new
machine is to convert an existing
program to run on it or, if someone
wants to try out some new feature, then
why not write a game or utility that uses
the feature? Make money as you learn.

The SAMBUS or Card Cage is being
redesigned because some parts of the
existing design are no longer available.
Ed.

Dear Editor,

The point of my letter is to ask why you don't cover the games side of computing. Let's face it, we all play the odd game now and then even if we normally just use the computer for business. I'm not saying you should fill **FORMAT** with cheats etc., I'm just suggesting a page or two listing new releases with a few details and the address where we can buy them from.

Before I finish I wonder if you could pass on the enclosed letter to Keith Watt who thinks he is the only Sam owner in Ulster (Your Letters, December issue).

If you decide to publish this letter PLEASE print my address - perhaps other Sam owners in Ulster could get in contact and we could start some sort of club or something - it is: 14a, Innisfayle Gardens, Belfast, BT15 4GJ.

Yours sincerely, Gavin Smith.

It is not that we exclude games from **FORMAT**, rather that nobody seems to write about them. The only thing we don't publish is games reviews, everything else is quite welcome within these pages. **Ed.**

Dear Editor,

I am writing about yours, and several readers' frankly ignorant, ill-informed and childish response to Geoff Winkless' letter in **FORMAT** Vol.7 N°1.

Although I don't agree with everything that he said, Geoff does have a number of valid points.

Not admitting that the Coupé needs full-screen scrolling is ridiculous. So ingenious software design eliminates the need for full-screen scrolling, does it? In that case, why have there been so many un-original puzzle games and flip-screen platformers and so few truly original,

playable games?

Eight of the ten new full-price games reviewed in issue 30 of *Amiga Power*, feature full-screen scrolling. Doesn't that tell you something?

Next, sampling. The point of sampling is not to provide sounds to be used in tunes, but a) to create atmosphere in games, and b) for professional music-making. Your comment about "taking the easy way out" is pure ignorance.

However, I must disagree with Geoff about *Enigma Variations*. If it wasn't for their software support in the early days, the Sam would have died a death. Perhaps you don't like them because they proved that big licenses can be done and done well on the Coupé, despite all of the inane bickering about sales figures and price structures.....

You must admit that the Sam needs all of the software support that it can get. Saying "Don't worry Sam, I still love you" every time someone points out that all is not well just isn't the answer.

Yours sincerely, Mark Sturdy.

There is much that could be improved on SAM. Its Basic, although the best on any home computer, could still be made more user friendly in some areas. It needs a Hard Disc interface, and the modem is long overdue. But to say it needs something just because other machines happen to have that feature and programmers just happen to have got stuck in the rut of constantly using that feature, is rubbish.

VERY GOOD games, playable and enjoyable games, were written for the ZX81. Many more were written and are still capable of being written for the Spectrum and SAM. The best software is that which is written to exploit the

machine. Quite frankly, having watched *Games World* and the like on television, scrolling screen games often seem to be the most boring ones shown. **Ed.**

Dear Editor,

Imagination.

Imagination has brought mankind through the Dark Ages to its present state of civilisation. Imagination led Columbus to discover America. Imagination led Franklin to discover electricity. Imagination has given us the steam engine, the telephone, the talking machine and the automobile, for these things had to be dreamed of before they became realities.

So I believe that dreams - daydreams, you know, with your eyes wide open and your brain-machinery whizzing - are likely to lead to the betterment of the world.

The imaginative child will become the imaginative man or woman, most apt to create, to invent, and therefore to foster civilization. *L.Frank Baun.*

From Dilson Mallio de Mosaes, Brazil, to INDUG England with compliments.

Dear Editor,

Bob and Jenny, on a filthy cold snowy, muddy, and generally awful day, I wish you both and all the team including "Prince" and Jenny's bairns a very happy and prosperous 1994. I hope you are not having to swim, or take a boat to work.

Very fortunately as it happens, we live at 500 feet and on the side of a hill so are spared the flooding, but not the cold gales of recent experience.

As a matter of interest, having received my copy of *SAMPaint* just before Christmas I have had a chance to play with it a bit and after *Flash!* I find

it a great improvement in most respects. In the right hands it should be capable of some very good art work.

Many thanks for all your efforts over the past 12 months, and here's hoping you keep healthy over the next.

Yours sincerely, Basil Lankester.

Dear Editor,

Can I have more details of the Games in **FORMAT** Vol.7 N°5 and more information on programming for basic please.

P.S. Could you tell me how big is the memory in the chips on a Spectrum 48K or 128K+2.

Yours sincerely, Darren Byrne.

I'm not quite sure what games you refer to Darren nor what sort of details you want so I can't answer your first question.

As to the second, well that depends on the model of Spectrum and its issue number, you could look up the chip numbers to find out. Could I ask why you want this information? **Ed.**

Dear Editor,

If anyone wants to know where there is a shop or company selling surplus software, then get in touch with Software Shop, 48 High Street, Renfrew, Renfrewshire, Scotland, PA4 8QP. Telephone 041 885 2761.

Yours sincerely, William Goodwin.

Letters may be edited or shortened to fit on the pages.

This is your letters page so it is up to you to fill it with interesting things. Come on, get writing, on any subject even remotely related to computers. Just keep things as short as you can so we can get as many letters as possible in each month.
Send your letters to the usual address (see page 3) or Fax them to us on 0452 380890.

NEW YEAR SALE

Special Offers For Format Subscribers.

PCG's DTP SUITE

The famous package including WordMaster, TypeLiner, HeadLiner. Complete on 3 1/2" disc for DISCIPLE or PLUS D. R.R.P. £37.50.

SPECIAL READER'S BONUS - Now includes 2 extra font packs worth £15.90 bringing the total pack value to £53.40.

Order Code NYS01SP.

New Year Sale Price £29.95

+3 version Order Code NYS01S3. **£31.95**

Also Available for Sam Coupé at the same price. Order Code NYS01SC

CLIP ART

Also from PCG, three different discs all ready to use with the DTP suite or with many other programs. Each disc has a good mix of images with up to 6 stored on each SCREEN\$ file. Suitable for Spectrum (DISCIPLE/PLUS D) or Sam (load into FLASH! using MODE 1 and convert to any other mode). R.R.P. £7.95 per disc.

Disc 1 - Order Code NYS02A - **£4.95**

Disc 2 - Order Code NYS02B - **£4.95**

Disc 3 - Order Code NYS02C - **£4.95**

Or order all three discs together -

Order Code NYS02X

New Year Sale Price Only £11.95

ULTRASONIC JOY-STICK INTERFACE

A very special offer on this advanced Joy-stick Interface from BLUE ALPHA. Designed to work with nearly all computers (Please state computer type clearly on your order) this interface comes in two parts, one to attach to your computer and one to connect to your favourite joy-stick. Now you can sit anywhere in the room, no direct line-of-sight needed, and you have perfect joy-stick control over any game. *Limited stock available at this time - order quick to avoid disappointment.* R.R.P. £36.99

Order Code NYS03

New Year Sale Price £25

PICK-POKE-IT

At long last it is available again. The on-line hacking toolkit that resides in PLUS D memory and is therefore available at the press of a button. Program now supplied on 3 1/2" disc to merge with your own copy of G+DOS2a to form the working system. Comprehensive manual explains the built-in features like a disassembler, memory view, search and edit, plus lots more. A must for every games hacker. R.R.P. £10.95

Order Code NYS04

New Year Sale Price £7.95

** LAST CHANCE - OFFERS CLOSE 1/3/94 **

All prices include UK Postage and Packing, Overseas add 15%.

Send cheque/postal order with order to:-

FORMAT Publications, 34, Bourton Road, Gloucester, GL4 0LE.

FORMAT BACK-ISSUES

Volumes 1, 2, 3 and 4 of FORMAT are now available only as complete volumes.

Order Code: FBI-V1 (Vol.1) Price: £10.00

Order Code: FBI-V2 (Vol.2) Price: £12.00

Order Code: FBI-V3 (Vol.3) Price: £12.00

Order Code: FBI-V4 (Vol.4) Price: £12.00

All issues, from Volume 5 N° 1 to the latest issue, are still available separately. To order just quote the Volume/Issue N°. Price: £1.50 each, (5 or more £1.25 per copy).

SOFTWARE

SAM Coupé Software On 3 1/2" Disc

SAM DEMO DISC #1, Utilities, demos, screens, a game, and lots more. A real bargain for any SAM owner.

Order Code: SCD-02 Price: £1.50

SAMCO NEWSDISC SET, Issues 1-5 (six discs) packed with things no SAM owner should miss.

Order Code: SCD-03 Price: £12.00

SAMSPEC SOFTWARE

SAM + Spectrum versions on one disc (80 track 3 1/2" or 5 1/4" - please state on order)

FONT LIBRARY, 100 screen fonts plus support software, easy to use on either computer. Special +3 disc also available (Spectrum files only). RRP £8.95

Order Code: SSD-01 Price: £6.95

MONEY MANAGER, Advanced personal budgeting system for both machines. Spectrum version need 128K/+2 (not +2a or +3). RRP £15.95

Order Code: SSD-02 Price: £12.95

DISCIPLE/PLUS D SOFTWARE

Please state 3 1/2" or 5 1/4" disc (80 track only)

ARTIST 2, The best art package ever written for the Spectrum. 48K and 128K versions on the same disc. With page-maker and utility software. Full manual. RRP £19.95

Order Code: SPD-01 Price: £16.95

UTILITY DISC #1, Six of the best and most useful disc utilities for DISCIPLE or PLUS D. Added bonus program - not to be missed. RRP £9.95

Order Code: SPD-02 Price: £6.95

ORDERING All prices include UK p&p, overseas readers please add 10% to total order for extra postage. Clearly state Order Code, Product description, Quantity required and Price. Remember to add any postage and don't forget your Membership Number or we can't process your order. Payment in STERLING by Cheque (drawn on a UK bank), P.O. Euro Cheque or Cash. Make cheques payable to FORMAT. Payment MUST be in same envelope as order. Send to FORMAT's address on page 3. Normally dispatch is at the same time as your next issue of FORMAT. We will not be held liable for delays or non-delivery due to circumstances beyond our control.

FORMAT

READERS SERVICES

HARDWARE

SPI-SAM's Printer Interface, A full feature parallel (Centronics) printer interface. Totally compatible with SAM's ROM and DOS printing routines and with utility programs like FLASH, Word-processors, Etc. Uses standard BBC type lead (see below). RRP £24.95

Order Code: SPI Price: £19.95

PRINTER LEAD, Top quality parallel printer lead (BBC standard). 2 meters long. For use with DISCIPLE, PLUS D or SAM. RRP £10.95

Order Code: PPL-01 Price: £7.95

SAM COUPÉ TECHNICAL MANUAL Version 3.

The real inside info on SAM. As published by MGT/SAMCO. No SAM is complete without one. Now only available through us. RRP £16.95

Order Code: STM-01 Price: £12.95

SAM KEYBOARD UNIT, Brand new (ex-SAMCO) stock. East to fit. RRP £15.95

Order Code: SKB Price: £12.95

MOUSE MAT & HOLDER, Top quality mouse mat (not to be confused with the small cheap ones) together with a handy mouse holder to keep your mouse out of harms way when not in use. Holder fits to any smooth surface with sticky pads provided. RRP £8.98

Order Code: SMM-01 Price: £5.95

SCART LEAD, Wired for SAM Coupé. 2 meters long, as produced for SAMCO. RRP £9.95

Order Code: SSL-01 Price: £5.95

FORMAT BINDERS

Hardcover binders to protect your valuable magazines. Each will hold 12 copies of FORMAT (or any other A5 magazine or manual). Copies held in place by wires that just spring out for easy insertion or removal.

Order Code: FMB-01 Price: £4.50